


.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE

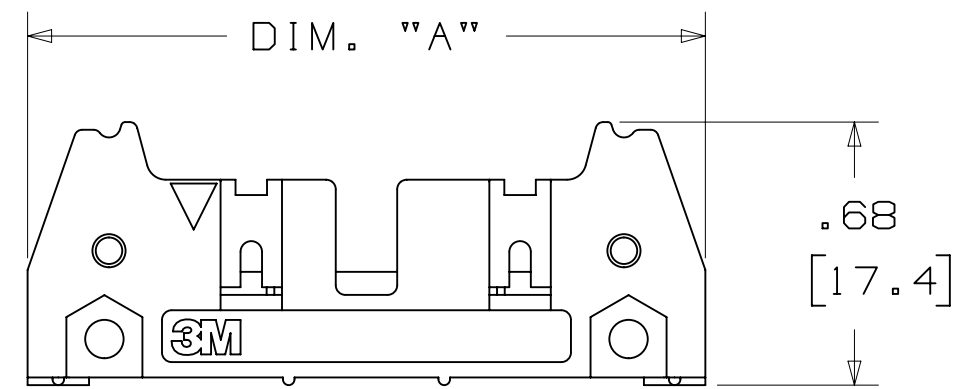

Technical drawing of a mechanical part with dimensions and tolerances:

- Top left dimension: $.573 \pm .010$
- Top left dimension in brackets: $[14.55 \pm 0.25]$
- Left side dimension: $.08$
- Left side dimension in brackets: $[2.0]$
- Right side dimension: (1.07)
- Right side dimension in brackets: $[(27.2)]$

UL
UL FILE NO: E68080

3M™ THREE-WALL HEADER, 3000 SERIES

.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE




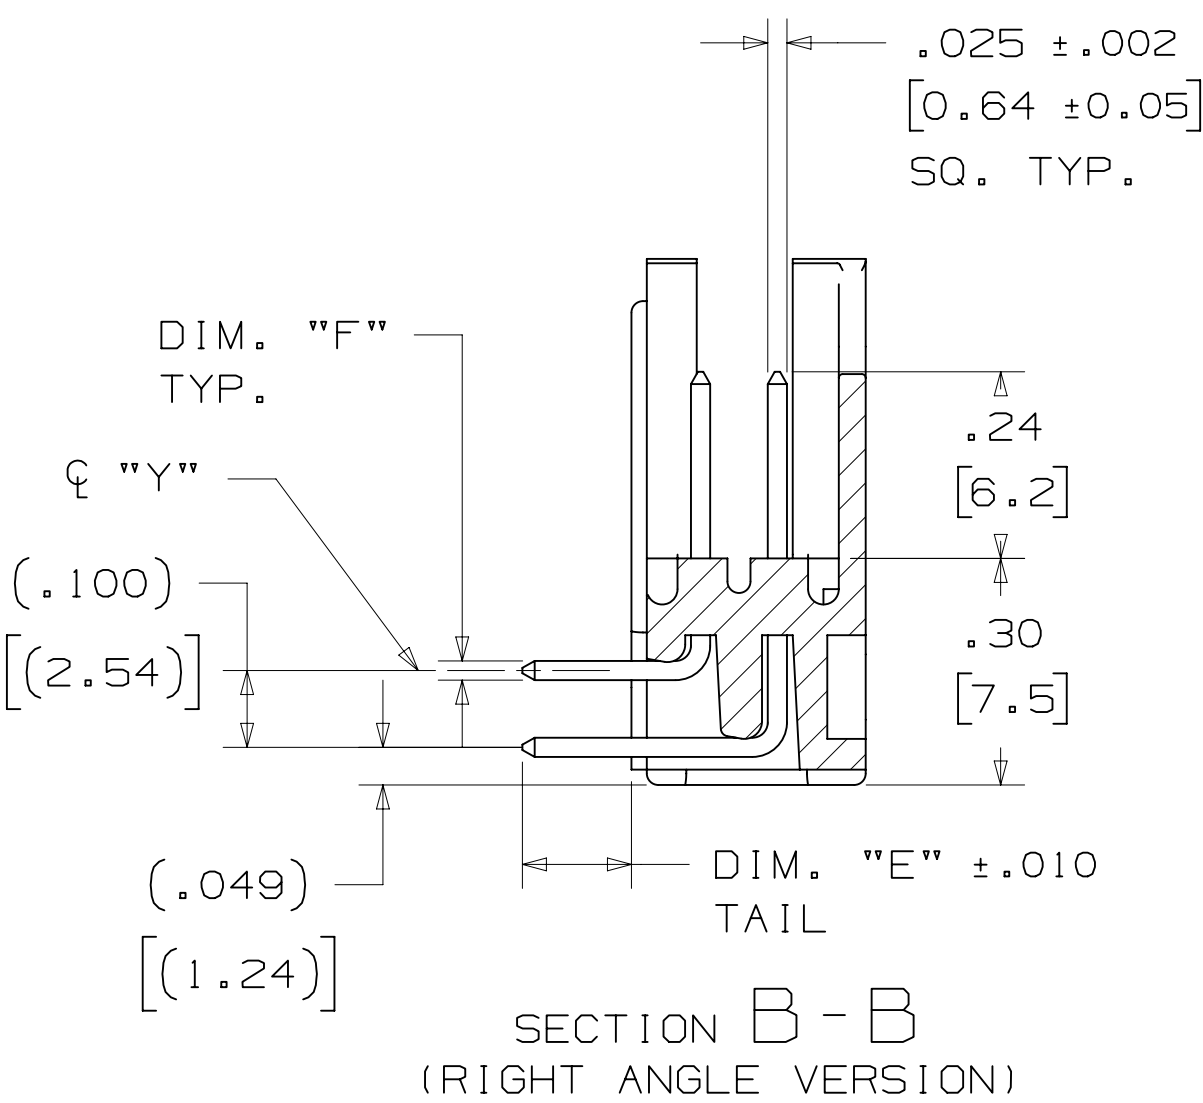


TABLE 1							
PIN QTY.	3M PART NUMBER	DIM. "A"	DIM. "B"	DIM. "C"	DIM. "D"	POLARIZING NOTCHES	PIN QTY.
10	3793	1.26 [32.1]	1.105 [28.04]	.865 [21.97]	.71 [18.0]	BC	10
14	3314	1.46 [37.2]	1.305 [33.12]	1.065 [27.05]	.91 [23.1]	BC	14
16	3408	1.56 [39.7]	1.405 [35.66]	1.165 [29.59]	1.01 [25.6]	ABC	16
20	3428	1.76 [44.8]	1.604 [40.74]	1.365 [34.67]	1.21 [30.7]	ABC	20
26	3429	2.06 [52.4]	1.905 [48.36]	1.665 [42.29]	1.51 [38.3]	ABC	26
34	3431	2.46 [62.6]	2.305 [58.52]	2.065 [52.45]	1.91 [48.5]	ABC	34
40	3432	2.76 [70.2]	2.605 [66.14]	2.365 [60.07]	2.21 [56.1]	ABC	40
50	3433	3.26 [82.9]	3.105 [78.84]	2.865 [72.77]	2.71 [68.8]	ABC	50
60	3372	3.76 [95.6]	3.605 [91.54]	3.365 [85.47]	3.21 [81.5]	ABC	60
64	3764	3.96 [100.7]	3.805 [96.62]	3.565 [90.55]	3.41 [86.6]	ABC	64

TABLE 2						
3M PART NUMBER SUFFIX	CONTACT TAIL	DIM. "E"	PIN CROSS SECTION			DIM. "G"
-1XX2 -2XX2	.062 [1.57] THICK PC BOARD	.112 [2.84]	DIM. "F" .0245+/- .0005 [.622]	DIAGONALS .028+/- .001 [.71]	CORNER RADIUS .0075 REF. [.191]	.035+/- .003 [.89] SEE NOTE 5
-1X03 -2X03	.094 [2.39] TO .125 [3.18] THICK PC BOARD	.155 [3.94]	.0245+/- .0005 [.622]	.028+/- .001 [.71]	.0075 REF. [.191]	.035+/- .003 [.89]

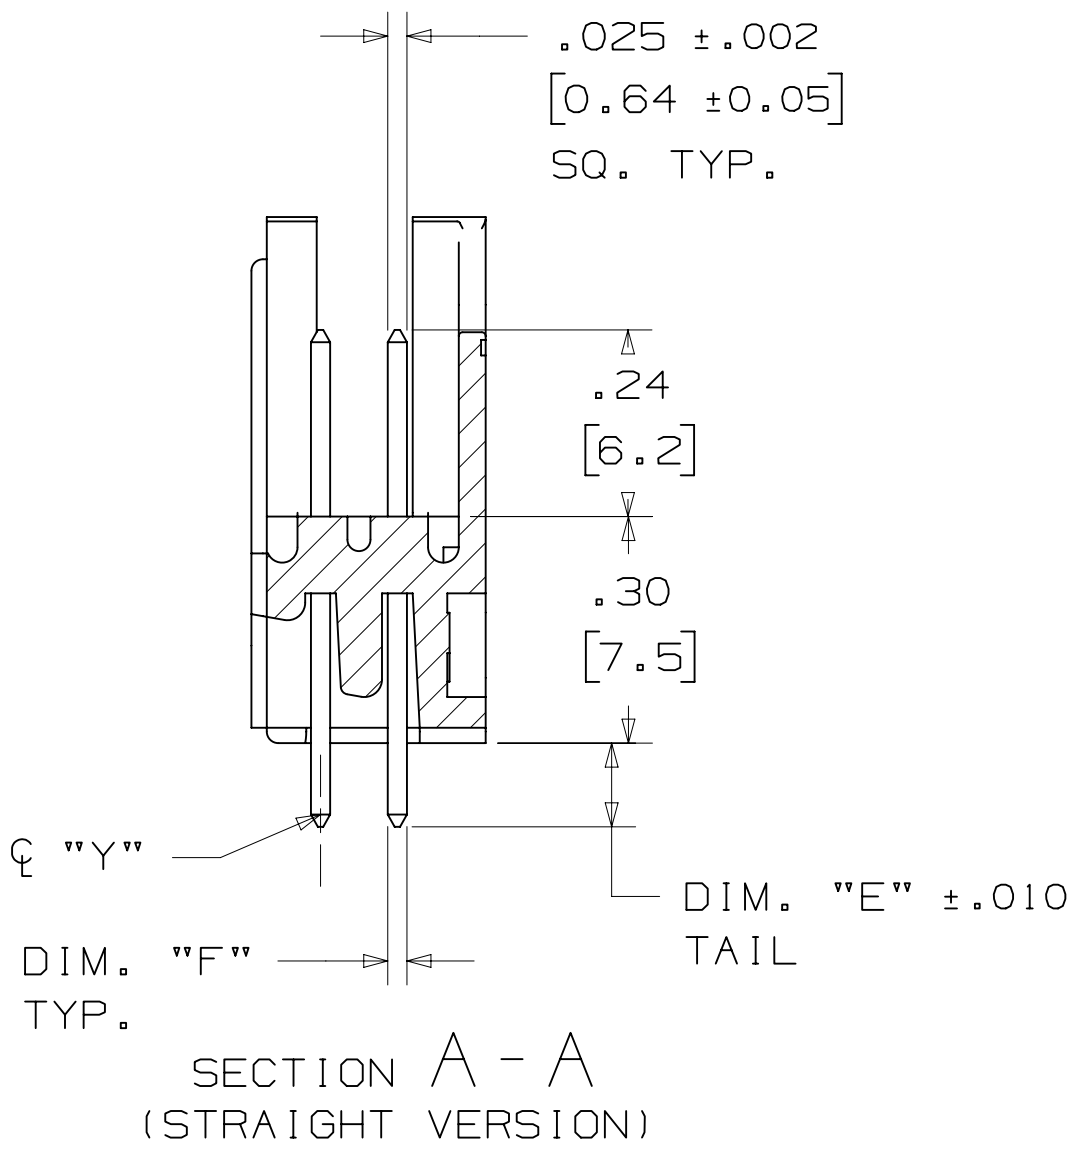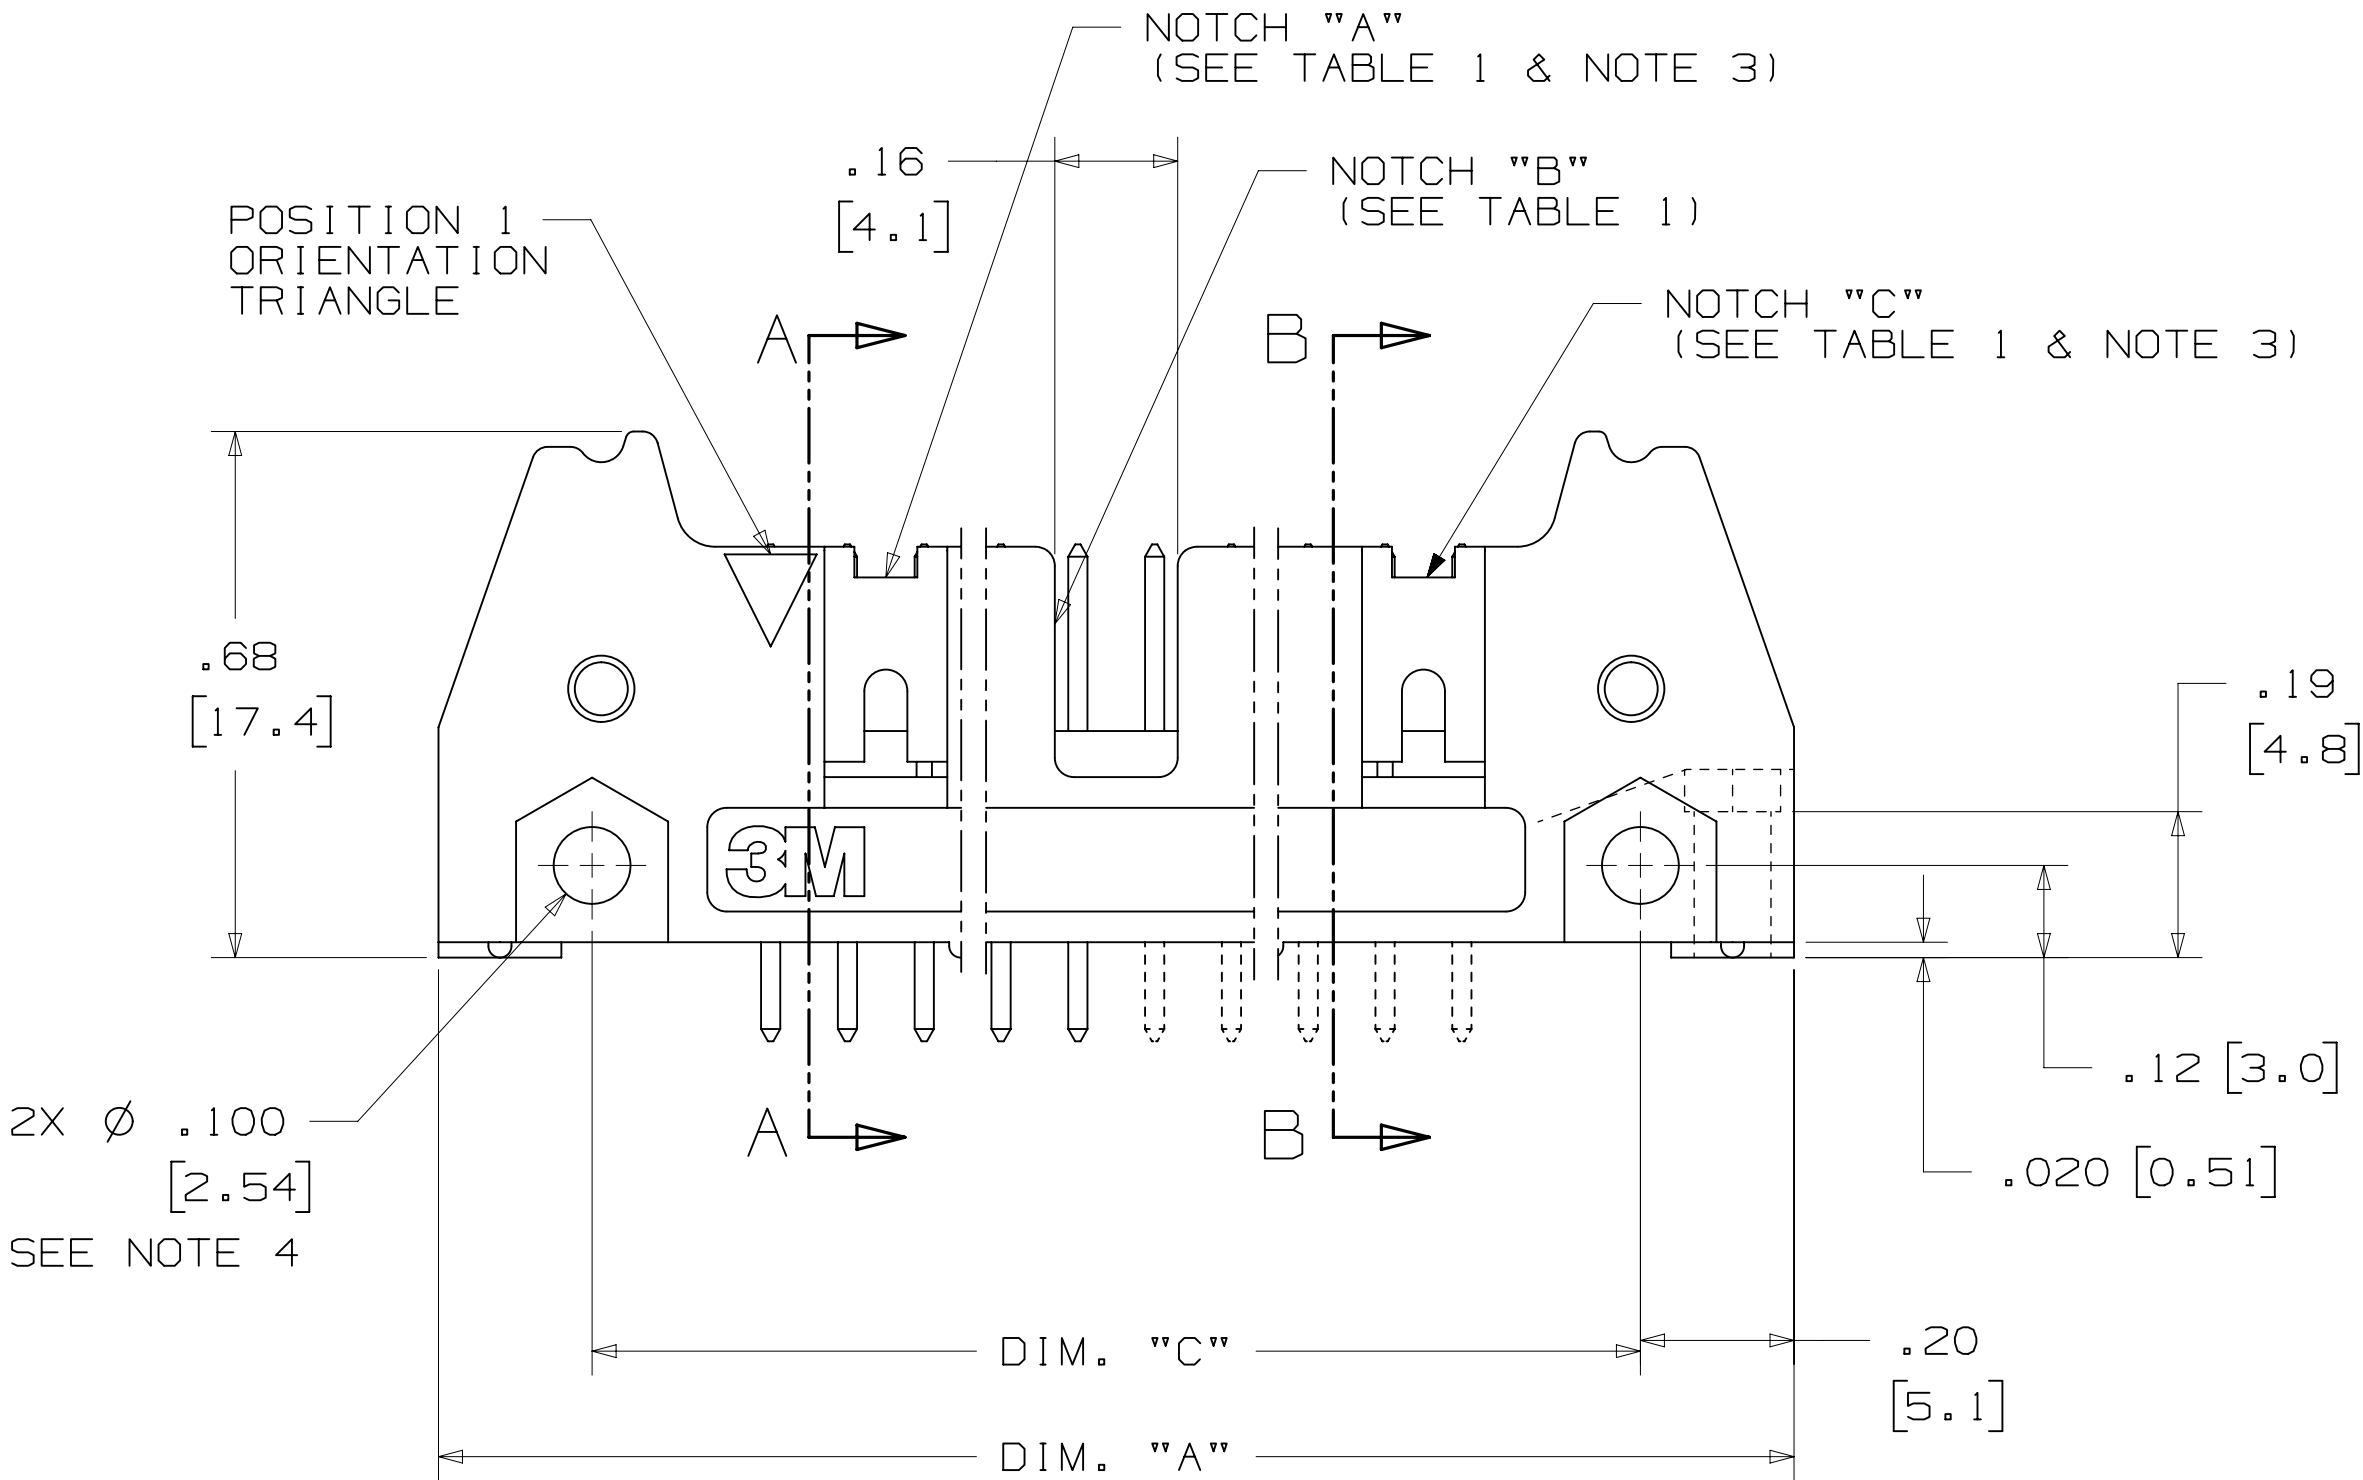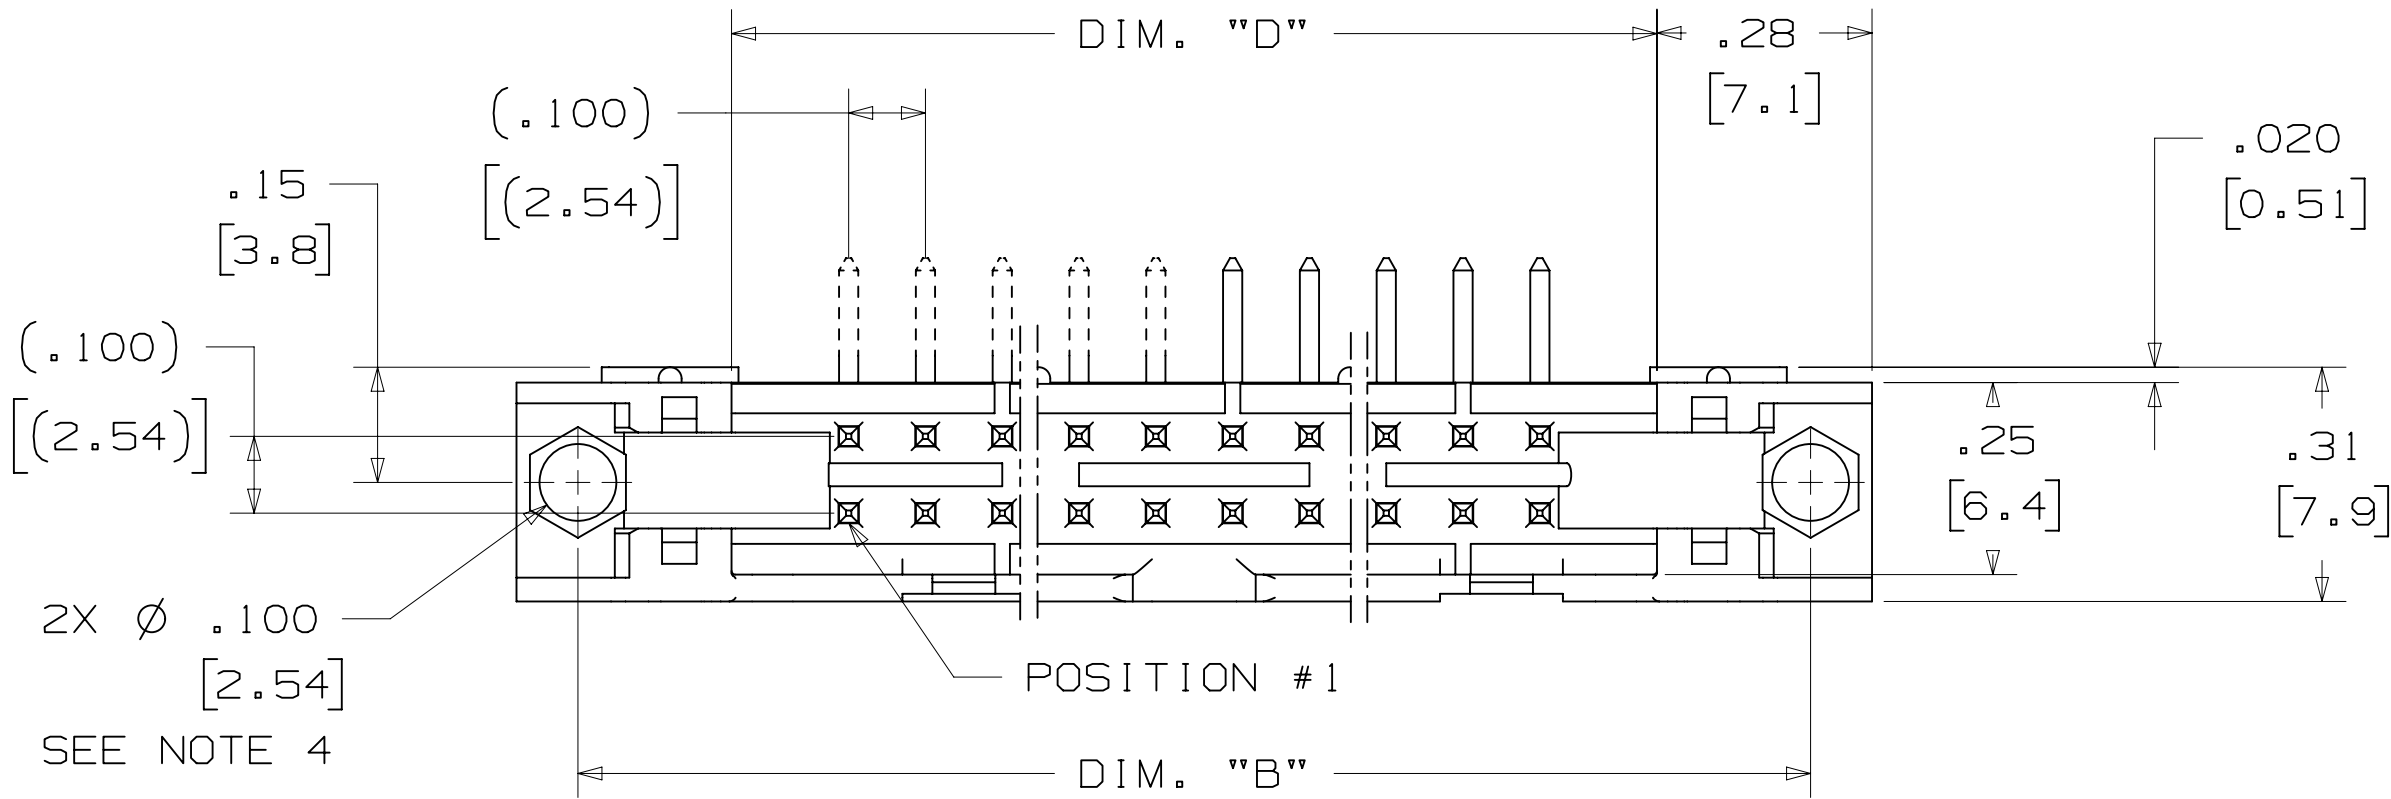

DESIGN REFERENCE
NEXT ASSEMBLY

DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION

MAX SURFACE ROUGHNESS
LISTED SURFACES
MARKED ONLY

INTERCONNECT SOLUTIONS

SCALE 4/1

INTERPRET PER ASME Y14.5 - 2009

TOLERANCES EXCEPT AS NOTED

INCHES
0 ± .01
.000 ± .005
.0000 ±

MILLIMETERS
0 ± .3
.00 ± .13
.000 ±

ANGLES

3M

3M Center St. Paul, MN 55144

© 3M COPYRIGHT 2015
This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.

TITLE
HEADER, 3-WALL, .100 X .100 LATCH/EJECTOR, STRAIGHT & RA

CAGE NUMBER
D78-5100-0771-5

MODEL
3000 SERIES

REV. ECO
DATE
AUG 05, 2014

ISSUE DATE AND DESCRIPTION
REVISED AND REDRAWN

DRFT
DATE
SEP 05, 2014

CHKD
DATE
SEP 05, 2014

APPR
R. SCHERER


H 60056
MAR 06, 2015
REVISE ORDERING NUMBER

G 56068
AUG 05, 2014
REVISED AND REDRAWN


JNC
DATE
SEP 05, 2014

RS

3M™ THREE-WALL HEADER, 3000 SERIES
.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE

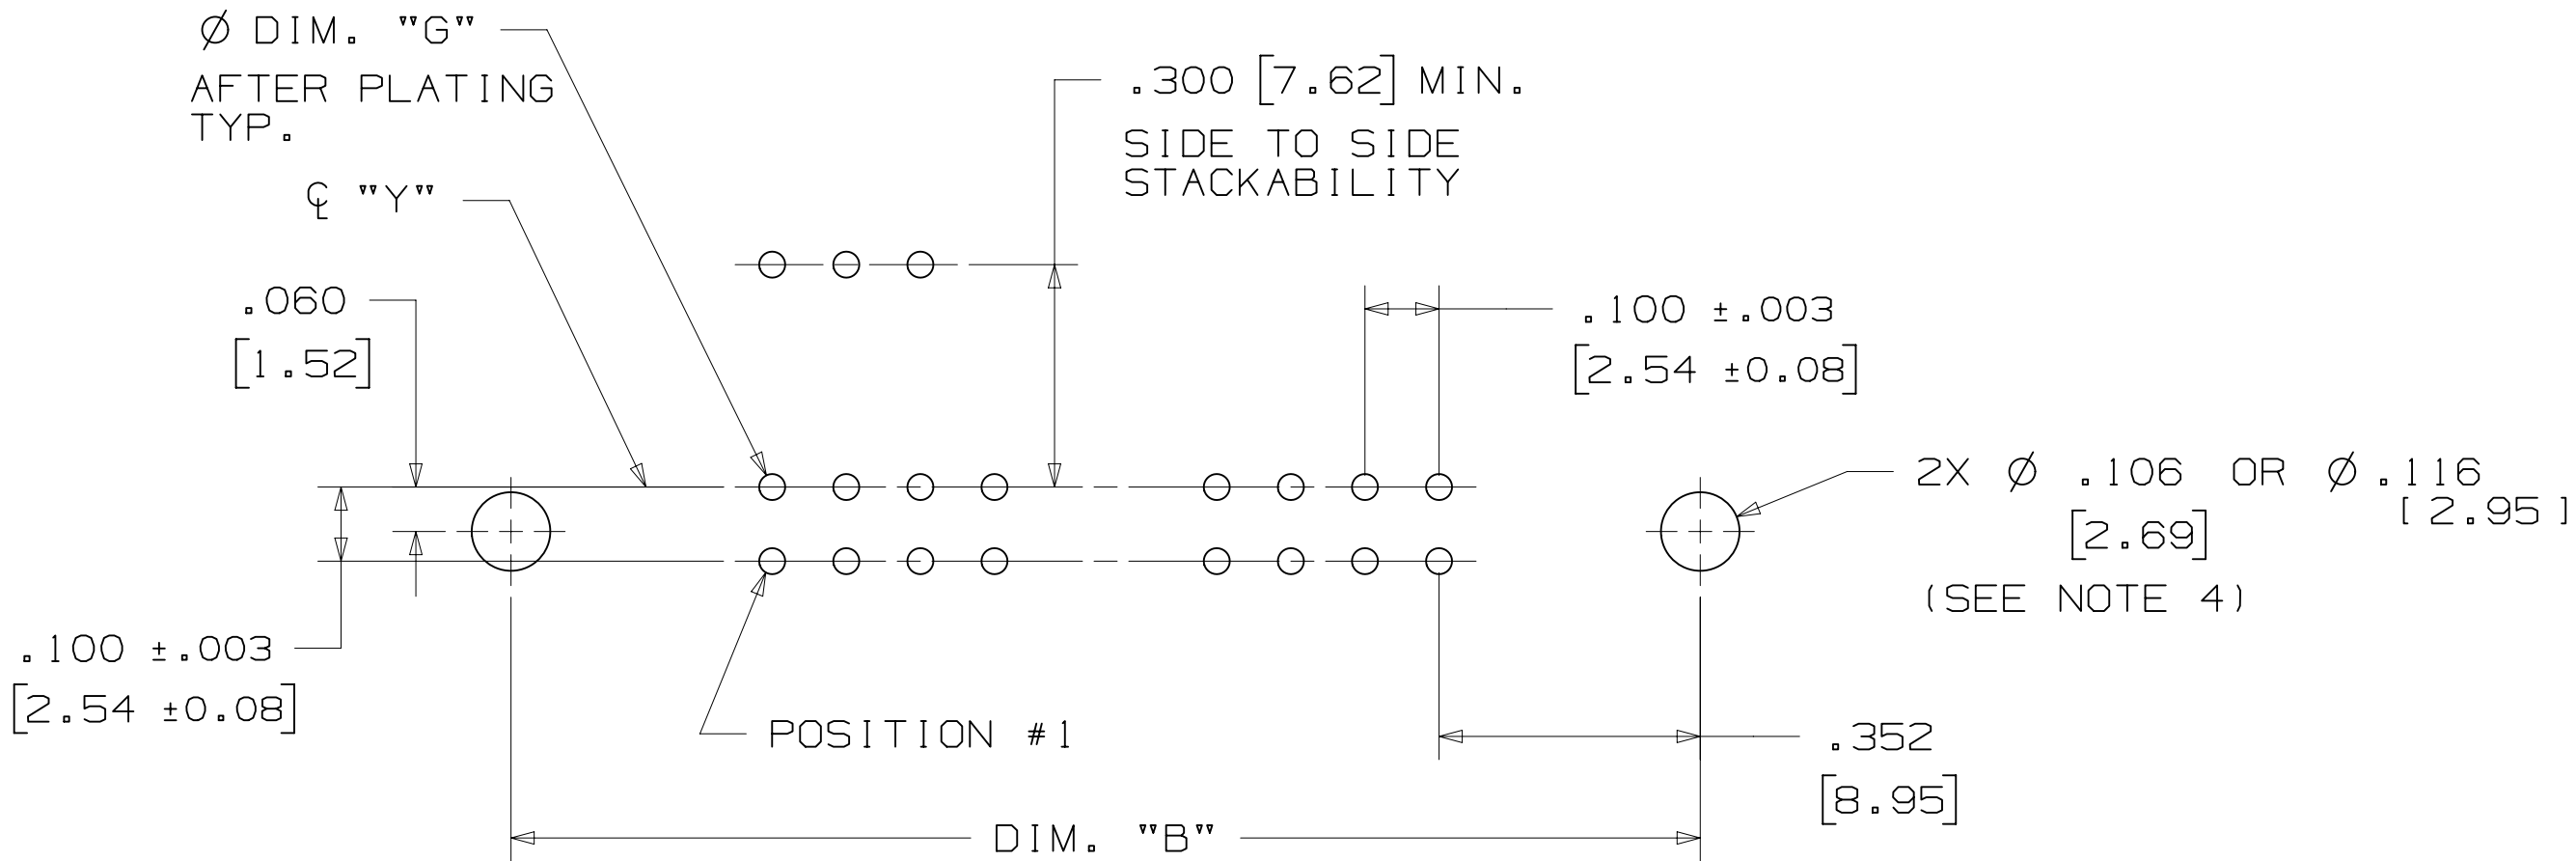

RECOMMENDED MOUNTING HOLE PATTERN
(STRAIGHT VERSION)

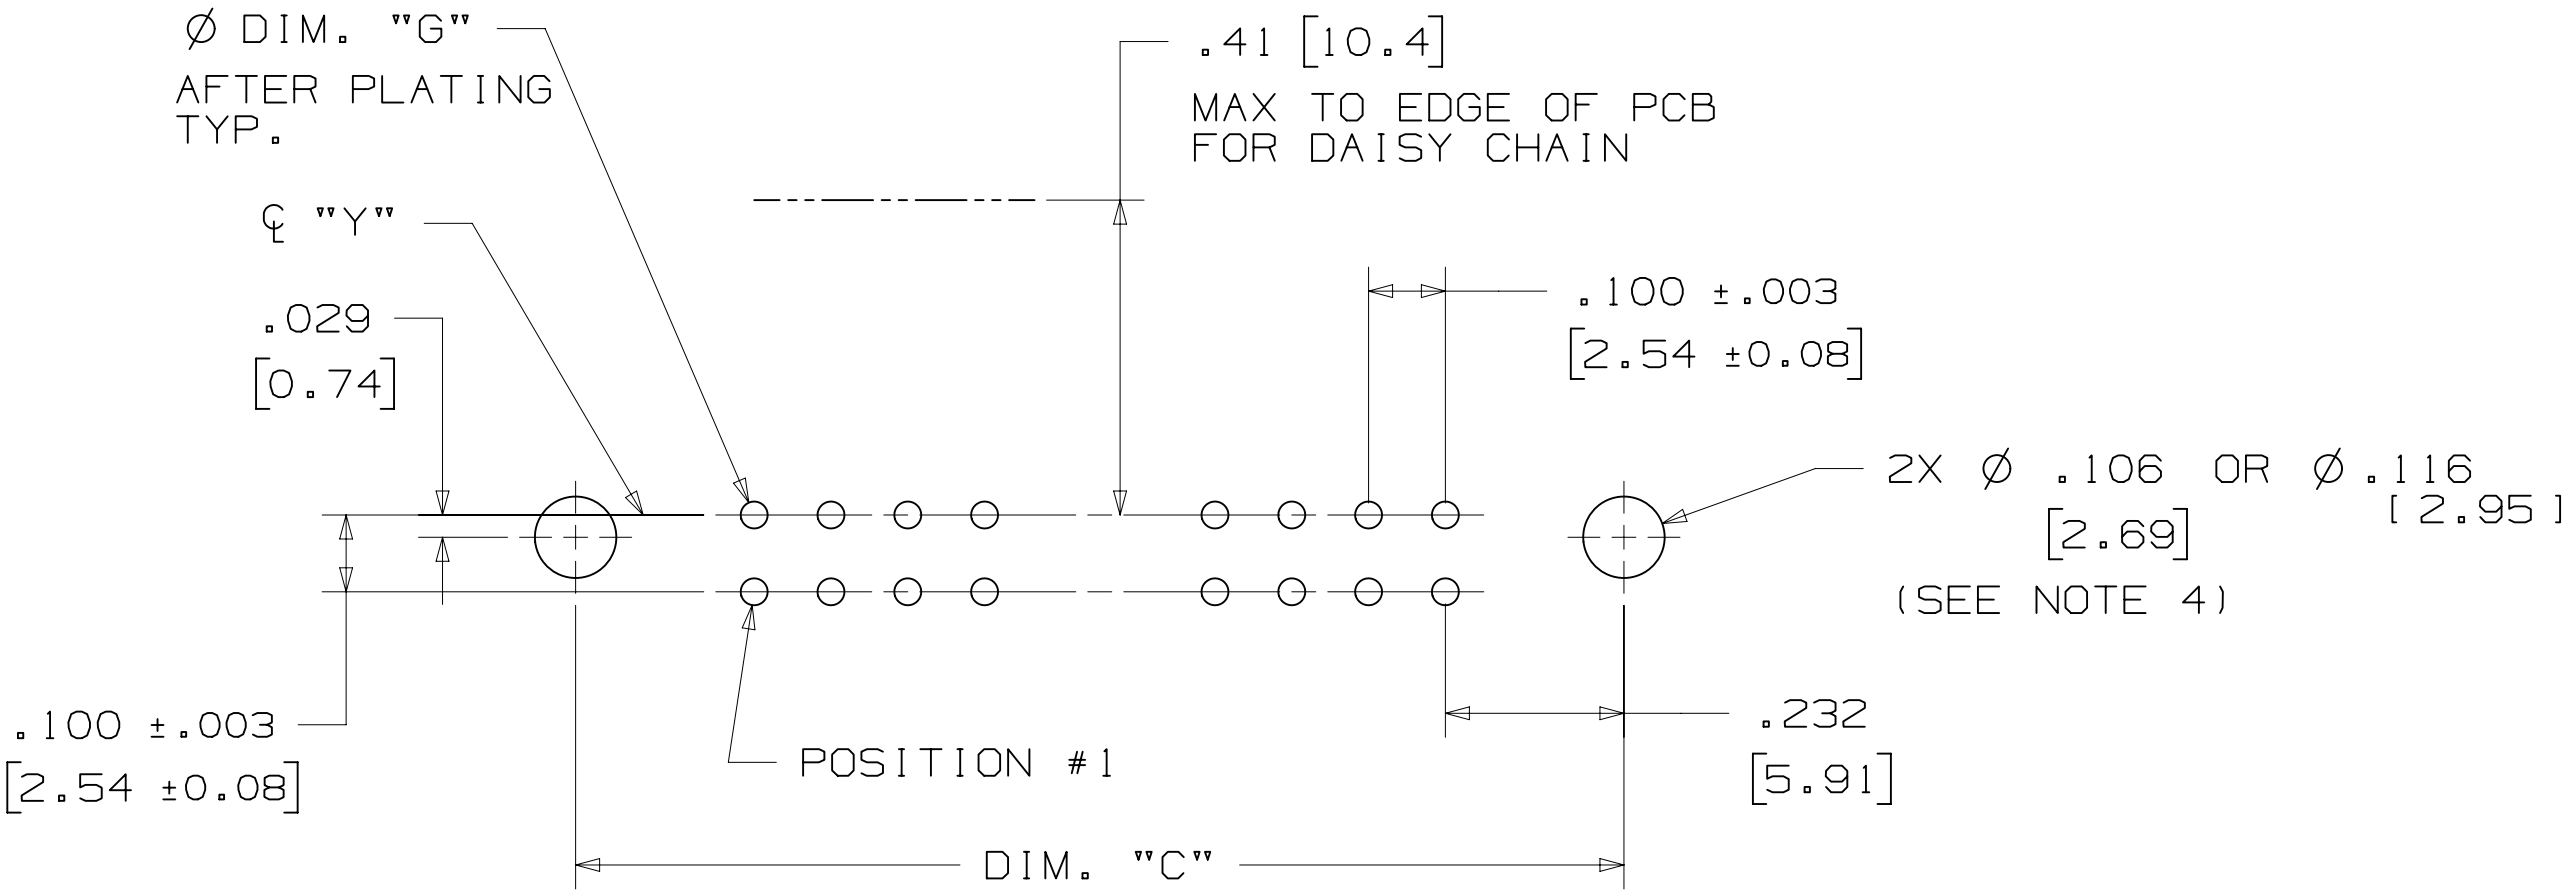

RECOMMENDED MOUNTING HOLE PATTERN
(RIGHT ANGLE VERSION)

PART CUSTOMIZATION


THIS SPEC SHEET DETAILS OUR STANDARD OFFERING.

3M HAS SEVERAL CAPABILITIES THAT CAN PROVIDE A PART TAILORED TO YOUR SPECIFIC NEEDS. ASK YOUR 3M SALES REPRESENTATIVE OR CUSTOMER SERVICE FOR MORE DETAILS.


BOTH SNAP-IN AND ROLL PIN LATCHES MAY BE ORDERED SEPARATELY. SNAP-IN AND ROLL PIN STYLE LATCHES ARE DIMENSIONALLY AND FUNCTIONALLY EQUIVALENT. IF ORDERING SNAP-IN OR ROLL PIN STYLE LATCHES SEPARATELY, PLEASE USE THE BELOW CHART.

MATERIAL	SHORT LATCH	LONG LATCH	LATCH STYLE	COLOR
HIGH TEMP. (PCT)	N3505-2B	N3505-3B	ROLL PIN	BLACK
HIGH TEMP (PPA)	N3505-30B	N3505-31B	SNAP-IN	BLACK

- * SELECTIVE PIN REMOVAL (ATA OR OTHER COMPATABILITY)
- * WIRE WRAP TAILS STYLE

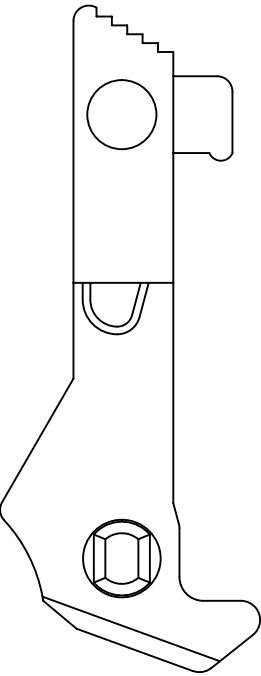


LONG

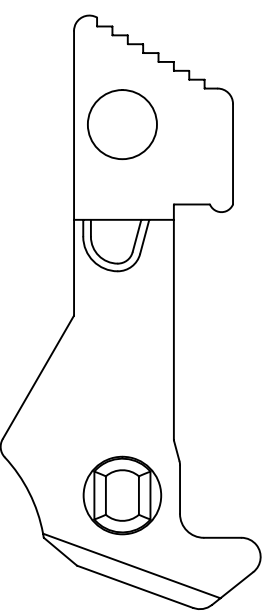


SHORT

SNAP-IN LATCHES

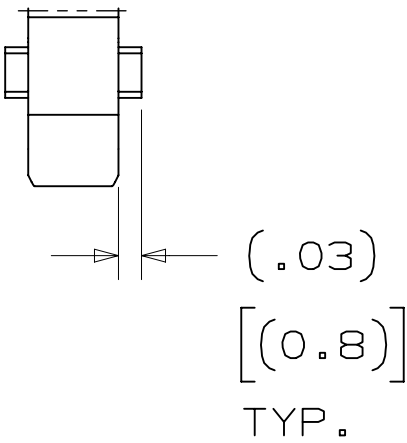

NOTE:
SNAP-IN LATCHES CAN ONLY BE ORDERED SEPARATELY AND ARE THE CUSTOMERS RESPONSIBILITY TO INSTALL.

POLARIZING POST

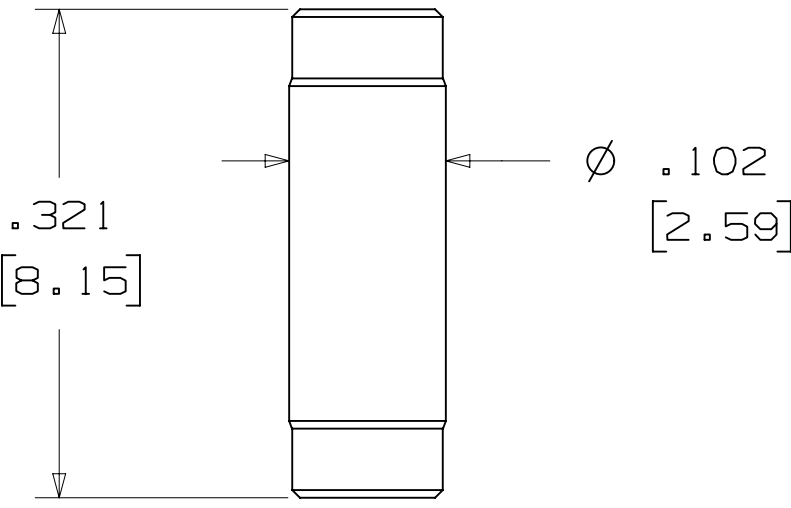

3M PART NO.	MATERIAL	COLOR
3201-4	LCP	BLACK


NOTE:
INSERT POST INTO ONE MOUNTING HARDWARE HOLE ON BOTTOM OF HEADER. SET POST TO PROTRUDE .115 [2.92]

(K2) OPTION

2500 & 3000 SERIES SHROUDED HEADER					
TOTAL NO. OF PINS	NO. OF TAILS KINKED	POSITIONS KINKED			
10	4	3	4	7	8
14	4	3	4	11	12
16	4	3	4	13	14
20	4	3	4	17	18
26	4	3	4	23	24
34	4	7	8	27	28
40	4	7	8	33	34
50	4	7	8	43	44
60	4	11	12	49	50
64	4	11	12	53	54

KINKED TAIL DETAIL:
- KINK IS LOCATED .05" BELOW BOTTOM SURFACE OF PLASTIC.
- EXTERNAL RADIUS OF KINK TOWARD PART CENTERLINE.

POLARIZING KEY

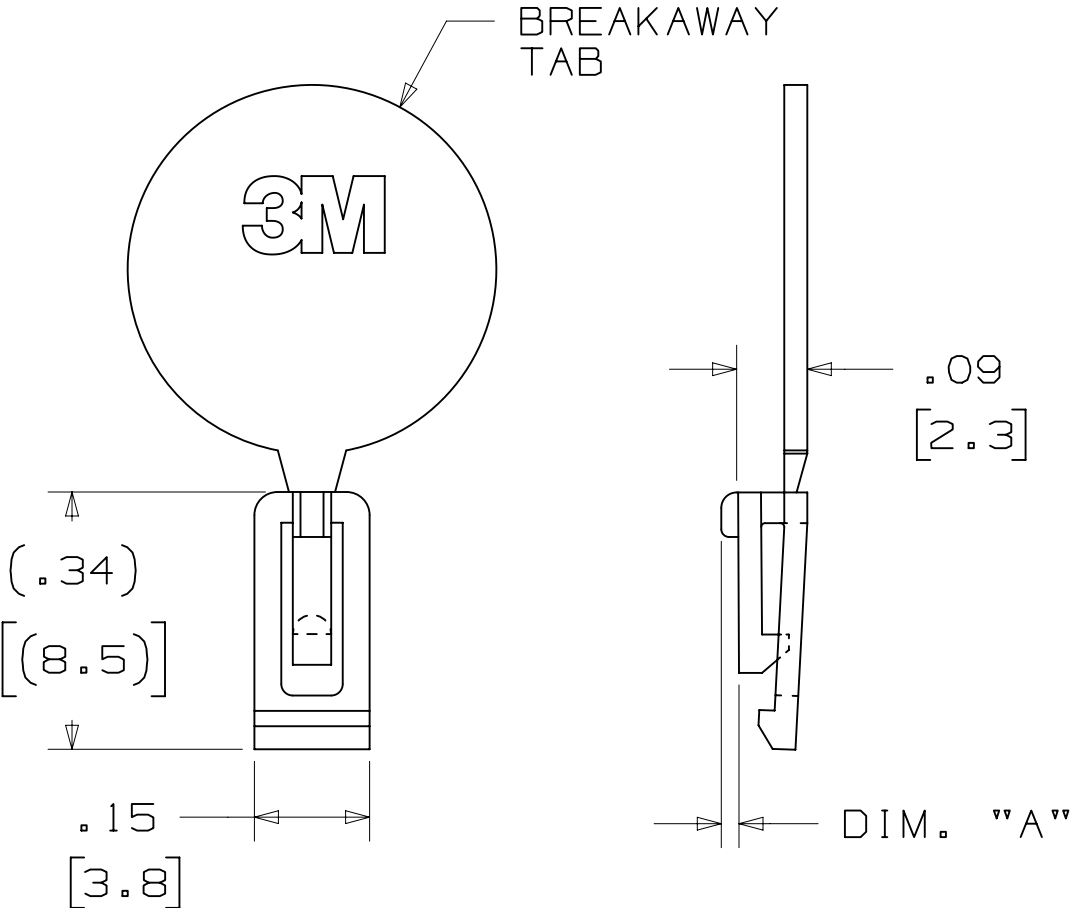


3M PART NO.	MATERIAL	COLOR	DIM. 'A'
N3518	LCP	BLACK	.02

NOTE:
#2216 B/A SCOTCHWELD CAN BE USED TO ADHERE KEYS.

DESIGN REFERENCE		NEXT ASSEMBLY		H	60056	MAR 06,2015		JNC	RS
ACCORDING TO CODES				REVISE ORDERING NUMBER					
G		56068		AUG 05,2014		JNC		RS	
				REVISED AND REDRAWN					
DIVISION		DIVISION CODE		REV		ECO		ISSUE DATE AND DESCRIPTION	
EMSD		TOLERANCES EXCEPT AS NOTED		DATE		MFG		DATE	
DO NOT SCALE DRAWING		1		CASTIGLIONE		AUG 05,2014		AUG 05,2014	
				CWDG		DATE		APPROV. R. SCHERER	
								SEP 05,2014	
Interconnect Solutions		3M Center St. Paul, MN 55144		© 3M COPYRIGHT 2015		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 2009		TITLE		HEADER, 3-WALL, .100 X .100 LATCH/EJECTOR, STRAIGHT & RA			
MAX SURFACE ROUGHNESS		CAGE NUMBER		SIZE		DRAWING NO.		REV.	
✓ □ MARKED ONLY		D		D78-5100-0771-5		H			
		3000 SERIES		DET. LISTS		YES □ NO		SHT 3 OF 4	


3M™ THREE-WALL HEADER, 3000 SERIES
.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE

MOUNTING HARDWARE

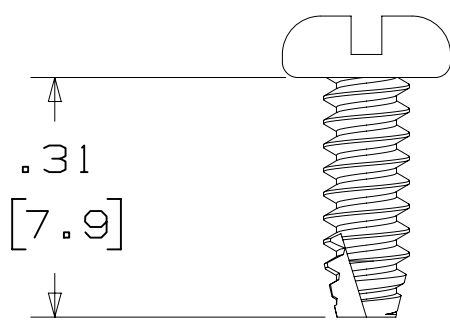


3341-5

(INSTALL FROM BOTTOM OF BOARD)
PANHEAD THREAD CUTTING SCREW:
#4-24 X 5/16"
TYPE: USA STD BT, FEDERAL BG
MATERIAL: STAINLESS STEEL

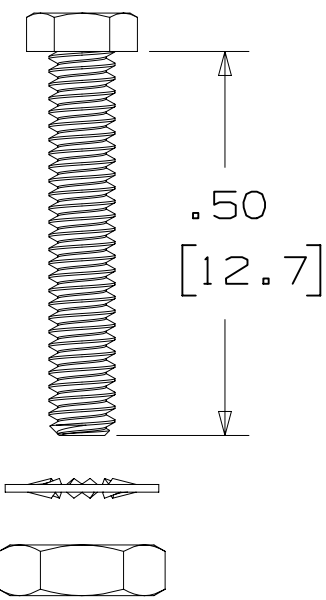

3341-6

HEX HEAD BOLT, NUT AND WASHER:
BOLT - #2-56 X 1/2"
MATERIAL: STAINLESS STEEL

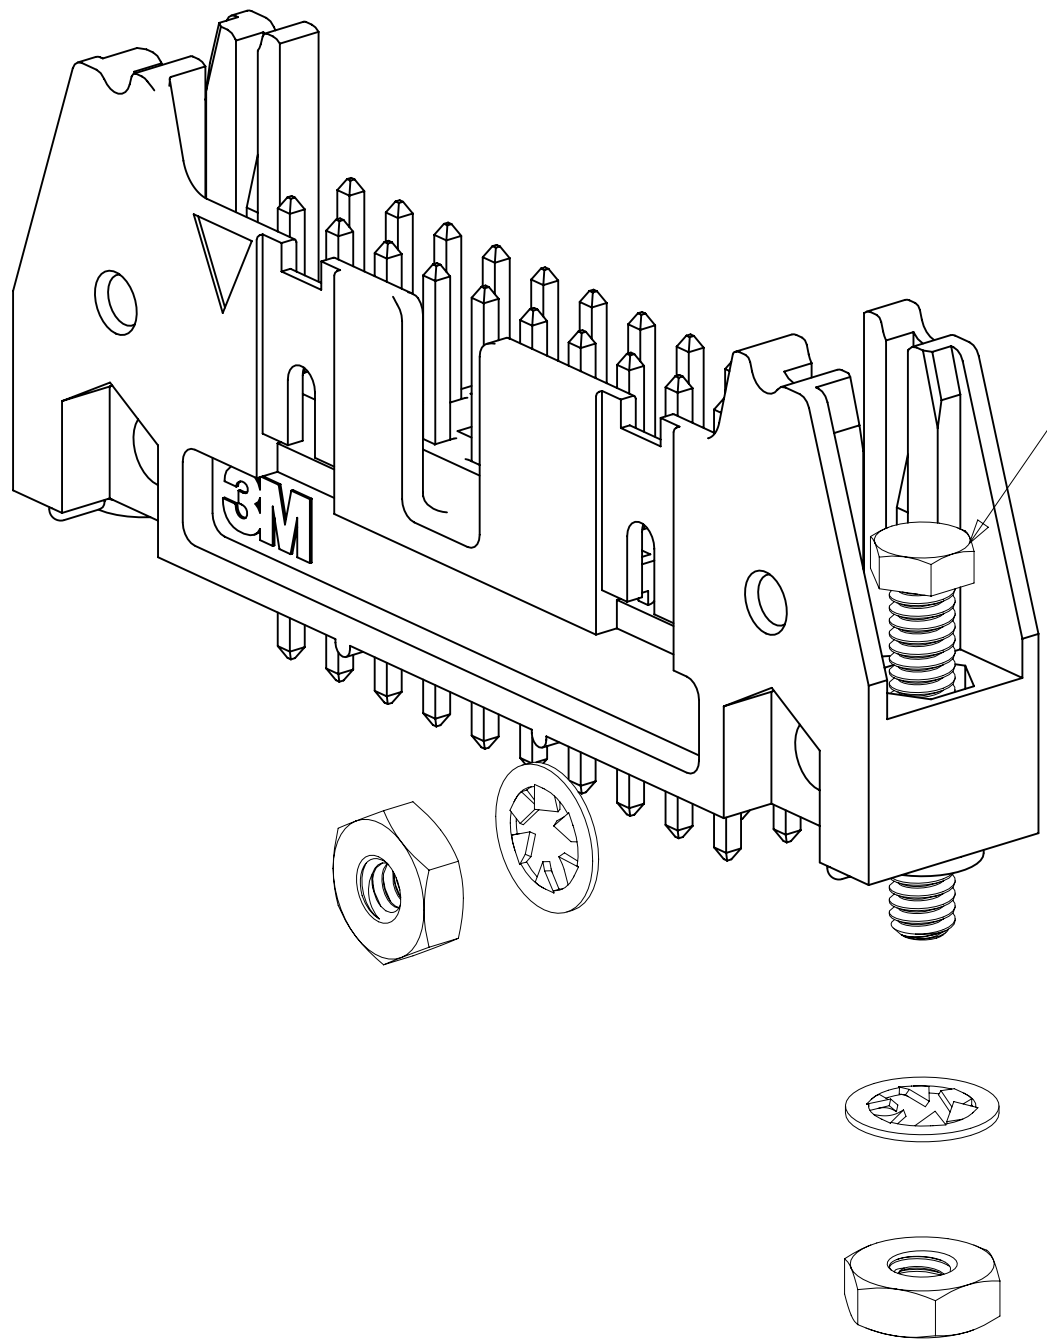


STRAIGHT VERSION INSTALL
(MUST BE INSERTED PRIOR TO
LATCH INSTALL)


RIGHT ANGLE VERSION INSTALL

3341-6

#2-56 NUT AND BOLT
TORQUE FOR EACH BOLT: 1.25 - 3.125 INCH LBS.

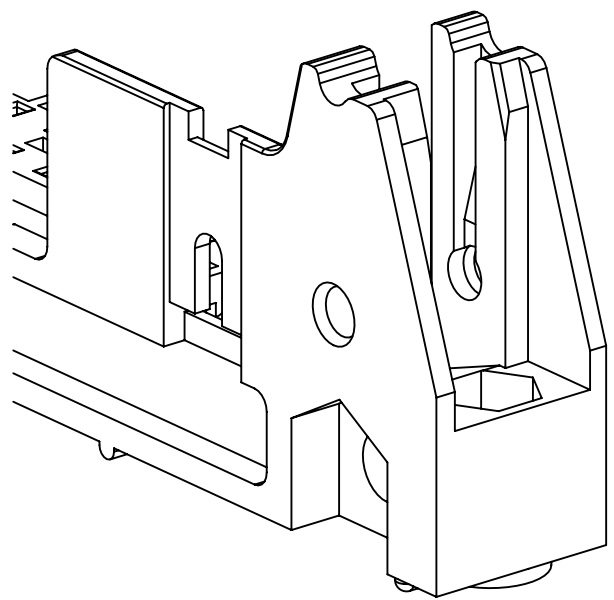

#4-24 TYPE BT SELF THREADING SCREW
WHEN USING LATCHES, MAXIMUM LENGTH
OF SCREW IS .250 INCHES PLUS
THICKNESS OF THE BOARD.
TORQUE FOR EACH SCREW IS 3-5 INCH LBS.



3341-5

H		60050E		MAR 06, 2015		JNC		RS			
G		5606B		AUG 05, 2014		JNC		RS			
REV		ECO		ISSUE DATE AND DESCRIPTION				DRFT		CHKD	
DRFT		CASTIGLIONE		DATE		AUG 05, 2014		MFG		DATE	
CHKD				DATE				APPR		DATE	
								R. SCHERER		SEP 05, 2014	
DIVISION		DIVISION CODE		© 3M COPYRIGHT 2015							
Interconnect Solutions		EMSD		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.							
DO NOT SCALE DRAWING		SCALE 4 1		TOLERANCES EXCEPT AS NOTED		TITLE					
				INCHES		HEADER, 3-WALL, .100 X .100 LATCH/EJECTOR, STRAIGHT & RA					
THIRD ANGLE PROJECTION				MILLIMETERS							
INTERPRET PER ASME Y14.5 - 2009				.00		.3					
MAX SURFACE ROUGHNESS				.00		.13					
✓ ☐ MARKED ONLY				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					
				.000		.000					



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.