



INVENTEK SYSTEMS

EZ-GPS-G

USB GPS Dongle

Based on the ISM3333

GPS Module

All-In-One multi-GNSS (Global Navigation Satellite System), module supports various location and navigation applications, including autonomous GPS, GLONASS, GALILEO, BEIDOU, SBAS ranging (WAAS, EGNOS, GAGAN, and MSAS), QZSS, DGPS)



Table of Contents

1	General Description	3
2	Part Number Detail Description.....	4
2.1	Ordering Information	4
3	General Features	4
3.1	Limitations	4
4	Complementary Documentation	4
4.1	Inventek Systems	4
5	Specification	5
5.1	Module Architecture	5
5.2	External Antenna Connections	5
5.3	Environmental Specifications	6
5.4	EZ-GPS-G Host Interface	6
6	Product Compliance Considerations.....	6
7	Packaging Information:.....	6
8	Revision Control	7
9	Contact Information	7

1 General Description

USB GPS Dongle, Plug and Play. Works with most GPS software programs that conform to the NMEA-0183 Standard. Most mapping software packages will work with the EZ-GPS-G. The output is set at 4800 baud, NMEA. The EZ-GPS-G is based on the Inventek ISM3333-C6.1 GPS module.

For detailed specification, please refer to the Inventek Media Tek GPS module, part number ISM3333-C6.1. The GPS has a USB host interface and a female SMA connector for a direct antenna attachment. We suggest the use of Inventek active waterproof dome antenna part number, ANTDOM-01-WPM that connects directly to the EZ-GPS-G.



The EZ-GPS-G is based on the MediaTek MT3333 All-In-One multi-GNSS SoC and includes an on-chip CMOS RF, digital baseband, ARM7 CPU and embedded flash. The ISM3333 can achieve the industry's highest level of sensitivity, accuracy, and Time-to-First-Fix (TTFF) with the lowest power consumption in a small-footprint lead-free package.

The ISM3333 acquires and tracks satellites in the shortest time even at indoor signal levels. The ISM3333 supports various location and navigation applications, including autonomous GPS, GLONASS, GALILEO, SBAS ranging.

The Inventek ISM3333 is ideal for a wide range of mobile and personal tracker, drone and industrial applications. The ISM3333 features high sensitivity (-165dBm tracking sensitivity), for enhanced performance in dense urban environments.

The EZ-GPS-G standard firmware is programmed to support GPS and Galileo simultaneously. This module has the ability to support any two: GPS + GLONASS + Galileo significantly improve on performance and GPS sensitivity.

The ISM3333 is suitable for a wide range of target applications, including the most compact:

- Portable Devices
- Asset Tracking / Personal Safety
- Sport Cameras / Equipment
- Navigation devices
- Fleet management
- Asset tracking

The ISM3333's world class performance suits it to navigating urban canyons, as well as wide-open spaces.

2 Part Number Detail Description

2.1 Ordering Information

Part Number	Description
EZ-GPS-G	4800 Baud UART with GPS and Glonass enabled. 1PPS output enabled 1 Hz update rate
EZ-GPS-GP	4800 Baud UART with GPS and Glonass enabled. 1PPS output enabled 1 Hz update rate – Includes PLastics

3 General Features

- Based on the MediaTek GPS
- Supports MediaTek SDK.
- Host interface: USB VCOM Por (FTDI 232HQ)
- Inputs +5 V
- -40 to +80 °C temperature range.
- Lead Free Design which is compliant with ROHS requirements.

3.1 Limitations

Inventek Systems products are not authorized for use in safety-critical applications (such as life support) where a failure of the Inventek Systems product would reasonably be expected to cause severe personal injury or death.

4 Complementary Documentation

4.1 Inventek Systems

- USB Drivers : <http://www.ftdichip.com/Drivers/VCP.htm>
- Firmware - Standard Firmware C6.1
- Custom Firmware: Contact Inventek

5 Specification

5.1 Module Architecture

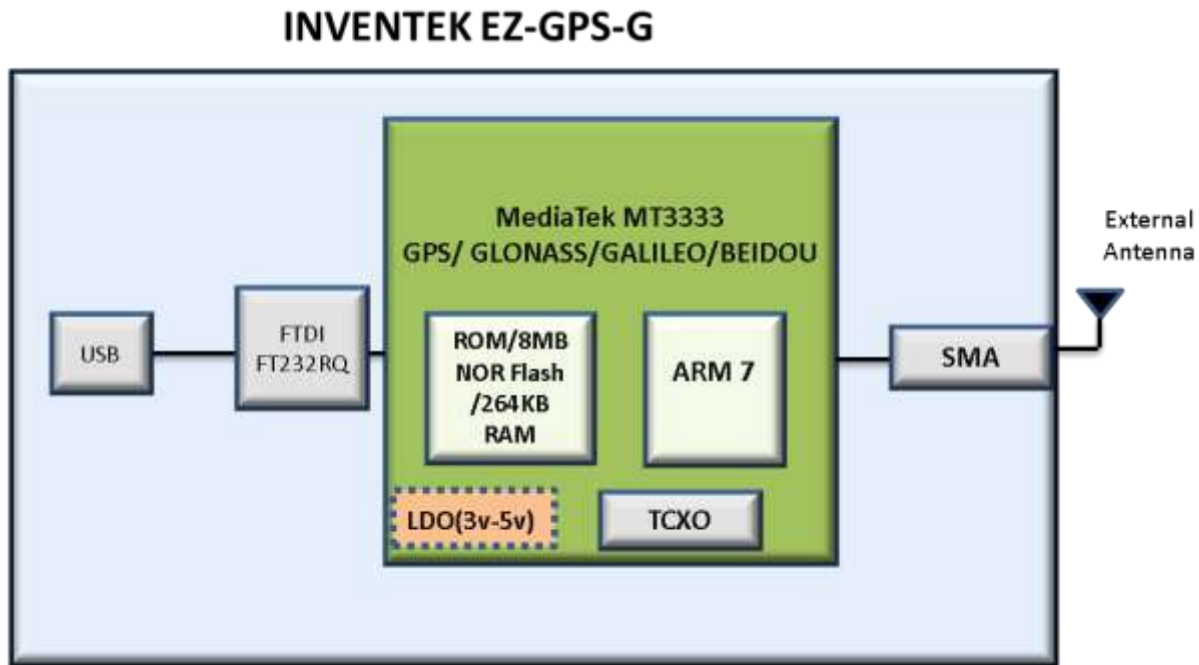


Figure 1 Inventek's EZ-GPS General Block Diagram

Note: 2. Standard Hardware and firmware is configured at 4800 Baud UART

5.2 External Antenna Connections

EZ-GPS-G module has an SMA Female connector on board for the antenna.

5.3 Environmental Specifications

Item	Description
Operating temperature range	-40 deg. C to +80 deg. C
Storage temperature range	-40 deg. C to +80 deg. C
Humidity	95% max non-condensing

5.4 EZ-GPS-G Host Interface


FTDI232 Virtual COM port (VCP) drivers cause the USB device to appear as an additional COM port available to the PC. Application software can access the USB device in the same way as it would access a standard COM port.

6 Product Compliance Considerations

RoHS: Restriction of Hazardous Substances (RoHS) directive has come into force since 1st July 2006 all electronic products sold in the EU must be free of hazardous materials, such as lead. Inventek is fully committed to being one of the first to introduce lead-free products while maintaining backwards compatibility and focusing on a continuously high level of product and manufacturing quality.

7 Packaging Information:

The module can be ordered with or without plastics.

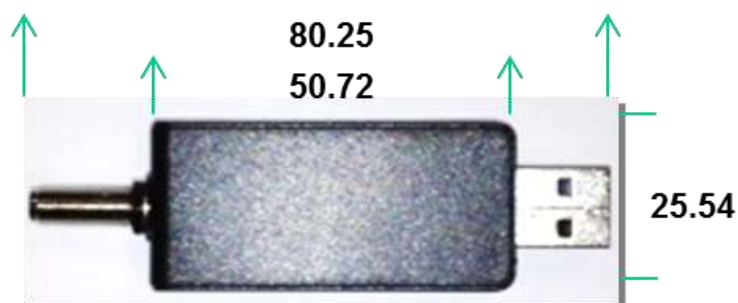

Scale: +/- 1.0 mm

8 Revision Control

Document EZ-GPS-G	GPS module
External Release	DOC-DS-200278B

Date	Author	Revision	Comment
5/18/2018	MFT	1.0	Preliminary

9 Contact Information

Inventek Systems
2 Republic Road
Billerica Ma, 01862
Tel: 978-667-1962
Sales@inventeksys.com

www.inventeksys.com

Copyright 2017, Inventek Systems. All Rights Reserved. This software, associated documentation, and materials ("Software"), referenced and provided with this documentation is owned by Inventek Systems and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Therefore, you may use this Software only as provided in the license agreement accompanying the software package from which you obtained this Software ("EULA"). If no EULA applies, Inventek Systems hereby grants you a personal, non-exclusive, non-transferable license to copy, modify, and compile the Software source code solely for use in connection with Inventek's integrated circuit products.

Any reproduction, modification, translation, compilation, or representation of this Software except as specified above is prohibited without the express written permission of Inventek. Disclaimer: THIS SOFTWARE IS PROVIDED AS-IS, WITH NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, NONINFRINGEMENT, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Inventek reserves the right to make changes to the Software without notice. Inventek does not assume any liability arising out of the application or use of the Software or any product or circuit described in the Software. Inventek does not authorize its products for use in any products where a malfunction or failure of the Inventek product may reasonably be expected to result in significant property damage, injury, or death ("High Risk Product"). By including Inventek's product in a High Risk product, the manufacturer of such system or application assumes all risk of such use and in doing so agrees to indemnify Inventek against all liability. Inventek Systems reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. The information contained within is believed to be accurate and reliable. However, Inventek does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.