

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0761349002

Status:


Active

Overview:

vhdm

Description:

VHDM® H-Series Board-to-Board Backplane Header, 2.00mm (.079") Pitch Vertical, 8-Row, Open Signal Module, 80 Circuits, Advance Mate Shield, Pin Length 6.25mm (.246"), Lead Free

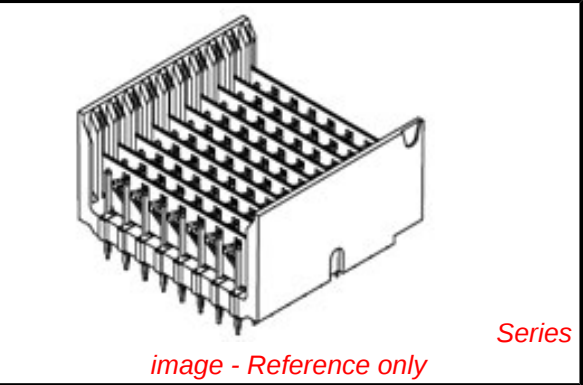

Documents:

[Drawing \(PDF\)](#)

[Product Specification PS-74031-999 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

General	
Product Family	Backplane Connectors
Series	76134
Application	Backplane
Comments	Open Header
Component Type	PCB Header
Overview	vhdm
Product Name	VHDM®
Style	N/A
Physical	
Circuits (Loaded)	80
Circuits (maximum)	80
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	Beryllium Copper, High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Columns	N/A
Number of Pairs	Open Pin Field
Number of Rows	8
Orientation	Vertical
PC Tail Length (in)	0.067 In
PC Tail Length (mm)	1.70 mm
PCB Locator	No
PCB Retention	None
PCB Thickness Recommended (in)	0.070 In
PCB Thickness Recommended (mm)	1.80 mm
Packaging Type	Tube
Pitch - Mating Interface (in)	0.079 In
Pitch - Mating Interface (mm)	2.00 mm
Pitch - Term. Interface (in)	0.039 In
Pitch - Term. Interface (mm)	1.00 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.75
Plating min: Termination (µin)	30
Plating min: Termination (µm)	0.75
Polarized to PCB	Yes
Stackable	Yes
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55°C to +105°C

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

76134Series

Mates With

76021 VHDM® Board-to-Board Daughtercard Receptacle

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.





Global

Description	Product #
VHDM® Signal Pin	0622015700
Insertor Repair Tool	
VHDM® 8 Row Pin and Shield Repair Tool	0622015900
VHDM® 8 Row Shield Extraction Tool	0622016100


Termination Interface: Style	Through Hole - Compliant Pin	VHDM® Insertion <u>0622020209</u>
Electrical		Module for Standard
Current - Maximum per Contact	3A	Shield Signal
Data Rate	2.5 Gbps	Header, 8 Row by
Shield Type	Ground Plane Shield	10 Wide, 20.00mm
Shielded	Yes	(.787")
Voltage - Maximum	30V AC (RMS)/DC	
Material Info		
Reference - Drawing Numbers		
Packaging Specification	PK-74060-003	
Product Specification	PS-74031-999	
Sales Drawing	SD-76134-001	
VHDM and Very High Density Metric are trademarks of Amphenol Corporation		

This document was generated on 05/28/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

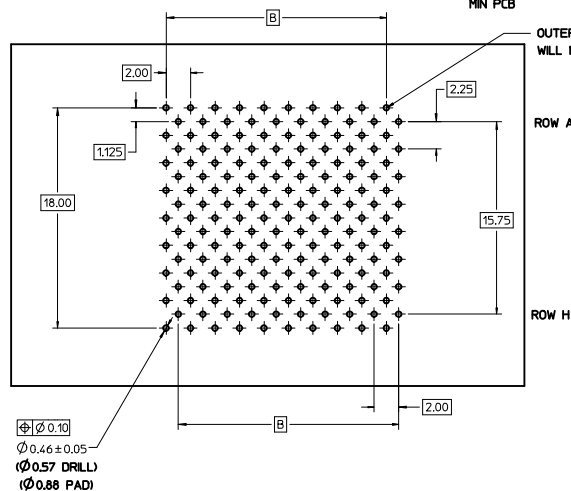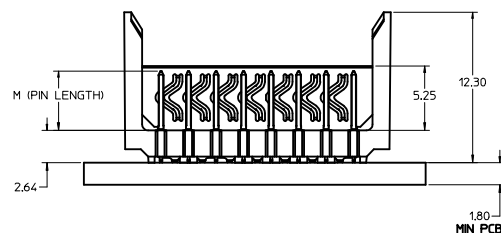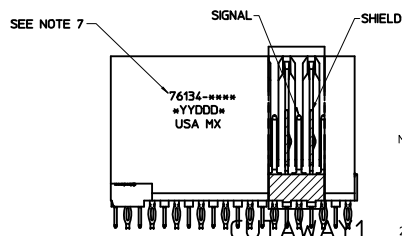
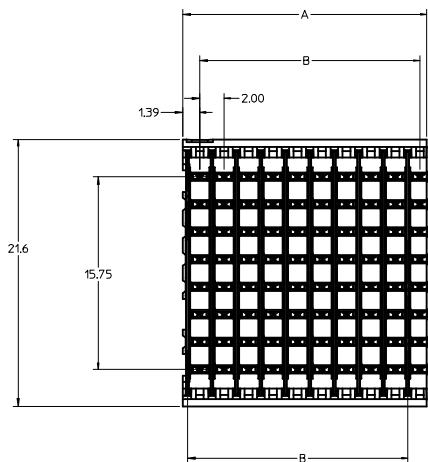


$\varnothing 0.10$
 $\varnothing 0.46 \pm 0.05$
 $(\varnothing 0.57 \text{ DRILL})$
 $(\varnothing 0.88 \text{ PAD})$

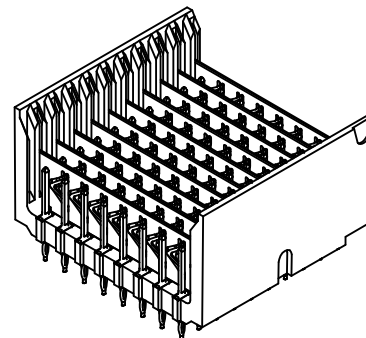

- NOTES:**
1. MATERIALS:
HOUSING - LIQUID CRYSTAL POLYMER (LCP)
GLASS FILLED, UL94V-0, BLACK
SIGNAL PIN AND SHIELD - COPPER ALLOY
 2. FINISHES:
CONTACT AREA - SELECTIVE GOLD (Au)
PCB TAILS - SELECTIVE TIN/LEAD (SnPb) OR MATTE TIN (Sn)
 3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-74031-999.
 4. FOR MIXED CONTACT LENGTH CONTACT MOLEX FOR AVAILABILITY.
 5. FOR SPECIFIC MATERIAL NUMBERS AND MATING INFORMATION REFER TO SHEET 2.
 6. PACKAGE PER PK-74060-003.
 7. ASSEMBLY WILL BE MARKED WITH P/N AND DATE CODE WITH LASER MARK ON SIDE OF HOUSING OR BY LABEL ON THE TUBE.

QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
				MM ONLY		5:1	METRIC		
				mm	INCH				
 =0		4 PLACES ±		---	±	---	TITLE VHDM H-SERIES 8 ROW OPEN END BACKPLANE SALES DRAWING MOLEX INCORPORATED		MATERIAL NO. DOCUMENT NO. SHEET NO.
 =0		3 PLACES ±		---	±	---			
		3 PLACES ±		---	±	---			
		2 PLACES ±		0.15	±	---			
		1 PLACE ±		0.25	±	---			
		ANGULAR ±1/2°							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWN BY J JONIAK 2008/12/01 CHECKED BY B BINGHAM 2008/04/11 APPROVED BY B BINGHAM 2008/04/11		DATE 2008/04/11 DATE 2008/04/11 DATE 2008/04/11		DATE 2008/04/11 DATE 2008/04/11 DATE 2008/04/11		DATE 2008/04/11 DATE 2008/04/11 DATE 2008/04/11	
INITIAL RELEASE EC NO: UCP2008-2748 DRAWN BY J JONIAK 2008/12/01 CHECKED BY B BINGHAM 2008/04/11 APPROVED BY B BINGHAM 2008/04/11		DATE 2008/04/11 DATE 2008/04/11 DATE 2008/04/11		DATE 2008/04/11 DATE 2008/04/11 DATE 2008/04/11		DATE 2008/04/11 DATE 2008/04/11 DATE 2008/04/11		DATE 2008/04/11 DATE 2008/04/11 DATE 2008/04/11	

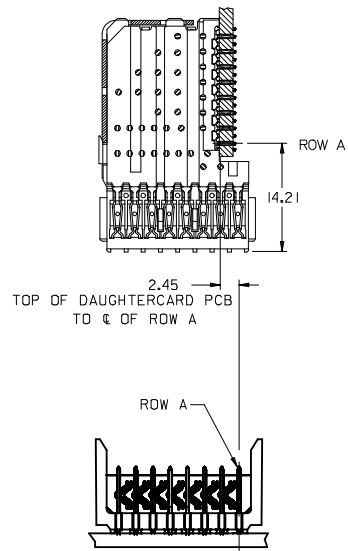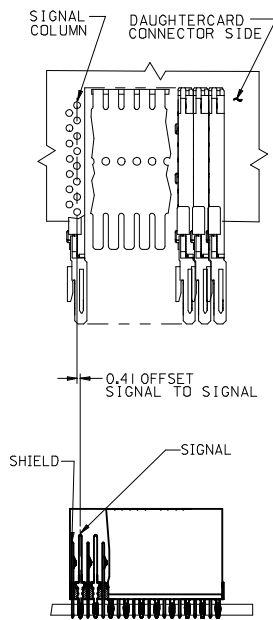

PART NUMBER	COLUMN	NUMBER OF SIGNAL PINS	NUMBER OF SHIELD	A	B	M	Au (um) THICKNESS	Sn (um) THICKNESS
76134-M001	10	80	10	20.00	18.00	4.75	0.76	0.76-1.52
76134-M006							1.27	
76134-M501	25	200	25	50.00	48.00		0.76	
76134-M506							1.27	
76134-M002	10	80	10	20.00	18.00	6.25	0.76	
76134-M007							1.27	
76134-M502	25	200	25	50.00	48.00		0.76	
76134-M507							1.27	
76134-M003	10	80	10	20.00	18.00	4.25	0.76	
76134-M008							1.27	
76134-M503	25	200	25	50.00	48.00		0.76	
76134-M508							1.27	
76134-M004	10	80	10	20.00	18.00	5.15	0.76	
76134-M009							1.27	
76134-M504	25	200	25	50.00	48.00		0.76	
76134-M509							1.27	

MATERIAL NUMBER ASSIGNMENT

76134-**-**

SEE TABLE

NUMBER OF COLUMNS/PLATING
 10 = 10 COLUMN TIN/LEAD
 25 = 25 COLUMN TIN/LEAD
 90 = 10 COLUMN MATTE TIN
 85 = 25 COLUMN MATTE TIN

INITIAL RELEASE IEC NO: UCP2008-2748 DRAWN: JONI AK 2008/12/01 CHECKED: JONI AK 2008/12/02 APPR: JLAIRY 2008/12/03	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY	SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	=0 =0	mm	INCH	DRAWN BY JONI AK	DATE 2008/04/11	TITLE VHDM H-SERIES 8 ROW OPEN END BACKPLANE SALES DRAWING	
	4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.15 ± --- 1 PLACE ± 0.25 ± --- ANGULAR ± 1/2°	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		CHECKED BY BINGHAM	DATE 2008/04/11	MOLEX INCORPORATED	
			APPROVED BY BINGHAM		DATE 2008/04/11	SHEET NO. 2 OF 2	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.