

S11MD7T/S11MD8T/S11MD9T S21MD7T/S21MD8T/S21MD9T

Low Input Driving Type Phototriac Coupler

- * Taping reel type of **S21MD8T** is also available (**S21MD8P**)
- * DIN-VDE0884 approved type is also available.

■ Features

- Low input driving current
(**S11MD7T** / **S11MD8T** / **S21MD7T** / **S21MD8T**)
 I_{FT} : MAX. 5mA
S11MD9T / **S21MD9T** I_{FT} : MAX. 7mA)
- Pin No. 5 completely molded for external noise resistance
- Built-in zero-cross circuit (**S11MD8T**/ **S21MD8T**)
- High repetitive peak OFF-state voltage
(**S11MD7T** / **S11MD8T** / **S11MD9T**)
 V_{DRM} : MIN. 400V
S21MD7T / **S21MD8T** / **S21MD9T**
 V_{DRM} : MIN. 600V
- Isolation voltage between input and output
(V_{iso} : 5 000V_{rms})
- Recognized by UL, file No.E64380

■ Model Line-ups

	100V line	200V line
No zero-cross circuit	S11MD7T/ S11MD9T	S21MD7T/ S21MD9T
Built-in zero-cross circuit	S11MD8T	S21MD8T

■ Applications

- For triggering medium/high power triacs

■ Absolute Maximum Ratings

(Ta = 25°C)

Parameter		Symbol	Rating		Unit
			S11MD7T/S11MD8T S11MD9T	S21MD7T/S21MD8T/ S21MD9T	
Input	Forward current	I_F	50		mA
	Reverse voltage	V_R	6		V
Output	RMS ON-state current	I_T	0.1		A _{rms}
	*1 Peak one cycle surge current	I_{surge}	1.2		A
	Repetitive peak OFF-state voltage	V_{DRM}	400	600	V
	*2 Isolation voltage	V_{iso}	5 000		V _{rms}
Operating temperature		T_{opr}	- 30 to +100		°C
Storage temperature		T_{stg}	- 55 to +125		°C
*3 Soldering temperature		T_{sol}	260		°C


*1 50Hz Sine wave

*2 40 to 60% RH, AC for 1 minute, f = 60Hz

*3 For 10 seconds

■ Outline Dimensions

(Unit : mm)

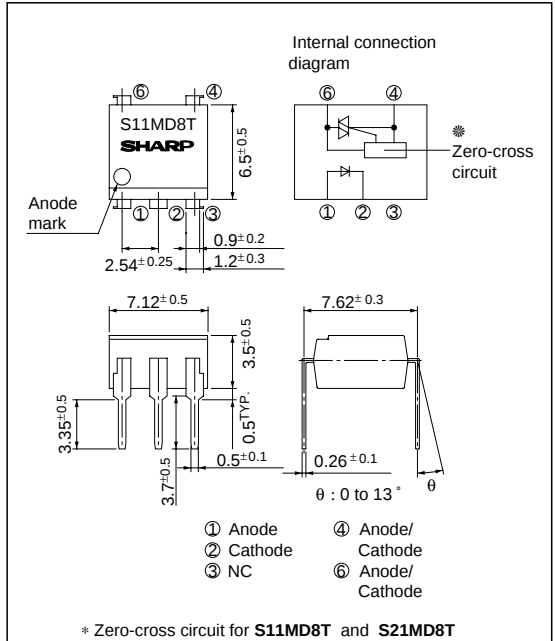

■ Electro-optical Characteristics

(Ta = 25°C)

Parameter			Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage		V _F	I _F = 20mA	-	1.2	1.4	V
	Reverse current		I _R	V _R = 3V	-	-	10 ⁻⁵	A
Output	Repetitive peak OFF-state current		I _{DRM}	V _{DRM} = Rated	-	-	10 ⁻⁶	A
	ON-state voltage	S11MD7T/S21MD7T S11MD9T/S21MD9T	V _T	I _T = 0.1A	-	1.5	2.5	V
		S11MD8T/S21MD8T			-	1.7	2.5	
		Holding current			I _H	V _D = 6V	0.1	
	Critical rate of rise of OFF-state voltage		dV/dt	V _{DRM} = 1/√2 • Rated	100	-	-	V/μs
	Zere-cross voltage	S11MD8T/S21MD8T	V _{OX}	Resistance load, I _F = 10mA	-	-	35	V
	Transfer charac- teristics	Minimum trigger current	S11MD7T/S21MD7T S11MD8T/S21MD8T	I _{FT}	V _D = 6V, R _L = 100Ω	-	-	5
S11MD9T/S21MD9T			-			-	7	
Isolation resistance			R _{ISO}			DC500V, 40 to 60% RH	5 x 10 ¹⁰	10 ¹¹
Turn-on time		S11MD7T	t _{on}	V _D = 6V, R _L = 100Ω I _F = 20mA	-	70	100	μs
		S11MD9T/S21MD7T/ S21MD9T			-	60	100	
		S11MD8T/S21MD8T			-	20	50	

Fig. 1 RMS ON-state Current vs. Ambient Temperature

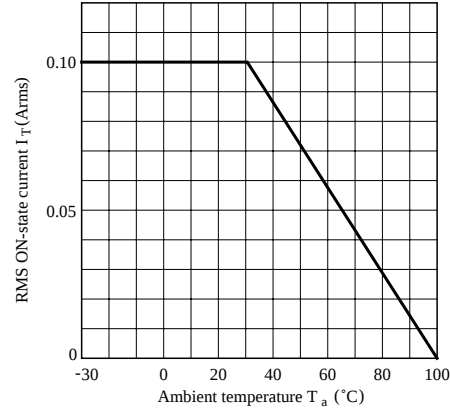


Fig. 2 Forward Current vs. Ambient Temperature

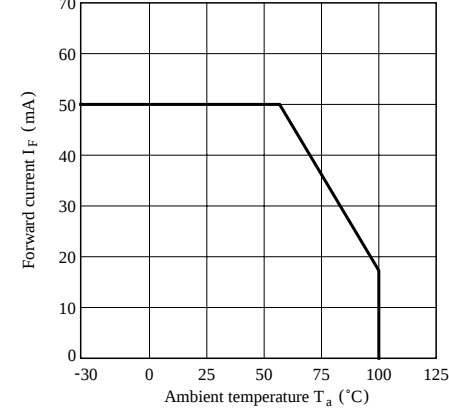


Fig. 3 Forward Current vs. Forward Voltage

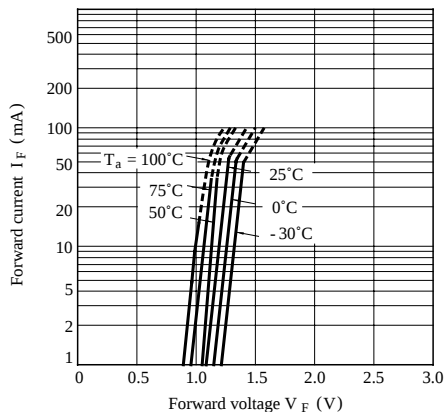


Fig. 4 Minimum Trigger Current vs. Ambient Temperature

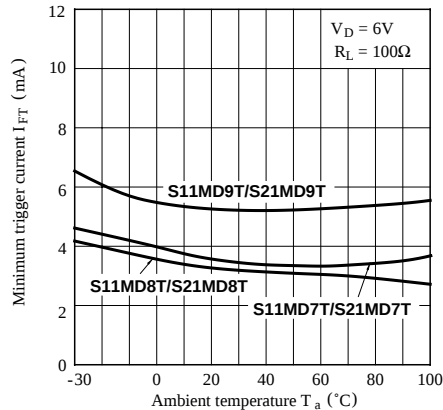


Fig. 5 Relative Repetitive Peak OFF-State Voltage vs. Ambient Temperature

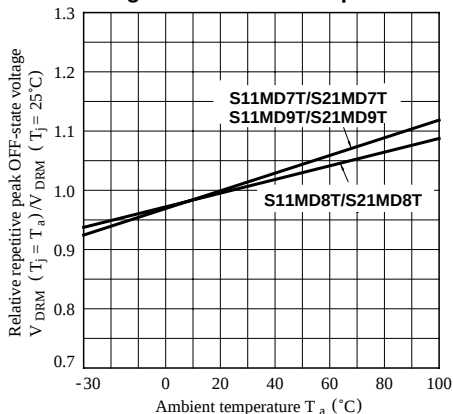


Fig. 6 ON-state Voltage vs. Ambient Temperature

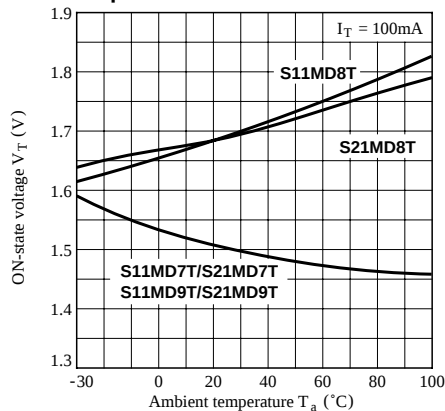


Fig. 7 Holding Current vs. Ambient Temperature

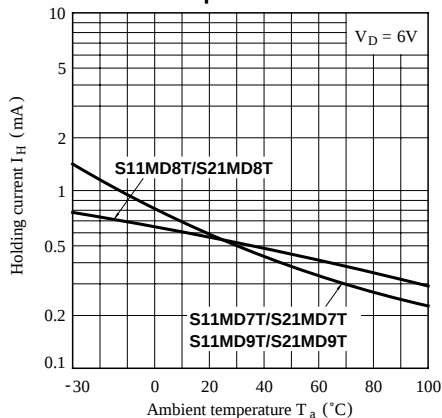


Fig. 8-a Repetitive Peak OFF-state Current vs. OFF-state Voltage (S11MD7T/S11MD9T)

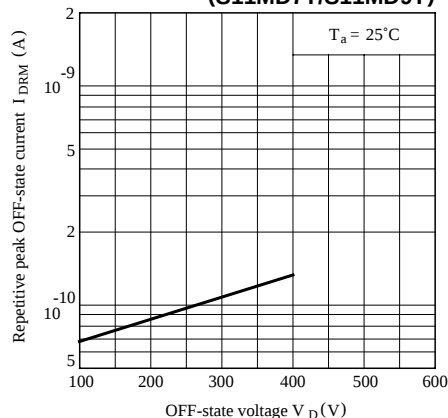


Fig. 8-b Repetitive Peak OFF-state Current vs. OFF-state Voltage

(S11MD8T/S21MD8T)

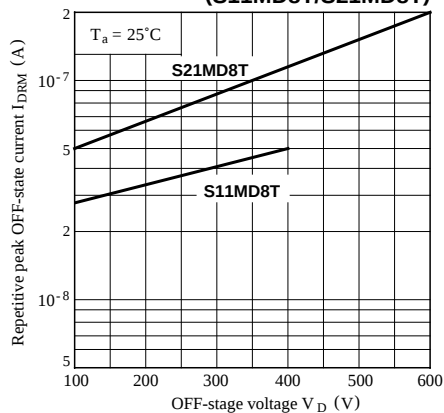


Fig. 8-c Repetitive Peak OFF-state Current vs. OFF-state Voltage

(S21MD7T/S21MD9T)

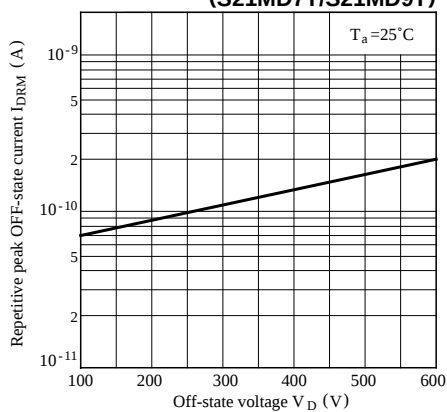


Fig. 9-a Repetitive Peak OFF-state Current vs. Ambient Temperature

(S11MD7T/S11MD9T/S21MD7T/S21MD9T)

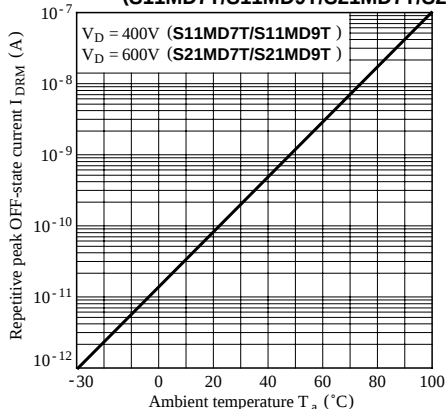


Fig. 9-b Repetitive Peak OFF-state Current vs. Ambient Temperature

(S11MD8T/S21MD8T)

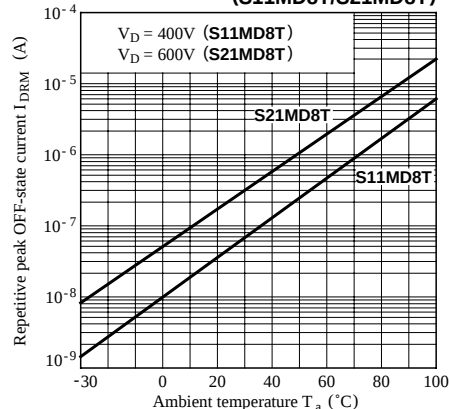


Fig.10 Zero-cross Voltage vs. Ambient Temperature

(S11MD8T/S21MD8T)



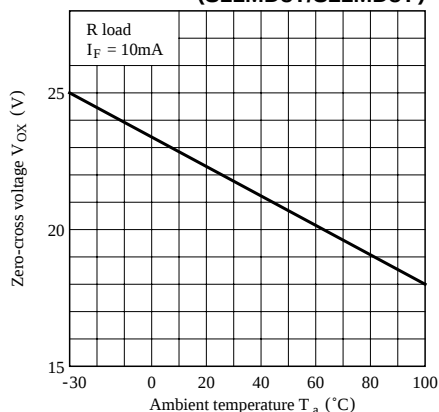


Fig.11-a Turn-on Time vs. Forward Current


(S11MD7T)

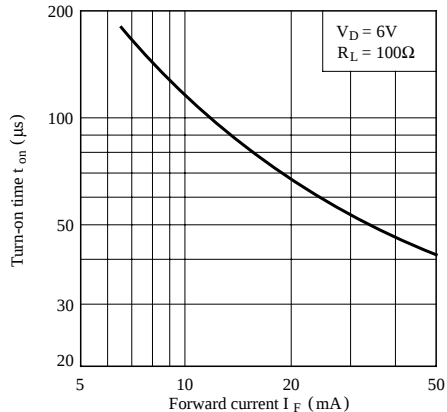


**Fig.11-b Turn-on Time vs. Forward Current
(S11MD8T/S21MD8T)**

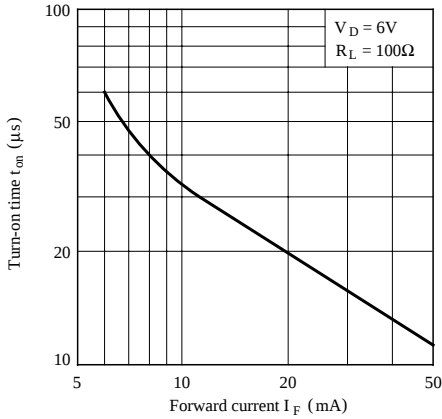


**Fig.11-c Turn-on Time vs. Forward Current
(S11MD9T/S21MD7T/S21MD9T)**

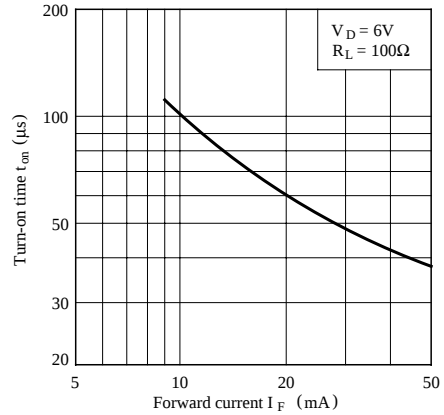

**Fig.12-a ON-state Current vs.
ON-state Voltage
(S11MD7T/S21MD7T/S11MD9T/S21MD9T)**

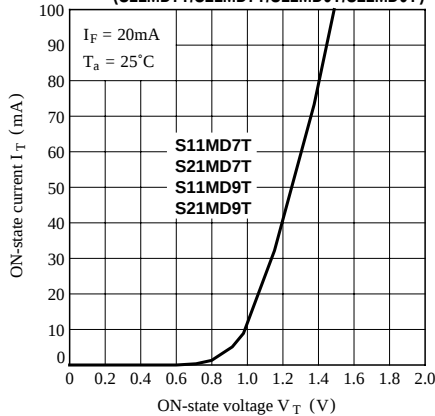


**Fig.12-b ON-state Current vs.
ON-state Voltage
(S11MD8T/S21MD8T)**

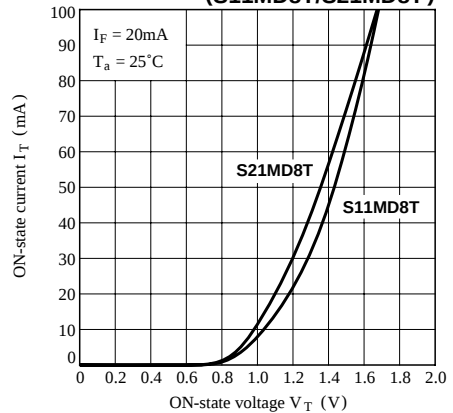

Basic Operation Circuit

S11MD7T/S11MD8T/S11MD9T
S21MD7T/S21MD8T/S21MD9T

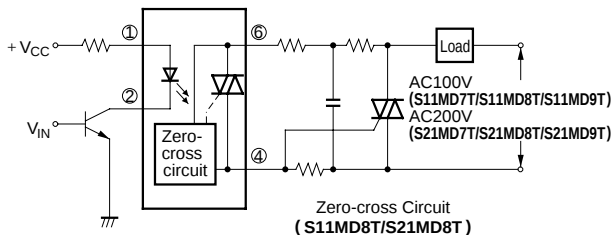

- Please refer to the chapter “Precautions for Use.”



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.