

### Features

- 3" x 5" x 1.3" Package
- 240 Watts
- EN55015 Class B Conducted EMI
- 50°C Ambient Operation with 300 LFM
- 130 Watts @ 70C (Conduction Cooled)
- 190 Watts @ 60C (200 LFM)
- 160 Watts @ 70C (200 LFM)
- Universal Input 90-264Vac
- Meets IEC61000-3-2 Class C for 0% to 100% LED Dimming Applications(1 Watt input power to full load)
- EN60950 2<sup>nd</sup> Edition



### Description

The LB240 model is the highest density conduction cooled power supply in a compact 3X5 package. Providing 240 Watts of power at 50°C ambient with 300 LFM airflow, the LB240 is designed to meet global lighting requirements and has a built-in EMI filter to meet EN55015 class B.

### Model Chart

Model* Number	Volts	Maximum Output Current (A)	Minimum Load	Ripple & Noise**	Total Regulation	OVP Threshold
LB240S56K	56V	4.29	0A	560mV pk-pk	±3%	66V± 4V
LB240S48K	48V	5	0A	480mV pk-pk	±3%	56V± 3V
LB240S24K	24V	10	0A	240mV pk-pk	±3%	29V±2.5V

\* For Cold Plate cooling, add option H. Consult the factory for model number availability.

\*\*Ripple is 800mV pk-pk @ -10°C

### General Specifications

<b>AC Input</b>	100-240Vac, ±10%, 47-63Hz, 1Ø	<b>Turn On Time</b>	Less than 3 sec. @115Vac, Full Load
<b>Input Current</b>	Max. 115Vac:2.6A, 230Vac: 1.3A	<b>Hold-up Time</b>	12 mSec min, 115Vac/60Hz
<b>Inrush Current</b>	< 55A peak, 264Vac, cold start, turn on at AC zero crossing	<b>Overtemperature Protection</b>	Sensing transformer temperature, 165°C latching type, requires input power recycling to reset.
<b>Input Fuse</b>	5A, 250Vac fuse provided on all models	<b>Overload Protection</b>	Hiccup Mode
<b>Earth Leakage Current</b>	<500µA@264Vac, 60Hz, NC	<b>Short Circuit Protection</b>	Hiccup Mode, auto recovery. A direct hard short may latch off the converter; remove AC input to reset.

<b>Efficiency</b>	VIN 24V 48V 56V (Vac) ----- 115 88% 90% 90% 230 90% 92% 92%	<b>Overvoltage Protection</b>	OVP latch, remove AC input to reset.
<b>Output Power</b>	240 Watts max. with 300 LFM	<b>Switching Frequency</b>	PFC: Fixed, 65kHz Main Converter: Variable 35-200kHz, 65-70kHz at full load
<b>Transient Response</b>	For 5% to 50% or 50% to 5% load change: <20 mSec, return to 1% of nominal, di/dt <0.2A/uS. Max voltage deviation=3%  For 50% to 100% or 100% to 50% load change: <1 mSec, return to 1% of nominal, di/dt <0.2A/uS. Max voltage deviation=3%  For 5% to 100% or 100% to 5% load change: 25 mSec, return to 1% of nominal, di/dt <0.2A/uS. Max voltage deviation=4%	<b>Isolation</b>	Input-Output: 3,000Vac Input-Ground: 1,800Vac Output-Ground: 1,500Vac
<b>Ripple and Noise</b>	0.5%rms, 1% pk-pk, see chart.	<b>Operating Temperature</b>	-10°C to +70°C( See Below Chart) Start Up at -40°C
<b>Output Voltage</b>	See Model Chart	<b>Heat-Sink Temperature</b>	To maintain Safety approval & life expectancy, heat-sink temperature should not exceed 85°C
<b>Voltage Adjustability</b>	Fixed Output	<b>Storage Temperature</b>	-40°C to +85°C
<b>Minimum Load</b>	Not required	<b>Altitude</b>	Operating: -457 to 3000 m Non-operating: -457 to 12,192m.
<b>Total Regulation</b>	+/- 3% combined line, load and initial setting.	<b>Relative Humidity</b>	5% to 95%, non-condensing
<b>Vibration</b>	Operating: 0.003g <sup>2</sup> /Hz, 1.5grms overall, 3 axes, 1 hr/axis Non-Operating: 0.026g <sup>2</sup> /Hz, 5.0grms overall, 3 axes, 10 min/axis	<b>Shock</b>	Operating: Half-sine, 20gpk, 10ms, 3 axes, 6 shocks total Non-Operating: Half-sine, 40 gpk, 10 ms, 3axes, 6 shocks total
<b>Dimensions</b>	W: 3.0" x L: 5.0" x H: 1.3" "H" option: 3.0"x 6.0" x1.5"	<b>Safety Standards</b>	EN/CSA/UL/IEC 60950-1, 2nd Edition
<b>Weight</b>	370g "H" option: TBD	<b>Life</b>	100,000 hours, 50C for 240W 40,000 hours, 70C for 130W
<b>Audible Noise</b>	20 dB A max per ISO7779 with 0% - 100% static load 25 dB A max per ISO7779 with 0% - 100% - 0% transient load	<b>MTBF</b>	438,540 hours. Conditions: Standard: Telcordia SR-332 issue 3 Ambient temp: 25c Voltage: 110v Level: 0/1 Environment: Ground, fixed, controlled


The specification above is based on 25°C ambient and where applicable at nominal input voltage of 100 to 240VAC.

Ambient	Cooling Method	Wattage (watts)
50°C	Forced Air, 300 LFM	240
60°C	Forced Air, 200 LFM	190
70°C	Forced Air, 200 LFM	160
70°C with Max. Temperature of primary heat-sink to be held under 85°C	Conduction	130
50°C	Convection	160
40°C with "H" option, Max. Temp of cold plate to be held under 60°C	Conduction	200

## EMI/EMC Compliance

<b>Conducted Emissions</b>	EN55015 Class B, FCC Part 15, Subpart B, Class B
<b>Radiated Emissions</b>	EN55022 Class A, FCC Part 15, Subpart B, Class A
<b>Static Discharge Immunity</b>	EN61000-4-2, 6kV Contact Discharge, 8kV air discharge
<b>Radiated RF Immunity</b>	EN61000-4-3, 3V/m.
<b>EFT/Burst Immunity</b>	EN61000-4-4, 2kV/5kHz
<b>Line Surge Immunity</b>	EN61000-4-5, 1kV differential, 2kV common-mode
<b>Conducted RF Immunity</b>	EN61000-4-6, 3Vrms
<b>Power Frequency Magnetic Field Immunity</b>	EN61000-4-8, 3A/m
<b>Voltage Dip Immunity</b>	EN61000-4-11, 100%, 10ms; 30%, 500ms; 60%, 100ms; Performance Criteria A, A, & A at 58% load.
<b>Line Harmonic Emissions</b>	EN61000-3-2, Class A, D For Class C from 1W input power to full load
<b>Flicker Test</b>	EN61000-3-3, Complies (dmax<6%)


## Mechanical Drawing

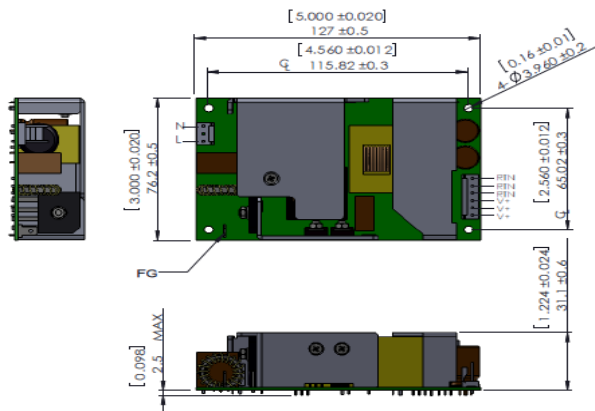

### Notes

1. All dimensions in inches (mm), tolerances are mentioned for each measurement
2. Mounting holes should be grounded for EMI purposes.
3. FG is safety ground connection.
4. The power supply requires mounting on Metal standoffs min. of 0.20" (5mm) in height

## LB240SXXKH

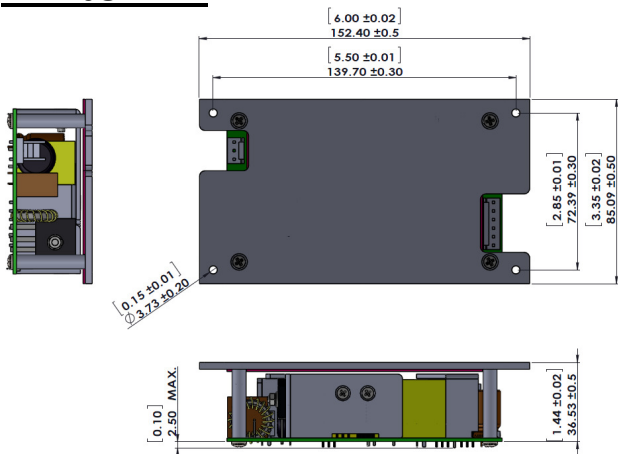

**Connector Information**

Input Connector J100	Ground (FG)	DC Output Connector J300	
PIN 1) AC LINE PIN 2) EMPTY PIN 3) AC NEUTRAL	0.25" FASTON TAB	Term. 1,2,3: RTN Term. 4,5,6: +Vout	
Mating Connector: AMP 640250-3 Pins: 640252-2	Mating Connector: Molex 190020001	Mating Connector: AMP 640250-6 Pins: 640252-2	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.