

### Description

Single and multipole magnetic circuit breakers with trip-free mechanism and toggle actuation. A choice of fast magnetic only or hydraulically delayed switching characteristics (S-type MO or HM CBE to EN 60934) ensures suitability for a wide range of applications. Industry standard dimensions and panel mounting. Options include auxiliary changeover contacts. Low temperature sensitivity at rated load.

Approved to CBE standard EN 60934 (IEC 60934).

### Typical application

Control equipment, communications systems, transportation, power supplies.

### Standard current ratings and typical internal resistance values

| Current rating (A) | Internal resistance values (Ω) per pole |        |            |            |
|--------------------|---|--------|------------|------------|
|                    | F1                                      | F2     | K1, M1, T1 | K2, M2, T2 |
| 0,02               | 1 493                                   | 953    | 2 669      | 2 457      |
| 0,05               | 276                                     | 152    | 452        | 376        |
| 0,1                | 58                                      | 37     | 100        | 94         |
| 0,25               | 8,2                                     | 6,0    | 15,5       | 14,7       |
| 0,5                | 2,3                                     | 1,47   | 3,9        | 3,2        |
| 0,75               | 0,98                                    | 0,63   | 1,65       | 1,56       |
| 1                  | 0,58                                    | 0,35   | 0,95       | 0,90       |
| 2                  | 0,145                                   | 0,096  | 0,26       | 0,20       |
| 2,5                | 0,096                                   | 0,061  | 0,15       | 0,15       |
| 3                  | 0,065                                   | 0,048  | 0,10       | 0,10       |
| 5                  | 0,025                                   | < 0,02 | 0,042      | 0,040      |
| 6                  | < 0,02                                  | < 0,02 | 0,029      | 0,028      |
| 8                  | < 0,02                                  | < 0,02 | < 0,02     | < 0,02     |
| 10                 | < 0,02                                  | < 0,02 | < 0,02     | < 0,02     |
| 12                 | < 0,02                                  | < 0,02 | < 0,02     | < 0,02     |
| 15                 | < 0,02                                  | < 0,02 | < 0,02     | < 0,02     |
| 16                 | < 0,02                                  | < 0,02 | < 0,02     | < 0,02     |
| 20                 | < 0,02                                  | < 0,02 | < 0,02     | < 0,02     |
| 25                 | < 0,02                                  | < 0,02 | < 0,02     | < 0,02     |
| 30                 | < 0,02                                  | < 0,02 | < 0,02     | < 0,02     |
| 40                 | < 0,01                                  | -      | < 0,01     | -          |
| 50                 | < 0,01                                  | -      | < 0,01     | -          |



### Technical data

For further details please see chapter: Technical Information

|   |  |   |  |
|---|--|---|--|
| Voltage rating                                      | 3 AC 415 V; AC 240 V, 50/60 Hz; DC 80 V (higher DC ratings to special order)   |   |  |
| Current ratings                                     | 0.02...50 A DC<br>0.02...30 A AC   |   |  |
| Auxiliary circuit                                   | 6 A, AC 240 V;<br>3 A, DC 28 V;<br>1 A, DC 65 V;<br>0.5 A, DC 80 V   |   |  |
| Typical life  | 3 AC 415 V, AC 240 V:<br>0.02...30 A 6,000 operations at 1 x I <sub>N</sub> , inductive<br>10,000 operations at 1 x I <sub>N</sub> , resistive<br>DC 80 V: 0.02...25 A 6,000 operations at 1 x I <sub>N</sub> , inductive<br>0.02...30 A 10,000 operations at 1 x I <sub>N</sub> , resistive<br>40 + 50 A 6,000 operations at 1 x I <sub>N</sub> , resistive |   |  |
| Ambient temperature                                 | -40...+85 °C (-40...+185 °F)   |   |  |
| Insulation co-ordination (IEC 60664 and 60664A)     | rated impulse withstand voltage<br>2.5 kV<br>reinforced insulation in operating area   | pollution degree<br>2   |  |
| Dielectric strength (IEC 60664 and 60664A)          | operating area<br>Line to Load<br>pole to pole (2- and 3-pole)<br>main to auxiliary circuit<br>switching to trip circuit (version -X)  | test voltage AC 3,000 V<br>test voltage AC 1,500 V<br>test voltage AC 1,500 V<br>test voltage AC 3,000 V<br>test voltage AC 1,500 V |  |
| Insulation resistance                               | > 100 MΩ (DC 500 V)  |   |  |
| Interrupting capacity (IEC 60934 - test sequence E) | 4 x IN at AC;<br>4 x IN at DC  |   |  |
| Interrupting capacity (UL 1077)                     | I <sub>N</sub>   | 0.02...20 A   | 25...30 A  |
|   | AC:  | 1-pole AC 250 V/3,500A<br>2-pole AC 250 V/3,500A<br>3-pole 3AC 250V/3,500A  | AC 250 V/3,500A<br>AC 250 V/5,000A<br>3AC250V/5,000A |
|   | DC:  | 1-pole 0.02...50 A<br>2-pole 0.02...30 A  | DC 80 V/3,500 A<br>DC 80 V/3500 A                    |
| Degree of protection (IEC 60529/DIN 40050)          | operating area IP40<br>terminal area IP00  |   |  |
| Vibration   | with toggle down: 10 g (57-2000Hz) ± 0.76 mm (10-57 Hz) at 0.9 x IN<br>directions 1, 2, 3, 4, 5: 10 g (57-2000 Hz) at 1 x IN.  |   |  |
| Shock   | 100 g (11 ms) at 1 x IN, directions 1,2,3,4,5<br>100 g (11 ms) at 0.8 x IN, direction 6.   |   |  |
| Corrosion   | 96 hours at 5 % salt mist, to IEC 60068-2-11, test Ka  |   |  |
| Humidity  | 240 hours at 95 % RH to IEC 60068-2-78, test Cab   |   |  |
| Mass  | approx. 65 g per pole  |   |  |

**Ordering information**

|  |  |
|--|--|
| <b>Type No.</b>  | 8340 magnetic circuit breaker with toggle actuator   |
| <b>Mounting</b>  | F flange mounting  |
| <b>Configuration</b>                                       | 1 with mounting nuts 6-32 UNC<br>4 with mounting nuts M3<br>9 snap-in frame  |
| <b>Number of poles</b>                                     | 1 single pole protected<br>2 two pole protected<br>3 three pole protected  |
|  | } magnetic and hydraulic magnetic delayed  |
| <b>Panel hardware</b>                                      | 0 without panel hardware   |
| <b>Terminal design (main contact)</b>                      | K4 screw terminals M5 recommended for $I_N > 20$ A<br>P1 blade terminals A6.3-0.8 mm (QC.250) ( $\leq 35$ A)   |
| <b>Characteristic curve *)</b>                             | <b>Characteristic curve, instantaneous:</b><br>F1 DC<br>F2 AC 50/60 Hz<br><b>Short delay:</b><br>K1 DC<br>K2 AC 50/60 Hz<br><b>Medium delay:</b><br>M1 DC<br>M2 AC 50/60 Hz<br><b>Long delay:</b><br>T1 DC<br>T2 AC 50/60 Hz |
| <b>Actuator colour/design</b>                              | A black, long toggle<br>K black, short toggle<br>Z black, without toggle, with slot (only 1-pole)  |
| <b>other colours to special order</b>                      |  |
| <b>Marking on actuator</b>                                 | 0 without marking<br>L I-O; ON-OFF<br>N I-O; ON-OFF (IN on housing top)  |
| <b>Auxiliary contacts</b>                                  | H0 without auxiliary contacts<br>H1 with auxiliary contacts, gold-flushed<br>H2 auxiliary contacts, gold-flushed on one pole only (multipole)  |
| <b>Auxiliary contact function</b>                          | 4 1 change over contact  |
| <b>Auxiliary contact terminal design</b>                   | 2 blade terminal 2.8-0.5 mm  |
| <b>Current ratings</b>                                     | 0.02...50 A  |
| 8340 - F 1 1 0 - P1 M1 - A L H1 4 2 - 30A ordering example |  |

**Approvals**

| Authority                          | Standard       | Rated voltage                                     | Current ratings   |
|------------------------------------|----------------|---|---|
| VDE                                | IEC / EN 60934 | AC 240/415 V<br>AC 240 V<br>DC 80 V               | 0.02 A...30 A<br>0.02 A...30 A<br>0.02 A...50 A   |
| UL                                 | UL 1077        | AC 250 V<br>DC 80 V<br>DC 80 V                    | 0.02 A...30 A<br>0.02 A...50 A<br>100 A (2 poles in parallel)                                       |
| CSA                                | C22.2 No 235   | AC 250 V<br>DC 80 V                               | 0.02 A...30 A<br>0.02 A...30 A  |
| CQC                                | GB 17701       | AC 240/415 V<br>AC 240 V<br>DC 80 V               | 0.02 A...30 A<br>0.02 A...30 A<br>0.02 A...50 A   |
| QPL Sweden Defence Material Admin. | MIL-C-55629    | AC 240 V<br>DC 50 V<br>AC 240 V<br>AC 240 / 415 V | 1 A...30 A (8340-F410)<br>1 A...30 A (8340-410)<br>1 A...30 A (8340-F420)<br>1 A...30 A (8340-F430) |

**Internal connection diagrams**



\*) Other characteristic curves upon request (e.g. pulse delayed, for high inrush currents or capacitive loads)

**Preferred types**


| Preferred types        | Standard current ratings (A) |   |   |   |   |    |    |    |    |    |    |    |    |  |
|------------------------|------------------------------|---|---|---|---|----|----|----|----|----|----|----|----|--|
|                        | 1                            | 2 | 3 | 5 | 8 | 10 | 12 | 16 | 20 | 25 | 30 | 40 | 50 |  |
| 8340-F410-P1K1-KNH0-   | x                            | x | x | x | x | x  | x  | x  | x  |    |    |    |    |  |
| 8340-F410-P1K1-KNH142- | x                            | x | x | x | x | x  | x  | x  | x  |    |    |    |    |  |
| 8340-F410-P1M1-KNH0-   | x                            | x | x | x | x | x  | x  | x  | x  |    |    |    |    |  |
| 8340-F410-P1M1-KNH142- | x                            | x | x | x | x | x  | x  | x  | x  |    |    |    |    |  |
| 8340-F410-K4K1-KNH0-   |                              |   |   |   |   |    |    |    |    | x  | x  | x  | x  |  |
| 8340-F410-K4K1-KNH142- |                              |   |   |   |   |    |    |    |    | x  | x  | x  | x  |  |
| 8340-F410-K4M1-KNH0-   |                              |   |   |   |   |    |    |    |    | x  | x  | x  | x  |  |
| 8340-F410-K4M1-KNH142- |                              |   |   |   |   |    |    |    |    | x  | x  | x  | x  |  |

**Dimensions**


**Flange mounting**

**Configuration: F4**


Actuator: long toggle

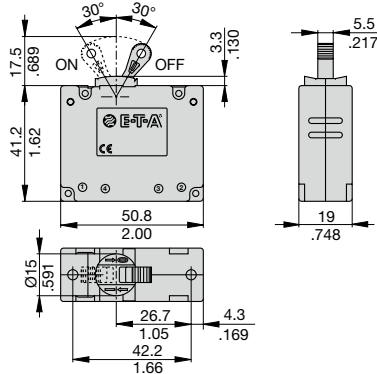

Actuator: short toggle

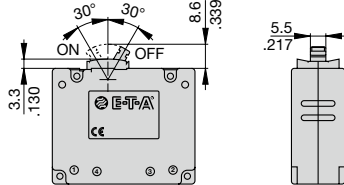


Actuator: without toggle, with slot




Applicable for nominal dimensions without direct tolerance indication: DIN ISO 286 ± IT13

number of poles: 1-3

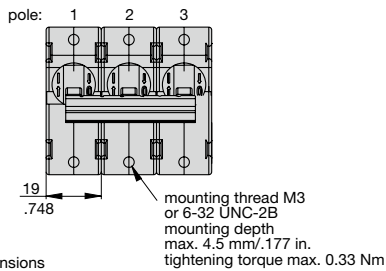


Cut-out dimensions max. panel thickness: 3 mm

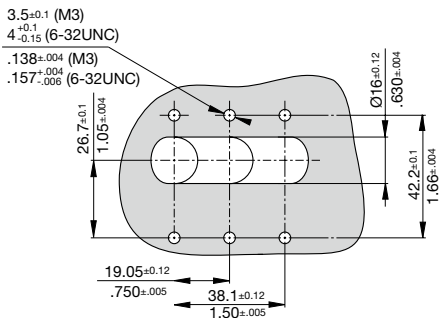


**Configuration: F9**


Actuator: long toggle

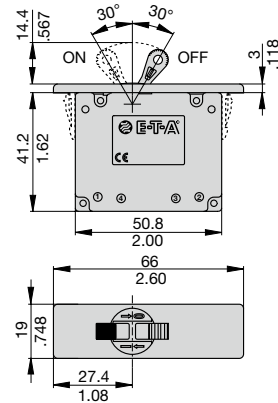


Actuator: short toggle




Actuator: without toggle, with slot



number of poles: 1-3



Cut-out dimensions max. panel thickness: 2 ± 0.1 mm or 4 ± 0.15 mm (snap-fit)

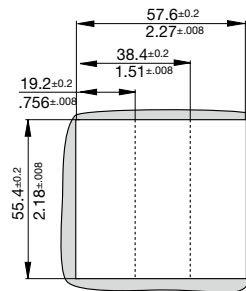

Applicable for nominal dimensions without direct tolerance indication: DIN ISO 286 ± IT13

This is a metric design and millimeter dimensions take precedence ( $\frac{\text{mm}}{\text{inch}}$ )

**Actuator configuration**

**Actuator design**

number of poles: 1 - 3  
Configuration: F4

**Actuator long**




**Actuator short**



number of poles: 1 - 3  
Configuration: F9

**Actuator long**

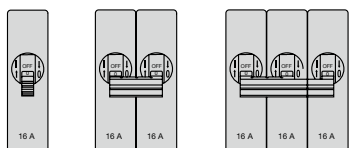

number of poles: 1  
Configuration: F4 / F9

**Actuator: Z (black, without toggle, with slot)**




**Terminal design / Dimensions**


**K4 screw terminals M5**  
tightening torque max. 1.2 Nm



**P1 blade terminals**

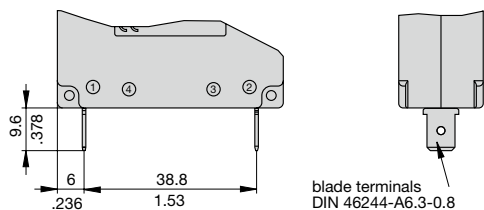


**Auxiliary contacts**

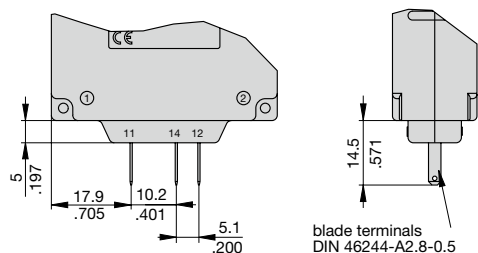

**Installation drawing**

**Terminal design K**




**Terminal design P**



Trip time values indicated for front mounting on a vertical even surface

This is a metric design and millimeter dimensions take precedence ( $\frac{mm}{inch}$ )

**Shock directions / Mounting attitudes**

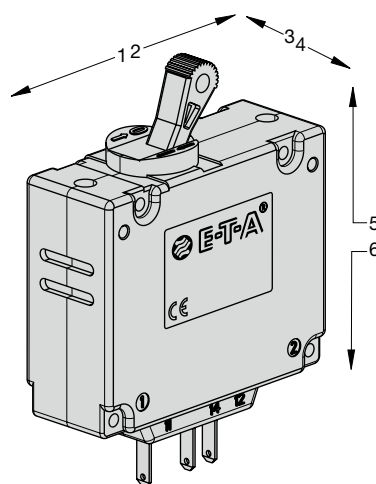

Typical time/current characteristics at 23 °C / +73.4 °F

**Curve F1 (instantaneous) for DC**




**Curve F2 (instantaneous) for AC**



**Curve K1 (short delay) for DC**




**Curve K2 (short delay) for AC 50/60 Hz**

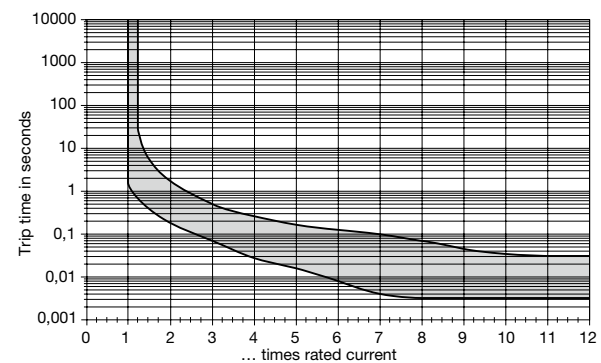

**Curve M1 (medium delay) for DC**




**Curve M2 (medium delay) for AC 50/60 Hz**

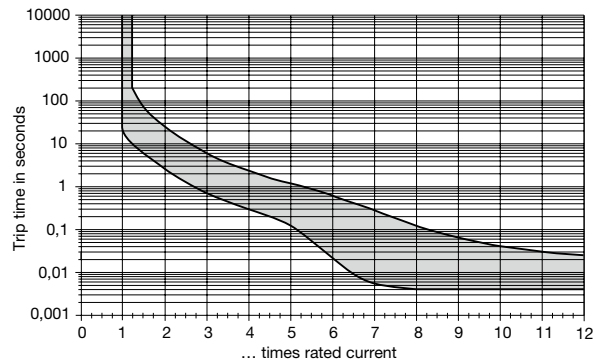

**Curve T1 (long delay) for DC**



**Curve T2 (long delay) for AC 50/60 Hz**

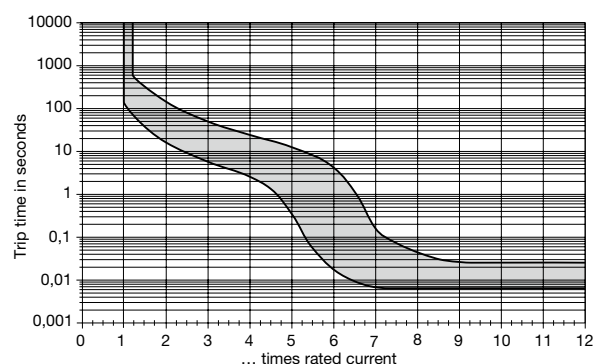

**N.B.** All curves will only be maintained if the escutcheon is mounted on a vertical surface. Ambient temperature or mounting side-by-side does not influence the trip curve, derating is not required. The breakers may trip in the event of current peaks < 0.003 sec. For these applications we offer a mechanical pulse delay – please enquire.

**Other characteristic curves upon request (e.g. pulse delayed, for high inrush currents or capacitive loads).**

1

**Accessories**

**Splash cover with mounting plate and screws  
for 8340-F1.. and 8340-F4**

**1 pole**

**Y 303 565 01**



**2 pole for 8340-F4**

**X 211 118 01**




**3 pole for 8340-F4**

**X 211 119 01**



**Toggle guard for 8340-F1.. and 8340-F4**

**Y 307 250 01**

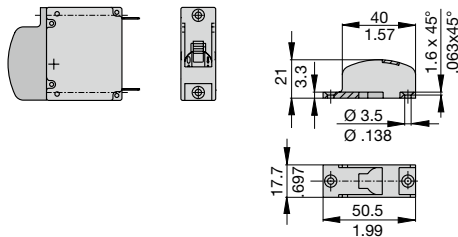

This is a metric design and millimeter dimensions take precedence ( $\frac{mm}{inch}$ )

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.