


## 650 V, 8 A high surge silicon carbide power Schottky diode

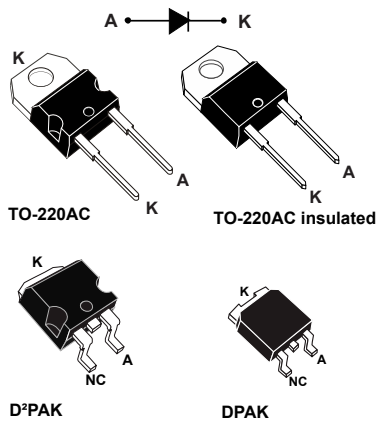

### Features

- No reverse recovery charge in application current range
- Switching behavior independent of temperature
- High forward surge capability
- Insulated package TO-220AC Ins:
  - Insulated voltage: 2500 V<sub>RMS</sub>
  - Typical package capacitance: 7 pF
- Power efficient product

### Applications

- Switch mode power supply
- PFC
- DCDC converters
- LLC topologies
- Boost diode

### Description

This 8 A, 650 V SiC diode is an ultrahigh performance power Schottky diode. It is manufactured using a silicon carbide substrate. The wide band gap material allows the design of a Schottky diode structure with a 650 V rating. Due to the Schottky construction, no recovery is shown at turn-off and ringing patterns are negligible. The minimal capacitive turn-off behavior is independent of temperature.

This [STPSC8H065](#) is especially suited for use in PFC applications. This ST SiC diode will boost the performance in hard switching conditions. Its high forward surge capability ensures a good robustness during transient phases.

| Product status                                                                      |        |
|-------------------------------------------------------------------------------------|--------|
| <a href="#">STPSC8H065</a>                                                          |        |
| Product summary                                                                     |        |
| Symbol                                                                              | Value  |
| $I_{F(AV)}$                                                                         | 8 A    |
| $V_{RRM}$                                                                           | 650 V  |
| $T_{j(max.)}$                                                                       | 175 °C |
| Product label                                                                       |        |
|  |        |

# 1 Characteristics

**Table 1. Absolute ratings (limiting values at 25 °C unless otherwise specified)**

| Symbol       | Parameter                                           |                                                                                                          | Value       | Unit |
|--------------|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------|-------------|------|
| $V_{RRM}$    | Repetitive peak reverse voltage                     |                                                                                                          | 650         | V    |
| $I_{F(RMS)}$ | Forward rms current                                 |                                                                                                          | 22          | A    |
| $I_{F(AV)}$  | Average forward current                             | TO-220AC, DPAK, D <sup>2</sup> PAK, $T_c = 140\text{ °C}^{(1)}$ , DC                                     | 8           | A    |
|              |                                                     | TO-220AC Ins, $T_c = 95\text{ °C}^{(1)}$                                                                 |             |      |
| $I_{FSM}$    | Surge non repetitive forward current                | $t_p = 10\text{ ms}$ sinusoidal, $T_c = 25\text{ °C}$                                                    | 75          | A    |
|              |                                                     | $t_p = 10\text{ ms}$ sinusoidal, $T_c = 125\text{ °C}$                                                   | 69          |      |
|              |                                                     | $t_p = 10\text{ }\mu\text{s}$ square, $T_c = 25\text{ °C}$                                               | 420         |      |
| $I_{FRM}$    | Repetitive peak forward current                     | TO-220AC, DPAK, D <sup>2</sup> PAK, $T_c = 140\text{ °C}^{(1)}$ , $T_j = 175\text{ °C}$ , $\delta = 0.1$ | 33          | A    |
|              |                                                     | TO-220AC Ins, $T_c = 95\text{ °C}^{(1)}$ , $T_j = 175\text{ °C}$ , $\delta = 0.1$                        |             |      |
| $T_{stg}$    | Storage temperature range                           |                                                                                                          | -55 to +175 | °C   |
| $T_j$        | Operating junction temperature range <sup>(2)</sup> |                                                                                                          | -40 to +175 | °C   |

1. Value based on  $R_{th(j-c)}$  max.

2.  $(dP_{tot}/dT_j) < (1/R_{th(j-a)})$  condition to avoid thermal runaway for a diode on its own heatsink.

**Table 2. Thermal resistance parameters**

| Symbol        | Parameter        |                                    | Typ. value | Max. value | Unit |
|---------------|------------------|------------------------------------|------------|------------|------|
| $R_{th(j-c)}$ | Junction to case | TO-220AC, DPAK, D <sup>2</sup> PAK | 1.3        | 1.6        | °C/W |
|               |                  | TO-220AC Ins                       | 2.45       | 3.8        |      |

**Table 3. Static electrical characteristics**

| Symbol      | Parameter               | Test conditions       |                    | Min. | Typ. | Max. | Unit          |
|-------------|-------------------------|-----------------------|--------------------|------|------|------|---------------|
| $I_R^{(1)}$ | Reverse leakage current | $T_j = 25\text{ °C}$  | $V_R = V_{RRM}$    | -    | 7    | 80   | $\mu\text{A}$ |
|             |                         | $T_j = 150\text{ °C}$ |                    | -    | 65   | 335  |               |
| $V_F^{(2)}$ | Forward voltage drop    | $T_j = 25\text{ °C}$  | $I_F = 8\text{ A}$ | -    | 1.56 | 1.75 | V             |
|             |                         | $T_j = 150\text{ °C}$ |                    | -    | 1.98 | 2.50 |               |

1.  $t_p = 10\text{ ms}$ ,  $\delta < 2\%$

2.  $t_p = 500\text{ }\mu\text{s}$ ,  $\delta < 2\%$

To evaluate the conduction losses, use the following equation:

$$P = 1.35 \times I_{F(AV)} + 0.144 \times I_{F(RMS)}^2$$

For more information, please refer to the following application notes related to the power losses :

- AN604: Calculation of conduction losses in a power rectifier
- AN4021: Calculation of reverse losses on a power diode


**Table 4. Dynamic electrical characteristics**

| Symbol   | Parameter               | Test conditions                                            | Typ. | Unit |
|----------|-------------------------|------------------------------------------------------------|------|------|
| $Q_{cj}$ | Total capacitive charge | $V_R = 400\text{ V}$                                       | 23.5 | nC   |
| $C_j$    | Total capacitance       | $V_R = 0\text{ V}, T_c = 25\text{ °C}, F = 1\text{ MHz}$   | 414  | pF   |
|          |                         | $V_R = 400\text{ V}, T_c = 25\text{ °C}, F = 1\text{ MHz}$ | 38   |      |


1. Most accurate value for the capacitive charge:  $Q_{cj}(V_R) = \int_0^{V_R} C_j(V) dV$

## 1.1 Characteristics (curves)


**Figure 1. Forward voltage drop versus forward current (typical values, low level)**

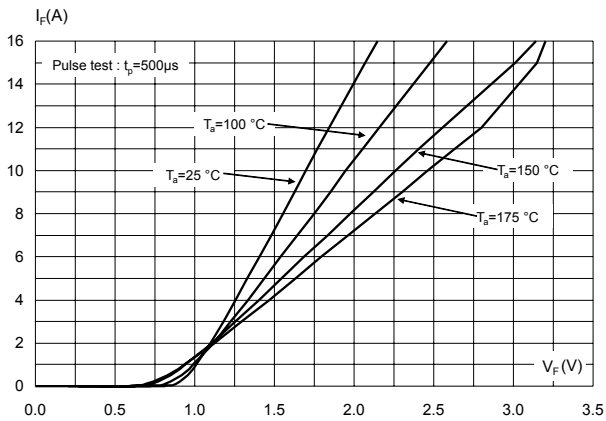


**Figure 2. Forward voltage drop versus forward current (typical values, high level)**

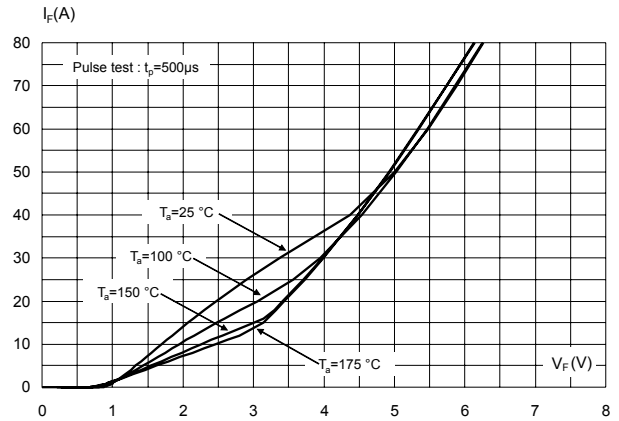


**Figure 3. Reverse leakage current versus reverse voltage applied (typical values)**

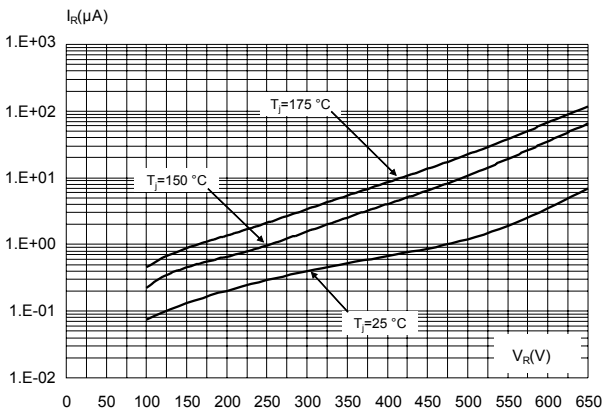


**Figure 4. Peak forward current versus case temperature (TO-220AC, DPAK, D<sup>2</sup>PAK)**

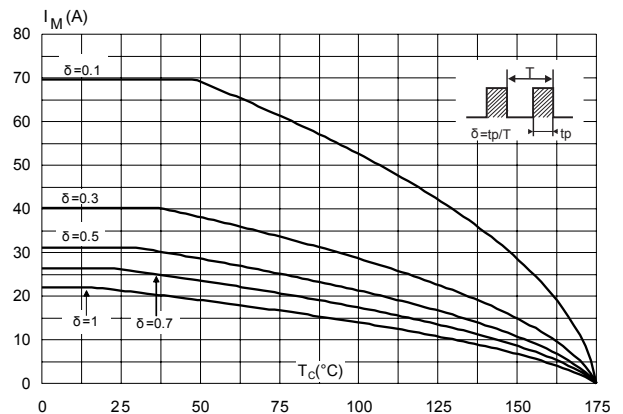


**Figure 5. Peak forward current versus case temperature (TO-220AC Ins)**

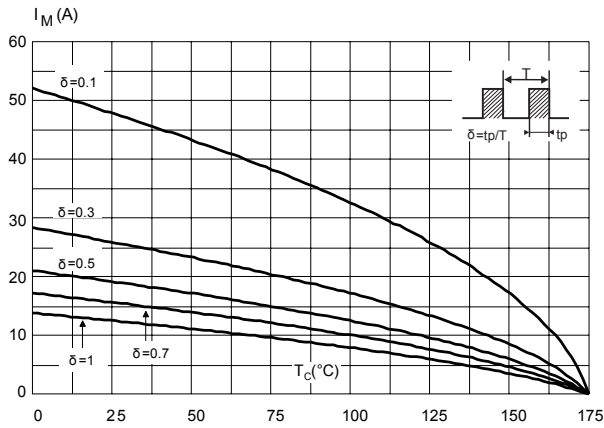


**Figure 6. Junction capacitance versus reverse voltage applied (typical values)**

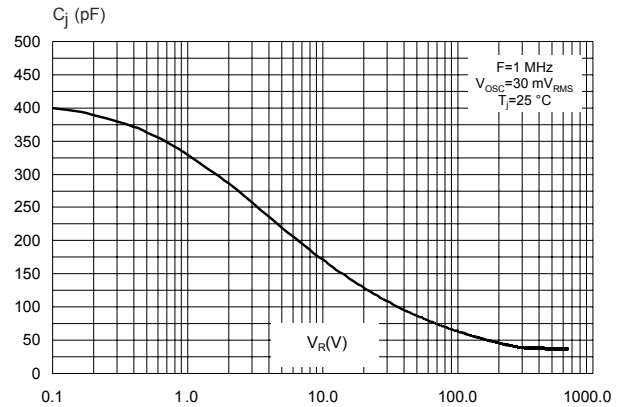


**Figure 7. Relative variation of thermal impedance junction to case versus pulse duration (TO-220AC, DPAK and D<sup>2</sup>PAK)**

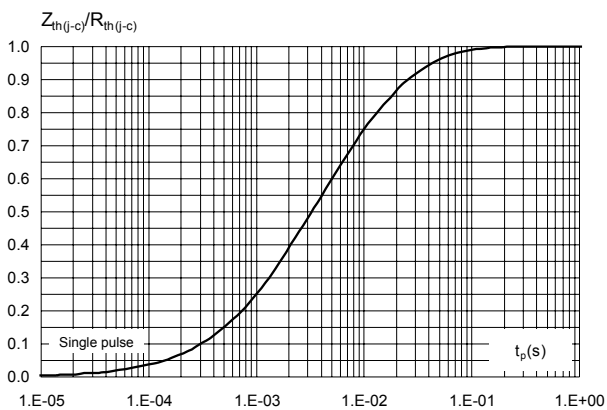


**Figure 8. Relative variation of thermal impedance junction to case versus pulse duration (TO-220AC Ins)**

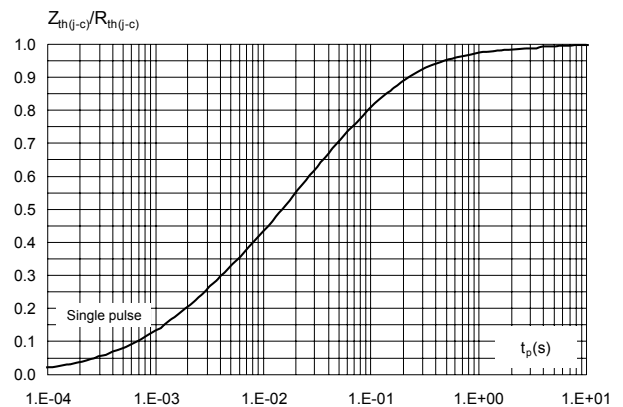

**Figure 9. Non-repetitive peak surge forward current versus pulse duration (sinusoidal waveform)**

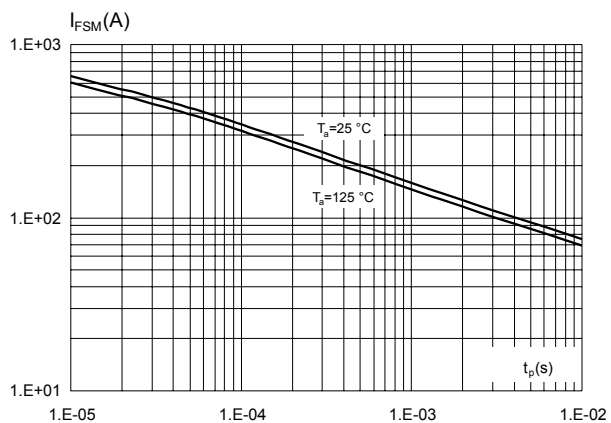

**Figure 10. Total capacitive charges versus reverse voltage applied (typical values)**

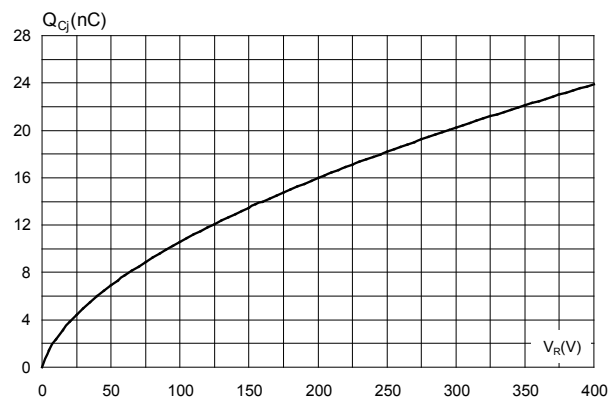


## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK®** packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

### 2.1 DPAK package information

- Epoxy meets UL94, V0


**Figure 11. DPAK package outline**

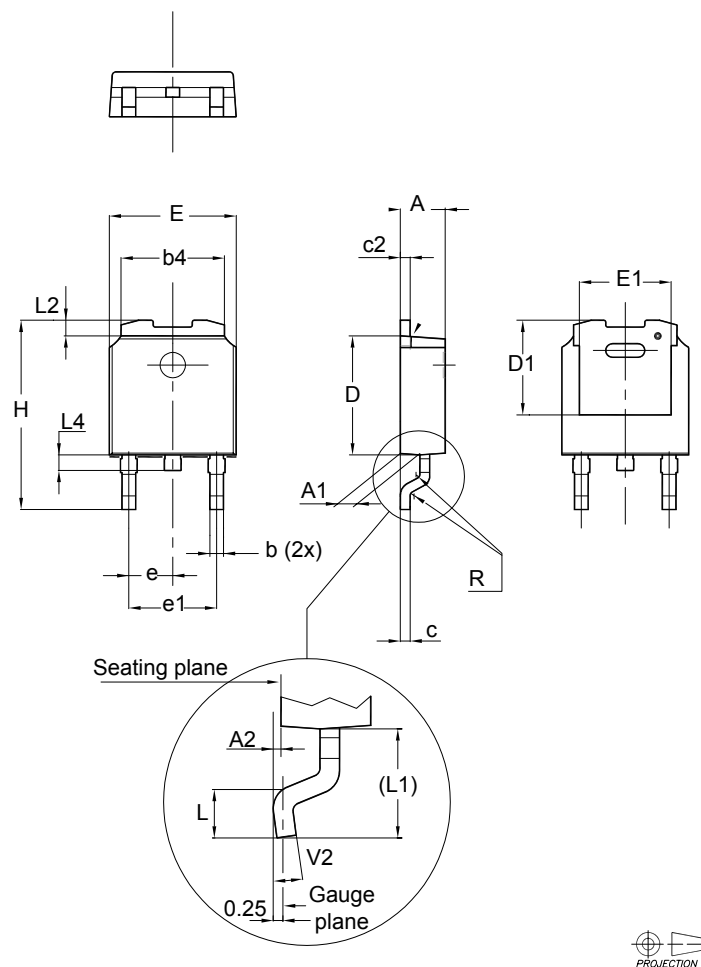

**Table 5. DPAK mechanical data**

| Dim. | Dimensions  |       |       |                       |       |       |
|------|-------------|-------|-------|-----------------------|-------|-------|
|      | Millimeters |       |       | Inches <sup>(1)</sup> |       |       |
|      | Min.        | Typ.  | Max.  | Min.                  | Typ.  | Max.  |
| A    | 2.20        |       | 2.40  | 0.087                 |       | 0.094 |
| A1   | 0.90        |       | 1.10  | 0.035                 |       | 0.043 |
| A2   | 0.03        |       | 0.23  | 0.001                 |       | 0.009 |
| b    | 0.64        |       | 0.90  | 0.025                 |       | 0.035 |
| b4   | 5.20        |       | 5.40  | 0.205                 |       | 0.213 |
| c    | 0.45        |       | 0.60  | 0.018                 |       | 0.024 |
| c2   | 0.48        |       | 0.60  | 0.019                 |       | 0.024 |
| D    | 6.00        |       | 6.20  | 0.236                 |       | 0.244 |
| D1   | 4.95        | 5.10  | 5.25  | 0.195                 | 0.201 | 0.207 |
| E    | 6.40        |       | 6.60  | 0.252                 |       | 0.260 |
| E1   | 4.60        | 4.70  | 4.80  | 0.181                 | 0.185 | 0.189 |
| e    | 2.159       | 2.286 | 2.413 | 0.085                 | 0.090 | 0.095 |
| e1   | 4.445       | 4.572 | 4.699 | 0.175                 | 0.180 | 0.185 |
| H    | 9.35        |       | 10.10 | 0.368                 |       | 0.398 |
| L    | 1.00        |       | 1.50  | 0.039                 |       | 0.059 |
| (L1) | 2.60        | 2.80  | 3.00  | 0.102                 | 0.110 | 0.118 |
| L2   | 0.65        | 0.80  | 0.95  | 0.026                 | 0.031 | 0.037 |
| L4   | 0.60        |       | 1.00  | 0.024                 |       | 0.039 |
| R    |             | 0.20  |       |                       | 0.008 |       |
| V2   | 0°          |       | 8°    | 0°                    |       | 8°    |

1. Inches dimensions given for reference only

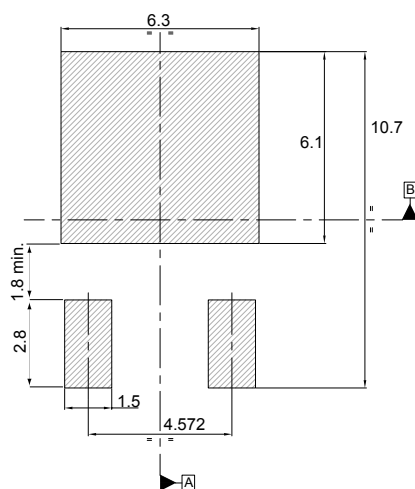
**Figure 12. DPAK recommended footprint (dimensions are in mm)**


The device must be positioned within  $\Phi 0.05 \text{ A B}$

## 2.2 D<sup>2</sup>PAK package information

- Epoxy meets UL94, V0.
- Cooling method: by conduction (C)


Figure 13. D<sup>2</sup>PAK package outline

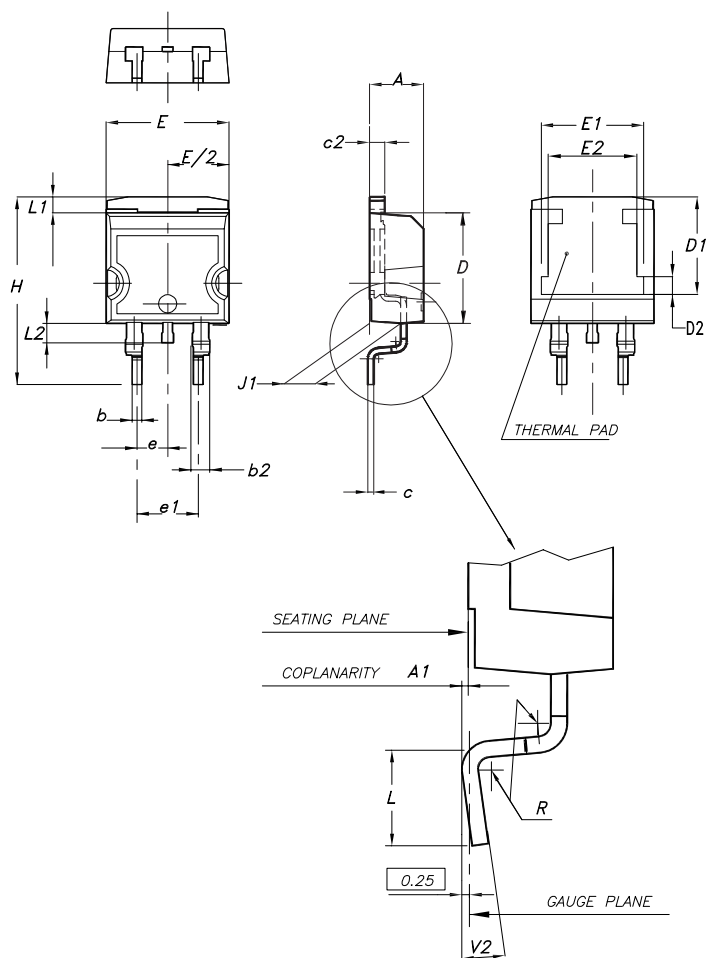

**Note:** This package drawing may slightly differ from the physical package. However, all the specified dimensions are guaranteed.

**Table 6. D<sup>2</sup>PAK package mechanical data**


| Ref. | Dimensions  |      |       |                             |       |       |
|------|-------------|------|-------|-----------------------------|-------|-------|
|      | Millimeters |      |       | Inches (for reference only) |       |       |
|      | Min.        | Typ. | Max.  | Min.                        | Typ.  | Max.  |
| A    | 4.40        |      | 4.60  | 0.173                       |       | 0.181 |
| A1   | 0.03        |      | 0.23  | 0.001                       |       | 0.009 |
| b    | 0.70        |      | 0.93  | 0.028                       |       | 0.037 |
| b2   | 1.14        |      | 1.70  | 0.045                       |       | 0.067 |
| c    | 0.45        |      | 0.60  | 0.018                       |       | 0.024 |
| c2   | 1.23        |      | 1.36  | 0.048                       |       | 0.053 |
| D    | 8.95        |      | 9.35  | 0.352                       |       | 0.368 |
| D1   | 7.50        | 7.75 | 8.00  | 0.295                       | 0.305 | 0.315 |
| D2   | 1.10        | 1.30 | 1.50  | 0.043                       | 0.051 | 0.060 |
| E    | 10.00       |      | 10.40 | 0.394                       |       | 0.409 |
| E1   | 8.30        | 8.50 | 8.70  | 0.335                       | 0.343 | 0.346 |
| E2   | 6.85        | 7.05 | 7.25  | 0.266                       | 0.278 | 0.282 |
| e    |             | 2.54 |       |                             | 0.100 |       |
| e1   | 4.88        |      | 5.28  | 0.190                       |       | 0.205 |
| H    | 15.00       |      | 15.85 | 0.591                       |       | 0.624 |
| J1   | 2.49        |      | 2.69  | 0.097                       |       | 0.106 |
| L    | 2.29        |      | 2.79  | 0.090                       |       | 0.110 |
| L1   | 1.27        |      | 1.40  | 0.049                       |       | 0.055 |
| L2   | 1.30        |      | 1.75  | 0.050                       |       | 0.069 |
| R    |             | 0.40 |       |                             | 0.015 |       |
| V2   | 0°          |      | 8°    | 0°                          |       | 8°    |

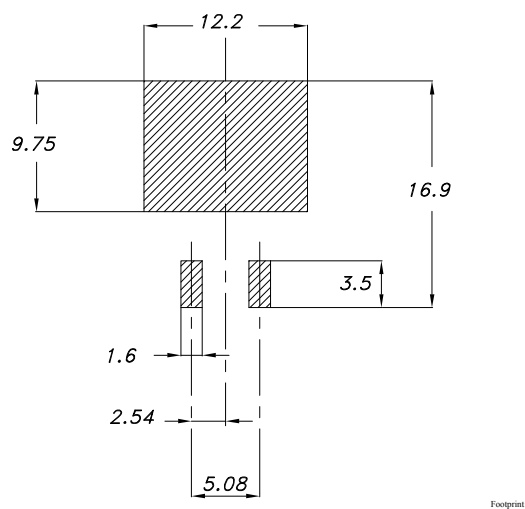**Figure 14. D<sup>2</sup>PAK recommended footprint (dimensions are in mm)**


### 2.3 TO-220AC package information

- Epoxy meets UL 94,V0
- Cooling method: by conduction (C)
- Recommended torque value: 0.55 N·m
- Maximum torque value: 0.70 N·m

**Figure 15. TO-220AC package outline**

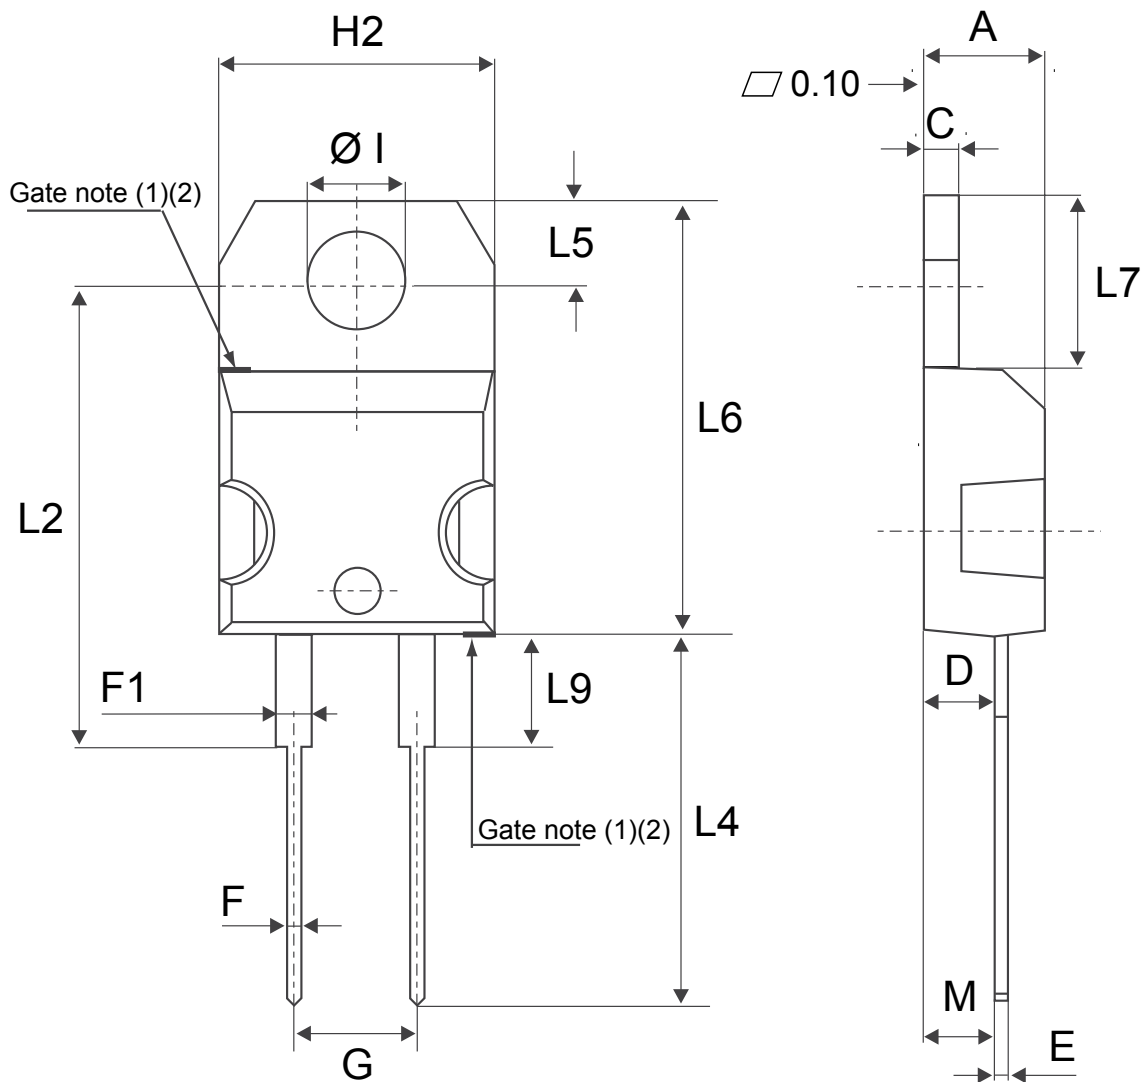

(1) :Max resin gate protusion 0.5 mm

(2) :Resin gate position is accepted in each of the two positions shown on the drawings or their symmetrical


**Table 7. TO-220AC package mechanical data**

| Ref. | Dimensions  |       |                             |       |
|------|-------------|-------|-----------------------------|-------|
|      | Millimeters |       | Inches (for reference only) |       |
|      | Min.        | Max.  | Min.                        | Max.  |
| A    | 4.40        | 4.60  | 0.173                       | 0.181 |
| C    | 1.23        | 1.32  | 0.048                       | 0.051 |
| D    | 2.40        | 2.72  | 0.094                       | 0.107 |
| E    | 0.49        | 0.70  | 0.019                       | 0.027 |
| F    | 0.61        | 0.88  | 0.024                       | 0.034 |
| F1   | 1.14        | 1.70  | 0.044                       | 0.066 |
| G    | 4.95        | 5.15  | 0.194                       | 0.202 |
| H2   | 10.00       | 10.40 | 0.393                       | 0.409 |
| L2   | 16.40 typ.  |       | 0.645 typ.                  |       |
| L4   | 13.00       | 14.00 | 0.511                       | 0.551 |
| L5   | 2.65        | 2.95  | 0.104                       | 0.116 |
| L6   | 15.25       | 15.75 | 0.600                       | 0.620 |
| L7   | 6.20        | 6.60  | 0.244                       | 0.259 |
| L9   | 3.50        | 3.93  | 0.137                       | 0.154 |
| M    | 2.60 typ.   |       | 0.102 typ.                  |       |
| Diam | 3.75        | 3.85  | 0.147                       | 0.151 |

## 2.4 TO-220AC Ins package information

- Epoxy meets UL 94,V0
- Cooling method: by conduction (C)
- Recommended torque value: 0.55 N·m
- Maximum torque value: 0.70 N·m

Figure 16. TO-220AC Ins package outline

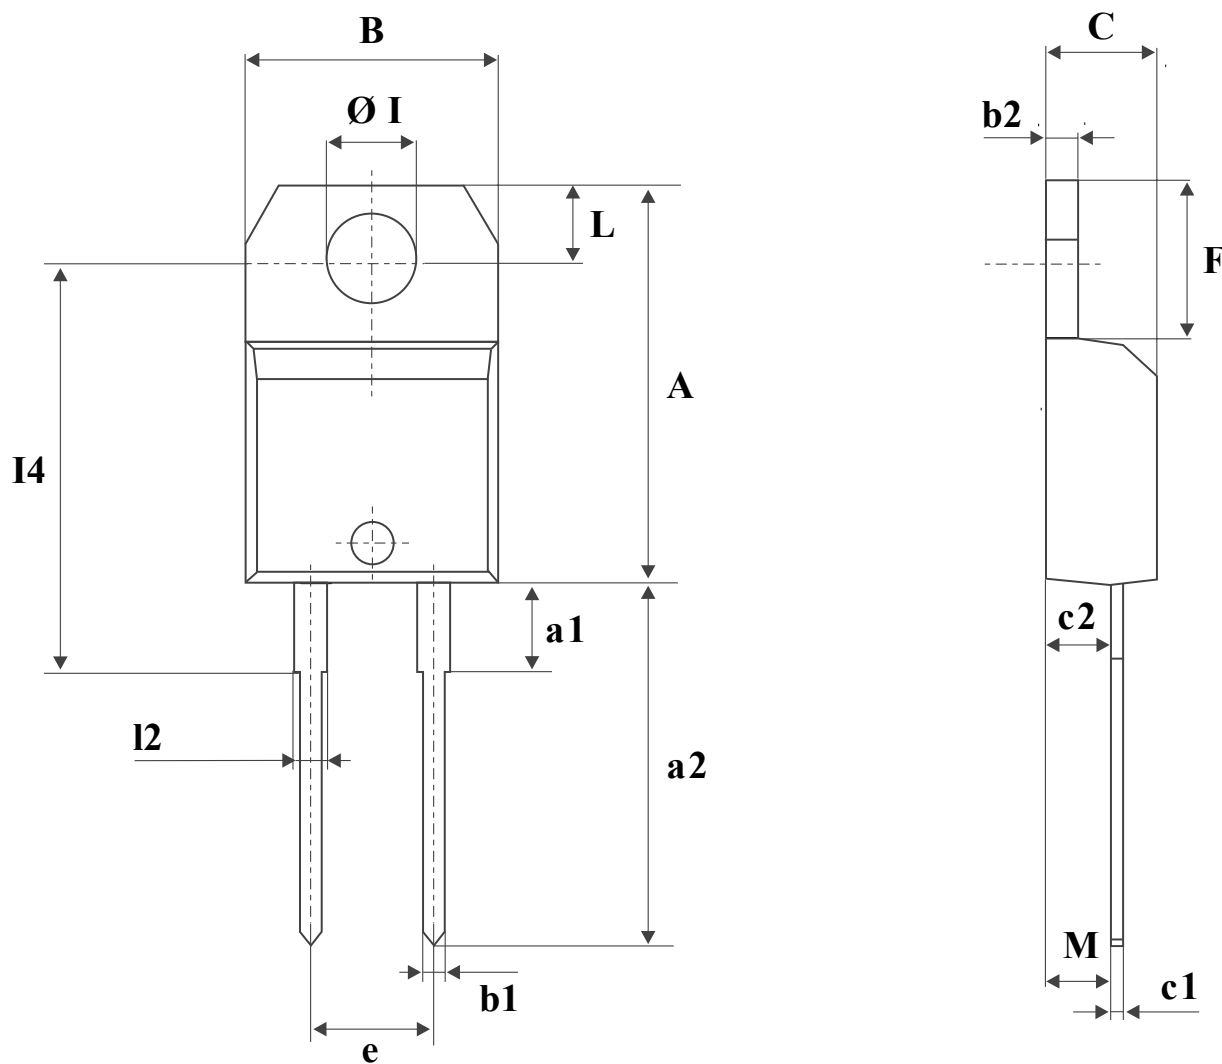

**Table 8. TO-220AC Ins package mechanical data**

| Ref. | Dimensions  |       |       |                             |       |       |
|------|-------------|-------|-------|-----------------------------|-------|-------|
|      | Millimeters |       |       | Inches (for reference only) |       |       |
|      | Min.        | Typ.  | Max.  | Min.                        | Typ.  | Max.  |
| A    | 15.20       |       | 15.90 | 0.598                       |       | 0.625 |
| a1   |             | 3.75  |       |                             | 0.147 |       |
| a2   | 13.00       |       | 14.00 | 0.511                       |       | 0.551 |
| B    | 10.00       |       | 10.40 | 0.393                       |       | 0.409 |
| b1   | 0.61        |       | 0.88  | 0.024                       |       | 0.034 |
| b2   | 1.23        |       | 1.32  | 0.048                       |       | 0.051 |
| C    | 4.40        |       | 4.60  | 0.173                       |       | 0.181 |
| c1   | 0.49        |       | 0.70  | 0.019                       |       | 0.027 |
| c2   | 2.40        |       | 2.72  | 0.094                       |       | 0.107 |
| e    | 4.80        |       | 5.40  | 0.189                       |       | 0.212 |
| F    | 6.20        |       | 6.60  | 0.244                       |       | 0.259 |
| L    | 2.65        |       | 2.95  | 0.104                       |       | 0.116 |
| l2   | 1.14        |       | 1.70  | 0.044                       |       | 0.066 |
| l4   | 15.80       | 16.40 | 16.80 | 0.622                       | 0.645 | 0.661 |
| M    |             | 2.60  |       |                             | 0.102 |       |
| Øl   | 3.75        |       | 3.85  | 0.147                       |       | 0.151 |

### 3 Ordering Information

**Table 9. Ordering information**

| Order code     | Marking       | Package            | Weight | Base qty. | Delivery mode |
|----------------|---------------|--------------------|--------|-----------|---------------|
| STPSC8H065D    | STPSC8H065D   | TO-220AC           | 1.86 g | 50        | Tube          |
| STPSC8H065DI   | STPSC 8H065DI | TO-220AC Ins       | 2.12 g | 50        | Tube          |
| STPSC8H065G-TR | STPSC8H065G   | D <sup>2</sup> PAK | 1.48 g | 1000      | Tape and reel |
| STPSC8H065B-TR | STPSC 8H065   | DPAK               | 0.32 g | 2500      | Tape and reel |

## Revision history

**Table 10. Document revision history**

| Date        | Version | Changes                                                                                                                                                 |
|-------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| 31-Aug-2012 | 1       | First issue.                                                                                                                                            |
| 10-Oct-2012 | 2       | Added Max. value to Table 3.                                                                                                                            |
| 07-Nov-2013 | 3       | Updated Figure 1, Figure 2, Figure 13, Figure 14, and Table 9.                                                                                          |
| 07-Jan-2014 | 4       | Added TO-220AC Ins package.                                                                                                                             |
| 21-Jul-2015 | 5       | Updated Table 10 and reformatted to current standard.                                                                                                   |
| 22-Feb-2016 | 6       | Updated cover image.                                                                                                                                    |
| 05-Feb-2019 | 7       | Updated D <sup>2</sup> PAK package information. Added <a href="#">Section Applications</a> and <a href="#">Section Sustainable technology program</a> . |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.