

OP7200 eDisplay Series

Ethernet-Intelligent Operator Interface

The compact eDisplay is an intelligent operator interface ideal for data acquisition and stand-alone systems such as factory floor controls.




Overview

The OP7200 series of intelligent operator interfaces offers rugged I/O and Ethernet connectivity, along with optional A/D and touchscreen capabilities. The 10-Base-T Ethernet facilitates remote diagnostics, control and communication, including sending and receiving emails and alerts. Both models come equipped with a 1/4 VGA display with a 9-key keypad and programmable on/off white LED backlight. The OP7200 series also provides easy-to-use menu building software and offer a programmable audible alarm for prompt notification and keypad/display feedback.

Functionality of the OP7200 series can be expanded using the optional RabbitNet™ expansion cards. RabbitNet expansion cards can be tailored to a large variety of demanding applications.

Application Highlight

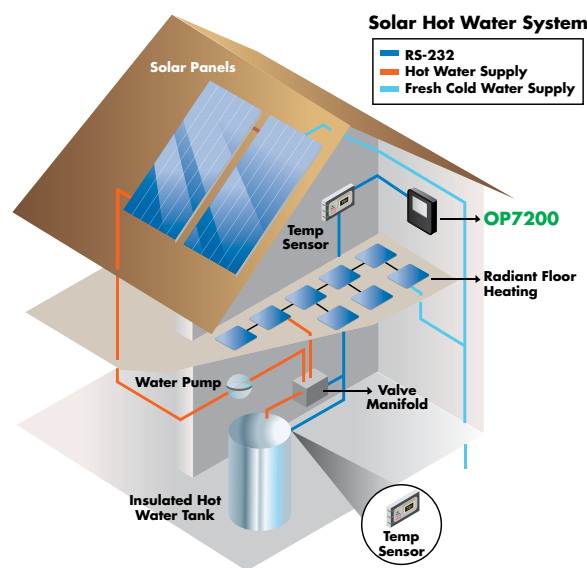

Potential Applications: Industrial real-time control and automation, remote machine control, data acquisition, display dependent applications

Features/Benefits

- Rabbit® 2000 microprocessor at 22 MHz
- 1/4 VGA display (320 x 240 pixels)
- 10Base-T Ethernet, RJ-45
- 256K Flash/128K SRAM
- 24-27 industrialized I/O and 4 CMOS-compatible serial ports
- English and foreign language fonts
- Graphic and bitmap images
- Open source GUI libraries



Specifications		OP7200	OP7210
Feature			
Microprocessor	Rabbit® 2000 at 22 MHz		
Ethernet Port	10/100-compatible with 10Base-T interface, RJ-45		
Flash Memory	256K		
SRAM	128K		
Backup Battery	Socketed 3V lithium coin type, 265 mA·h		
Keypad/Display	¼ VGA (320 × 240 pixels) with programmable white LED backlight, black on white display, transreflective FSTN LCD, 6 o'clock viewing angle; 9-key keypad		
Touchscreen	4096 × 4096 resistive touchscreen	None	
LEDs	4: Power On, Microprocessor Error, Ethernet Link, Ethernet Activity		
Digital Inputs	19: Protected to ±36VDC	16: Protected to ±36VDC	
Digital Outputs	8: Individually configurable in software to sink up to 350 mA each, 36VDC max., or source up to 250 mA each, 40VDC max		
Analog Inputs	8 single-ended or 4 differential, 200 kΩ input impedance, 1.5 ksamples/s sampling rate Software-controlled ranges: 0–1V, 2V, 5V 10V, 20VDC (11-bit single-ended, 12-bit differential)	None	
Connectors	Four 12-position screw-terminal headers, 0.1" pitch	Three 12-position screw-terminal headers, 0.1" pitch	
Serial Ports	4 serial ports: • 2 RS-232 or 1 RS-232 (with CTS/RTS) • 1 RS-485 with onboard network termination and bias resistors or 1 RS-422 SPI master port • One 5V CMOS-compatible programming port		
Serial Rate	Max. burst rate = CLK/32, Max. sustained rate = CLK/64		
Real-Time Clock	Yes		
Timers	Five 8-bit timers (4 cascadable from the first), one 10-bit timer with 2 match registers		
Watchdog/Supervisor	Yes		
Power	9–40V DC or 22–26V AC, 4W max.		
Temperature	Operating Range: -10° C to +65° C Storage Range: -30° C to +80° C		
Humidity	20% to 70%, non-condensing		
Unit Size	4.41" × 5.67" × 1.70" (112 mm × 144 mm × 43 mm)		
Pricing			
Price (qty. 1)	\$449	\$399	
Part Number	20-101-0535	20-101-0536	

You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support

91001597
B4/415

Digi International
Worldwide HQ
877-912-3444
952-912-3444
www.digi.com

Digi International
France
+33-1-55-61-98-98
www.digi.fr

Digi International
Japan
+81-3-5428-0261
www.digi-intl.co.jp

Digi International
Singapore
+65-6213-5380

Digi International
China
+86-21-50492199
www.digi.com.cn



www.digi.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.