



PTVA104501EH

Thermally-Enhanced High Power RF LDMOS FET 450 W, 50 V, 960 – 1215 MHz

Description

The PTVA104501EH LDMOS FET is designed for use in power amplifier applications in the 960 to 1215 MHz frequency band. Features include high gain and thermally-enhanced package with bolt-down flange. Manufactured with Wolfspeed's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.

PTVA104501EH
Package H-33288-2

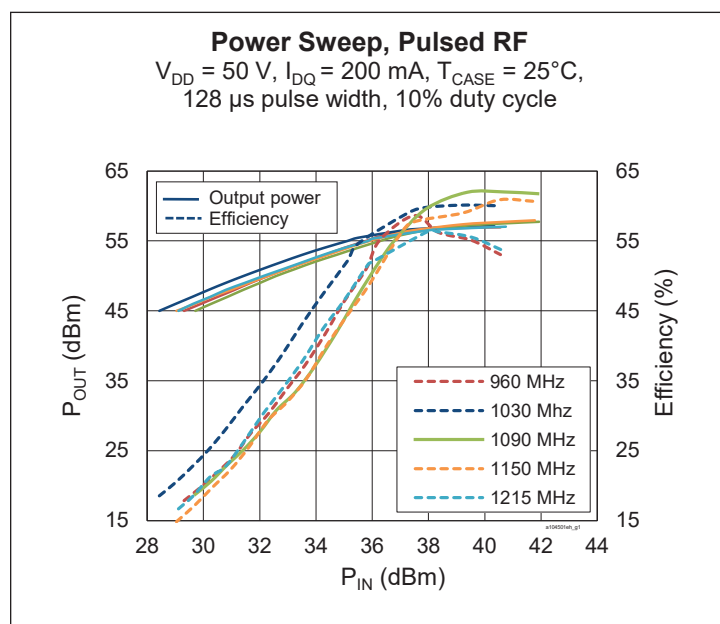

Features

- Broadband internal input and output matching
- High gain and efficiency
- Integrated ESD protection
- Human Body Model Class 2 (per ANSI/ESDA/ JEDEC JS-001)
- Low thermal resistance
- Excellent ruggedness
- Pb-free and RoHS compliant
- Capable of withstanding a 10:1 load mismatch (all phase angles) at 450 W peak under RF pulse, 128 μs , 10% duty cycle.

RF Characteristics

Pulsed RF Performance (tested in Wolfspeed test fixture)

$V_{DD} = 50\text{ V}$, $I_{DQ} = 200\text{ mA}$, $P_{OUT} = 450\text{ W}$ (peak), $f_1 = 960\text{ MHz}$, $f_2 = 1090\text{ MHz}$, $f_3 = 1215\text{ MHz}$, RF pulse 128 μs , 10% duty cycle

| Characteristic | Symbol | Min | Typ | Max | Unit |
|------------------|------------|------|------|-----|------|
| Gain | G_{ps} | 16.5 | 17.5 | — | dB |
| Drain Efficiency | η_D | 53 | 58 | — | % |
| Gain Flatness | ΔG | — | 0.85 | 1.8 | dB |
| Return Loss | IRL | — | -9.5 | -6 | dB |

All published data at $T_{CASE} = 25^\circ\text{C}$ unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

RF Characteristics

Typical RF Performance (not subject to production test, verified by design/characterization in Wolfspeed test fixture)

$V_{DD} = 50\text{ V}$, $I_{DQ} = 200\text{ mA}$, Input signal ($t_r = 7.0\text{ ns}$, $t_f = 7.0\text{ ns}$), $128\text{ }\mu\text{s}$ pulse width, 10% duty cycle, class AB test

| Mode of Operation | f (MHz) | IRL (dB) | P _{1dB} | | | P _{3dB} | | | Max P _{droop} (pulse) @ P _{1dB} | t_r (ns) @ P _{1dB} | t_f (ns) @ P _{1dB} |
|-------------------------|-----------|----------|------------------|---------|----------------------|------------------|---------|----------------------|---|-------------------------------|-------------------------------|
| | | | Gain (dB) | Eff (%) | P _{OUT} (W) | Gain (dB) | Eff (%) | P _{OUT} (W) | | | |
| 128 μs , 10% | 960 | -7.5 | 18.0 | 56 | 460 | 16.0 | 53 | 490 | 0.15 | 5 | <2 |
| | 1030 | -13.0 | 18.5 | 59 | 470 | 16.5 | 60 | 540 | 0.15 | 5 | <2 |
| | 1090 | -8.0 | 17.8 | 61 | 510 | 15.8 | 61 | 590 | 0.20 | 5 | <2 |
| | 1150 | -15.0 | 18.1 | 59 | 540 | 16.1 | 60 | 620 | 0.20 | 5 | <2 |
| | 1215 | -9.0 | 18.3 | 56 | 460 | 16.3 | 53 | 510 | 0.20 | 5 | <2 |

DC Characteristics

| Characteristic | Conditions | Symbol | Min | Typ | Max | Unit |
|--------------------------------|---|---------------|-----|-----|-----|---------------|
| Drain-Source Breakdown Voltage | $V_{GS} = 0\text{ V}$, $I_{DS} = 10\text{ mA}$ | $V_{(BR)DSS}$ | 105 | — | — | V |
| Drain Leakage Current | $V_{DS} = 50\text{ V}$, $V_{GS} = 0\text{ V}$ | I_{DSS} | — | — | 1 | μA |
| | $V_{DS} = 111\text{ V}$, $V_{GS} = 0\text{ V}$ | I_{DSS} | — | — | 10 | μA |
| On-State Resistance | $V_{GS} = 10\text{ V}$, $V_{DS} = 0.1\text{ V}$ | $R_{DS(on)}$ | — | 0.1 | — | Ω |
| Operating Gate Voltage | $V_{DS} = 50\text{ V}$, $I_{DQ} = 200\text{ mA}$ | V_{GS} | 3.0 | 3.5 | 4.0 | V |
| Gate Leakage Current | $V_{GS} = 10\text{ V}$, $V_{DS} = 0\text{ V}$ | I_{GSS} | — | — | 1 | μA |

Maximum Ratings





| Parameter | Symbol | Value | Unit |
|---------------------------|-----------------|-------------|----------------------|
| Drain-Source Voltage | V_{DSS} | 105 | V |
| Gate-Source Voltage | V_{GS} | -6 to +12 | V |
| Operating Voltage | V_{DD} | 0 to +55 | V |
| Junction Temperature | T_J | 225 | $^{\circ}\text{C}$ |
| Storage Temperature Range | T_{STG} | -65 to +150 | $^{\circ}\text{C}$ |
| Thermal Resistance | $R_{\theta JC}$ | 0.25 | $^{\circ}\text{C/W}$ |

($T_{CASE} = 70^{\circ}\text{C}$, 430 W CW, $f = 1090\text{ MHz}$, $V_{DD} = 50\text{ V}$, $I_{DQ} = 200\text{ mA}$)





Ordering Information

| Type and Version | Order Code | Package Description | Shipping |
|----------------------|----------------------|---------------------|----------------------|
| PTVA104501EH V1 R0 | PTVA104501EH-V1-R0 | H-33288-2 | Tape & Reel, 50 pcs |
| PTVA104501EH V1 R250 | PTVA104501EH-V1-R250 | H-33288-2 | Tape & Reel, 250 pcs |



Typical RF Performance (data taken in production test fixture)

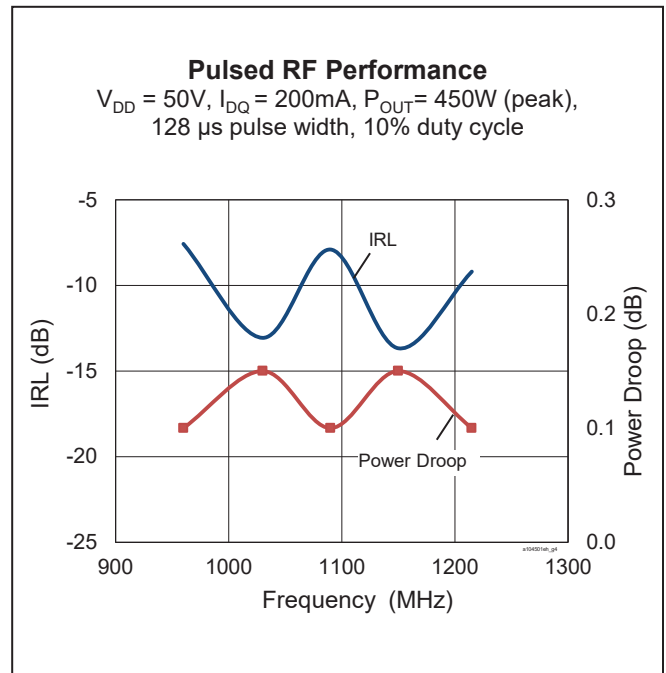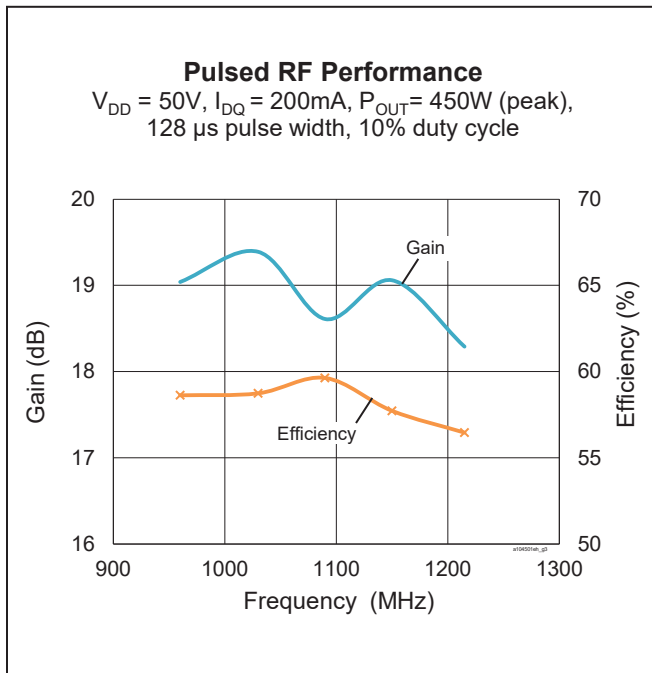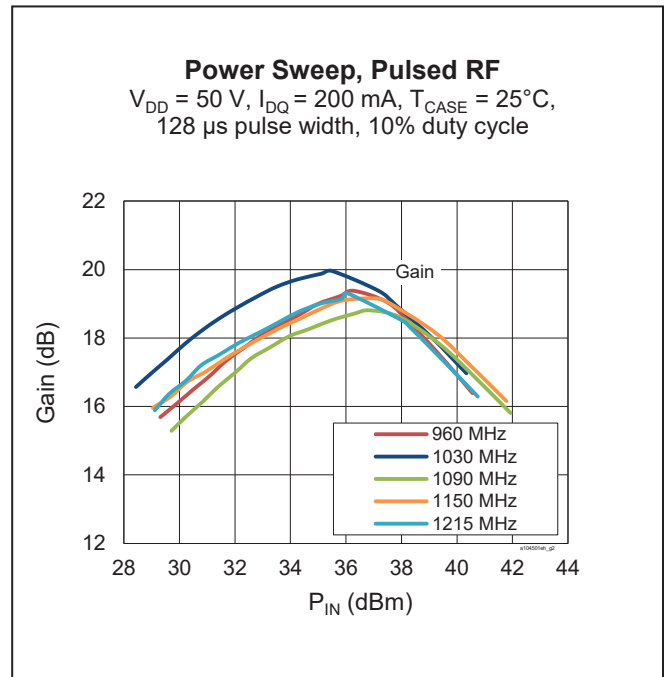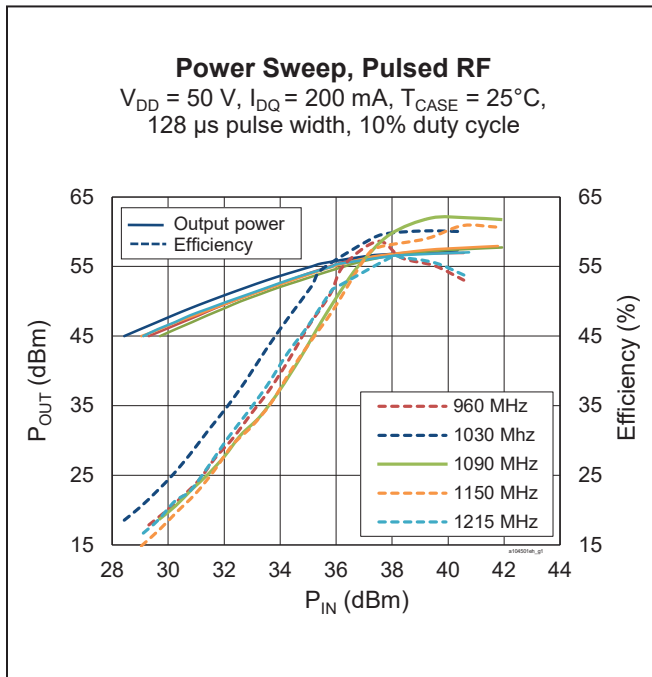

Typical RF Performance (cont.)

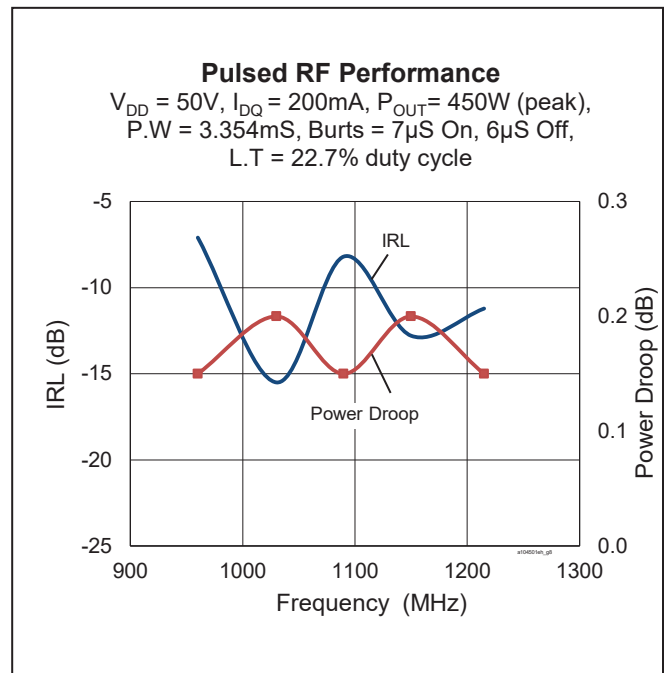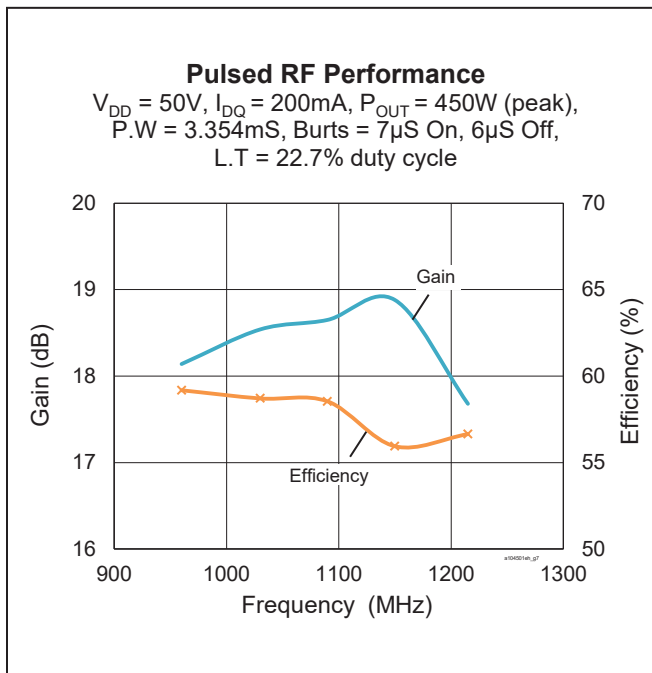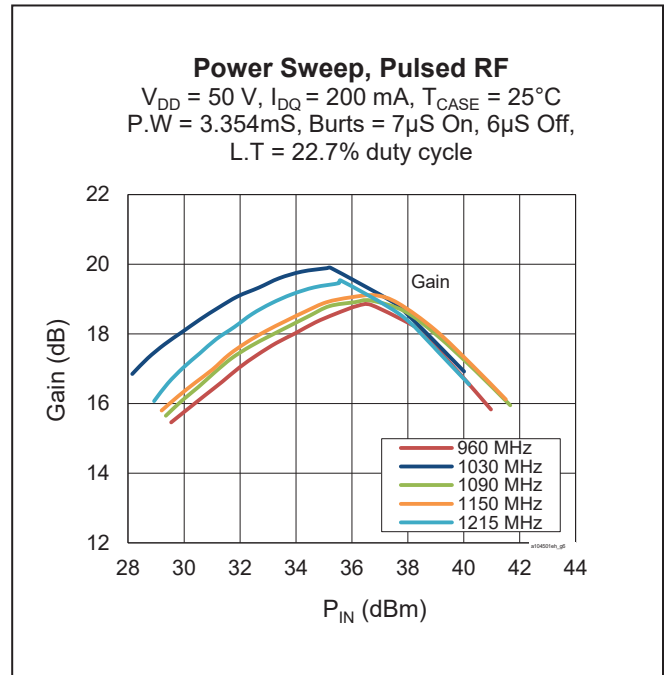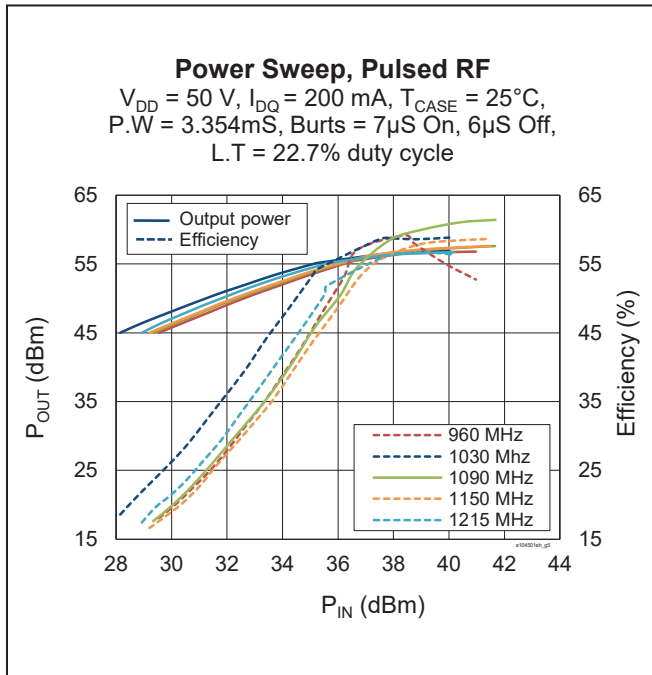


Typical RF Performance (cont.)

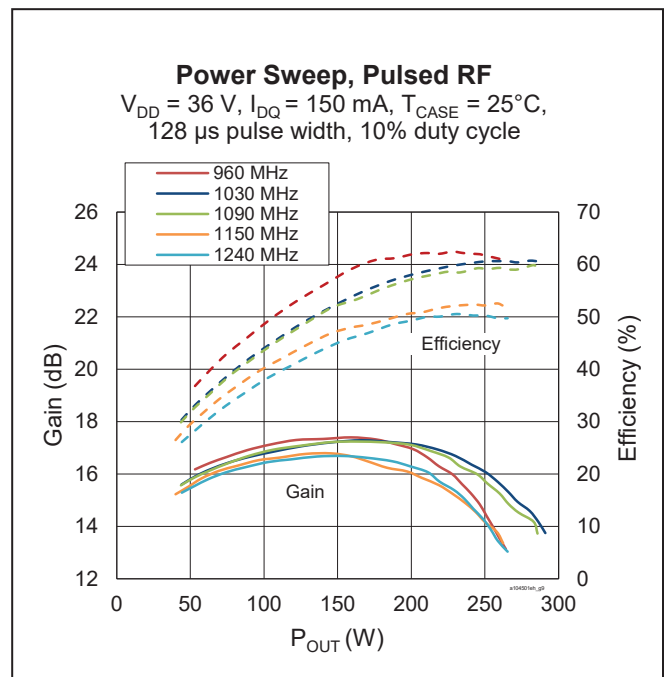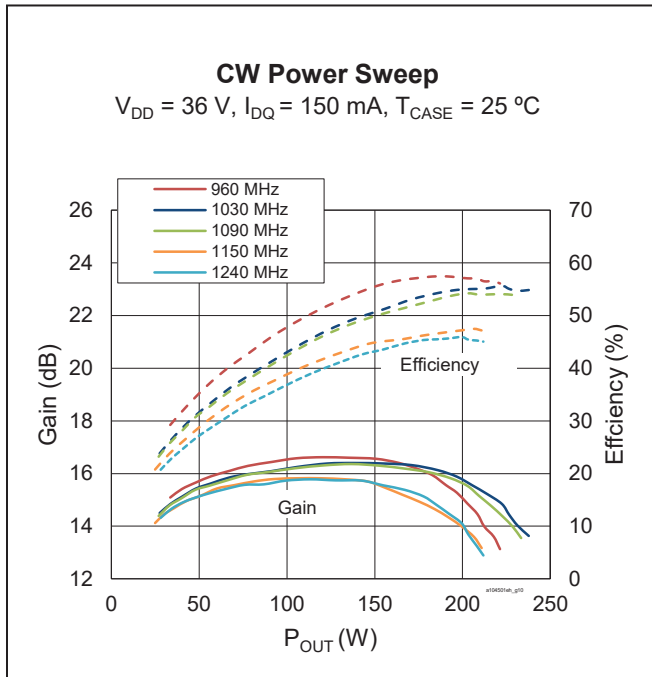

Broadband Circuit Impedance

| Freq [MHz] | Z Source Ω | | Z Load Ω | |
|------------|-------------------|-------|-----------------|-------|
| | R | jX | R | jX |
| 960 | 2.04 | -0.30 | 0.79 | -0.02 |
| 1030 | 1.71 | -0.18 | 0.73 | 0.64 |
| 1090 | 1.45 | 0.09 | 0.95 | 1.09 |
| 1150 | 1.23 | 0.41 | 1.26 | 0.98 |
| 1215 | 1.07 | 0.77 | 0.71 | 0.93 |



Load Pull Performance

Load Pull at Max P_{OUT} Point – 16 μ s pulse width, 10% duty cycle, class AB, V_{DD} = 50 V, 200 mA

| Freq [MHz] | ZI [Ω] | P _{IN} [dBm] | P _{OUT} [dBm] | P _{OUT} [W] | P _G [dB] | PAE Eff [%] | Z _{OUT} [Ω] |
|------------|-----------------|-----------------------|------------------------|----------------------|---------------------|-------------|-------------------------------|
| 960 | 1.35 - j0.70 | 43.30 | 57.83 | 606.74 | 14.53 | 54.90 | 1.29 - j1.37 |
| 1030 | 0.99 - j0.78 | 42.14 | 57.62 | 578.10 | 15.48 | 50.96 | 1.02 - j1.43 |
| 1090 | 1.24 - j0.84 | 41.37 | 57.40 | 549.54 | 16.03 | 50.52 | 1.06 - j1.51 |
| 1215 | 1.56 - j0.99 | 39.24 | 56.92 | 492.04 | 17.68 | 48.12 | 1.13 - j1.66 |

Load Pull at Max G_T Point – 16 μ s pulse width, 10% duty cycle, class AB, V_{DD} = 50 V, 200 mA

| Freq [MHz] | ZI [Ω] | P _{IN} [dBm] | P _{OUT} [dBm] | P _{OUT} [W] | P _G [dB] | PAE Eff [%] | Z _{OUT} [Ω] |
|------------|-----------------|-----------------------|------------------------|----------------------|---------------------|-------------|-------------------------------|
| 960 | 1.35 - j0.70 | 40.10 | 55.70 | 371.54 | 15.60 | 58.76 | 2.15 - j2.60 |
| 1030 | 0.99 - j0.78 | 38.16 | 55.33 | 341.19 | 17.17 | 59.44 | 2.73 - j2.02 |
| 1090 | 1.24 - j0.84 | 36.05 | 54.14 | 259.42 | 18.09 | 56.31 | 3.55 - j0.42 |
| 1215 | 1.56 - j0.99 | 33.38 | 53.42 | 219.79 | 20.04 | 49.44 | 1.34 - j0.08 |

Load Pull at Max Efficiency Point – 16 μ s pulse width, 10% duty cycle, class AB, V_{DD} = 50 V, 200 mA


| Freq [MHz] | ZI [Ω] | P _{IN} [dBm] | P _{OUT} [dBm] | P _{OUT} [W] | P _G [dB] | PAE Eff [%] | Z _{OUT} [Ω] |
|------------|-----------------|-----------------------|------------------------|----------------------|---------------------|-------------|-------------------------------|
| 960 | 1.35 - j0.70 | 42.00 | 57.27 | 533.33 | 15.27 | 62.15 | 1.60 - j1.79 |
| 1030 | 0.99 - j0.78 | 39.44 | 56.34 | 430.53 | 16.90 | 61.78 | 2.27 - j1.50 |
| 1090 | 1.24 - j0.84 | 37.54 | 55.36 | 343.56 | 17.82 | 59.60 | 2.72 - j1.29 |
| 1215 | 1.56 - j0.99 | 36.19 | 55.58 | 361.41 | 19.39 | 56.63 | 1.65 - j0.92 |

Z Optimum – 16 μ s pulse width, 10% duty cycle, class AB, V_{DD} = 50 V, 200 mA

| Freq [MHz] | ZI [Ω] | P _{IN} [dBm] | P _{OUT} [dBm] | P _{OUT} [W] | P _G [dB] | PAE Eff [%] | Z _{OUT} [Ω] |
|------------|-----------------|-----------------------|------------------------|----------------------|---------------------|-------------|-------------------------------|
| 960 | 1.35 - j0.70 | 42.62 | 57.62 | 578.10 | 15.00 | 60.03 | 1.50 - j1.61 |
| 1030 | 0.99 - j0.78 | 39.82 | 56.62 | 459.20 | 16.80 | 61.39 | 2.03 - j1.45 |
| 1090 | 1.24 - j0.84 | 38.71 | 56.21 | 417.83 | 17.50 | 58.60 | 2.02 - j1.38 |
| 1215 | 1.56 - j0.99 | 37.79 | 56.47 | 443.61 | 18.68 | 53.43 | 1.29 - j1.37 |



Reference Circuit

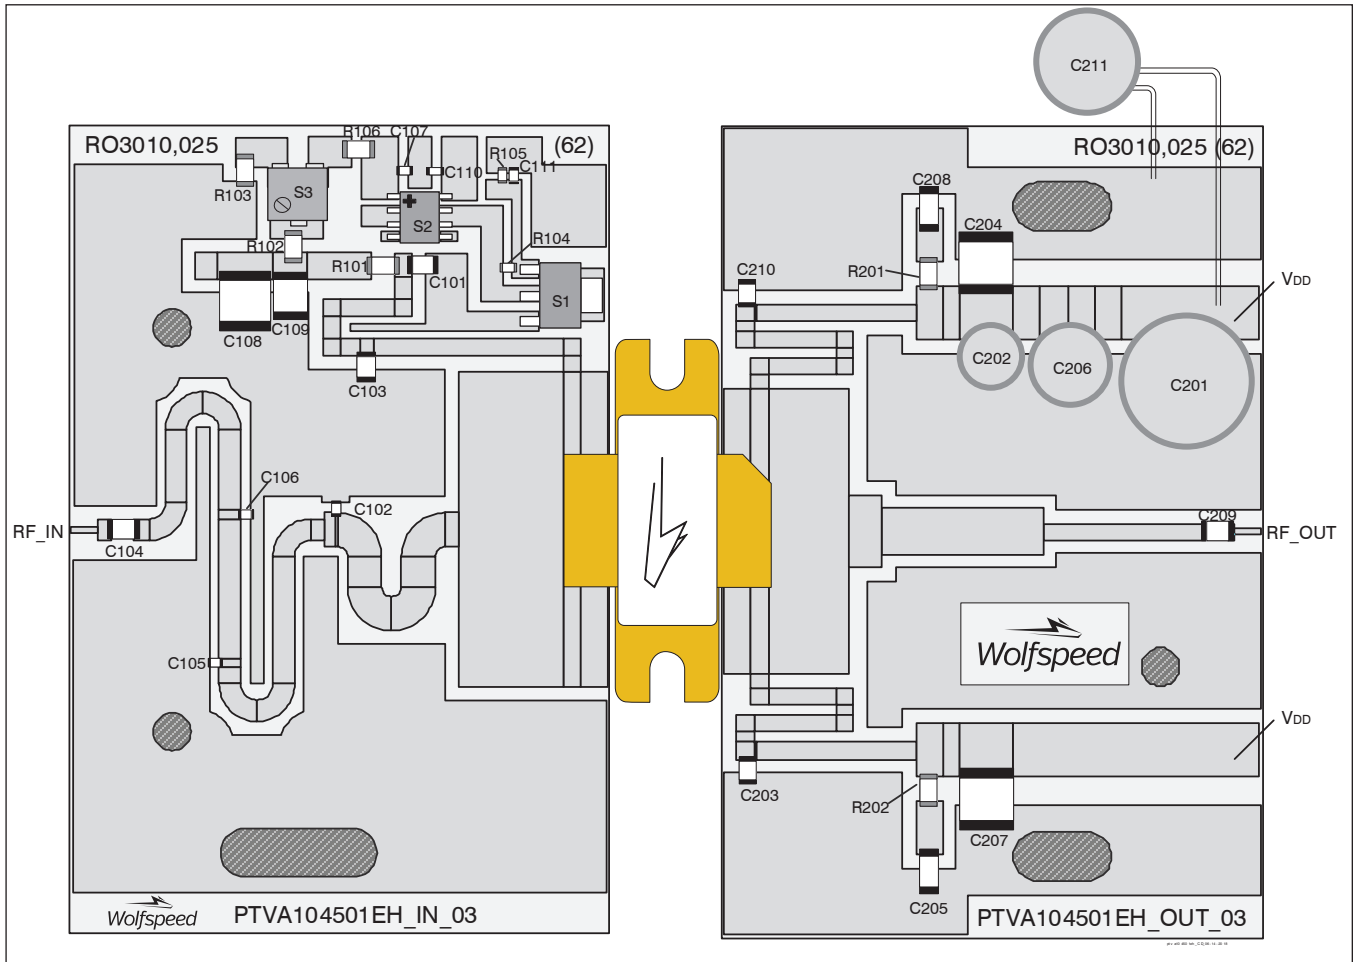

Reference circuit assembly diagram (not to scale)

Find Gerber files for this test fixture on the Wolfspeed Web site at www.wolfspeed.com/RF


Reference Circuit (cont.)**Reference Circuit Assembly**

| | |
|-----------------------|---|
| DUT | PTVA104501EH |
| Test Fixture Part No. | LTN/PTVA104501EH V1 |
| PCB | Rogers 3010, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 10.2$ |

Components Information

| Component | Description | Suggested Manufacturer | P/N |
|------------------|----------------------------|------------------------------------|---------------------|
| Input | | | |
| C101, C103 | Capacitor, 39 pF | ATC | 100B 390 |
| C102 | Capacitor, 3.3 pF | ATC | 800A 3R3 |
| C104 | Capacitor, 56 pF | ATC | 100B 560 |
| C105 | Capacitor, 3.9 pF | ATC | 800A 3R9 |
| C106 | Capacitor, 2.4 pF | ATC | 800A 2R4 |
| C107, C110, C111 | Capacitor, 1000 pF | Panasonic Electronic Components | ECJ-1VB1H102K |
| C108 | Capacitor, 10 μ F | TDK Corporation | C5750X5R1H106K230KA |
| C109 | Capacitor, 1 μ F | TDK Corporation | C4532X7R2A105M230KA |
| R101 | Resistor, 20 Ω | Panasonic Electronic Components | ERJ-8GEYJ200V |
| R102 | Resistor, 1k Ω | Panasonic Electronic Components | ERJ-8GEYJ102V |
| R103 | Resistor, 2k Ω | Panasonic Electronic Components | ERJ-8GEYJ202V |
| R104 | Resistor, 1.2k Ω | Panasonic Electronic Components | ERJ-3GEYJ122V |
| R105 | Resistor, 1.3k Ω | Panasonic Electronic Components | ERJ-3GEYJ132V |
| R106 | Resistor, 10 ohms | Panasonic Electronic Components | ERJ-8GEYJ100V |
| S1 | Transistor | Infineon Technologies | BCP56 |
| S2 | Voltage Regulator | Texas Instruments | LM78L05ACM |
| S3 | Potentiometer, 2k Ω | Bourns Inc. | 3224W-1-202E |
| Output | | | |
| C201 | Capacitor, 100 μ F | Cornell Dubilier Electronics (CDE) | SK101M100ST |
| C202 | Capacitor, 10 μ F | Cornell Dubilier Electronics (CDE) | SEK100M100ST |
| C203, C210 | Capacitor, 39 pF | ATC | 100B 390 |
| C204, C207 | Capacitor, 10 μ F | TDK Corporation | C5750X5R1H106K230KA |
| C205, C208 | Capacitor, 1 μ F | TDK Corporation | C4532X7R2A105M230KA |
| C206 | Capacitor, 22 μ F | Cornell Dubilier Electronics (CDE) | SEK220M100ST |
| C209 | Capacitor, 56 pF | ATC | 100B 560 |
| C211 | Capacitor, 6800 μ F | Panasonic Electronic Components | ECO-S2AP682EA |
| R201, R202 | Resistor, 5.6 Ω | Panasonic Electronic Components | ERJ-8RQJ5R6V |

Package Outline Specifications

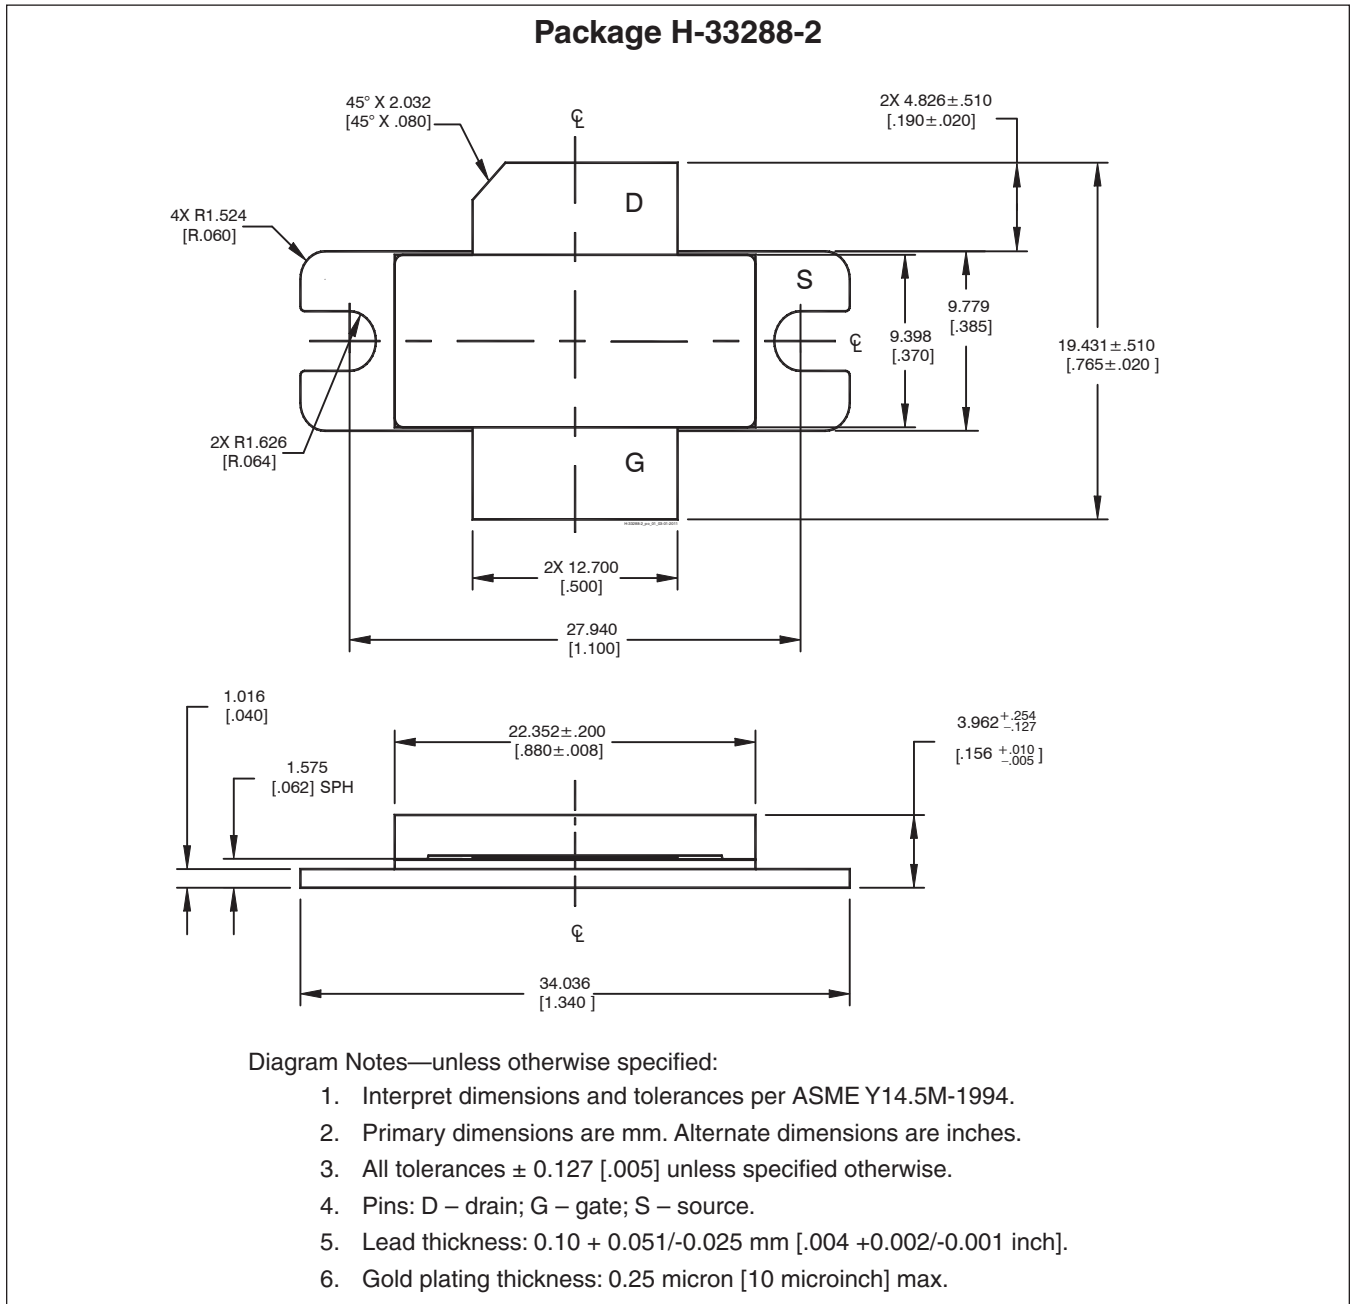

Revision History

| Revision | Date | Data Sheet Type | Page | Subjects (major changes since last revision) |
|----------|------------|-----------------|-----------|--|
| 01 | 2013-05-21 | Advance | All | Data Sheet reflects advance specification for product development |
| 02 | 2014-07-22 | Production | All | Data Sheet reflects released product specification |
| 02.1 | 2016-04-19 | Production | 2 1, 2 | Updated conditions for drain leakage current in DC Characteristics Added ESD rating, updated ordering information |
| 02.2 | 2017-01-31 | Production | 2 | Corrected typo in package description, updated operating voltage and junction temperature |
| 02.3 | 2017-09-20 | Production | 5 | Added two new graphs ($V_{DD} = 36V$) |
| 03 | 2018-06-14 | Production | All | Converted to Wolfspeed Data Sheet |

For more information, please contact:

4600 Silicon Drive
Durham, North Carolina, USA 27703
www.wolfspeed.com/RF

Sales Contact
RFSales@wolfspeed.com

RF Product Marketing Contact
RFMarketing@wolfspeed.com
919.407.7816

Notes

Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.