


# RFID Chip Antenna



9.0 x 3.0 x 1.2 mm

**ACAJ-110-T**

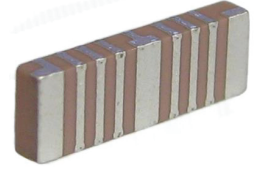

RoHS / RoHS II Compliant



Moisture Sensitivity Level (MSL) – MSL = 1

## FEATURES:

- Passive Dielectric Chip Antenna
- Covering dual ISM bands 868MHz and 915MHz
- SMA mount, Reflowable to 255 degrees C max.
- Compact Dimensions (9.0mm x 3.0mm x 1.2mm)
- Peak Gain – 868MHz -2.5dBi, 915MHz -2.7dBi
- VSWR 3.0:1 Max (measured on matched EV board)
- Impedance 50 Ohms
- Linear Polarization / Omni-directional azimuth pattern
- RoHS/RoHS II compliant
- 2J Technology

## APPLICATIONS:

- ISM 868 / 915MHz
- Low power radio links
- Sensor networks
- For use with ultra low power transceiver IC's

## STANDARD SPECIFICATIONS

| ITEM                  |         | SPECIFICATION    |      |
|-----------------------|---------|------------------|------|
| Frequency Range       |         | 868/915MHz       |      |
| VSWR                  |         | 3.0: 1 Max       |      |
| Polarization          |         | Linear           |      |
| Azimuth Beam Pattern  |         | Omni-directional |      |
| Impedance             |         | 50Ω              |      |
| Operating Temperature |         | -35°C to + 85°C  |      |
| Frequency [MHz]       |         | 868              | 915  |
| Gain [dBi]            | Peak    | -2.5             | -2.7 |
|                       | Average | -3.4             | -1.8 |
| Efficiency [%]        |         | 34               | 37   |

The results are measured on the 100x50mm<sup>2</sup> evaluation board.

## PART IDENTIFICATION:

ACAJ-110-□




| Packaging   |                               |
|-------------|-------------------------------|
| Blank: Bulk |                               |
| T:          | Tape and Reel (1000 per reel) |

# RFID Chip Antenna




ACAJ-110-T

Pb RoHS / RoHS II Compliant

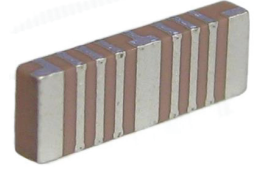

9.0 x 3.0 x 1.2 mm


## PCB DESIGN GUIDE

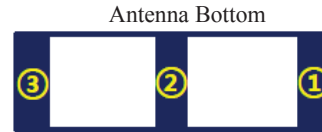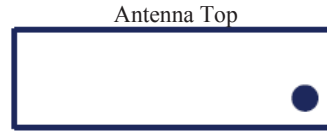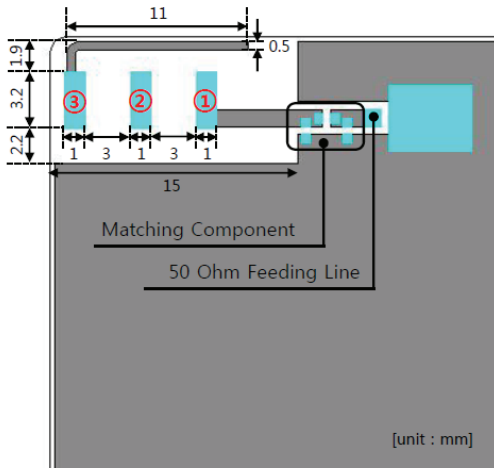

| NO | Pin Assignment            |
|----|---------------------------|
| ①  | Feeding                   |
| ②  | N/C                       |
| ③  | N/C (Connected Stub line) |


## MEASUREMENT GUIDE

### Typical Measurement Result (VSWR, RL & Smith Chart) @ 868MHz

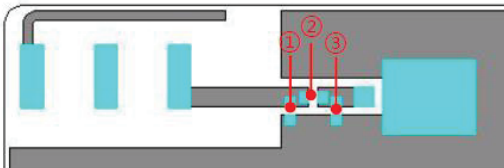


| NO | Matching Value |
|----|----------------|
| ①  | N/C            |
| ②  | 15 nH          |
| ③  | 5.0 pF         |

### Measured VSWR & Return-loss @868MHz

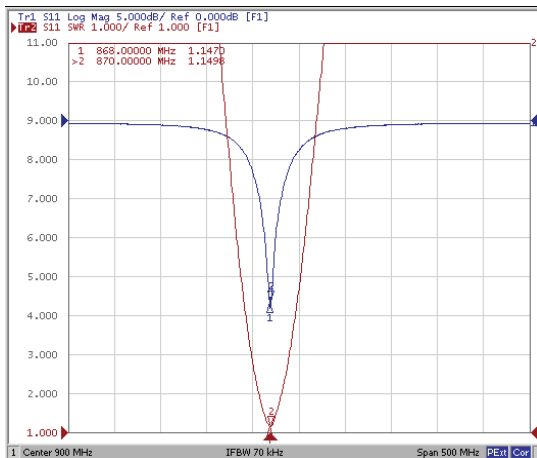


### Measured Smith Chart @868MHz

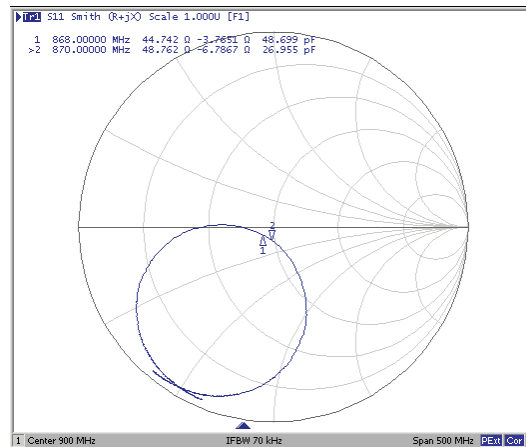

# RFID Chip Antenna

ACAJ-110-T


Pb RoHS / RoHS II Compliant

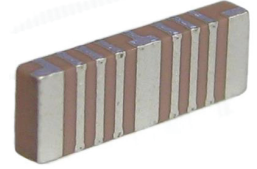

9.0 x 3.0 x 1.2 mm


## S11 (VSWR)- Penta Band (GSM850&900, DCS, PCS, U

### Typical Measurement Result (VSWR, RL & Smith Chart) @ 915MHz

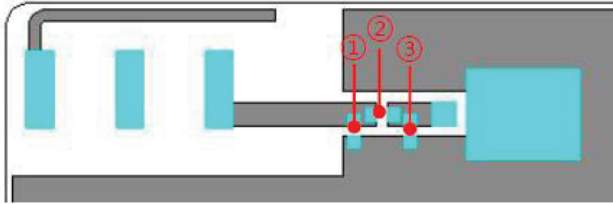


| NO | Matching Value |
|----|----------------|
| ①  | N/C            |
| ②  | 8.2 nH         |
| ③  | 4.3 pF         |


### Measured VSWR & Return-loss @915MHz

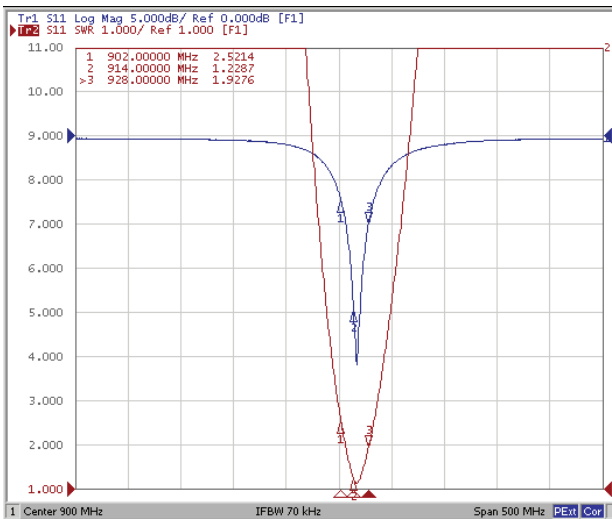


### Measured Smith Chart @ 915 MHz

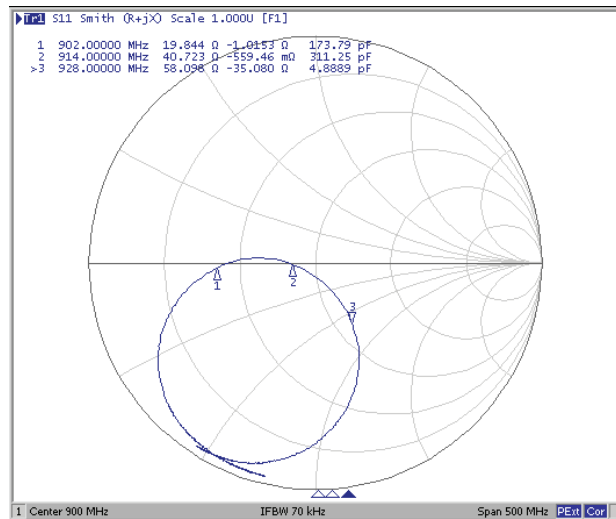

### Measured Antenna Efficiency

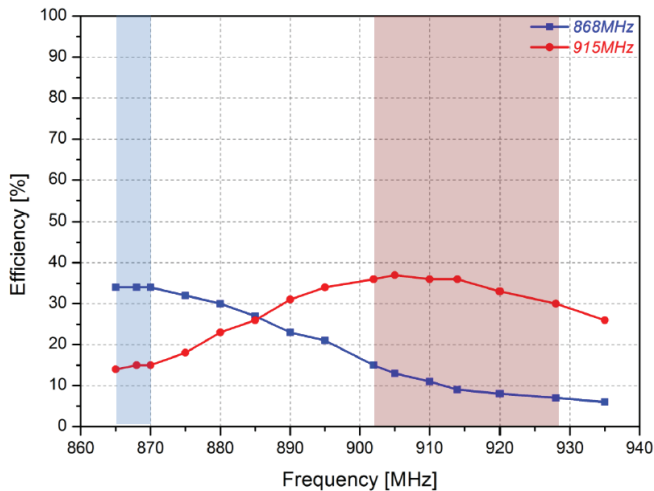


### Measured Average Gain

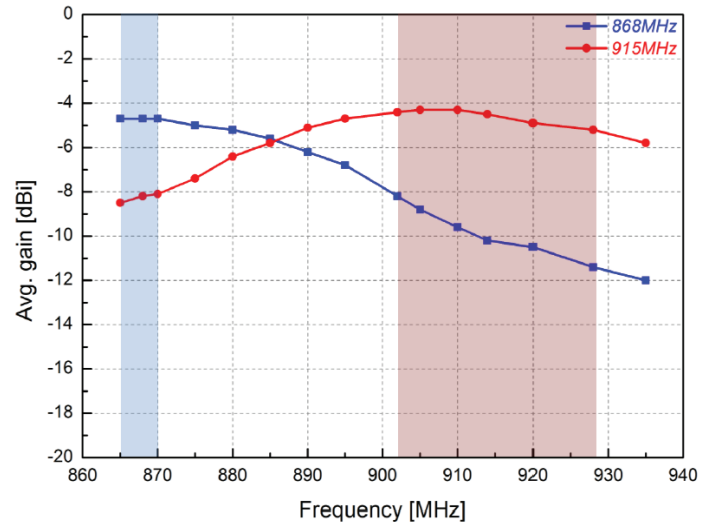

# RFID Chip Antenna


ACAJ-110-T

RoHS / RoHS II Compliant

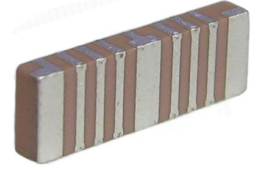

9.0 x 3.0 x 1.2 mm


## OUTLINE DIMENSION:

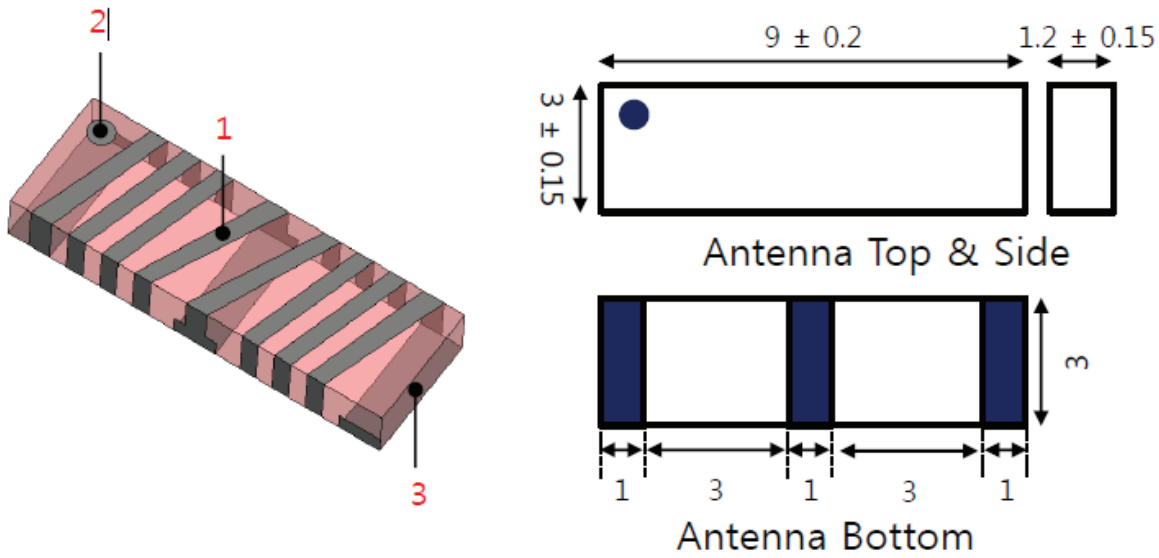

| No | Name      | Function            | Material |
|----|-----------|---------------------|----------|
| 1  | Electrode | Radiation Element   | Ag       |
| 2  | Electrode | Identification Mark | Ag       |
| 3  | Body      | Dielectric Material | Ceramic  |

Unit: mm


## REFLOW PROFILE:

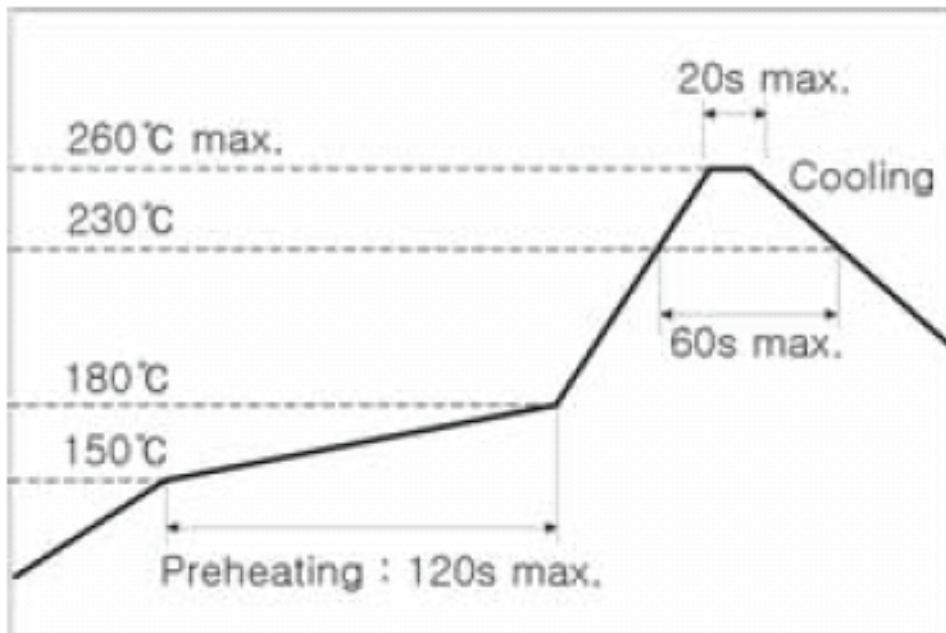

# RFID Chip Antenna

ACAJ-110-T


 RoHS / RoHS II Compliant 

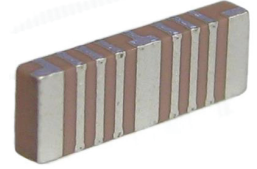

9.0 x 3.0 x 1.2 mm

## TAPE & REEL:

### Tape Dimensions (mm)

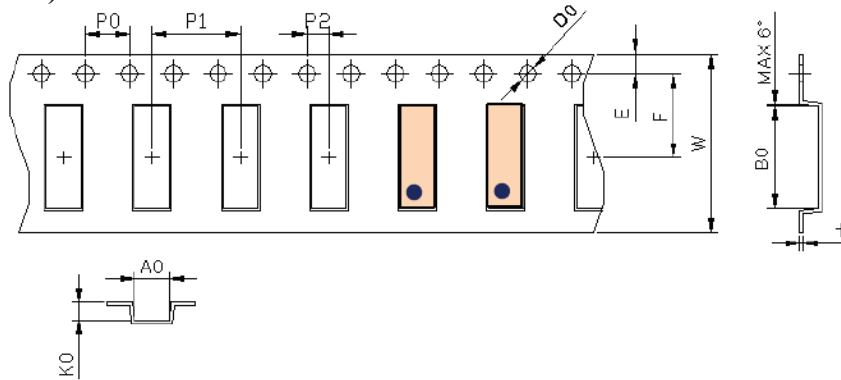

|    |            |    |            |   |             |
|----|------------|----|------------|---|-------------|
| A0 | 3.20 ±0.10 | P0 | 4.00 ±0.10 | E | 1.75 ±0.10  |
| B0 | 9.20 ±0.10 | P1 | 8.00 ±0.10 | F | 7.50 ±0.10  |
| K0 | 1.65 ±0.10 | P2 | 2.00 ±0.10 | W | 16.00 ±0.30 |
| D0 | 1.55 ±0.05 | -  | -          | t | 0.30 ±0.05  |

### Packing Quantity

| Item | Quantity | Dimension  |
|------|----------|------------|
| Reel | 1,000 ea | Φ7" * 16mm |

## CAUTION:

### Static voltage

Static voltage between signal & ground may cause deterioration & destruction of the component. Please avoid static voltage.

### Ultrasonic cleaning

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning.

### Soldering

Only leads of the component may be soldered. Please avoid soldering to any other part of the component, such as the Ag patterning as this will change the performance of the antenna.

## NOTES:

- The parts are manufactured in accordance with this specification. If other conditions and specifications which are required for this specification, please contact ABRACON for more information.
- ABRACON will supply the parts in accordance with this specification unless we receive a written request to modify prior to an order placement.
- In no case shall ABRACON be liable for any product failure from in appropriate handling or operation of the item beyond the scope of this specification.
- When changing your production process, please notify ABRACON immediately.
- ABRACON LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. ABRACON's products are not specifically designed for Military, Aviation, Aerospace, Lifedependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from ABRACON LLC is required. Please contact ABRACON LLC for more information.
- All specifications and Marking will be subject to change without notice.

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO9001:2008  
CERTIFIED

 **ABRACON**<sup>®</sup>  
The Power of Linking Together

2 Faraday, Suite# B | Irvine | CA 92618 Revised: 11.20.15  
Ph. 949.546.8000 | Fax. 949.546.8001

Visit [www.abracon.com](http://www.abracon.com) for Terms and Conditions of Sale



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.