

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 755

600KHZ, 1A SYNCHRONOUS BUCK-BOOST CONVERTER

LTC3443

DESCRIPTION

Demonstration Circuit 755 is a constant-frequency synchronous Buck-Boost converter using the LTC3443. The input range is from 2.4V to 5.5V, making it ideal for single-cell lithium-ion or three-cell NiCd/NiMH battery applications. This converter provides up to 95% efficiency, much higher than traditional Buck-Boost converters. For 2.5V minimum input voltage, this converter can provide up to 1A load current.

The output voltage is set at 3.3V. A different output voltage in the range of 2.4V to 5.25V can be obtained by changing one of the feedback resistors. The switching frequency is set at 600kHz, which is a good trade-off between efficiency and size. Applying twice the desired

frequency at the MODE/SYNC pin can also synchronize the switching frequency between 690kHz to 1.2MHz. In shutdown, the IC draws less than 1 μ A.

When using long wire connection to the input sources (such as wall adaptors), there can be input over voltage transients during initial plug-in. C8 is installed on DC755 to damp the possible voltage transients. C8 is not needed for any application when input source is close to the regulator. Please refer to Application Note 88 for details.

**Design files for this circuit board are available.
Call the LTC factory.**

Table 1. Performance Summary ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITION	VALUE
Minimum Input Voltage	-40°C to 85°C	2.4V (2.5V minimum input for 1A load)
Maximum Input Voltage	-40°C to 85°C	5.5V
Output Voltage V_{OUT}	$V_{IN} = 2.5\text{V to } 5.5\text{V}$, $I_{OUT} = 0\text{A to } 1\text{A}$	3.3V $\pm 4\%$
Maximum Output Current	$V_{IN} = 2.5\text{V}$	1A
Typical Output Ripple V_{OUT}	$V_{IN} = 3.0\text{V}$, $I_{OUT} = 1\text{A}$ (20MHz BW)	12mV _{PP} (measured at C5) 30mV _{PP} (measured across TP1 and TP2)
Typical Switching Frequency		600kHz
Efficiency (Fixed Frequency Mode)	$V_{IN} = 4.2\text{V}$, $I_{OUT} = 0.2\text{A}$	95% Typical
	$V_{IN} = 4.2\text{V}$, $I_{OUT} = 1\text{A}$	91% Typical
On/Off Control	Off (40°C to 85°C)	0.4V MAX
	On (-40°C to 85°C)	1.4V MIN

QUICK START PROCEDURE

Demonstration circuit 755 is easy to set up to evaluate the performance of the LTC3443. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

NOTE: When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the Vin or Vout and GND terminals. See Figure 2 for proper scope probe technique.

1. Place jumpers in the following positions:

JP1 RUN
JP2 FIXED FREQ.

2. With power off, connect the input power supply to Vin and GND.

3. Turn on the power at the input.

NOTE: Make sure that the input voltage does not exceed 5.5V.

4. Check for the proper output voltage. Vout = 3.17V to 3.43V.

NOTE: If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

5. Once the proper output voltage is established, adjust the load within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 755

600KHZ, 1A SYNCHRONOUS BUCK-BOOST CONVERTER

GRAPHICS

Linear Tech. Corp.
Demo Circuit 755A Rev1

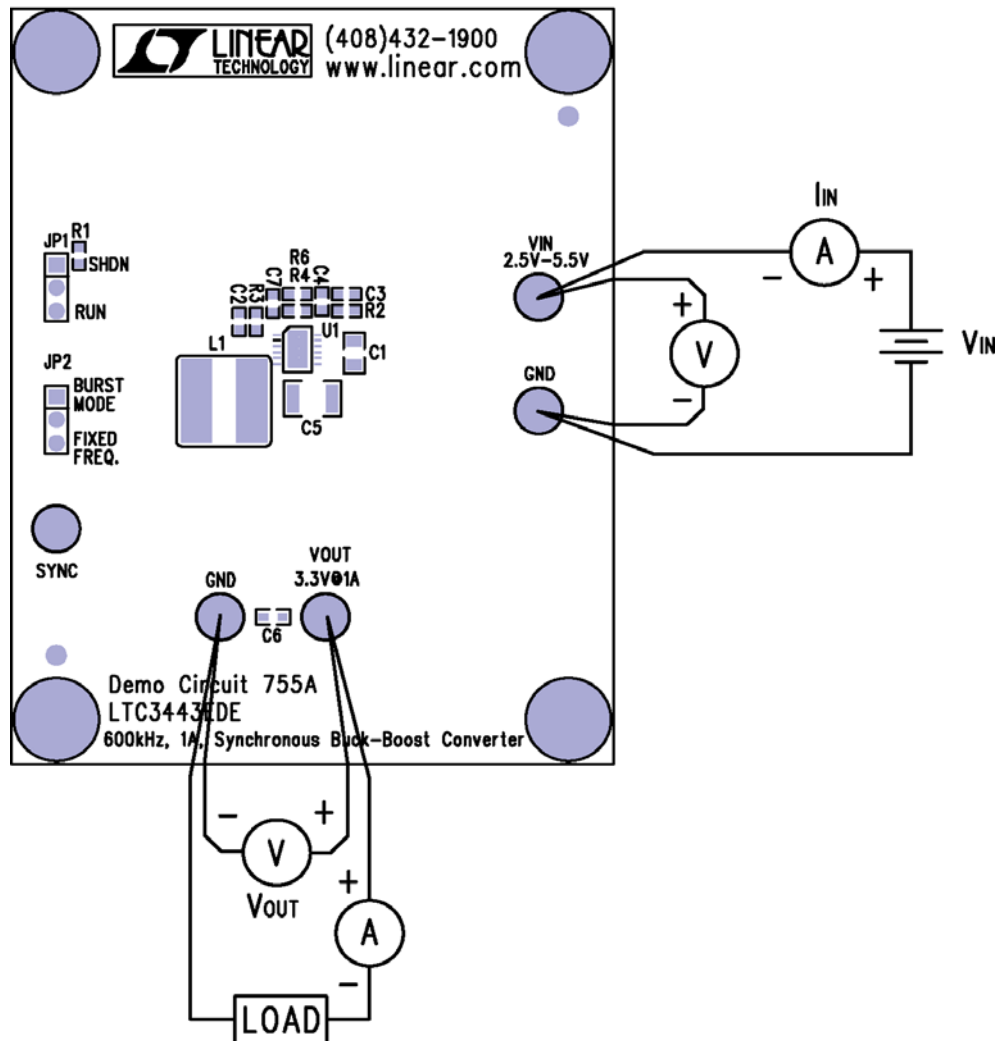


Figure 1. Proper Measurement Equipment Setup

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 755

600KHZ, 1A SYNCHRONOUS BUCK-BOOST CONVERTER




Figure 2. Measuring Input or Output Ripple

Efficiency vs. Load

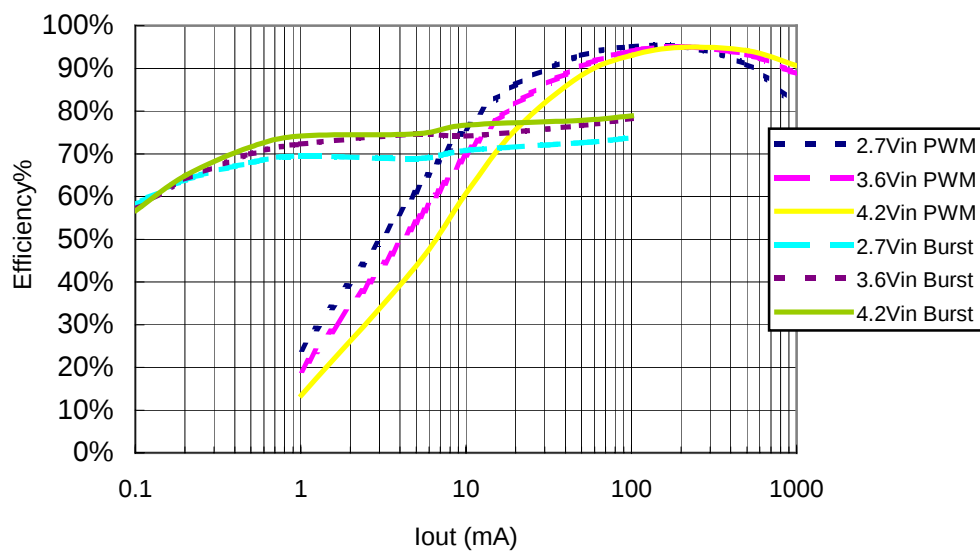


Figure 3. Efficiency of DC755

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 755

600KHZ, 1A SYNCHRONOUS BUCK-BOOST CONVERTER


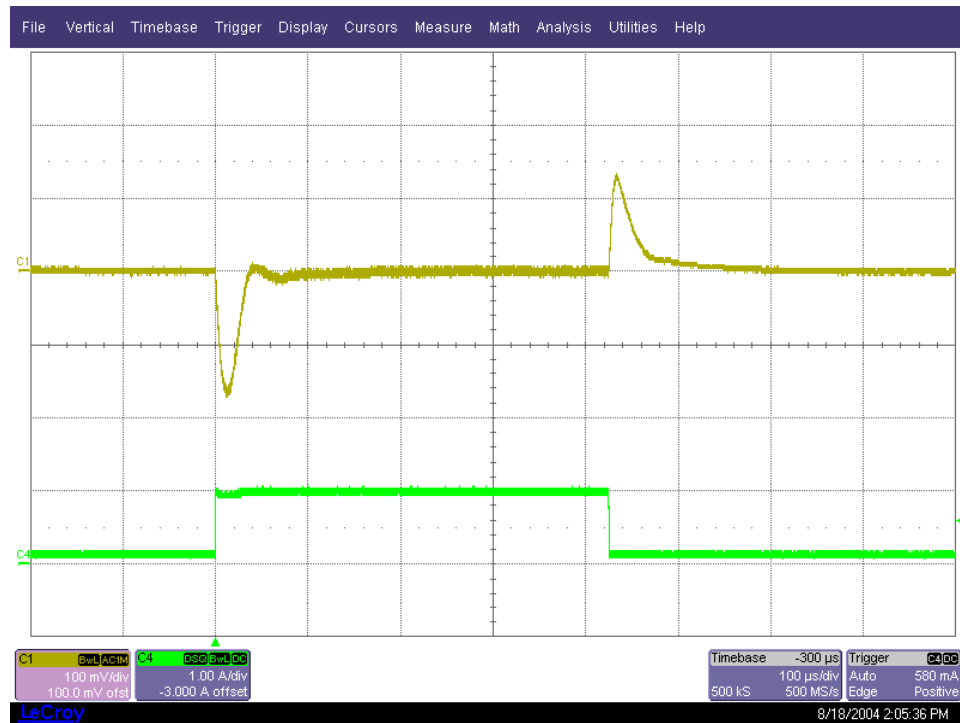



Figure 4. Load Transient Response ($V_{in}=3.3V$; Channel 1: V_{out} , 100mV/div; Channel4: I_{out} load step: 100mA to 1A)

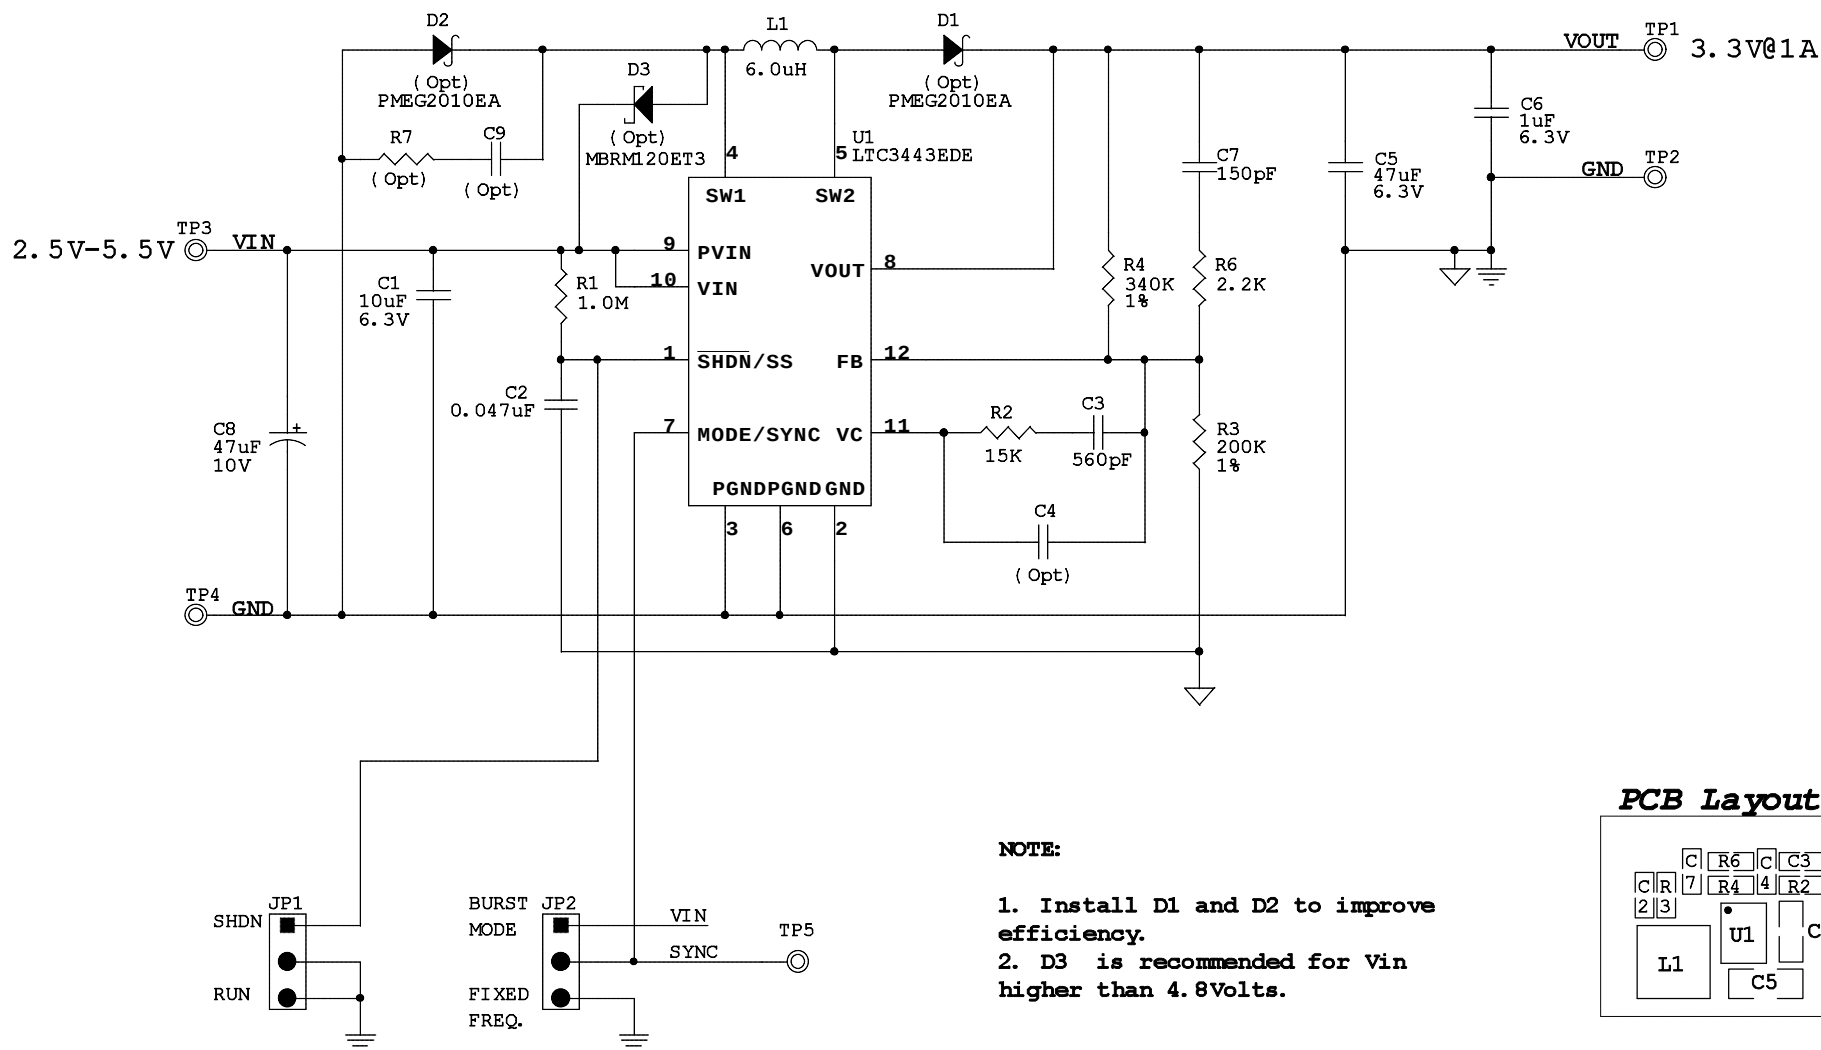

NOTE:

1. Install D1 and D2 to improve efficiency.
2. D3 is recommended for Vin higher than 4.8Volts.

PCB Layout



Item	Qty	Reference	Part Description	Manufacture / Part #
1	1	C1	Cap., X5R 10uF 6.3V 20%	Taiyo Yuden JMK212BJ106MG-T
2	1	C2	Cap., X5R 0.047uF 16V 20%	AVX 0402YD473MAT2A
3	1	C3	Cap., X7R 560pF 16V 20%	AVX 0402YC561MAT2A
4	0	C4 (Opt)	Cap., NPO 10pF 25V 10%	AVX 04023A100KAT2A
5	1	C5	Cap., X5R 47uF 6.3V 20%	Taiyo Yuden JMK325BJ476MM-T
6	1	C6	Cap., X5R 1uF 6.3V 10%	Taiyo Yuden JMK107BJ105KA-T
7	1	C7	Cap., NPO 150pF 25V 5%	AVX 04023A151JAT2A
8	1	C8	Cap., Tant. 47uF 10V 20%	AVX TAJB476M010
9	0	C9 (Opt)	Cap., X7R 1000pF 25V 20%	AVX 04023C102MAT2A
10	2	D2,D1	Schottky Diodes, 1A/20V	Philips PMEG2010EA
11	1	D3	Schottky Diodes, 1A/20V	ON SEMI. MBRM120ET3
12	2	JP1,JP2	Headers, 3 Pins 2mm Ctrs.	CommConn Con Inc. 2802S-03G2
13	2	XJP1-XJP2	SHUNT, .079" CENTER	COMM-CON CCIJ2MM-138GW
14	1	L1	Inductor, 6.0uH	Sumida CDRH6D28-6R0NC
15	1	R1	Res., Chip 1.0M 1/16W 5%	AAC CR05-105JM
16	1	R2	Res., Chip 15K 1/16W 5%	AAC CR05-153JM
17	1	R3	Res., Chip 200K 0.06W 1%	AAC CR05-2003FM
18	1	R4	Res., Chip 340K 1/16W 1%	AAC CR05-3403FM
19	1	R6	Res., Chip 2.2K 0.06W 5%	AAC CR05-222JM
20	0	R7 (Opt)	Res., Chip 2.0 0.06W 1%	AAC CR05-2R00FM
22	1	U1	I.C., Buck Converter	Linear Tech. Corp. LTC3443EDE



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.