
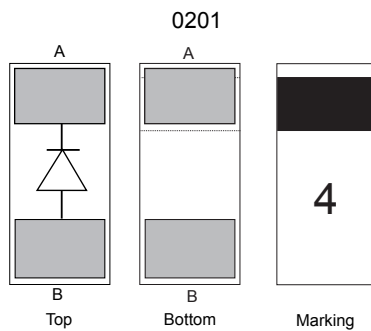


30 V signal Schottky diode



Features

- Very low conduction losses
- Negligible switching losses
- 0201 package
- Low capacitance diode
- ECOPACK[®]2 and RoHS compliant

Applications

- Reverse polarity protection
- Fingerprint module
- Camera module
- Bluetooth wireless earbud
- Biometric computer card

Description

The **BAT30F4** uses 30 V Schottky barrier diodes in a 0201 package. This device is intended to be used in smartphones, and is especially suited for rail to rail protection where its low forward voltage drop will help designers to get an efficient protection of their ICs.

Product status link

[BAT30F4](#)

Product summary

V_{RRM}	30 V
T_j (max)	85 °C
I_F	300 mA

1 Characteristics

Table 1. Absolute ratings (limiting values, at 25 °C, unless otherwise specified)

Symbol	Parameter	Value	Unit
V_{RRM}	Repetitive peak reverse voltage	30	V
I_F	Continuous forward current	300	mA
I_{FSM}	Surge non repetitive forward current	$t_p = 10$ ms sinusoidal 4	A
$P_D^{(1)}$	Power dissipation	200	mW
T_{stg}	Storage temperature range	-55 to + 150	°C
T_{OP}	Operating junction temperature range	-40 to +85	°C
T_j	Maximum junction temperature in DC forward mode	150	°C
T_L	Maximum soldering temperature during 10 s	260	°C

1. On epoxy printed circuit board with minimum recommended footprint

Table 2. Thermal resistance parameter

Symbol	Parameter	Value (Typ.)	Unit
$R_{th(j-a)}$	Junction to ambient ⁽¹⁾	450	°C/W

1. On epoxy printed circuit board with minimum recommended footprint

Table 3. Static electrical characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit	
$I_R^{(1)}$	Reverse leakage current	$T_j = 25$ °C	$V_R = 10$ V	-	2.2	6.0	μ A
		$T_j = 85$ °C		-		300	
		$T_j = 25$ °C	$V_R = 30$ V	-	18		
		$T_j = 85$ °C		-		1600	
$V_F^{(2)}$	Forward voltage drop	$T_j = 25$ °C	$I_F = 5$ mA	-		0.285	V
		$T_j = 85$ °C		-		0.205	
		$T_j = 25$ °C	$I_F = 10$ mA	-	0.27	0.31	
		$T_j = 85$ °C		-		0.24	
		$T_j = 25$ °C	$I_F = 100$ mA	-	0.39	0.44	
		$T_j = 85$ °C		-		0.40	
		$T_j = 25$ °C	$I_F = 300$ mA	-	0.55	0.625	
		$T_j = 85$ °C		-		0.64	

1. Pulse test: $t_p = 5$ ms, $\delta < 2\%$

2. Pulse test: $t_p = 380$ μ s, $\delta < 2\%$

Table 4. Dynamic characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C	Diode capacitance	$V_R = 1\text{ V}$, $F = 1\text{ MHz}$	-	10	14	pF

1.1 Characteristics (curves)

Figure 1. Reverse leakage current versus reverse applied voltage (typical values)

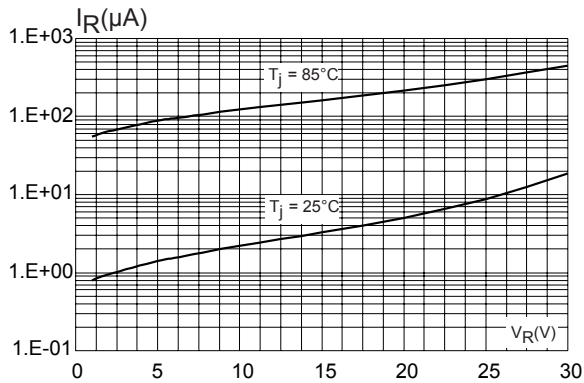


Figure 2. Forward voltage drop versus forward current (typical values)

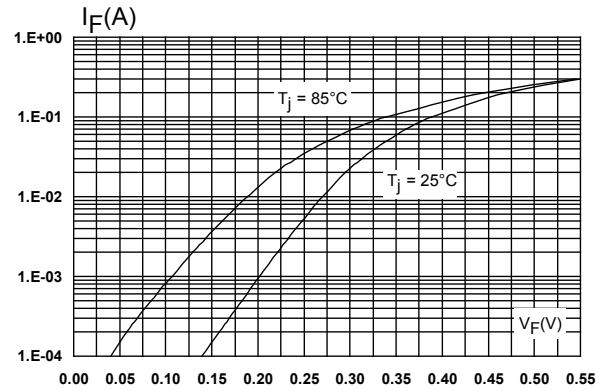


Figure 3. Relative variation of reverse leakage current versus junction temperature

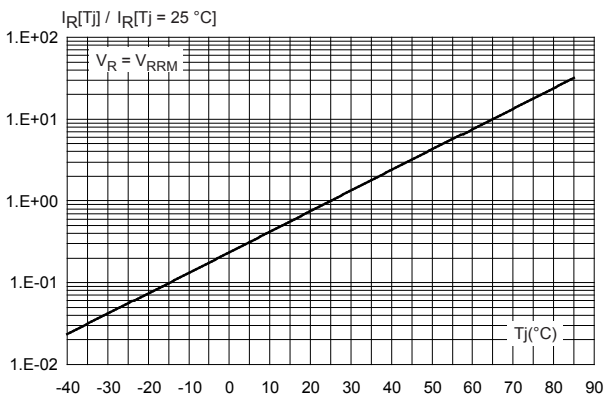


Figure 4. Junction capacitance versus reverse applied voltage (typical values)


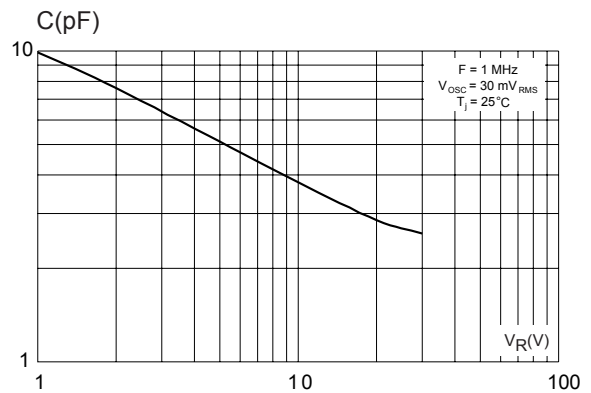


Figure 5. Continuous forward current versus ambient temperature

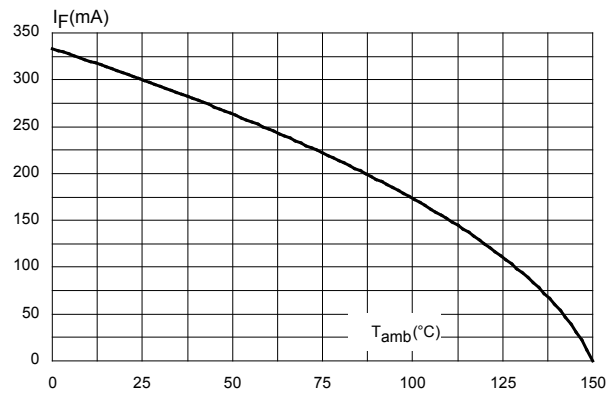

2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

2.1 0201 package information

Figure 6. 0201 package outline

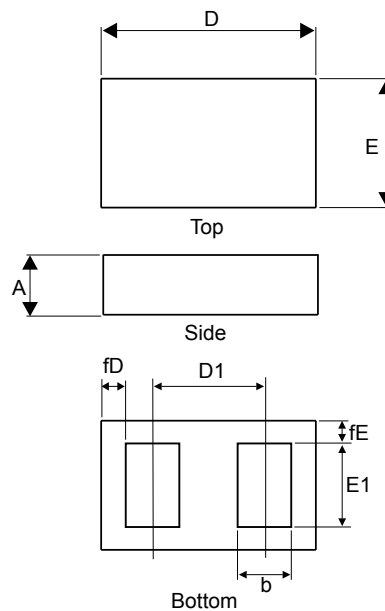


Table 5. 0201 package mechanical data

Ref.	Dimensions					
	Millimeters			Inches (for reference only)		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.28	0.30	0.32	0.0110	0.0118	0.0126
b	0.125	0.14	0.155	0.0049	0.0055	0.0061
D	0.57	0.60	0.63	0.0224	0.0236	0.0248
D1		0.35			0.0138	
E	0.27	0.30	0.33	0.0106	0.0118	0.0130
E1	0.175	0.19	0.205	0.0069	0.0075	0.0081
fD	0.040	0.055	0.070	0.0015	0.0021	0.0027
fE	0.040	0.055	0.070	0.0015	0.0021	0.0027

Figure 7. Footprint in mm (inches)


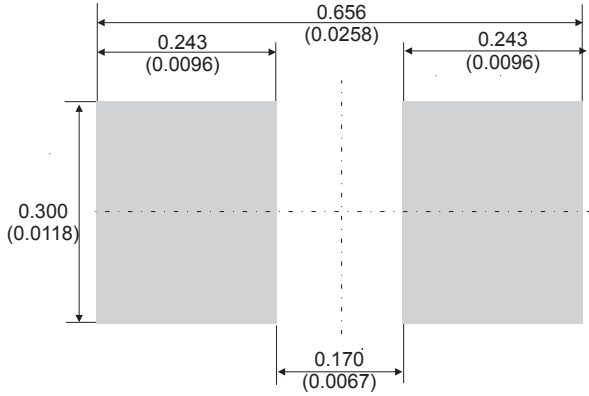


Figure 8. Marking



Note: The marking codes can be rotated by 90° or 180° to differentiate assembly location. In no case should this product marking be used to orient the component for its placement on a PCB. Only pin 1 mark is to be used for this purpose.

Figure 9. Tape and reel specification

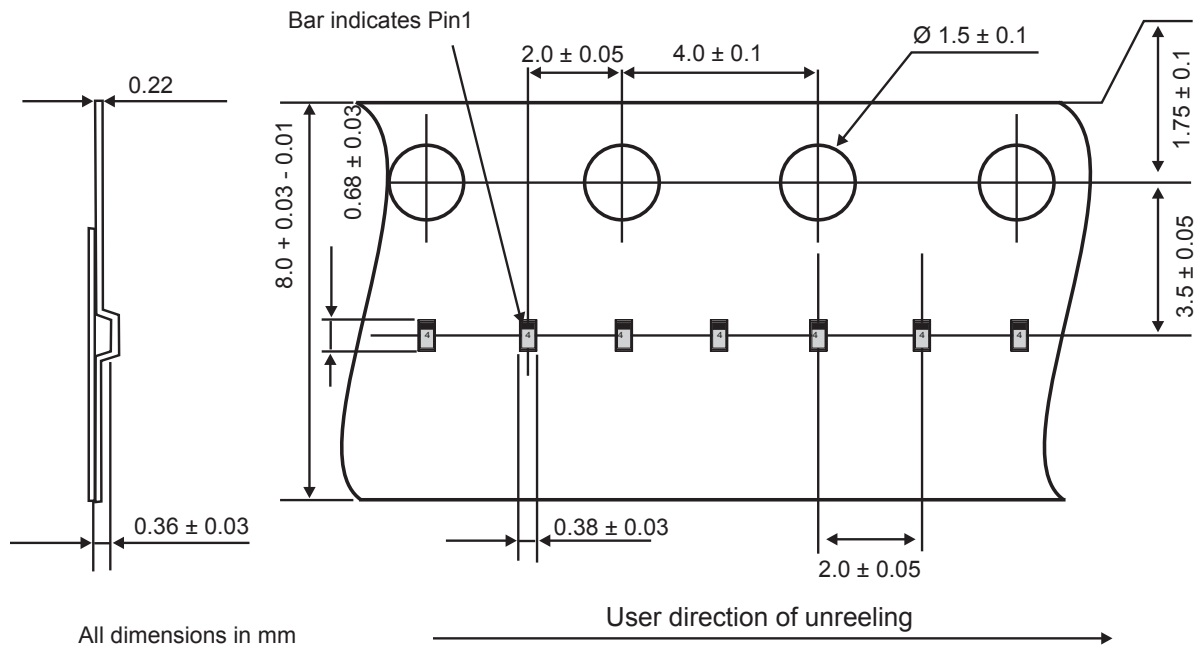


3 Recommendation on PCB assembly

3.1 Stencil opening design


1. General recommendation on stencil opening design
 - a. Stencil opening dimensions: L (Length), W (Width), T (Thickness).

Figure 10. Stencil opening recommendation



- b. General design rule
 - Stencil thickness (T) = 75 ~ 125 μm
 - $\frac{W}{T} \geq 1.5$
 - $\frac{L \times W}{2T(L + W)} \geq 0.66$
1. Reference design
 - a. Stencil opening thickness: 80 μm
 - b. Other dimensions: see below figure.

Figure 11. Recommended stencil window position, stencil opening thickness: 80 μm

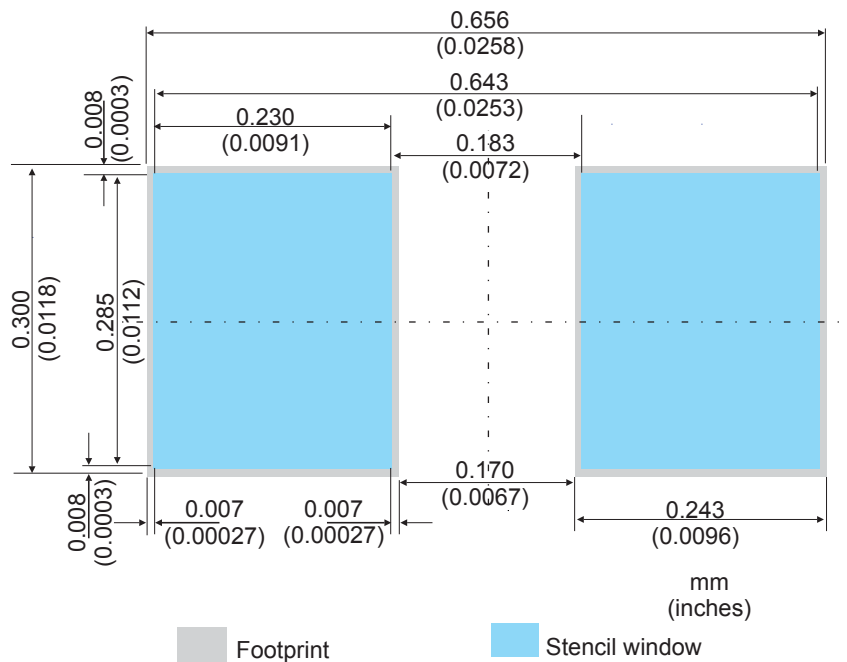

3.2 Solder paste

1. Halide-free flux qualification ROL0 according to ANSI/J-STD-004.
2. "No clean" solder paste is recommended.
3. Offers a high tack force to resist component displacement during PCB movement.
4. Use solder paste with fine particles: Type 4 (powder particle size 20-48 μm per IPC J STD-005).

3.3 Placement


1. Manual positioning is not recommended.
2. It is recommended to use the lead recognition capabilities of the placement system, not the outline centering
3. Standard tolerance of ± 0.05 mm is recommended.
4. 1.0 N placement force is recommended. Too much placement force can lead to squeezed out solder paste and cause solder joints to short. Too low placement force can lead to insufficient contact between package and solder paste that could cause open solder joints or badly centered packages.
5. To improve the package placement accuracy, a bottom side optical control should be performed with a high resolution tool.
6. For assembly, a perfect supporting of the PCB (all the more on flexible PCB) is recommended during solder paste printing, pick and place and reflow soldering by using optimized tools.

3.4 PCB design preference

1. To control the solder paste amount, the closed via is recommended instead of open vias.
2. The position of tracks and open vias in the solder area should be well balanced. A symmetrical layout is recommended, to avoid any tilt phenomena caused by asymmetrical solder paste due to solder flow away.

3.5 Reflow profile

Figure 12. ST ECOPACK[®] recommended soldering reflow profile for PCB mounting

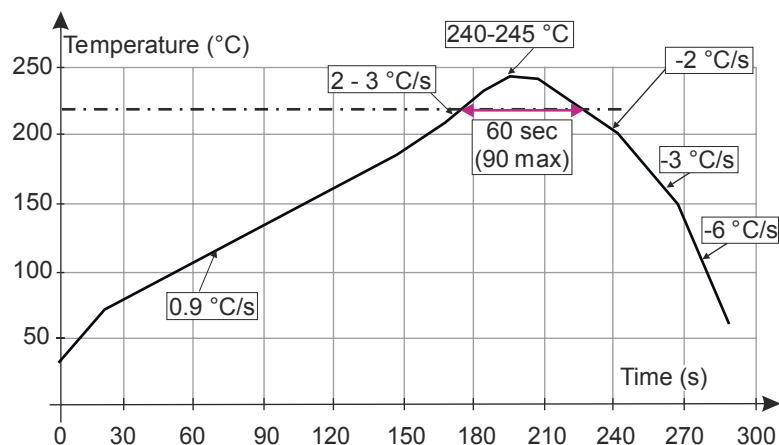

Note: Minimize air convection currents in the reflow oven to avoid component movement.

4 Ordering information

Table 6. Ordering information

Order code	Marking	Package	Weight	Base qty	Delivery mode
BAT30F4	4 ⁽¹⁾	Flat CSPS	0.116 mg	15000	Tape and reel

1. The marking codes can be rotated by 90° or 180° to differentiate assembly location

Revision history

Table 7. Document revision history

Date	Revision	Changes
13-May-2014	1	First issue
24-Nov-2014	2	Updated Table 2.
13-Apr-2015	3	Updated Features and Description.
11-Feb-2016	4	Updated Table 3 and Figure 4.
26-Feb-2016	5	Updated Table 2. Added Table 3, Table 5 and Figure 7.
05-Jun-2018	6	Updated Table 3. Static electrical characteristics , Table 5. 0201 package mechanical data and Table 6. Ordering information .
24-Sep-2018	7	Updated Table 3. Static electrical characteristics .

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.