

## Trench gate field-stop IGBT, HB series 650 V, 40 A high speed

Datasheet - production data

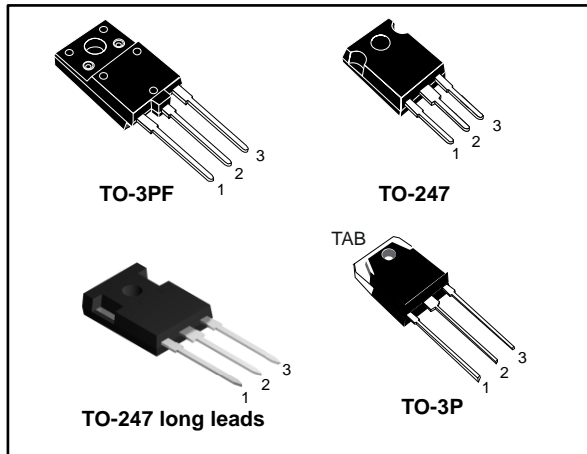


Figure 1: Internal schematic diagram

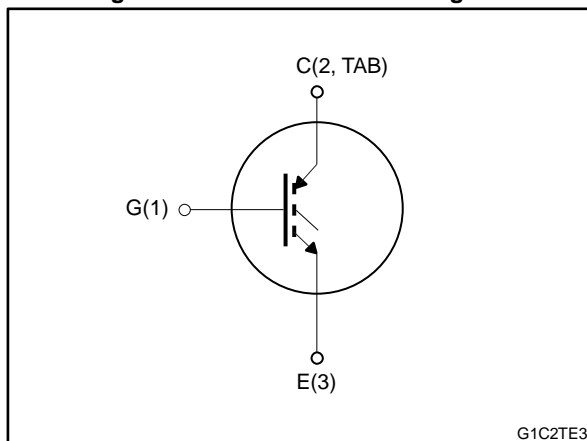


Table 1: Device summary

| Order code   | Marking    | Package           | Packing |
|--------------|------------|-------------------|---------|
| STGFW40H65FB | GFW40H65FB | TO-3PF            | Tube    |
| STGW40H65FB  | GW40H65FB  | TO-247            | Tube    |
| STGWA40H65FB | GWA40H65FB | TO-247 long leads | Tube    |
| STGWT40H65FB | GWT40H65FB | TO-3P             | Tube    |

### Features

- Maximum junction temperature:  $T_J = 175\text{ °C}$
- High speed switching series
- Minimized tail current
- Very low saturation voltage:  $V_{CE(sat)} = 1.6\text{ V}$  (typ) @  $I_C = 40\text{ A}$
- Safe paralleling
- Tight parameter distribution
- Low thermal resistance

### Applications

- Photovoltaic inverters
- High frequency converters

### Description

These devices are IGBTs developed using an advanced proprietary trench gate field-stop structure. These devices are part of the new HB series of IGBTs, which represent an optimum compromise between conduction and switching loss to maximize the efficiency of any frequency converter. Furthermore, the slightly positive  $V_{CE(sat)}$  temperature coefficient and very tight parameter distribution result in safer paralleling operation.

## Contents

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>Electrical ratings .....</b>                 | <b>3</b>  |
| <b>2</b> | <b>Electrical characteristics .....</b>         | <b>4</b>  |
|          | 2.1 Electrical characteristics (curves) .....   | 6         |
| <b>3</b> | <b>Test circuits .....</b>                      | <b>11</b> |
| <b>4</b> | <b>Package information .....</b>                | <b>12</b> |
|          | 4.1 TO-3PF package information .....            | 12        |
|          | 4.2 TO-247 package information .....            | 14        |
|          | 4.3 TO-247 long leads package information ..... | 16        |
|          | 4.4 TO-3P package information .....             | 18        |
| <b>5</b> | <b>Revision history .....</b>                   | <b>20</b> |

# 1 Electrical ratings

Table 2: Absolute maximum ratings

| Symbol                         | Parameter   | Value                                  |        | Unit |
|--------------------------------|---|--|--------|------|
|                                |   | TO-247,<br>TO-247 long leads,<br>TO-3P | TO-3PF |      |
| V <sub>CEs</sub>               | Collector-emitter voltage (V <sub>GE</sub> = 0 V)   | 650                                    |        | V    |
| I <sub>C</sub>                 | Continuous collector current at T <sub>C</sub> = 25 °C  | 80                                     |        | A    |
|                                | Continuous collector current at T <sub>C</sub> = 100 °C   | 40                                     |        |      |
| I <sub>CP</sub> <sup>(1)</sup> | Pulsed collector current  | 160                                    |        | A    |
| V <sub>GE</sub>                | Gate-emitter voltage  | ±20                                    |        | V    |
| P <sub>TOT</sub>               | Total dissipation at T <sub>C</sub> = 25 °C   | 283                                    | 62.5   | W    |
| V <sub>ISO</sub>               | Insulation withstand voltage (RMS) from all three leads to external heat sink (t = 1 s; T <sub>C</sub> = 25 °C) |  | 3.5    | kV   |
| T <sub>STG</sub>               | Storage temperature range   | -55 to 150                             |        | °C   |
| T <sub>J</sub>                 | Operating junction temperature range  | -55 to 175                             |        | °C   |

**Notes:**

<sup>(1)</sup>Pulse width is limited by maximum junction temperature.

Table 3: Thermal data

| Symbol            | Parameter                           | Value                                  |        | Unit |
|-------------------|-------------------------------------|--|--------|------|
|                   |                                     | TO-247,<br>TO-247 long leads,<br>TO-3P | TO-3PF |      |
| R <sub>thJC</sub> | Thermal resistance junction-case    | 0.53                                   | 2.4    | °C/W |
| R <sub>thJA</sub> | Thermal resistance junction-ambient | 50                                     |        | °C/W |

## 2 Electrical characteristics

$T_C = 25\text{ °C}$  unless otherwise specified

Table 4: Static characteristics

| Symbol        | Parameter                            | Test conditions   | Min. | Typ. | Max.      | Unit          |
|---------------|--------------------------------------|---|------|------|-----------|---------------|
| $V_{(BR)CES}$ | Collector-emitter breakdown voltage  | $V_{GE} = 0\text{ V}$ , $I_C = 2\text{ mA}$                             | 650  |      |           | V             |
| $V_{CE(sat)}$ | Collector-emitter saturation voltage | $V_{GE} = 15\text{ V}$ , $I_C = 40\text{ A}$                            |      | 1.6  | 2         | V             |
|               |                                      | $V_{GE} = 15\text{ V}$ , $I_C = 40\text{ A}$ ,<br>$T_J = 125\text{ °C}$ |      | 1.7  |           |               |
|               |                                      | $V_{GE} = 15\text{ V}$ , $I_C = 40\text{ A}$ ,<br>$T_J = 175\text{ °C}$ |      | 1.8  |           |               |
| $V_{GE(th)}$  | Gate threshold voltage               | $V_{CE} = V_{GE}$ , $I_C = 1\text{ mA}$                                 | 5    | 6    | 7         | V             |
| $I_{CES}$     | Collector cut-off current            | $V_{GE} = 0\text{ V}$ , $V_{CE} = 650\text{ V}$                         |      |      | 25        | $\mu\text{A}$ |
| $I_{GES}$     | Gate-emitter leakage current         | $V_{CE} = 0\text{ V}$ , $V_{GE} = \pm 20\text{ V}$                      |      |      | $\pm 250$ | nA            |

Table 5: Dynamic characteristics

| Symbol    | Parameter                    | Test conditions   | Min. | Typ. | Max. | Unit |
|-----------|------------------------------|---|------|------|------|------|
| $C_{ies}$ | Input capacitance            | $V_{CE} = 25\text{ V}$ , $f = 1\text{ MHz}$ ,<br>$V_{GE} = 0\text{ V}$  | -    | 5412 | -    | pF   |
| $C_{oes}$ | Output capacitance           |   | -    | 198  | -    |      |
| $C_{res}$ | Reverse transfer capacitance |   | -    | 107  | -    |      |
| $Q_g$     | Total gate charge            | $V_{CC} = 520\text{ V}$ , $I_C = 40\text{ A}$ ,<br>$V_{GE} = 0\text{ to }15\text{ V}$<br>(see <a href="#">Figure 28: "Gate charge test circuit"</a> ) | -    | 210  | -    | nC   |
| $Q_{ge}$  | Gate-emitter charge          |   | -    | 39   | -    |      |
| $Q_{gc}$  | Gate-collector charge        |   | -    | 82   | -    |      |

Table 6: Switching characteristics (inductive load)

| Symbol          | Parameter                 | Test conditions   | Min. | Typ. | Max. | Unit       |
|-----------------|---------------------------|---|------|------|------|------------|
| $t_{d(on)}$     | Turn-on delay time        | $V_{CE} = 400\text{ V}$ , $I_C = 40\text{ A}$ ,<br>$V_{GE} = 15\text{ V}$ , $R_G = 5\ \Omega$<br>(see <a href="#">Figure 27: "Test circuit for inductive load switching"</a> )  | -    | 40   | -    | ns         |
| $t_r$           | Current rise time         |   | -    | 13   | -    |            |
| $(di/dt)_{on}$  | Turn-on current slope     |   | -    | 2413 | -    | A/ $\mu$ s |
| $t_{d(off)}$    | Turn-off delay time       |   | -    | 142  | -    | ns         |
| $t_f$           | Current fall time         |   | -    | 27   | -    |            |
| $E_{on}^{(1)}$  | Turn-on switching energy  |   | -    | 498  | -    | $\mu$ J    |
| $E_{off}^{(2)}$ | Turn-off switching energy |   | -    | 363  | -    |            |
| $E_{ts}$        | Total switching energy    | -   | 861  | -    |      |            |
| $t_{d(on)}$     | Turn-on delay time        | $V_{CE} = 400\text{ V}$ , $I_C = 40\text{ A}$ ,<br>$V_{GE} = 15\text{ V}$ , $R_G = 5\ \Omega$ ,<br>$T_J = 175\text{ }^\circ\text{C}$<br>(see <a href="#">Figure 27: "Test circuit for inductive load switching"</a> ) | -    | 38   | -    | ns         |
| $t_r$           | Current rise time         |   | -    | 14   | -    |            |
| $(di/dt)_{on}$  | Turn-on current slope     |   | -    | 2186 | -    | A/ $\mu$ s |
| $t_{d(off)}$    | Turn-off delay time       |   | -    | 141  | -    | ns         |
| $t_f$           | Current fall time         |   | -    | 61   | -    |            |
| $E_{on}^{(1)}$  | Turn-on switching energy  |   | -    | 1417 | -    | $\mu$ J    |
| $E_{off}^{(2)}$ | Turn-off switching energy |   | -    | 764  | -    |            |
| $E_{ts}$        | Total switching energy    | -   | 2181 | -    |      |            |


**Notes:**

(1)Including the reverse recovery of the external diode. The diode is the same of the co-packed STGW40H65DFB.


(2)Including the tail of the collector current.

## 2.1 Electrical characteristics (curves)


**Figure 2: Power dissipation vs. case temperature for TO-247, TO-247 long leads and TO-3P**

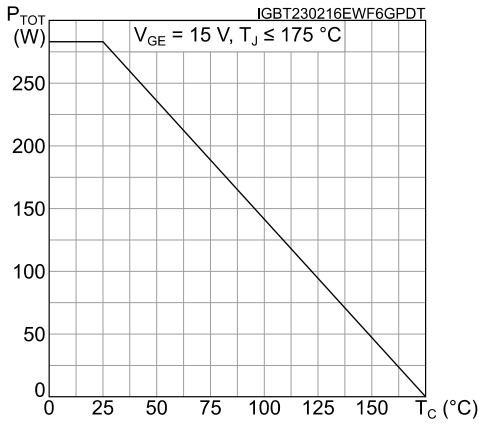


**Figure 3: Collector current vs. case temperature for TO-247, TO-247 long leads and TO-3P**

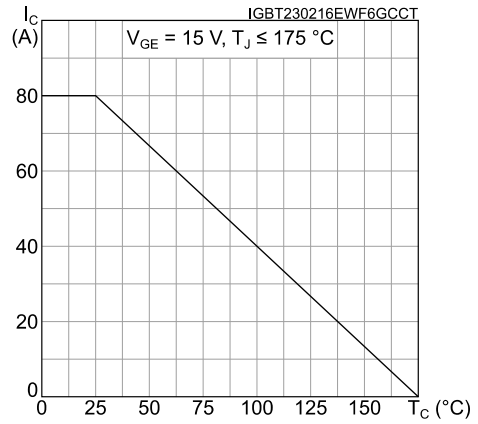


**Figure 4: Power dissipation vs. case temperature for TO-3PF**

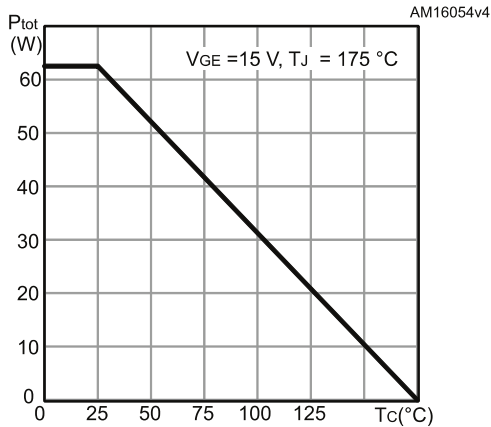


**Figure 5: Collector current vs. case temperature for TO-3PF**






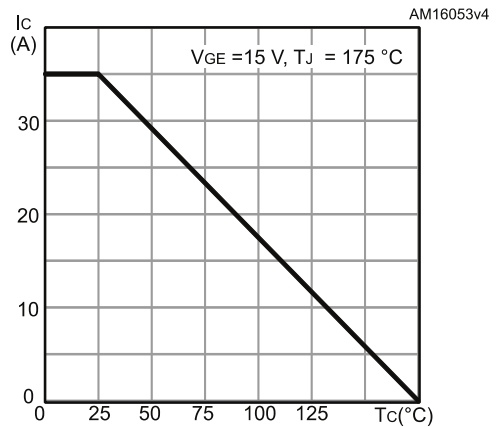








**Figure 6: Output characteristics ( $T_J = 25 \text{ }^\circ\text{C}$ )**

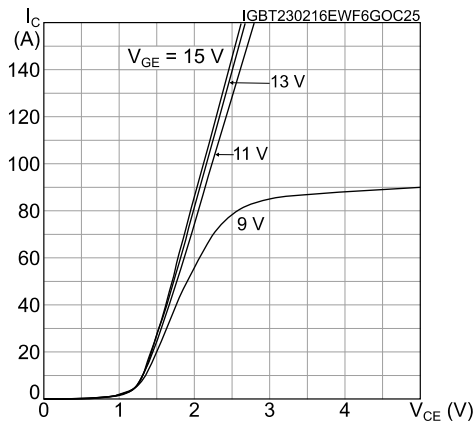

**Figure 7: Output characteristics ( $T_J = 175 \text{ }^\circ\text{C}$ )**

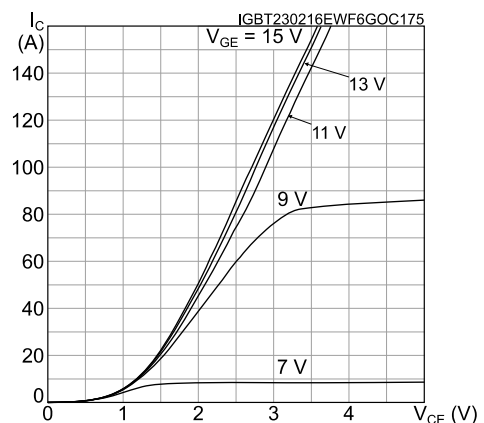

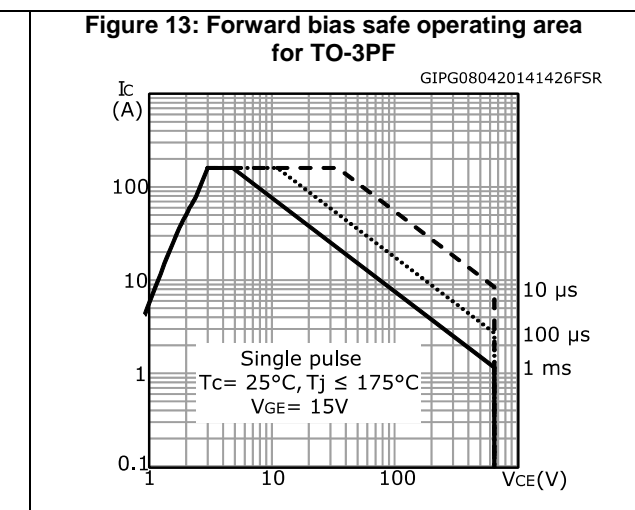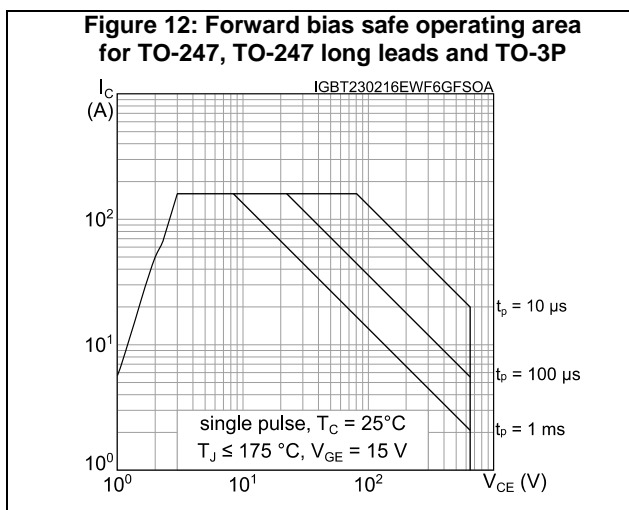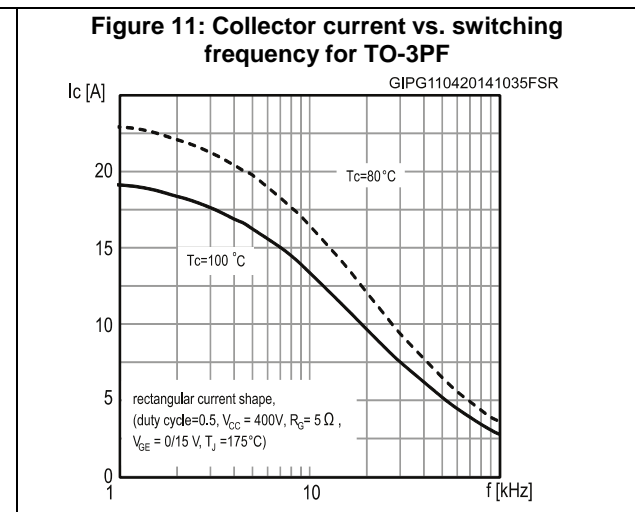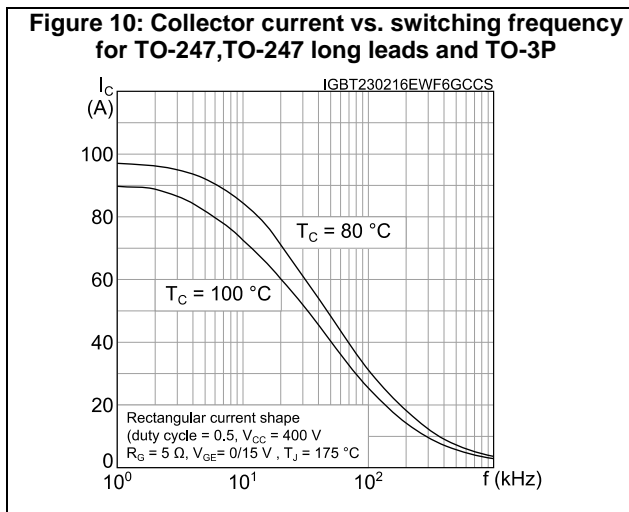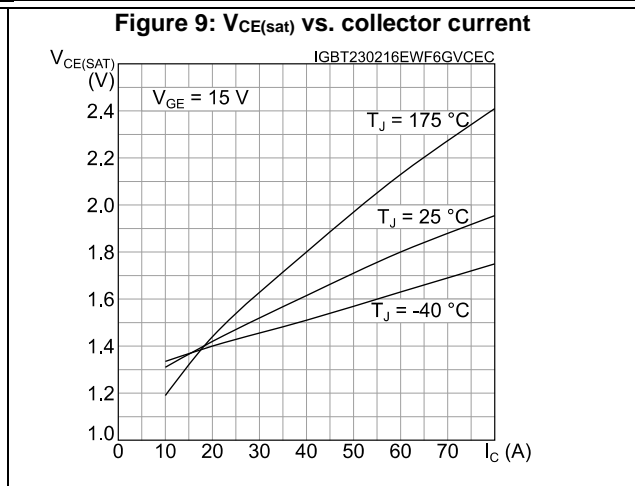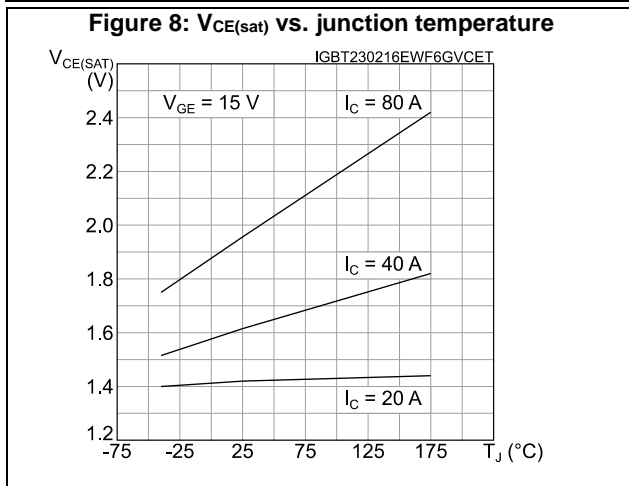

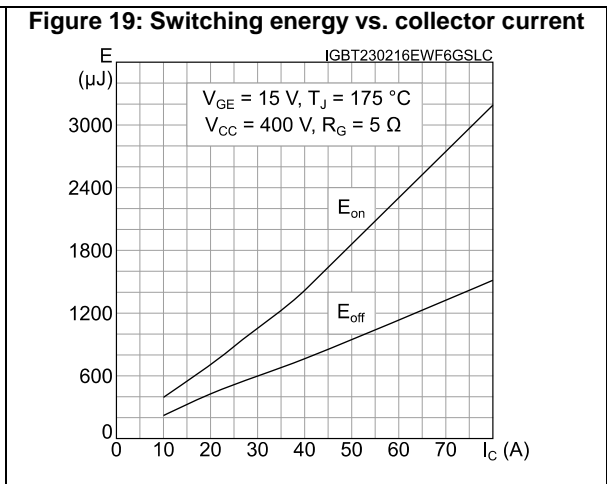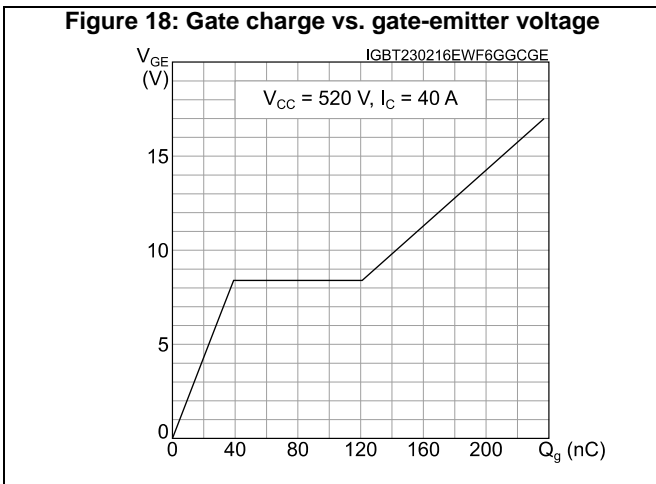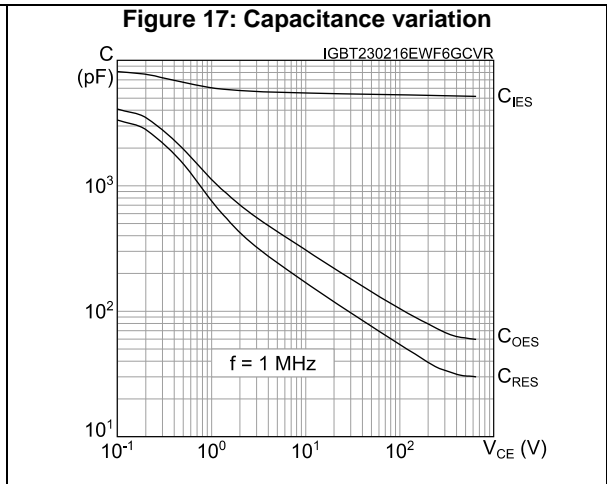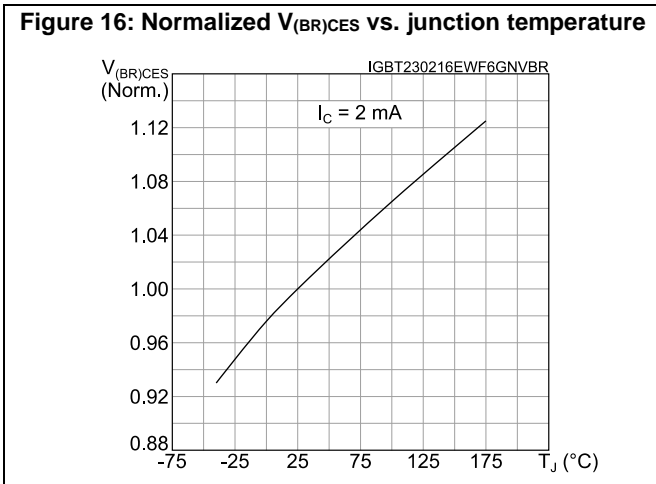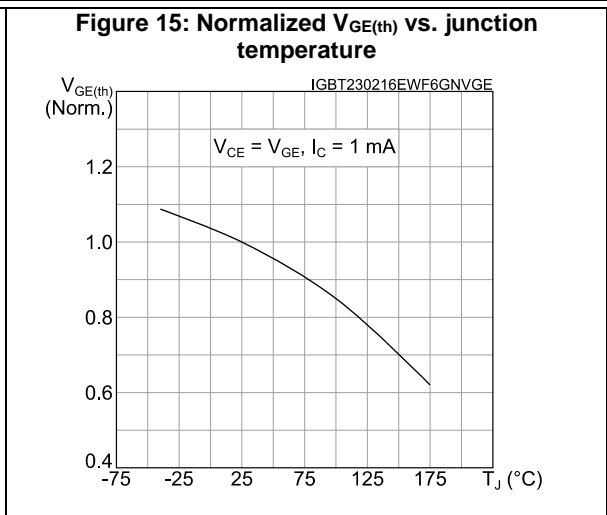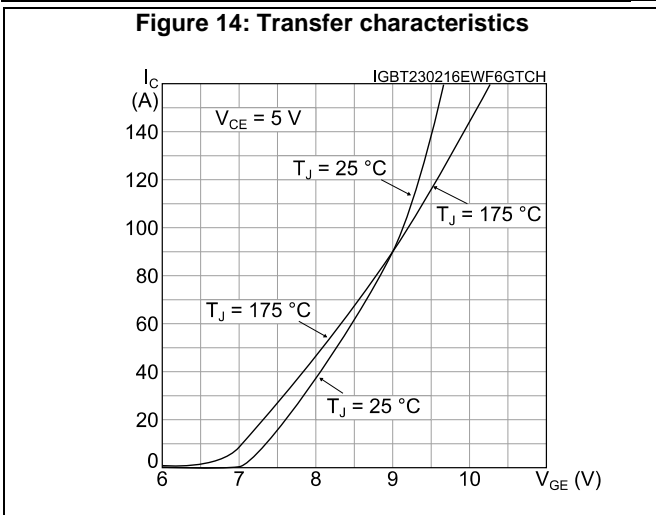



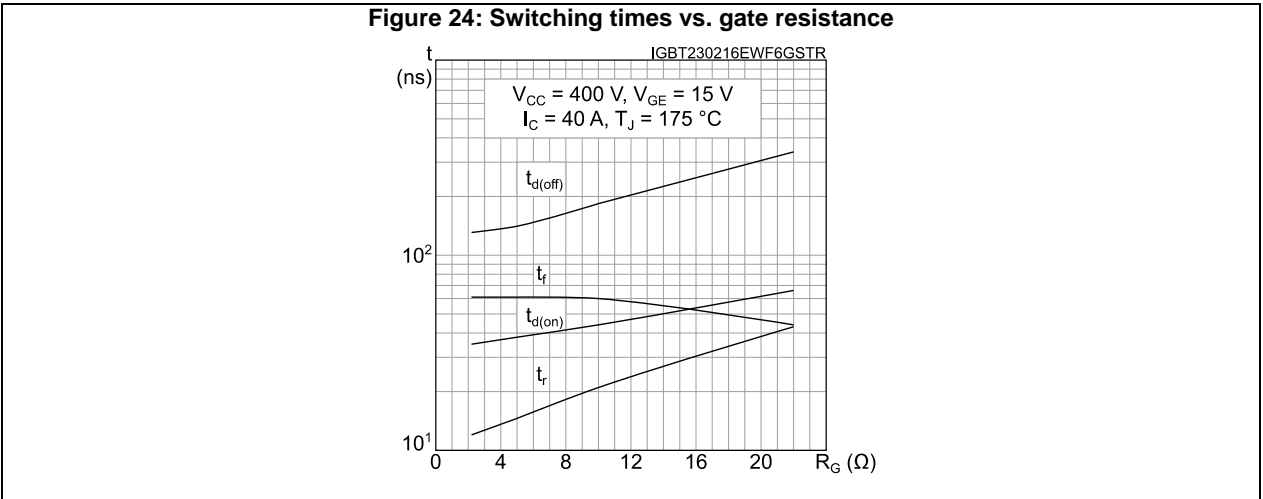
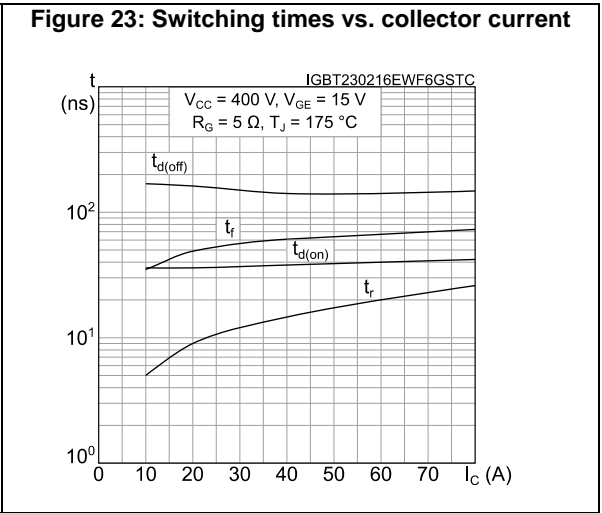
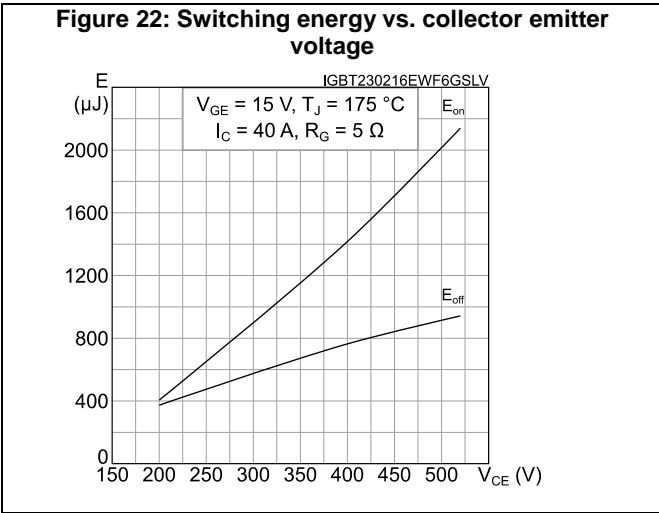
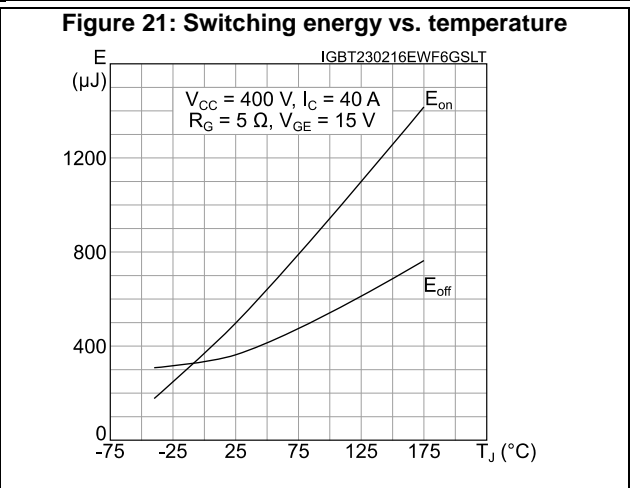
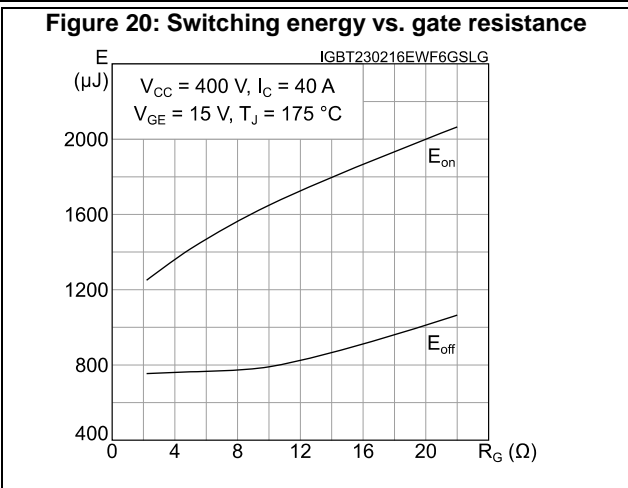


Figure 25: Thermal impedance for TO-247, TO-247 long leads and TO-3P




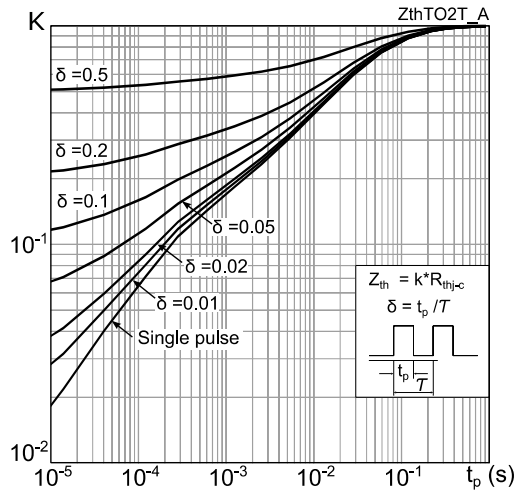


Figure 26: Thermal impedance for TO-3PF

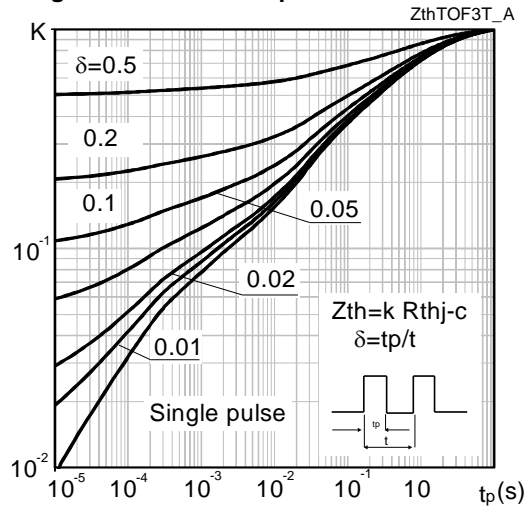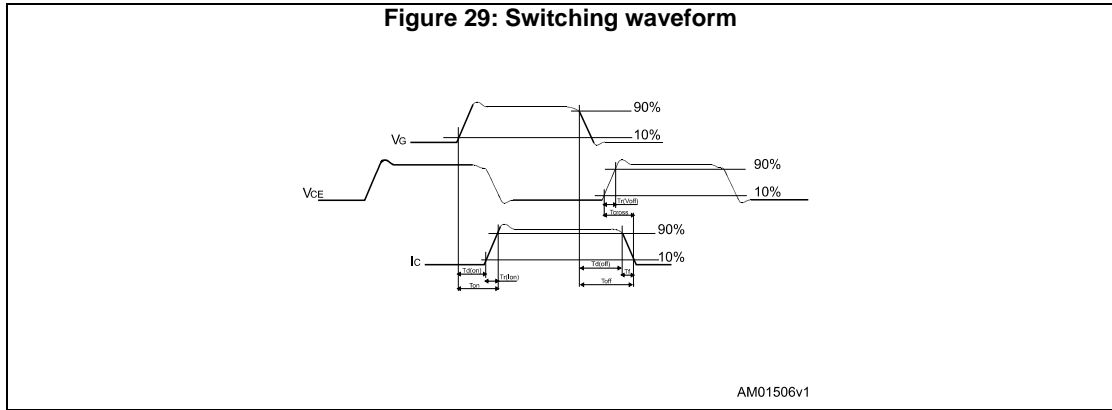

### 3 Test circuits

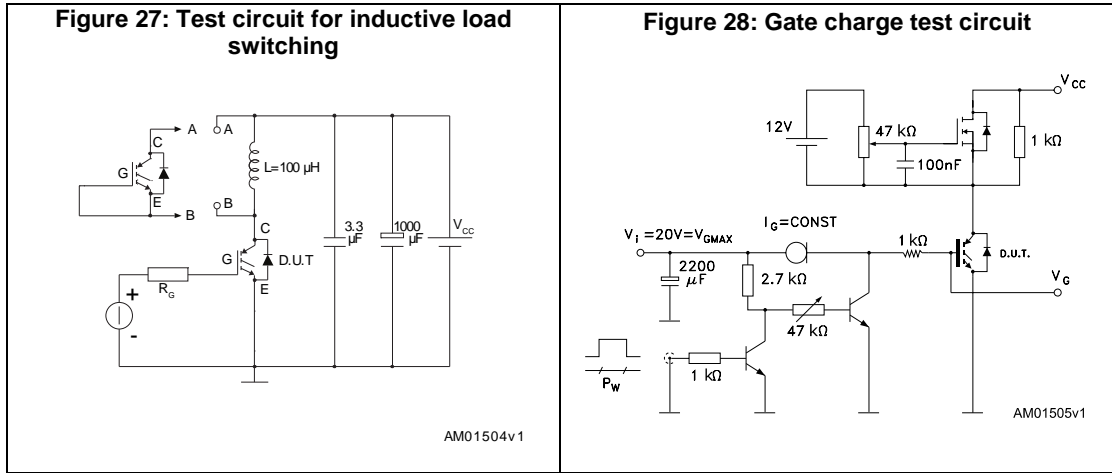


## 4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

### 4.1 TO-3PF package information

Figure 30: TO-3PF package outline

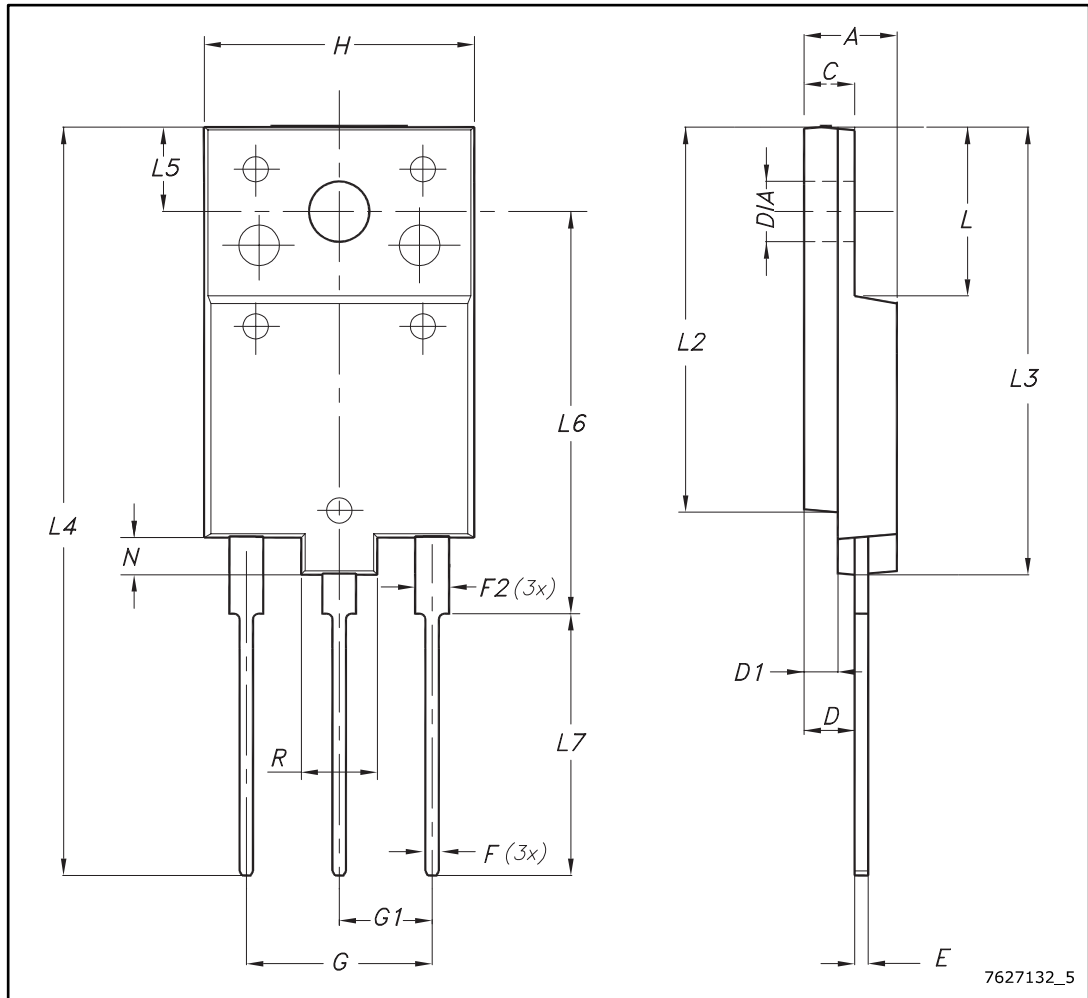

7627132\_5

Table 7: TO-3PF mechanical data

| Dim. | mm    |      |       |
|------|-------|------|-------|
|      | Min.  | Typ. | Max.  |
| A    | 5.30  |      | 5.70  |
| C    | 2.80  |      | 3.20  |
| D    | 3.10  |      | 3.50  |
| D1   | 1.80  |      | 2.20  |
| E    | 0.80  |      | 1.10  |
| F    | 0.65  |      | 0.95  |
| F2   | 1.80  |      | 2.20  |
| G    | 10.30 |      | 11.50 |
| G1   |       | 5.45 |       |
| H    | 15.30 |      | 15.70 |
| L    | 9.80  | 10   | 10.20 |
| L2   | 22.80 |      | 23.20 |
| L3   | 26.30 |      | 26.70 |
| L4   | 43.20 |      | 44.40 |
| L5   | 4.30  |      | 4.70  |
| L6   | 24.30 |      | 24.70 |
| L7   | 14.60 |      | 15    |
| N    | 1.80  |      | 2.20  |
| R    | 3.80  |      | 4.20  |
| Dia  | 3.40  |      | 3.80  |

### 4.2 TO-247 package information

Figure 31: TO-247 package outline

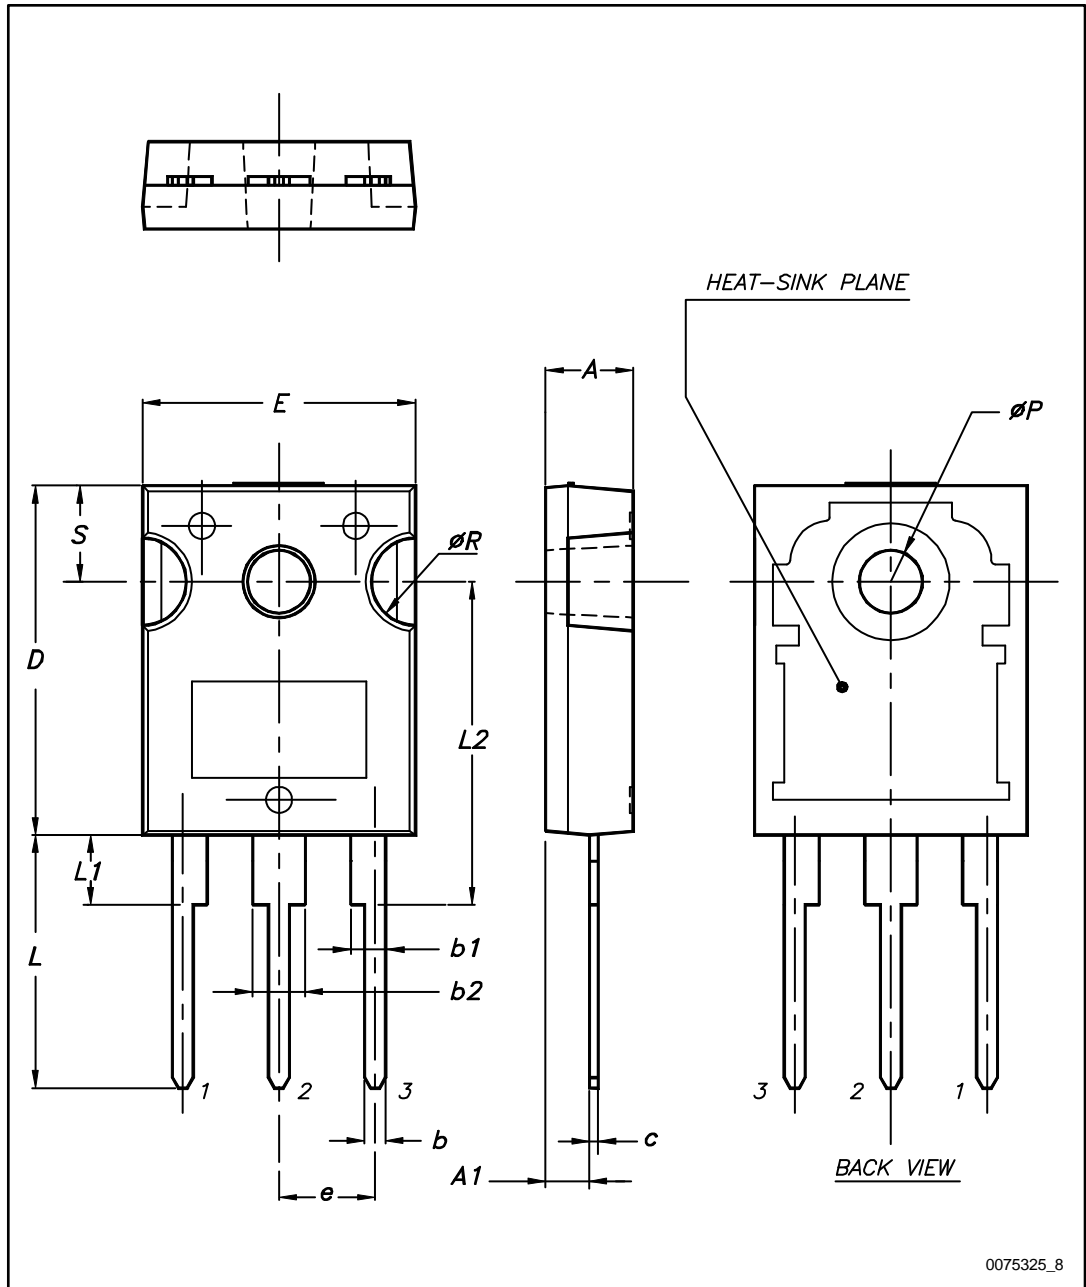


Table 8: TO-247 package mechanical data

| Dim. | mm    |       |       |
|------|-------|-------|-------|
|      | Min.  | Typ.  | Max.  |
| A    | 4.85  |       | 5.15  |
| A1   | 2.20  |       | 2.60  |
| b    | 1.0   |       | 1.40  |
| b1   | 2.0   |       | 2.40  |
| b2   | 3.0   |       | 3.40  |
| c    | 0.40  |       | 0.80  |
| D    | 19.85 |       | 20.15 |
| E    | 15.45 |       | 15.75 |
| e    | 5.30  | 5.45  | 5.60  |
| L    | 14.20 |       | 14.80 |
| L1   | 3.70  |       | 4.30  |
| L2   |       | 18.50 |       |
| ØP   | 3.55  |       | 3.65  |
| ØR   | 4.50  |       | 5.50  |
| S    | 5.30  | 5.50  | 5.70  |

### 4.3 TO-247 long leads package information

Figure 32: TO-247 long leads package outline

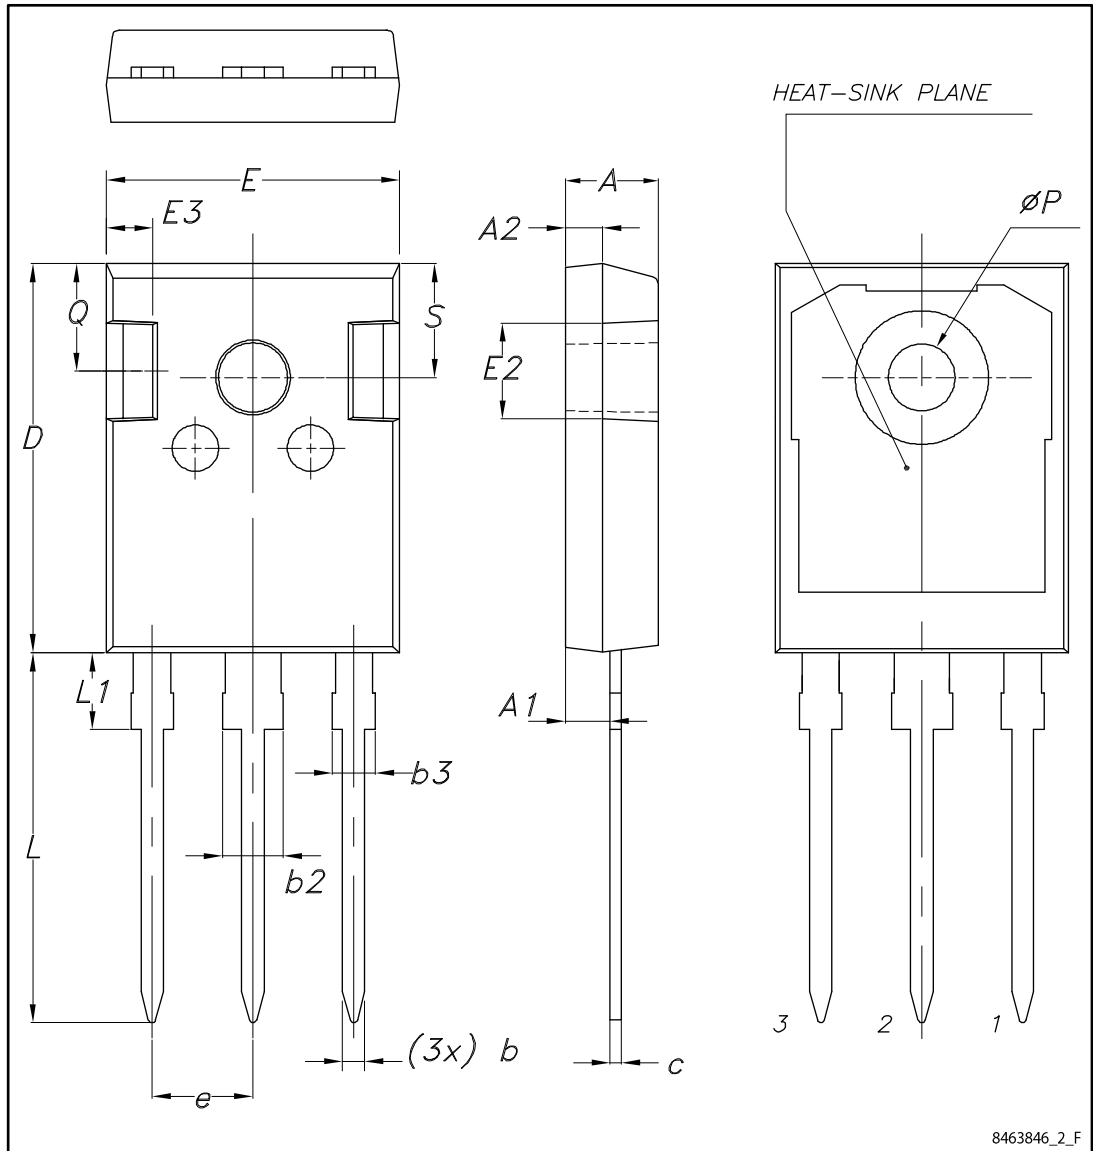




Table 9: TO-247 long leads package mechanical data

| Dim. | mm    |       |       |
|------|-------|-------|-------|
|      | Min.  | Typ.  | Max.  |
| A    | 4.90  | 5.00  | 5.10  |
| A1   | 2.31  | 2.41  | 2.51  |
| A2   | 1.90  | 2.00  | 2.10  |
| b    | 1.16  |       | 1.26  |
| b2   |       |       | 3.25  |
| b3   |       |       | 2.25  |
| c    | 0.59  |       | 0.66  |
| D    | 20.90 | 21.00 | 21.10 |
| E    | 15.70 | 15.80 | 15.90 |
| E2   | 4.90  | 5.00  | 5.10  |
| E3   | 2.40  | 2.50  | 2.60  |
| e    | 5.34  | 5.44  | 5.54  |
| L    | 19.80 | 19.92 | 20.10 |
| L1   |       |       | 4.30  |
| P    | 3.50  | 3.60  | 3.70  |
| Q    | 5.60  |       | 6.00  |
| S    | 6.05  | 6.15  | 6.25  |

### 4.4 TO-3P package information

Figure 33: TO-3P package outline



Table 10: TO-3P package mechanical data

| Dim. | mm    |       |       |
|------|-------|-------|-------|
|      | Min.  | Typ.  | Max.  |
| A    | 4.60  | 4.80  | 5.00  |
| A1   | 1.45  | 1.50  | 1.65  |
| A2   | 1.20  | 1.40  | 1.60  |
| b    | 0.80  | 1.00  | 1.20  |
| b1   | 1.80  | 2.00  | 2.20  |
| b2   | 2.80  | 3.00  | 3.20  |
| c    | 0.55  | 0.60  | 0.75  |
| D    | 19.70 | 19.90 | 20.10 |
| D1   | 13.70 | 13.90 | 14.10 |
| E    | 15.40 | 15.60 | 15.80 |
| E1   | 13.40 | 13.60 | 13.80 |
| E2   | 9.40  | 9.60  | 9.90  |
| e    | 5.15  | 5.45  | 5.75  |
| L    | 19.80 | 20.00 | 20.20 |
| L1   | 3.30  | 3.50  | 3.70  |
| L2   | 18.20 | 18.40 | 18.60 |
| ØP   | 3.30  | 3.40  | 3.50  |
| ØP1  | 3.10  | 3.20  | 3.30  |
| Q    | 4.80  | 5.00  | 5.20  |
| Q1   | 3.60  | 3.80  | 4     |

## 5 Revision history

Table 11: Document revision history

| Date        | Revision | Changes  |
|-------------|----------|--|
| 30-Aug-2013 | 1        | Initial release  |
| 11-Sep-2013 | 2        | Document status changed from preliminary to production data. Inserted <i>Section 2.1: Electrical characteristics (curves)</i> .  |
| 28-Feb-2014 | 3        | Updated title and description in cover page.   |
| 05-Mar-2014 | 4        | Updated units in <i>Table 6: Switching characteristics (inductive load)</i> .  |
| 11-Apr-2014 | 5        | Added part number and references for the device in a TO-3PF package.   |
| 03-Nov-2016 | 6        | Added device in TO-247 long leads and updated the document accordingly.<br>Updated <i>Section 2.1: Electrical characteristics (curves)</i> and <i>Section 4.3: TO-247 long leads, package information</i> .<br>Minor text changes. |
| 21-Mar-2017 | 7        | Updated <i>Table 1: "Device summary"</i> .<br>Added <i>Figure 26: "Thermal impedance for TO-3PF"</i> .<br>Minor text changes   |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.