

# General Specifications

## Electrical Capacity (Resistive Load)

**Logic Level:** 0.4VA maximum @ 28V AC/DC maximum  
(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)  
Note: Find additional explanation of operating range in Supplement section.

## Other Ratings

**Contact Resistance:** 50 milliohms maximum  
**Insulation Resistance:** 500 megohms minimum @ 500V DC  
**Dielectric Strength:** 500V AC minimum for 1 minute minimum  
**Mechanical Life:** 50,000 operations minimum  
**Electrical Life:** 50,000 operations minimum  
**Nominal Operating Force:** 2.55N  
**Contact Timing:** Nonshorting (break-before-make)  
**Travel:** Pretravel: .082" (2.1mm); Overtravel: .016" (0.4mm); Total Travel: .098" (2.5mm)

## Materials & Finishes

**Actuator:** Glass fiber reinforced polyamide  
**Upper Case Housing:** Carbon blended polyacetal (antistatic)  
**Lower Case Housing:** Glass fiber reinforced polyamide  
**Support Bracket:** Tin plated phosphor bronze  
**Movable Contact:** Phosphor bronze with gold plating  
**Stationary Contacts:** Brass with gold plating  
**Terminals:** Brass with gold plating

## Environmental Data

**Operating Temperature Range:** -30°C through +85°C (-22°F through +185°F)  
**Humidity:** 90 ~ 95% humidity for 192 hours @ 40°C (104°F)  
**Vibration:** 10 ~ 60Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 5 minutes; 3 right angled directions for 30 minutes  
**Shock:** 50G (490m/s<sup>2</sup>) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

## PCB Processing

**Soldering:** Wave Soldering Recommended. See Profile A in Supplement section.  
Manual Soldering: for single pole see Profile B in Supplement section; for double pole see Profile A.  
**Cleaning:** These devices are not process sealed. Hand clean locally using alcohol based solution.

## Standards & Certifications

The A Series slides have not been tested for UL recognition or CSA certification.  
These switches are designed for use in a low-voltage, low-current, logic-level circuit.  
When used as intended in a logic-level circuit, the results do not produce hazardous energy.

# Distinctive Characteristics

Subminiature size (1/3 size of Series M switches) saves space on PC boards.

Specifically developed for logic-level applications.

Award-winning STC contact mechanism with benefits unavailable in conventional mechanisms: smoother, positive detent actuation, increased contact stability and unparalleled logic-level reliability. (Additional STC details in Terms & Acronyms; see Supplement section.)


Available in various actuator lengths.

Antistatic superstructure of carbon blended polyacetal prevents static discharge to the contacts.


Molded-in, epoxy sealed or ultrasonically welded terminals lock out flux, solvents, and other contaminants.

.100" x .100" (2.54mm x 2.54mm) terminal spacing conforms to standard PC board grid spacing.

Matching indicators available.

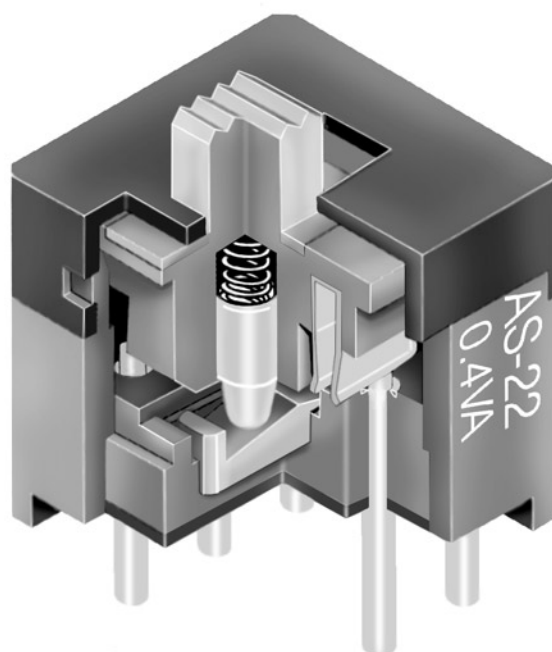

Actual Size



TYPICAL SWITCH ORDERING EXAMPLE

AS

2

2

A

H

| Poles |              | Circuits |    |      |     | Actuators |                    | PC Terminals |                          |
|-------|--------------|----------|----|------|-----|-----------|--------------------|--------------|--------------------------|
| 1     | SPST<br>SPDT | 1        | ON | NONE | OFF | A         | .098" (2.5mm) Long | P            | Straight                 |
| 2     | DPDT<br>SP3T | 2        | ON | NONE | ON  | B         | Flush              | *B           | Straight with Bracket    |
|       |              | 3        | ON | OFF  | ON  | C         | .150" (3.8mm) Long | *H           | Right Angle with Bracket |
|       |              | 4        | ON | ON   | ON  |           |                    | *V           | Vertical with Bracket    |

\*Bracketed models are ESD protected

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

AS22AH

DPDT  
ON-NONE-ON Circuit

.098" (2.5mm) Long  
Actuator

Right Angle PC Terminals




POLES & CIRCUITS

|      |              | Slide Position |             |          | Connected Terminals |              |                    | Throw & Schematics |
|------|--------------|----------------|-------------|----------|---------------------|--------------|--------------------|--------------------|
| Pole | Model        | Left           | Center      | Right    | Left                | Center       | Right              |                    |
| SP   | AS11         | ON             | NONE        | OFF      | 3-1                 | OPEN         | OPEN               | SPST<br>           |
| SP   | AS12<br>AS13 | ON<br>ON       | NONE<br>OFF | ON<br>ON | 2-1<br>2-1          | OPEN<br>OPEN | 2-3<br>2-3         | SPDT<br>           |
| DP   | AS22<br>AS23 | ON<br>ON       | NONE<br>OFF | ON<br>ON | 2-1 5-4<br>2-1 5-4  | OPEN<br>OPEN | 2-3 5-6<br>2-3 5-6 | DPDT<br>           |

For 3 Throw (3-On)





| Connected Terminals & Schematics |       |                   |                   |                   | External Connection                                                                                                 |
|----------------------------------|-------|-------------------|-------------------|-------------------|---------------------------------------------------------------------------------------------------------------------|
| Pole                             | Model | Left              | Center            | Right             |                                                                                                                     |
| SP                               | AS24  | ON<br><br>2-1 5-4 | ON<br><br>2-3 5-4 | ON<br><br>2-3 5-6 | The SP3T model utilizes a double pole base.<br><br>External connections must be made during field installation.<br> |

## ACTUATORS

**A****.098" (2.5mm) Long****B****Flush****C****.150" (3.8mm) Long**





**Actuator Color:** Gray standard; contact factory for other colors.

## PC TERMINALS

**P****Straight****B****Straight with Bracket****H****Right Angle with Bracket****V****Vertical with Bracket**





Use of a support bracket is recommended to increase PCB mounting strength and stability.

## TYPICAL SWITCH DIMENSIONS





**Single Pole****Straight PC**

Actuator shown in LEFT position

Single throw models do not have terminal 2.

**AS12AP****Double Pole****Straight PC**

Actuator shown in LEFT position


**AS22AP****Single Pole****Straight PC • Bracket**

Actuator shown in LEFT position




**AS12AB**

## TYPICAL SWITCH DIMENSIONS

### Straight PC • Bracket




### Double Pole






AS22AB

Actuator shown in LEFT position

### Right Angle PC




### Single Pole






AS12AH

Actuator shown in LEFT position

### Right Angle PC




### Double Pole






AS22AH

Actuator shown in LEFT position

### Vertical PC




### Single Pole






AS12AV

Actuator shown in LEFT position

### Vertical PC



### Double Pole

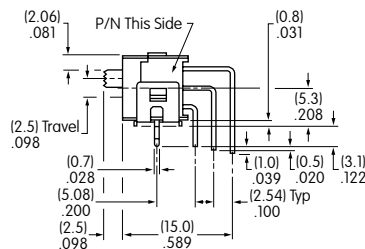

AS22AV

Actuator shown in LEFT position



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.