

# MAP55 Series

## AC-DC Power Supplies

Bel Power Solutions MAP55 Series of power supplies provides reliable, tightly-regulated DC power for commercial and industrial systems. Wide-range AC input and full international safety, EMI, and ESD compliance ensure worldwide acceptance. All units bear the CE Mark.

The MAP55 utilizes a thermally efficient U-channel chassis design, which allows full power operation in convection cooled applications. Other mechanical design innovations include metric and SAE mounting inserts on each mounting surface to provide integration flexibility. Dual-mode connectors provide traditional terminal block connections or popular single row Molex connector mating.

Single-output models feature wide-range output adjustability to meet a wide variety of standard and user-specific output voltage requirements.



### Key Features & Benefits

- RoHS Compliant
- Wide Range Input for 110/220 VAC Applications
- Meets EN55022, Conducted Class B Limits
- Compact Footprint: 6.0 x 3.27 x 1.6 inch (152.4 x 83.1 x 40.6 mm)
- Greater than 225000 Hours MTBF
- Metric and SAE Mounting Inserts



**bel** POWER  
SOLUTIONS &  
PROTECTION

a bel group

[belpowersolutions.com](http://belpowersolutions.com)

## 1. SINGLE-OUTPUT MODEL SELECTION

MODEL <sup>8</sup>	OUTPUT VOLTAGE	ADJUSTMENT RANGE	MAX OUTPUT CURRENT	PEAK OUTPUT CURRENT <sup>1</sup>	LINE REGULATION	LOAD REGULATION	RIPPLE & NOISE <sup>2</sup>	INITIAL SETTING ACCURACY
MAP40-1005G	5V	4.7V to 5.5V	8A	11A	0.2%	±1.5%	1%	5.0V to 5.2V
MAP55-1012G <sup>6</sup>	12V/15V	11.4V to 15.75V	5.0/4.0A <sup>3</sup>	5.8/4.7A <sup>3</sup>	0.2%	±1%	1%	12.0V to 12.2V
MAP55-1024G <sup>6</sup>	24V/28V	23.5V to 28.5V	2.5/2.2A <sup>3</sup>	2.9/2.5A <sup>3</sup>	0.2%	1%	1%	23.8V to 24.2V

## 2. MULTIPLE-OUTPUT MODEL SELECTION – 55 W CONTINUOUS OUTPUT POWER

MODEL <sup>8</sup>	OUTPUT VOLTAGE	ADJUSTMENT RANGE	OUTPUT CURRENT	PEAK OUTPUT CURRENT <sup>4</sup>	LINE REGULATION	LOAD REGULATION	RIPPLE & NOISE <sup>2</sup>	INITIAL SETTING ACCURACY
MAP55-4000G <sup>7</sup>	+5V	4.7V to 5.6V	6A	8A	0.2%	2%	1%	5.0V to 5.2V
	+12V	Fixed	3A	5A	0.2%	2%	1%	11.6V to 12.4V
	-5V	Fixed	0.5A	1A <sup>5</sup>	0.5%	2%	1%	-4.8V to -5.2V
	-12V	Fixed	0.5A	1A <sup>5</sup>	0.5%	2%	1%	-11.6V to -12.4V
MAP55-4001G <sup>7</sup>	+5V	4.7V to 5.6V	6A	8A	0.2%	2%	1%	5.0V to 5.2V
	+24V	Fixed	1.5A	2.5A	0.2%	2%	1%	23.0V to 24.9V
	-12V	Fixed	0.5A	1A <sup>5</sup>	0.5%	2%	1%	-11.6V to -12.4V
	+12V	Fixed	0.5A	1A <sup>5</sup>	0.5%	2%	1%	11.6V to 12.4V
MAP55-4002G <sup>7</sup>	+5V	4.7V to 5.6V	6A	8A	0.2%	2%	1%	5.0V to 5.2V
	+12V	Fixed	3A	5A	0.2%	2%	1%	11.6V to 12.4V
	-12V	Fixed	0.5A	1A <sup>5</sup>	0.5%	2%	1%	-11.6V to -12.4V
	+12V	Fixed	0.5A	1A <sup>5</sup>	0.5%	2%	1%	11.6V to 12.4V
MAP55-4003G <sup>7</sup>	+5V	4.7V to 5.6V	6A	8A	0.2%	2%	1%	5.0V to 5.2V
	+15V	Fixed	2.5A	3.5A	0.2%	2%	1%	14.6V to 15.4V
	-5V	Fixed	0.5A	1A <sup>5</sup>	0.5%	2%	1%	-4.8V to -5.2V
	-15V	Fixed	0.5A	1A <sup>5</sup>	0.5%	2%	1%	-14.4V to -15.6V
MAP55-4004G <sup>7</sup>	+5V	4.7V to 5.6V	6A	8A	0.2%	2%	1%	5.0V to 5.2V
	+24V	Fixed	1.5A	2.5A	0.2%	2%	1%	23.0V to 24.9V
	-15V	Fixed	0.5A	1A <sup>5</sup>	0.5%	2%	1%	-14.5V to -15.5V
	+15V	Fixed	0.5A	1A <sup>5</sup>	0.5%	2%	1%	14.5V to 15.5V

<sup>1</sup> Peak load for 60 seconds or less are acceptable, 10% duty cycle, maximum.

<sup>2</sup> Maximum peak to peak noise expressed as a percentage of output voltage, 20 MHz bandwidth.

<sup>3</sup> MAP55-1012 output currents are expressed as 12V/15V operation. MAP55-1024 output currents are expressed as 24V/28V operation.

<sup>4</sup> Peak loads up to 65 watts for 60 seconds or less are acceptable, (10% duty cycle max.). Peak power must not exceed 65 watts.

<sup>5</sup> Maximum load on V3 or V4 could be 1 amp continuous if output V4 or V3 is unloaded.

<sup>6</sup> Maximum 60 W with 150LFM (Linear Feet per Minute) air cooling or maximum 50 W with convection cooling.

<sup>7</sup> Maximum 55 W with 200LFM (Linear Feet per Minute) air cooling or maximum total output power 45 W at 40°C ambient operating temperature for models with no cover or 40 W for models with cover / convection cooling.

<sup>8</sup> Non-G models use lead solder exemption.

## 3. INPUT SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Input Voltage - AC	Continuous input range	90 175		132 264	VAC
Input Frequency	AC input	47		63	Hz
Brown Out Protection	Lowest AC input voltage that regulation is maintained with full rated loads	90			VAC
Hold-up Time	Nominal AC Input Voltage (115VAC), full rated load	20			ms
Input Current	90 VAC (55 W load)		1.6		A <sub>RMS</sub>
Input Protection	Non-user serviceable internally located AC input line fuse.				
Inrush Surge Current	Internally limited by thermistor, V <sub>in</sub> = 264 VAC (one cycle), 25°C			38	A <sub>PK</sub>
Operating Frequency	Switching frequency of power supply (varies with load)	22		180	kHz

## 4. OUTPUT SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Efficiency	Full load @ 115 VAC. Varies with distribution of loads among outputs.		73% typical		
Minimum Loads	MAP55-1012 MAP55-1024 MAP40-1005 and all multiple output models, main channel only	0.21 0.11 0.50			Amps
Ripple and Noise	Full load, 20 MHz bandwidth.		See Model Selection Chart		
Output Power	Continuous output power, all multiple output models. Peak output power (60 s maximum, 10% duty cycle), all multiple output models.			55 65	Watts
Overshoot / Undershoot	Output voltage overshoot/undershoot at turn-on, V1, V2.			1	%
Regulation	Varies by output. Total regulation includes: line changes from 90-132 VAC or 175-264 VAC, changes in load starting at 20% load and changing to 100% load.		See Model Selection Chart		
Transient Response	Recovery time, to within 1% of initial set point due to a 50-100% load change, 4% max. deviation. (Main output of multiple output units.)			500	μs
Turn-on Delay	Time required for initial output voltage stabilization.	1		4	Sec
Turn-on Rise Time	Time required for output voltage to rise from 10% to 90%. (Nominal rise time for MAP55-1024 is 36 msec.)		7		ms

## 5. INTERFACE SIGNALS & INTERNAL PROTECTION

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Overvoltage Protection	MAP40-1005 MAP55-1012 MAP55-1024 Main output only of multiple output units.	5.5 17.5 32.0 5.6		6.8 19.7 36.0 6.8	V
Overload Protection	Fully protected against output overload and short circuit. Automatic recovery upon removal of overload condition.				



Asia-Pacific  
+86 755 298 85888

Europe, Middle East  
+353 61 225 977

North America  
+1 408 785 5200

## 6. SAFETY, REGULATORY AND EMI SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Agency Approvals	Approved to the latest edition of the following standards; UL/CSA60950-1 2nd, IEC60950-1 2nd and EN60950-1 2nd.				
Dielectric Withstand Voltage	Input to Chassis	2121			VDC
	Input to Output (tested by manufacturer only)	4242			
Electromagnetic Interference, Conducted	FCC CFR title 47 Part 15 Sub-Part B - conducted & radiated. EN55022 / CISPR 22 conducted. EN55022 / CISPR 22 radiated.	B			Class
		B			
		A			
Insulation Resistance	Input to output	7			MΩ
Leakage Current	Per EN60950, 264 VAC			500	μA

## 7. ENVIRONMENTAL SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Altitude	Operating			10k	Feet
	Non-operating			40k	
Operating Temperature	Derate linearly above 50°C by 2.5% per °C to a maximum temperature of 70°C	At 100% load:	0	50	°C
		At 50% load:	0	70	
Storage Temperature		-40		85	°C
Temperature Coefficient	0°C to 70°C (after 15 minute warm-up)		±0.02	±0.03	%/°C
Relative Humidity	Non-condensing	5		95	%RH
Shock	Operating, peak acceleration			20	G
Vibration	Random vibration, 10Hz to 2kHz, 3 axis			6	G <sub>RMS</sub>

## 8. MECHANICAL SPECIFICATIONS / OPTIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Dimensions		152.4 x 83.1 x 40.6			mm
		6.00 x 3.27 x 1.6			
Weight		0.55			kg
		1.1			
Cover (Option)	Order the cover number 412-59584-G separately. For convection cooled applications, derate output power to 45 watts on multiple output units, 50 watts on MAP55-1012 and MAP55-1024 and 40 watts on MAP40-1005.				
	Dimensions:	152.4 x 83.1 x 45.0			mm
		6.00 x 3.27 x 1.77			in

## 9. CONNECTIONS

CONNECTOR	CONDITIONS / DESCRIPTION
Input & Output Connectors	6-32 screw wire clamps on 0.312" (7.9 mm) centers 0.045" (1.1 mm) square pins on 0.156" (3.4 mm) centers
Matting Connectors	Molex Series 2139, 6442, or 41695
Chassis	0.090" (2.3 mm) aluminum alloy, with clear finish

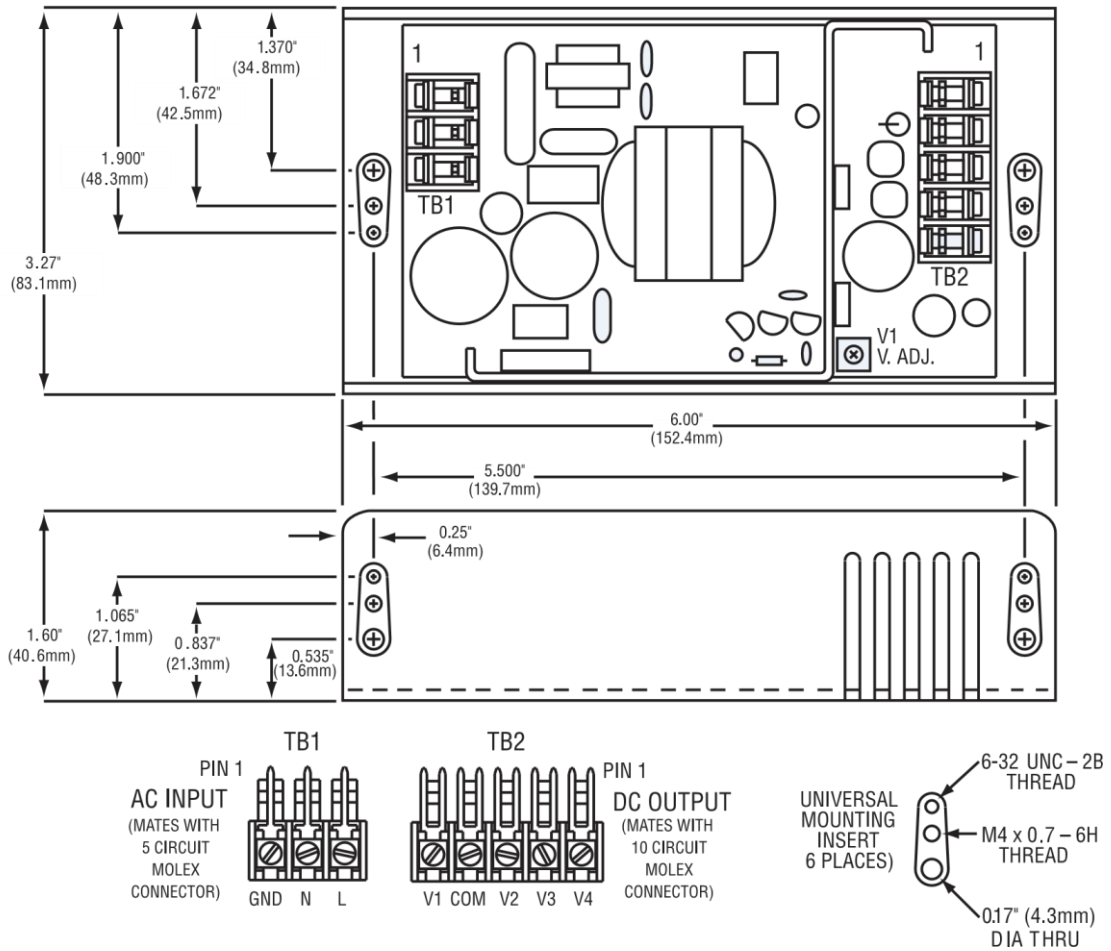


Figure 1. Mechanical Drawing

**For more information on these products consult: [tech.support@psbel.com](mailto:tech.support@psbel.com)**

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Asia-Pacific  
+86 755 298 85888

Europe, Middle East  
+353 61 225 977

North America  
+1 408 785 5200



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.