

Inductors for Power Circuits

Wound/STD • magnetic shielded

SPM series

Type: **SPM3012 (3.2x3.0 mm)**
 SPM5030 (5.2x5.0 mm)
 SPM6530 (7.1x6.5 mm)

Issue date: September 2011

- All specifications are subject to change without notice.
 - Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
-

Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

SPM Series SPM3012

The SPM3012 is a large-current SMD power inductor that uses a magnetic metal material. In addition to the conventional SPM6530 and SPM5030 products, the SPM Series now includes this 3×3.2mm product with a maximum height of 1.2mm.

FEATURES

- Small and low profile design.
Size: 3.2×3.0mm.
Height: 1.2mm max.
- Uses a magnetic metal material with a high magnetic flux density.
- Has a high curie temperature, which ensures a wide operating temperature range.
- Available for automatic mounting in tape and reel package.

APPLICATIONS

Cellular phones, note book type computers, etc.

PRODUCT IDENTIFICATION

SPM	3012	T	- 1R0	- M
(1)	(2)	(3)	(4)	(5)

(1) Series name

(2) Dimensions L×H

3012 3.0×1.2mm max.

(3) Packaging style

T Embossed carrier tape

(4) Inductance value

1R0 1.0μH


(5) Inductance tolerance

M ±20%


PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	2000 pieces/reel

SHAPES AND DIMENSIONS

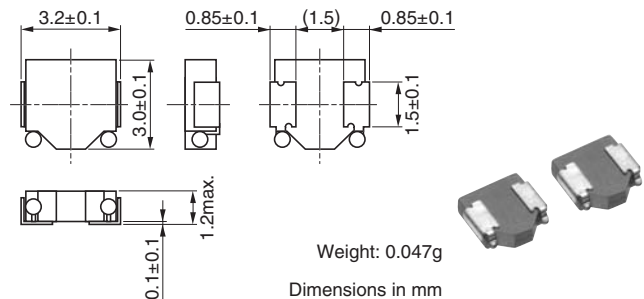


RECOMMENDED PC BOARD PATTERN

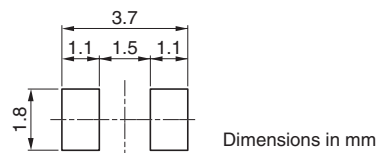

CIRCUIT DIAGRAM



RECOMMENDED SOLDERING CONDITION REFLOW SOLDERING

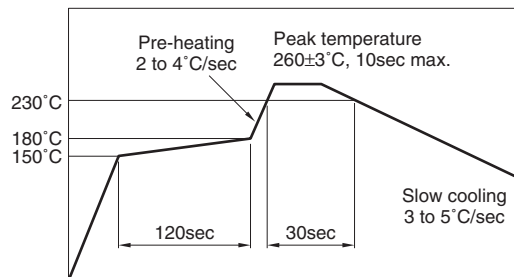

HANDLING AND PRECAUTIONS

- Please contact us before cleaning this product.
- Maintain a safe distance between this product and other components according to the working voltage.
- If this product is left in a humid environment for a long period of time, rust may appear on the surface.
However, this does not affect performance.

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• Please contact our Sales office when your application is considered the following:
The device's failure or malfunction may directly endanger human life (e.g. application for automobile/aircraft/medical/nuclear power devices, etc.)

• All specifications are subject to change without notice.

ELECTRICAL CHARACTERISTICS

Part No.	Inductance (μH)	Tolerance (%)	Test frequency (kHz)	DC resistance($\text{m}\Omega$)		Rated current(A)*		
				max.	typ.	Based on inductance change		Based on temperature rise
						max.	typ.	typ.
SPM3012T-1R0M	1.0	± 20	100	65	57	3.4	5.4	2.8
SPM3012T-1R5M	1.5	± 20	100	90	77	2.8	4.7	2.5
SPM3012T-2R2M	2.2	± 20	100	115	100	2.5	3.4	2.2
SPM3012T-3R3M	3.3	± 20	100	210	183	1.8	2.8	1.5
SPM3012T-4R7M	4.7	± 20	100	270	232	1.5	2.6	1.3


* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to +125°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS


SPM3012T-1R0M

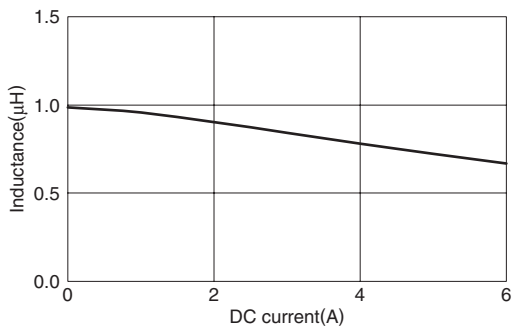


SPM3012T-1R5M

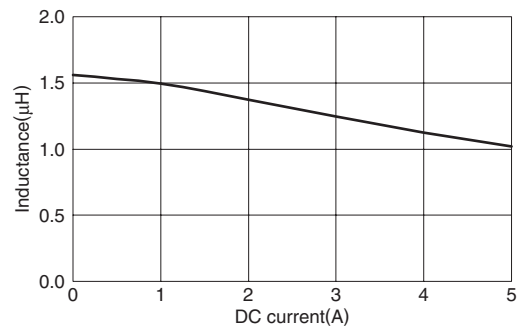


SPM3012T-2R2M

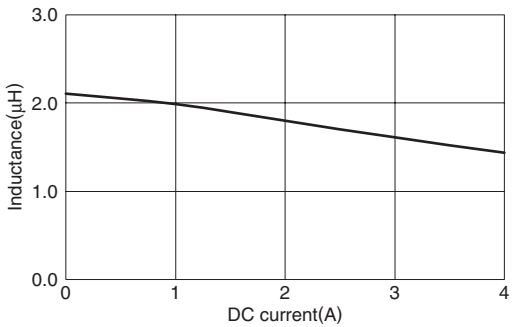


SPM3012T-3R3M

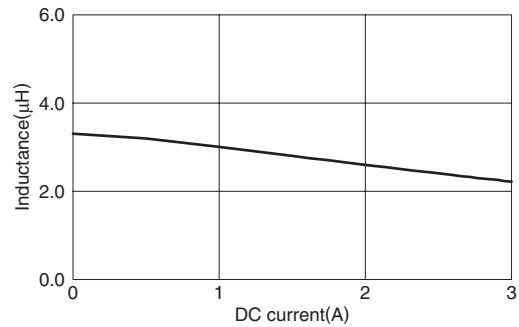


SPM3012T-4R7M

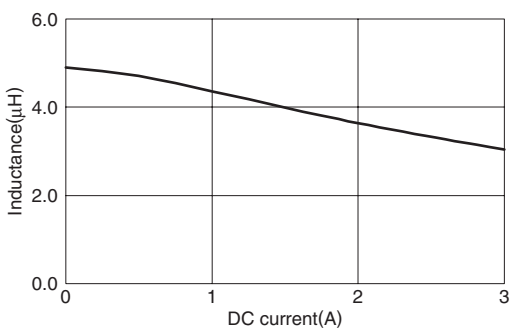


TEST CIRCUIT

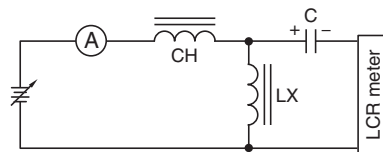

REEL DIMENSIONS

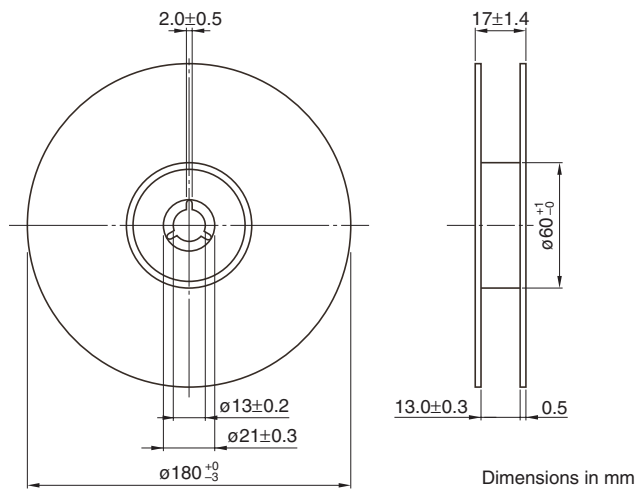

TAPE DIMENSIONS

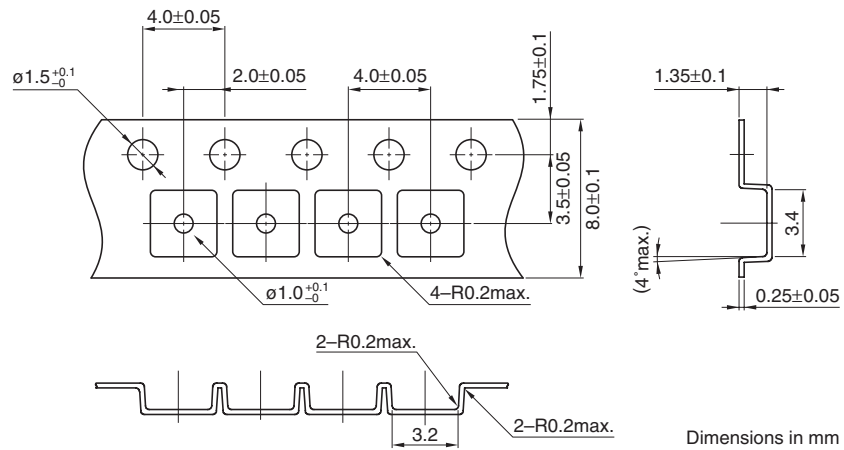

Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

SPM Series SPM5030

The SPM5030 contains SMD inductors for large currents. They have a high saturation current, and the DC superimposition characteristics have low temperature variance. This series can meet the needs of customers requiring products smaller than the SPM6530.

FEATURES

- Small and low profile design
Size: 5.2×5.0mm
Height: 3.0mm max.
- High power handling capability:
Small copper loss
Using large saturation induction of Fe-based metals
- Wide operating temperature range due to high Curie temperature of around 550°C.
- Available for automatic mounting in tape and reel package.

APPLICATIONS

Note book type computers, servers, VRMs, etc.

PRODUCT IDENTIFICATION

SPM	5030	T	-	□□□	-	□
(1)	(2)	(3)		(4)		(5)

(1) Series name

(2) Dimensions L×H

5030 5.0×3.0mm max.

(3) Packaging style

T Embossed carrier tape

(4) Inductance value

R20 0.20μH


(5) Inductance tolerance

M ±20%


PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	500 pieces/reel

SHAPES AND DIMENSIONS

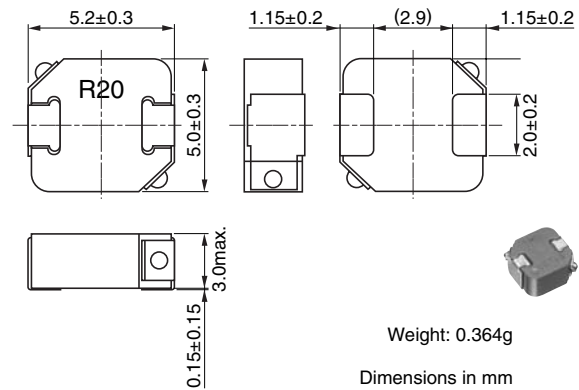


RECOMMENDED PC BOARD PATTERN

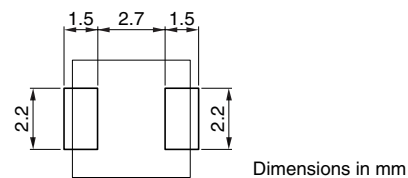

CIRCUIT DIAGRAM



RECOMMENDED SOLDERING CONDITION REFLOW SOLDERING

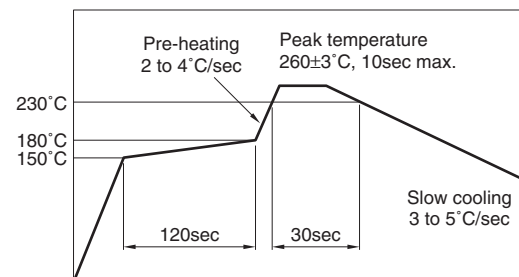

HANDLING AND PRECAUTIONS

- Please contact us before cleaning this product.
- Maintain a safe distance between this product and other components according to the working voltage.
- If this product is left in a humid environment for a long period of time, rust may appear on the surface. However, this does not affect performance.

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• Please contact our Sales office when your application is considered the following:
The device's failure or malfunction may directly endanger human life (e.g. application for automobile/aircraft/medical/nuclear power devices, etc.)

• All specifications are subject to change without notice.

ELECTRICAL CHARACTERISTICS

Part No.	Inductance (μH)	Tolerance (%)	Test frequency (kHz)	DC resistance($\text{m}\Omega$)		Rated current(A)*	
				max.	typ.	Based on inductance change typ.	Based on temperature rise typ.
SPM5030-R20M	0.20	± 20	100	2.31	2.1	21.0	22.2
SPM5030-R35M	0.35	± 20	100	4.29	3.9	14.9	16.6
SPM5030-R75M	0.75	± 20	100	9.35	8.5	9.7	11.3


* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 20%, whichever is smaller.

• Operating temperature range: -40 to +125°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS


SPM5030T-R20M

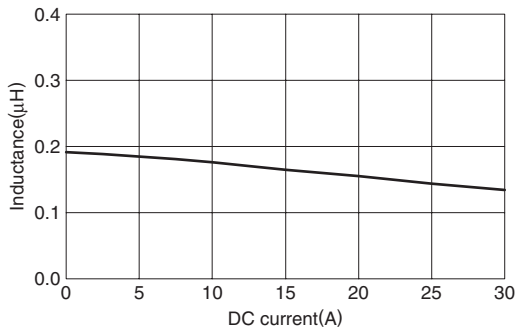


SPM5030T-R35M

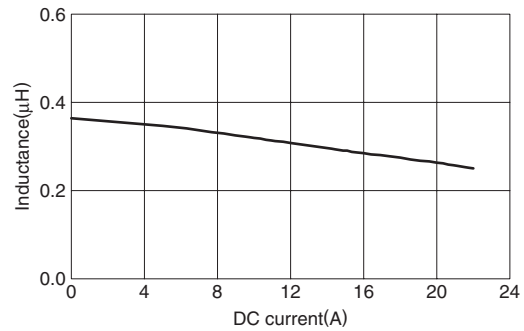

SPM5030T-R75M

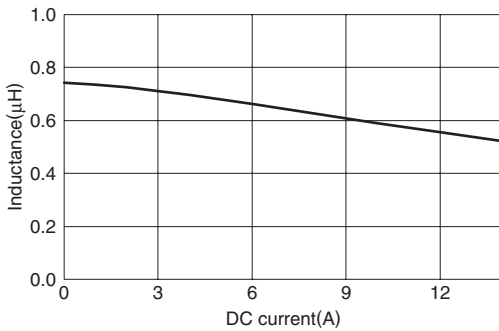


TEST CIRCUIT

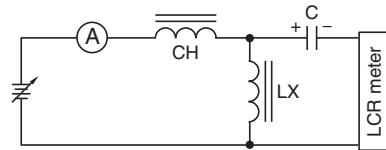


PACKAGING STYLES

REEL DIMENSIONS

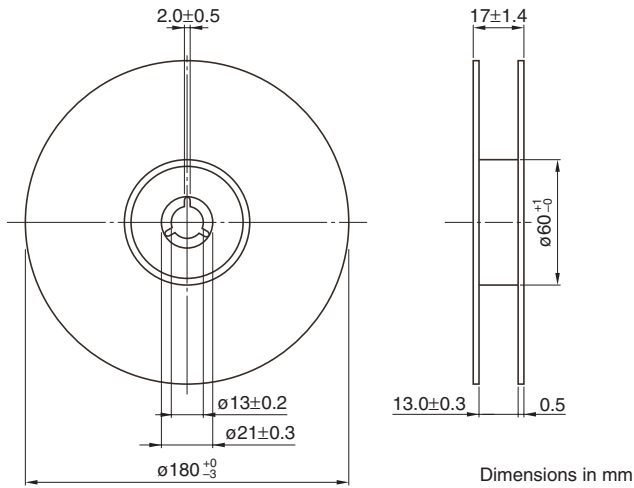

TAPE DIMENSIONS

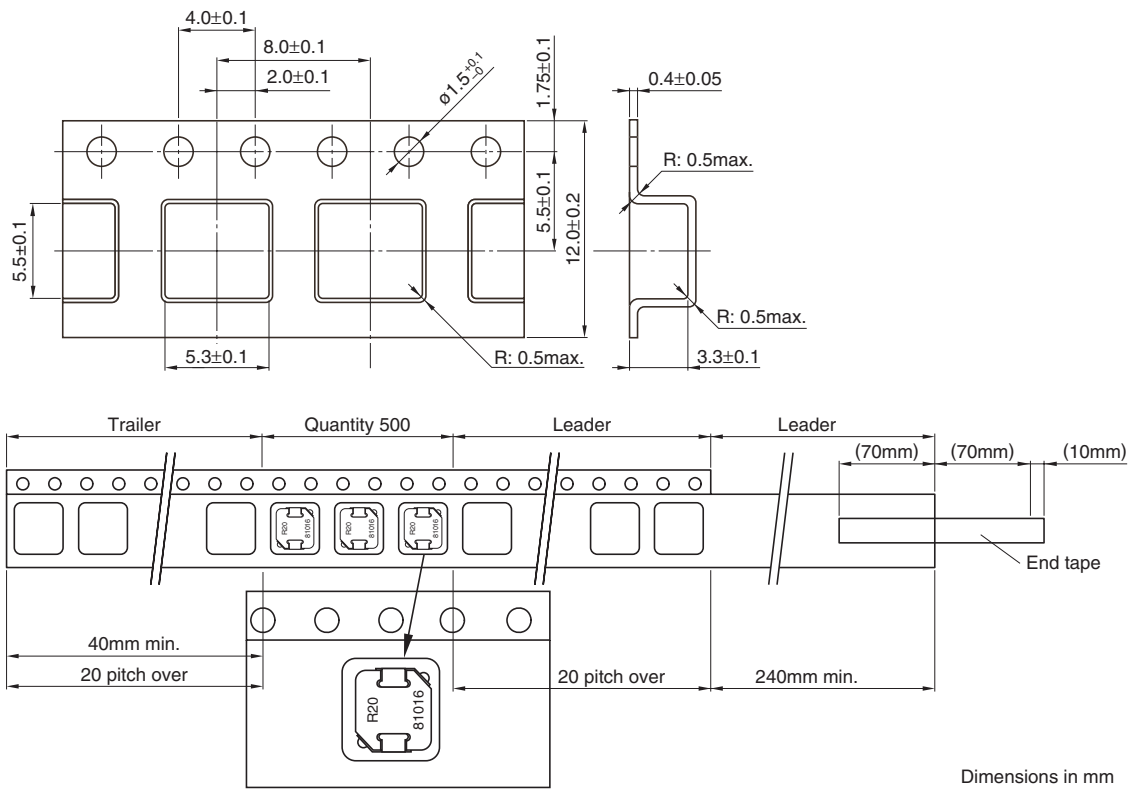

Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

SPM Series SPM6530

The SPM6530 is a large-current SMD power inductor that uses a magnetic metal material.

This product has good superimposition characteristics and low DC resistance.

FEATURES

- Small footprint and Low profile design
Footprint: 7.1×6.5mm
Height: 3.0mm max.
- High power handling capability:
Small copper loss
Using large saturation induction of Fe-based metals
- A high Curie temperature of about 550°C means low inductance temperature variance.
- Available for automatic mounting in tape and reel package.

APPLICATIONS

Note book type computers, VRMs, etc.

PRODUCT IDENTIFICATION

SPM	6530	T	- 3R3	- M
(1)	(2)	(3)	(4)	(5)

(1) Series name

(2) Dimensions L×H

6530 6.5×3.0mm max.

(3) Packaging style

T Embossed carrier tape

(4) Inductance value

3R3 3.3μH


(5) Inductance tolerance

M ±20%


PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	1000 pieces/reel

SHAPES AND DIMENSIONS

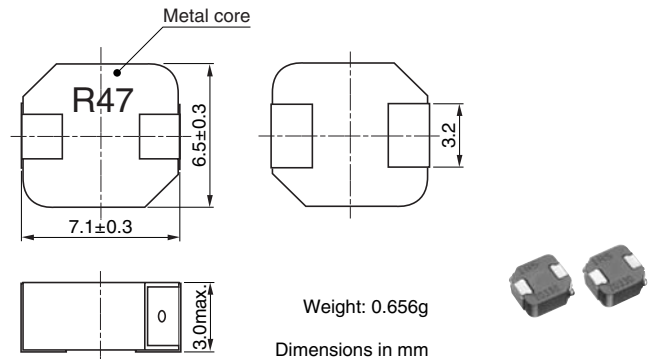


RECOMMENDED PC BOARD PATTERN

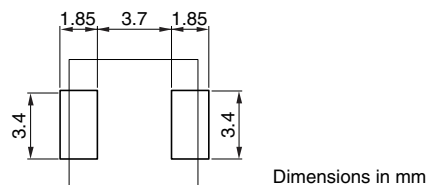

CIRCUIT DIAGRAM



RECOMMENDED SOLDERING CONDITION REFLOW SOLDERING

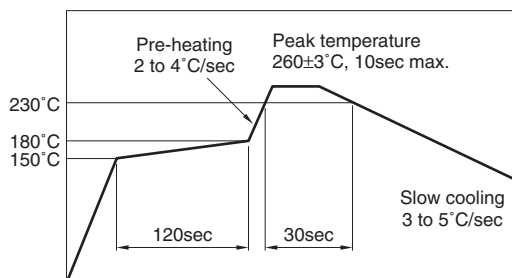

HANDLING AND PRECAUTIONS

- Please contact us before cleaning this product.
- Maintain a safe distance between this product and other components according to the working voltage.
- If this product is left in a humid environment for a long period of time, rust may appear on the surface. However, this does not affect performance.

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• Please contact our Sales office when your application is considered the following:
The device's failure or malfunction may directly endanger human life (e.g. application for automobile/aircraft/medical/nuclear power devices, etc.)

• All specifications are subject to change without notice.

ELECTRICAL CHARACTERISTICS

Part No.	Inductance (μ H)	Tolerance (%)	Test frequency (kHz)	DC resistance(m Ω)		Rated current(A)*	
				max.	typ.	Based on inductance change typ.	Based on temperature rise typ.
SPM6530T-R25M230	0.25	± 20	100	2.31	2.1	28.5	23
SPM6530T-R47M170	0.47	± 20	100	3.63	3.3	20.5	20
SPM6530T-R68M140	0.68	± 20	100	5.39	4.9	16.6	16
SPM6530T-1R0M120	1	± 20	100	7.81	7.1	14.1	13
SPM6530T-1R5M100	1.5	± 20	100	10.67	9.7	11.5	11
SPM6530T-2R2M	2.2	± 20	100	19	17.3	8.4	8.2
SPM6530T-3R3M	3.3	± 20	100	29.7	27	7.3	6.8
SPM6530T-4R7M	4.7	± 20	100	39.4	35.8	6.2	5.6


* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 20%, whichever is smaller.

- Operating temperature range: -40 to +125°C (Including self-temperature rise)
- The cleaning agent can not be used for these parts.


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS


SPM6530T-R25M230

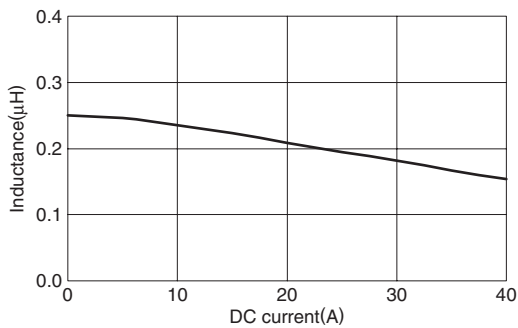


SPM6530T-R47M170

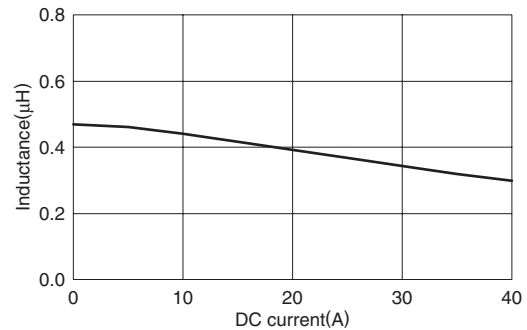


SPM6530T-R68M140

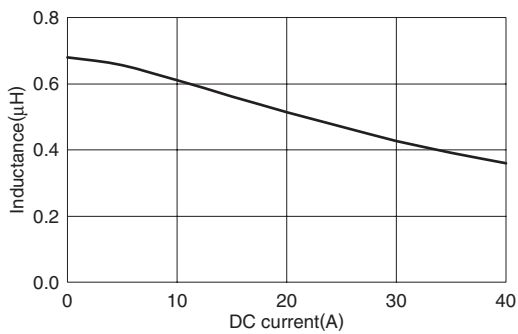


SPM6530T-1R0M120

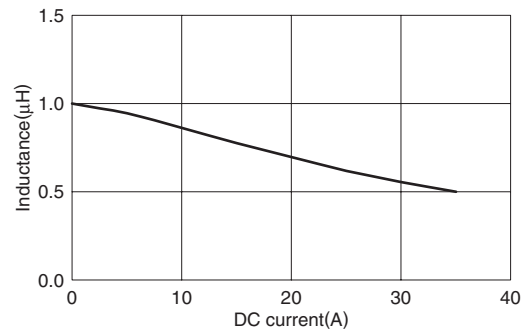

SPM6530T-1R5M100

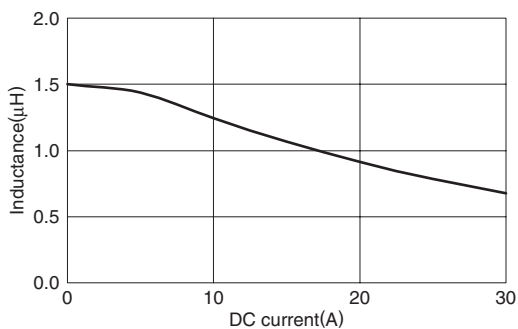


SPM6530T-2R2M

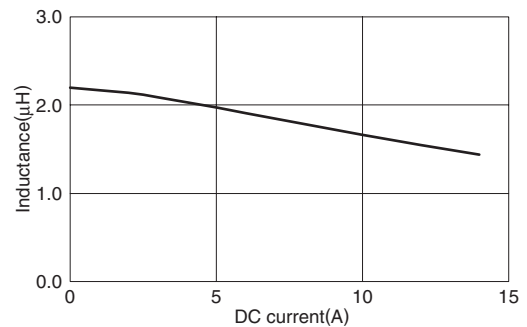


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS


SPM6530T-3R3M

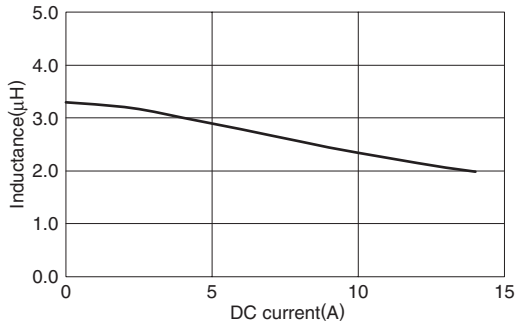

SPM6530T-4R7M

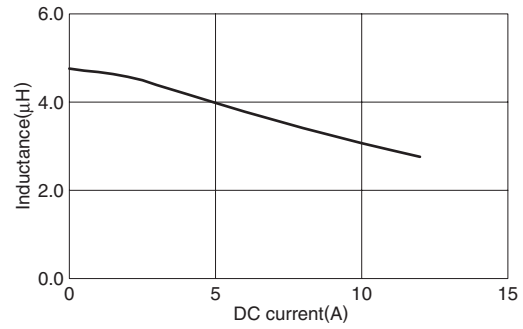


TEST CIRCUIT

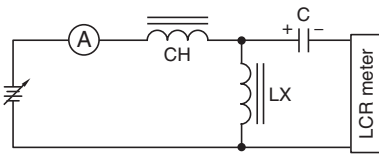


PACKAGING STYLES

REEL DIMENSIONS

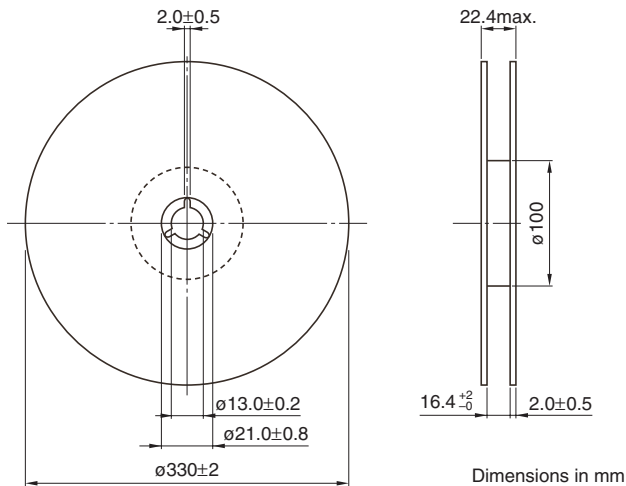

TAPE DIMENSIONS

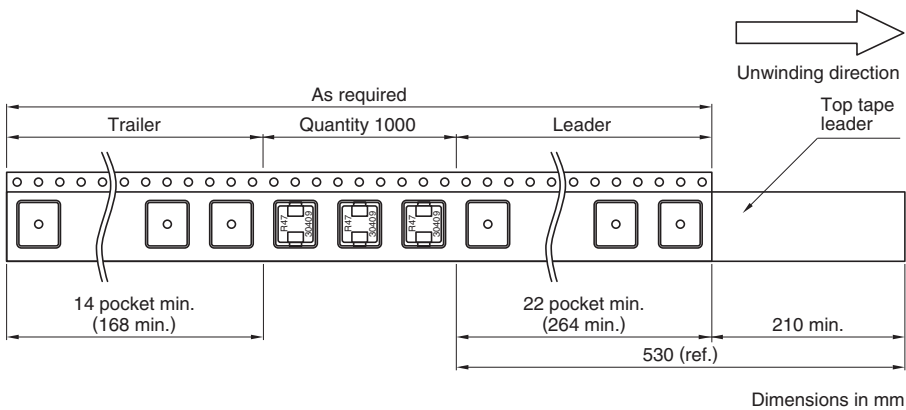



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.