



## TLE 4941plusC

### Differential Hall IC for Wheel Speed Sensing

TLE 4941plusC, a differential Hall sensor for measuring magnetically the car's wheel speed, is the latest offspring of the extremely successful TLE 4941 family, based on Infineon's most recent sensor technologies for front- and backend. Designed as drop-in replacement the TLE 4941plusC is, as its predecessors, a single chip solution combining Hall sensor elements and both analogue and digital signal processing in one single chip. Its differential principle makes it immune to any kind of undesired magnetic fields and disturbances. The Hall element distance has been downsized to 2 mm to be also fit for extremely small encoders. Several product improvements, both electrical and magnetic, have been put in place, such as an accelerated calibration during start-up phase and higher load dump robustness. The formerly optional first-edge-detection, a feature for quick start-up, providing a reliable output signal even before calibration is fully completed, has now become standard.

TLE 4941plusC has a standard 2-wire current interface, high ESD robustness and works in the wide temperature range present in the harsh automotive environment. Magnetic and device offsets are cancelled by a sophisticated self-calibration algorithm immediately after start-up. The TLE 4941plusC is an extremely robust product due to Infineon's high quality standards as experienced automotive semiconductor supplier. After several hundred million units sold, Infineon's active wheel speed sensors have largely proven to be the perfect match for wheel speed sensing in all aspects of functionality, robustness and flexibility.

#### Applications

- Reliable Wheel Speed Sensing in automotive applications
- Anti-lock Braking System (ABS)
- Electronic Stability Program (ESP)
- Automatic Transmissions


#### Features

- Two-wire current interface: Minimizes wiring
- Dynamic self-calibration principle: Compensates offsets
- Single chip solution: Ensures outstanding reliability
- High sensitivity: Can be used for large airgap applications
- South and north pole pre-induction possible: Works for both encoders and tonewheels
- High resistance to piezo effects: Suits sensor overmolding wide operating temperature range
- C type with 1.8 nF overmolded capacitor: Enhances EMC & microbreak resistance, without any external components

# TLE 4941plusC

## Differential Hall IC for Wheel Speed Sensing

TLE 4941plusC block diagram

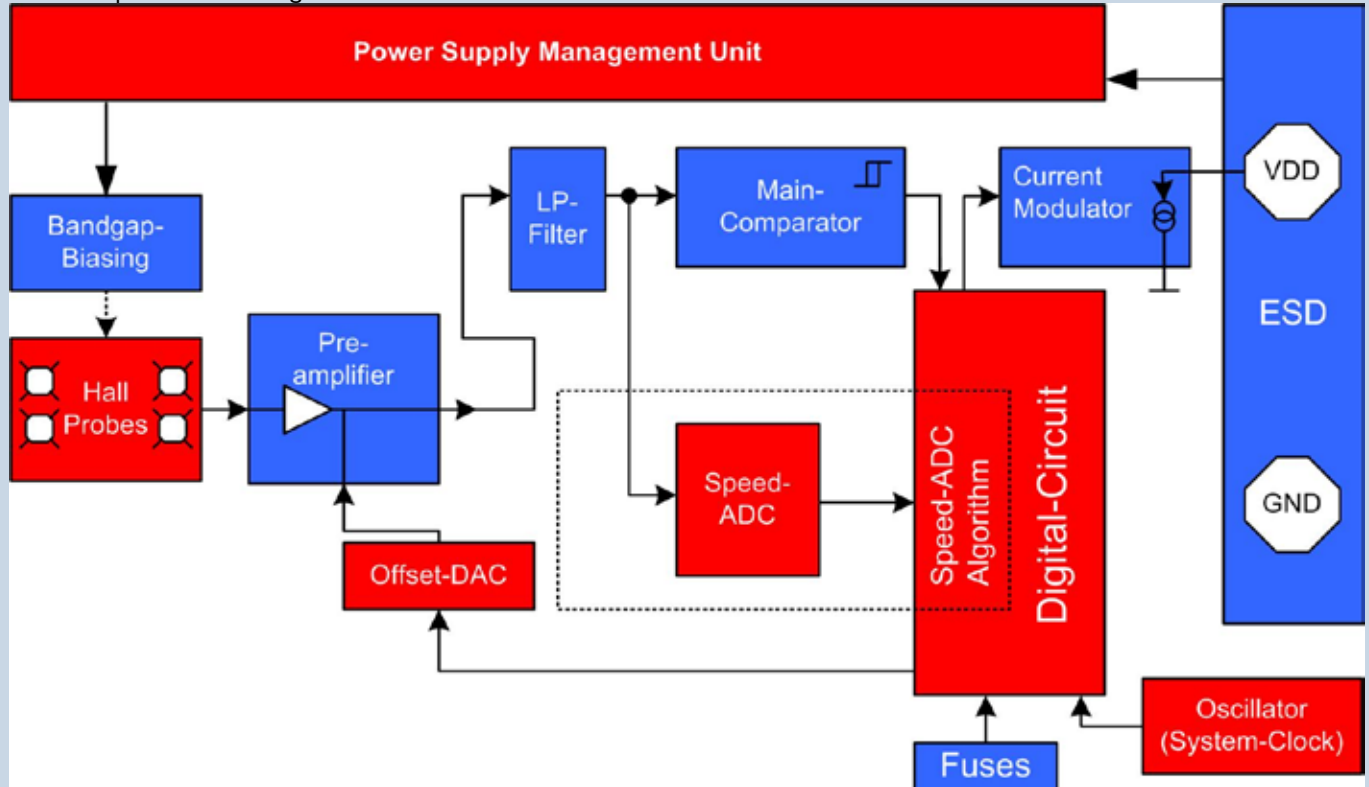

The TLE4941plusC signal path includes a pair of hall probes (2 mm spacing), a differential amplifier and a comparator feeding a switched current output stage. Additionally, the circuit has a feedback loop for offset compensation which consists of a signal-Speed ADC, a digital signal processor (DSP) and an offset D/A converter.

Parameter	value	Unit
Operating Voltage	4.5...24	V
Supply current (L/H)	7 / 14	mA
Min magn. Flux density	0.7	mT
Frequency range	1 ... 10000	Hz
Temperaure range	- 40... +150	°C
Jitter	2	%
Calibrated Mode available	> 4	# of edges

Type	Sales Code	Package
TLE4941plusC	SP000478508	PG-SSO-2-53
TLE4941plusCN	tbd	Leads with NiNiP plating
TLE4941plusCB	Available - 2012	With integrated back bias magnet

Published by  
Infineon Technologies AG  
85579 Neubiberg, Germany

© 2010 Infineon Technologies AG.  
All Rights Reserved.

Visit us:  
[www.infineon.com](http://www.infineon.com)

Order Number: B142-H9533-X-X-7600  
Date: 10 / 2010

#### ATTENTION PLEASE!

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

#### INFORMATION

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

#### WARNINGS

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office. Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.