

CURRENT SENSING SINGLE CHANNEL DRIVER

Features

- Floating channel designed for bootstrap operation
 Fully operational to +600 V
 Tolerant to negative transient voltage dV/dt immune
- Application-specific gate drive range:
 Motor Drive: 12 V to 20 V (IRS2127/IRS2128)
 Automotive: 9 V to 20 V (IRS21271/IRS21281)
- Undervoltage lockout
- 3.3 V, 5 V, and 15 V input logic compatible
- FAULT lead indicates shutdown has occurred
- Output in phase with input (IRS2127/IRS21271)
- Output out of phase with input (IRS2128/IRS21281)
- RoHS compliant


Description

The IRS2127/IRS2128/IRS21271/IRS21281 are high voltage, high speed power MOSFET and IGBT drivers. Proprietary HVIC and latch immune CMOS technologies enable ruggedized monolithic construction. The logic input is compatible with standard CMOS or LSTTL outputs, down to 3.3 V. The protection circuitry detects over-current in the driven power transistor and terminates the gate drive voltage. An open drain FAULT signal is provided to indicate that an over-current shutdown has occurred. The output driver features a high pulse current buffer stage designed for minimum cross-conduction. The floating channel can be used to drive an N-channel power MOSFET or IGBT in the high-side or low-side configuration which operates up to 600 V.


Product Summary

| | |
|---------------------------|---|
| V_{OFFSET} | 600 V max. |
| I_{O+/-} | 200 mA / 420 mA |
| V_{OUT} | 12 V - 20V 9 V - 20 V (IRS2127/IR2128) (IRS21271/IR21281) |
| V_{Csth} | 250 mV or 1.8 V |
| ton/off (typ.) | 150 ns & 150 ns |

Packages

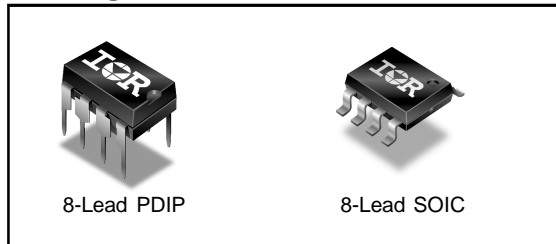

Typical Connection

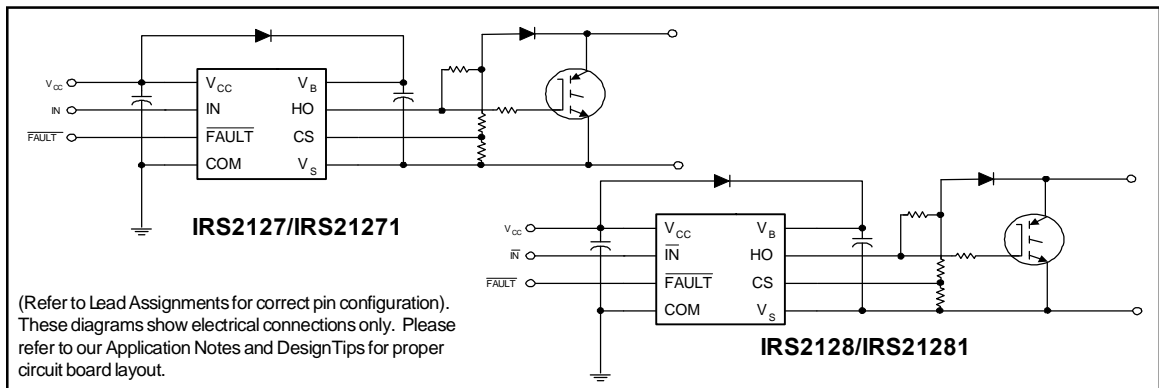

Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

| Symbol | Definition | Min. | Max. | Units | |
|---------------------|---|----------------------|-----------------------|-------|------|
| V _B | High-side floating supply voltage | -0.3 | 625 | V | |
| V _S | High-side floating offset voltage | V _B - 25 | V _B + 0.3 | | |
| V _{HO} | High-side floating output voltage | V _S - 0.3 | V _B + 0.3 | | |
| V _{CC} | Logic supply voltage | -0.3 | 25 | | |
| V _{IN} | Logic input voltage | -0.3 | V _{CC} + 0.3 | | |
| V _{FLT} | $\overline{\text{FAULT}}$ output voltage | -0.3 | V _{CC} + 0.3 | | |
| V _{CS} | Current sense voltage | V _S - 0.3 | V _B + 0.3 | | |
| dV _S /dt | Allowable offset supply voltage transient | — | 50 | V/ns | |
| P _D | Package power dissipation @ T _A ≤ +25 °C | 8-Lead DIP | — | 1.0 | W |
| | | 8-Lead SOIC | — | 0.625 | |
| R _{thJA} | Thermal resistance, junction to ambient | 8-Lead DIP | — | 125 | °C/W |
| | | 8-Lead SOIC | — | 200 | |
| T _J | Junction temperature | — | 150 | °C | |
| T _S | Storage temperature | -55 | 150 | | |
| T _L | Lead temperature (soldering, 10 seconds) | — | 300 | | |

Recommended Operating Conditions

The input/output logic timing diagram is shown in Fig. 1. For proper operation the device should be used within the recommended conditions. The V_S offset rating is tested with all supplies biased at 15 V differential.

| Symbol | Definition | Min. | Max. | Units | |
|------------------|--|---------------------|---------------------|---------------------|---|
| V _B | High-side floating supply voltage | (IRS2127/IRS2128) | V _S + 12 | V _S + 20 | V |
| | | (IRS21271/IRS21281) | V _S + 9 | V _S + 20 | |
| V _S | High-side floating offset voltage | Note 1 | 600 | | |
| V _{HO} | High-side floating output voltage | V _S | V _B | | |
| V _{CC} | Logic supply voltage | 10 | 20 | | |
| V _{IN} | Logic input voltage | 0 | V _{CC} | | |
| V _{FLT} | $\overline{\text{FAULT}}$ output voltage | 0 | V _{CC} | | |
| V _{CS} | Current sense signal voltage | V _S | V _S + 5 | | |
| T _A | Ambient temperature | -40 | 125 | °C | |

Note 1: Logic operational for V_S of -5 V to +600 V. Logic state held for V_S of -5 V to -V_{BS}. (Please refer to the Design Tip DT97-3 for more details).

Dynamic Electrical Characteristics

V_{BIAS} (V_{CC} , V_{BS}) = 15 V, C_L = 1000 pF and T_A = 25 °C unless otherwise specified. The dynamic electrical characteristics are measured using the test circuit shown in Fig. 3.


| Symbol | Definition | Min. | Typ. | Max. | Units | Test Conditions |
|-----------|---------------------------------------|------|------|------|-------|-----------------|
| t_{on} | Turn-on propagation delay | — | 150 | 200 | ns | $V_S = 0$ V |
| t_{off} | Turn-off propagation delay | — | 150 | 200 | | $V_S = 600$ V |
| t_r | Turn-on rise time | — | 80 | 130 | | |
| t_f | Turn-off fall time | — | 40 | 65 | | |
| t_{bl} | Start-up blanking time | 550 | 750 | 950 | | |
| t_{cs} | CS shutdown propagation delay | — | 65 | 360 | | |
| t_{ft} | CS to FAULT pull-up propagation delay | — | 270 | 510 | | |

Static Electrical Characteristics


V_{BIAS} (V_{CC} , V_{BS}) = 15 V and T_A = 25 °C unless otherwise specified. The V_{IN} , V_{TH} , and I_{IN} parameters are referenced to COM. The V_O and I_O parameters are referenced to V_S .

| Symbol | Definition | Min. | Typ. | Max. | Units | Test Conditions | |
|--------------|---|---------------------|------|------|----------|--|--------------|
| V_{IH} | Logic "1" input voltage (IRS2127/IRS21271) | 2.5 | — | — | V | $V_{CC} = 10$ V to 20 V | |
| | Logic "0" input voltage (IRS2128/IRS21281) | | | | | | |
| V_{IL} | Logic "0" input voltage (IRS2127/IRS21271) | — | — | 0.8 | V | | |
| | Logic "1" input voltage (IRS2128/IRS21281) | | | | | | |
| V_{CSTH+} | CS input positive going threshold | (IRS2127/IRS2128) | 180 | 250 | 320 | | mV |
| | | (IRS21271/IRS21281) | 1.5 | 1.8 | 2.1 | | V |
| V_{OH} | High level output voltage, $V_{BIAS} - V_O$ | — | 0.05 | 0.2 | V | | $I_O = 2$ mA |
| V_{OL} | Low level output voltage, V_O | — | 0.02 | 0.1 | V | | |
| I_{LK} | Offset supply leakage current | — | — | 50 | μ A | $V_B = V_S = 600$ V | |
| I_{QBS} | Quiescent V_{BS} supply current | — | 300 | 800 | | $V_{IN} = 0$ V or 5 V | |
| I_{QCC} | Quiescent V_{CC} supply current | — | 60 | 120 | | $V_{IN} = 5$ V | |
| I_{IN+} | Logic "1" input bias current | — | 7.0 | 15 | | $V_{IN} = 0$ V | |
| I_{IN-} | Logic "0" input bias current | — | — | 5.0 | | $V_{CS} = 3$ V | |
| I_{CS+} | "High" CS bias current | — | — | 5.0 | | $V_{CS} = 0$ V | |
| I_{CS-} | "High" CS bias current | — | — | 5.0 | | | |
| V_{BSUV+} | V_{BS} supply undervoltage positive going threshold | (IRS2127/IRS2128) | 8.8 | 10.3 | 11.8 | V | |
| | | (IRS21271/IRS21281) | 6.3 | 7.2 | 8.2 | | |
| V_{BSUV-} | V_{BS} supply undervoltage negative going threshold | (IRS2127/IRS2128) | 7.5 | 9.0 | 10.6 | | |
| | | (IRS21271/IRS21281) | 6.0 | 6.8 | 7.7 | | |
| I_{O+} | Output high short circuit pulsed current | 200 | 290 | — | mA | $V_O = 0$ V, $V_{IN} = 5$ V PW ≤ 10 μ s | |
| I_{O-} | Output low short circuit pulsed current | 420 | 600 | — | | $V_O = 15$ V, $V_{IN} = 0$ V PW ≤ 10 μ s | |
| $R_{on,FLT}$ | FAULT - low on resistance | — | 125 | — | Ω | | |

Functional Block Diagram IRS2127/IRS21271

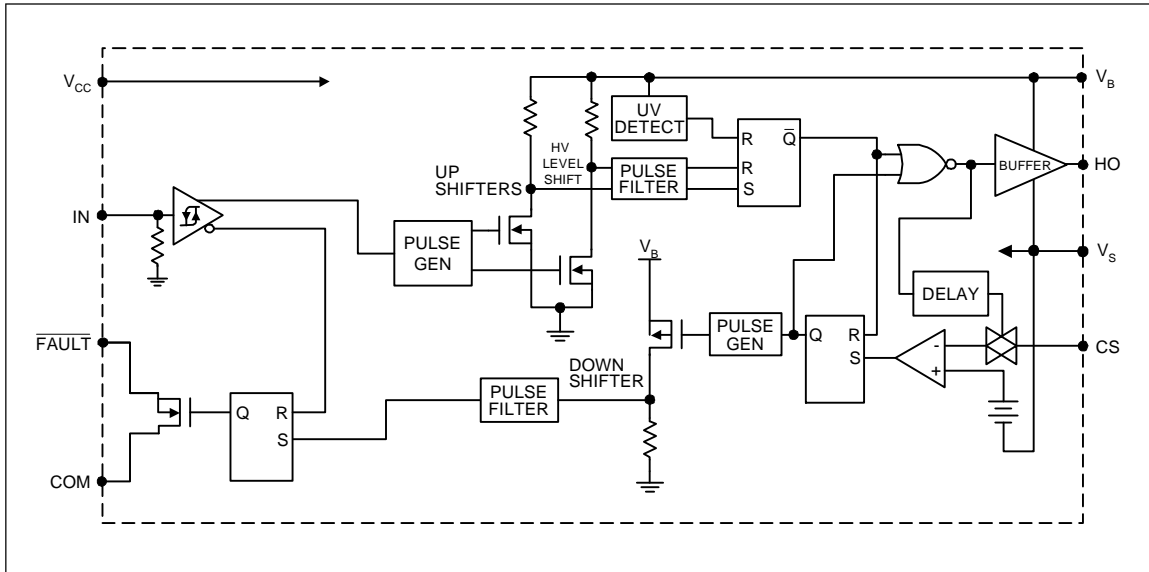



Functional Block Diagram IRS2128/IRS21281

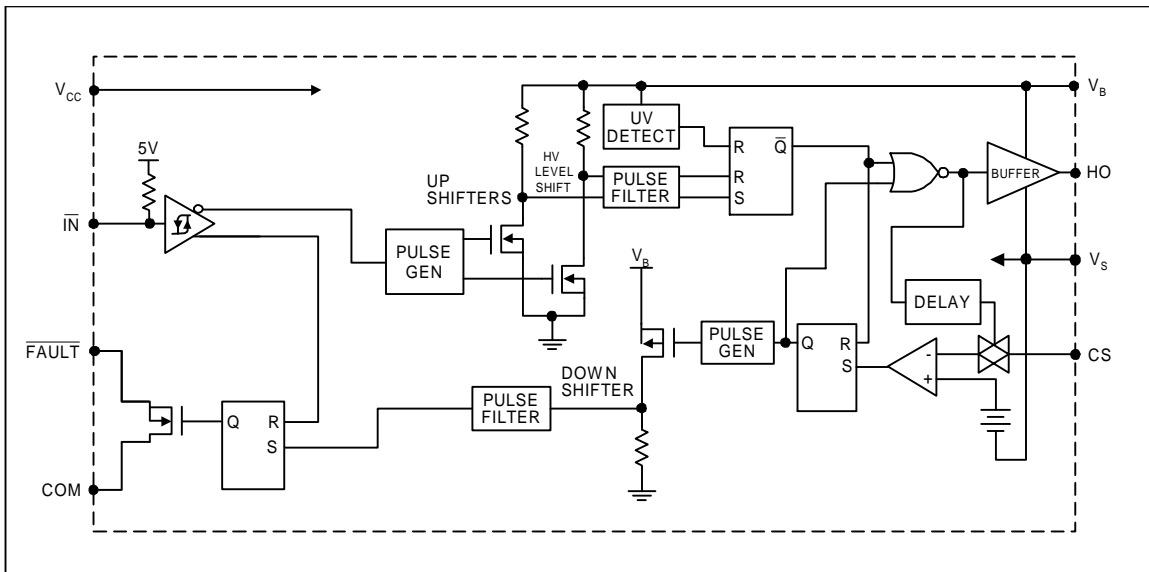

Lead Definitions

| Symbol | Description |
|-----------------|---|
| V _{CC} | Logic and gate drive supply |
| IN | Logic input for gate driver output (HO), in phase with HO (IRS2127/IRS21271) out of phase with HO (IRS2128/IRS21281) |
| FAULT | Indicates over-current shutdown has occurred, negative logic |
| COM | Logic ground |
| V _B | High-side floating supply |
| HO | High-side gate drive output |
| V _S | High-side floating supply return |
| CS | Current sense input to current sense comparator |

Lead Assignments

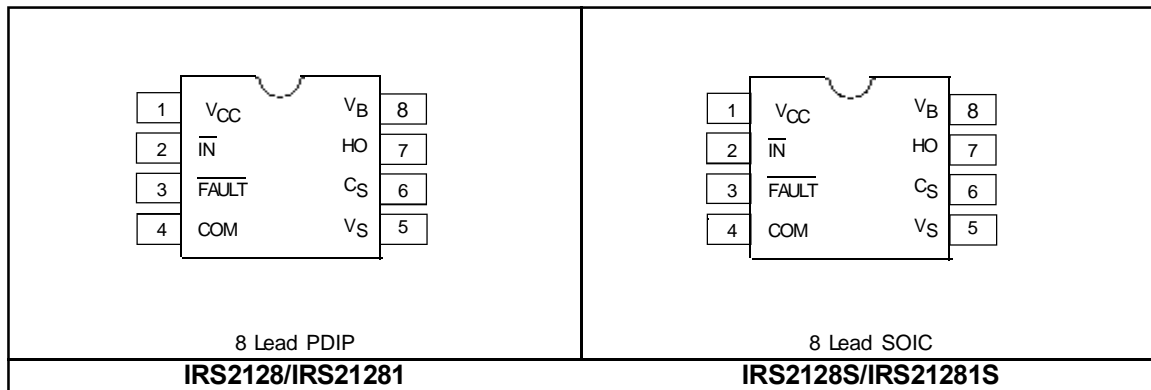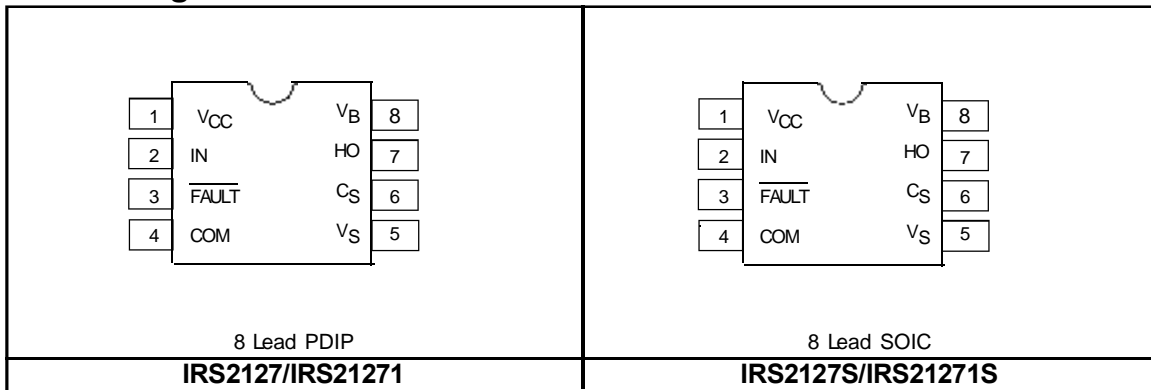

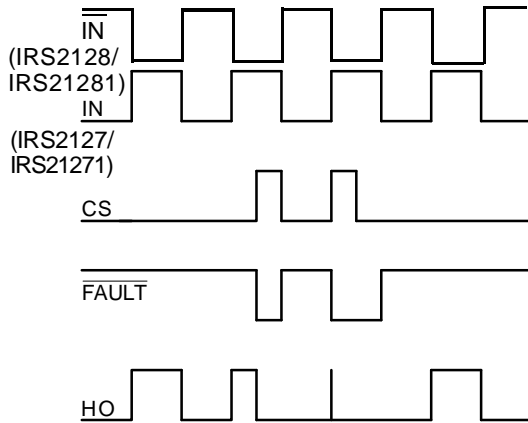


Figure 1. Input/Output Timing Diagram

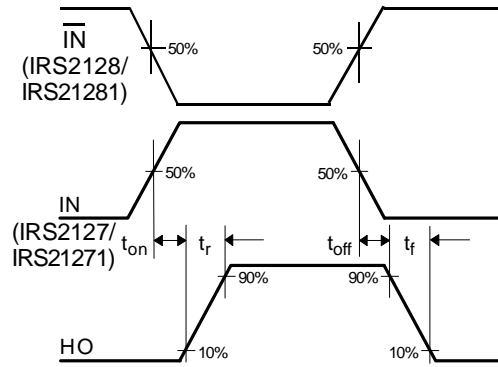


Figure 2. Switching Time Waveform Definition

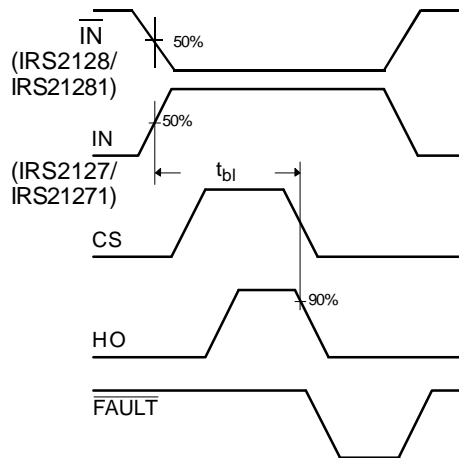


Figure 3. Start-Up Blanking Time Waveform Definitions

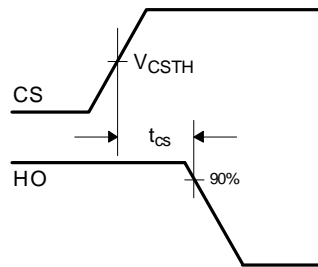


Figure 4. CS Shutdown Waveform Definitions

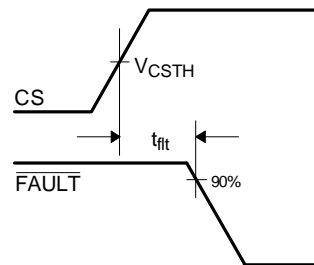


Figure 5. CS to FAULT Waveform Definitions

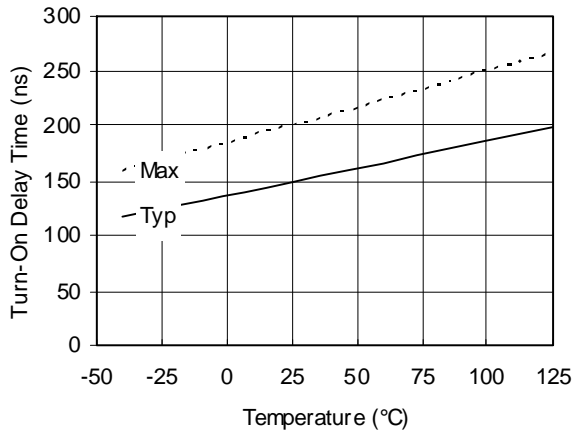


Figure 6A. Turn-On Delay Time vs. Temperature

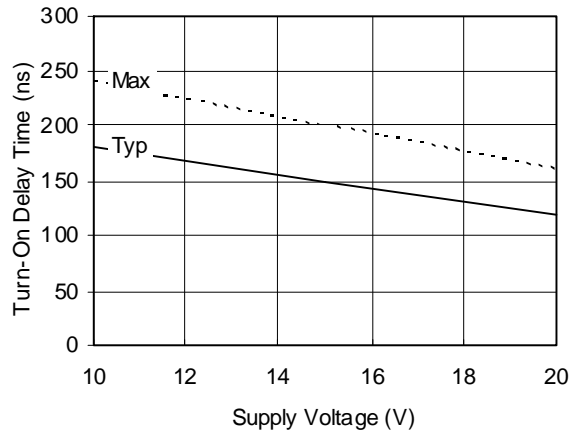


Figure 6B. Turn-On Delay Time vs. Voltage

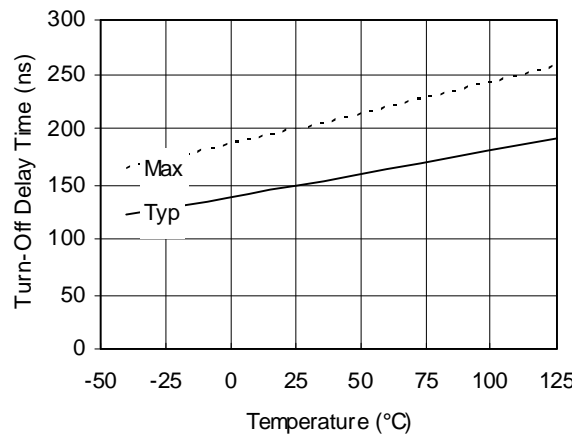


Figure 7A. Turn-Off Delay Time vs. Temperature

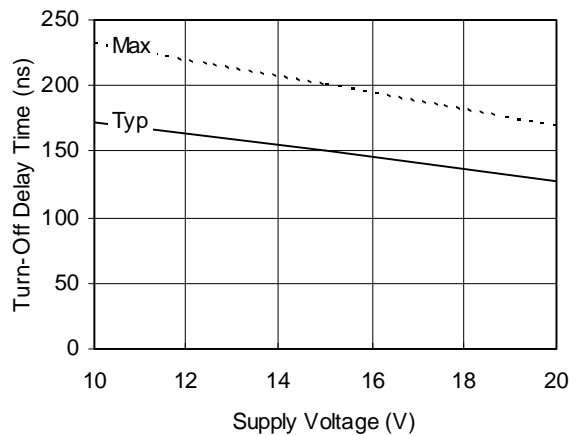


Figure 7B. Turn-Off Delay Time vs. Voltage



IRS212(7, 71, 8, 81)(S)PbF

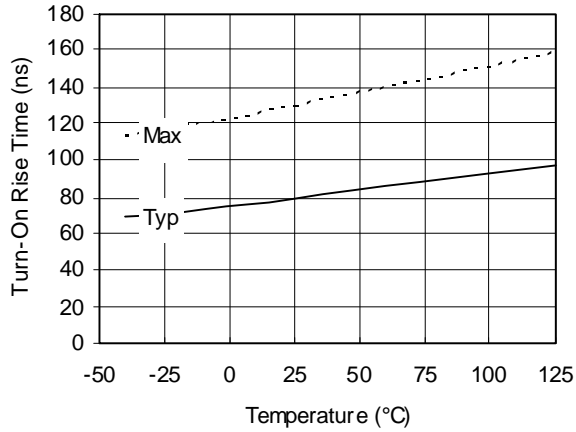


Figure 8A. Turn-On Rise Time vs. Temperature

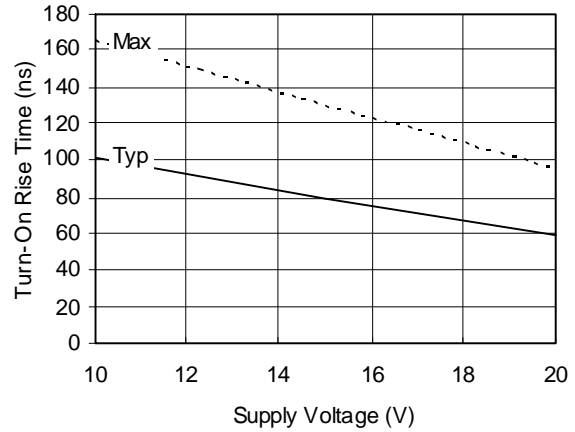


Figure 8B. Turn-On Rise Time vs. Voltage

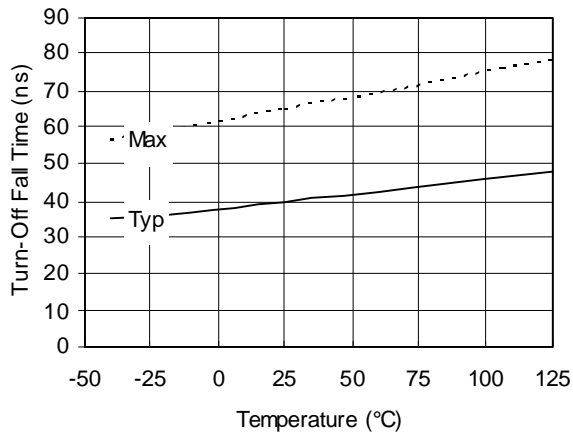


Figure 9A. Turn-Off Fall Time vs. Temperature

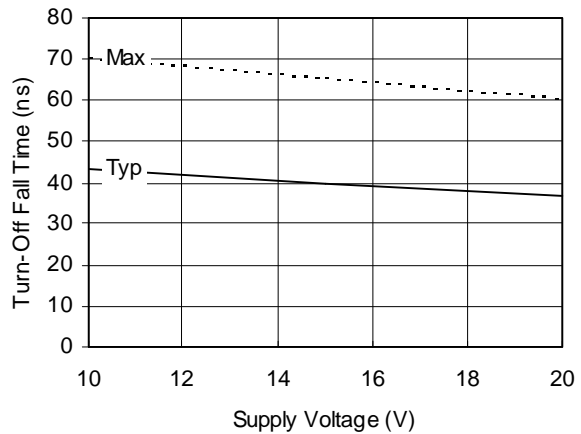


Figure 9B. Turn-Off Fall Time vs. Voltage

IRS212(7, 71, 8, 81)(S)PbF

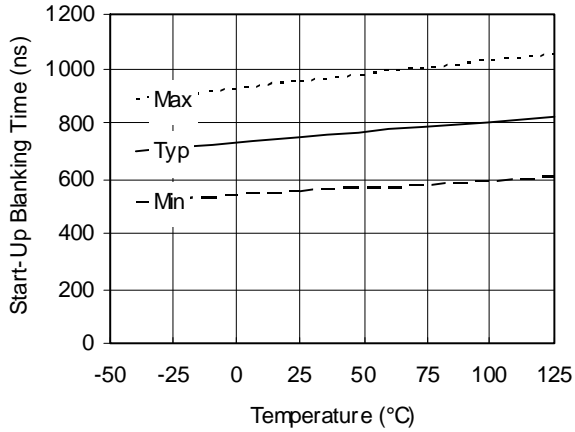


Figure 10A. Start-Up Blanking Time vs. Temperature

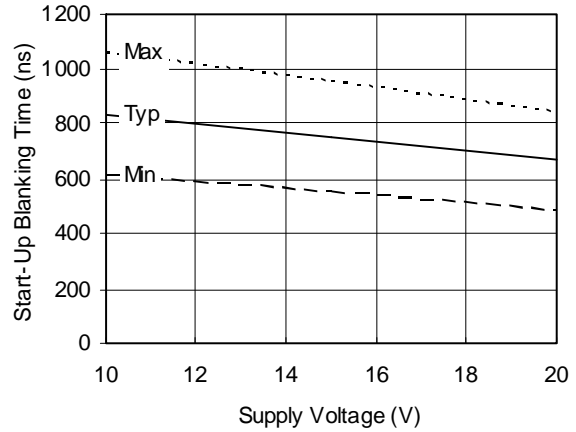


Figure 10B. Start-Up Blanking Time vs. Voltage

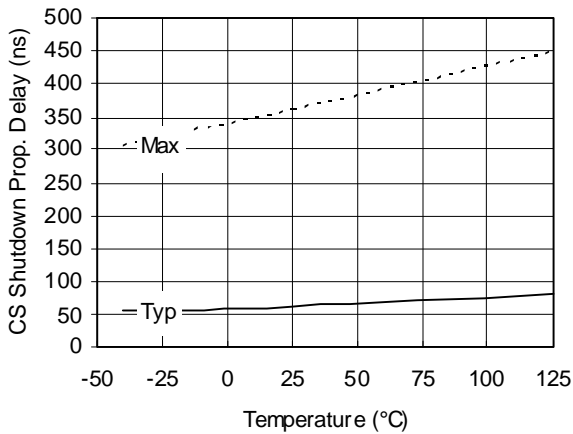


Figure 11A. CS Shutdown Prop. Delay vs. Temperature

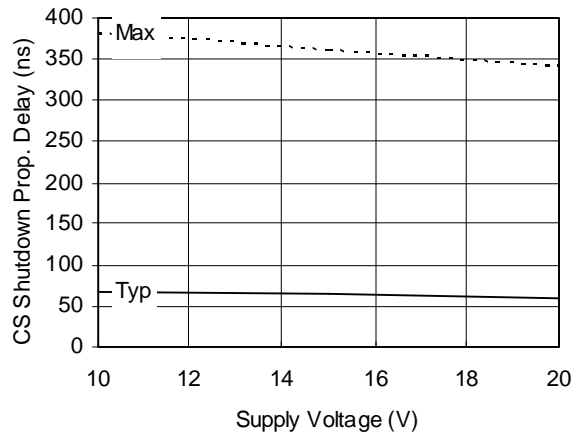


Figure 11B. CS Shutdown Prop. Delay vs. Voltage

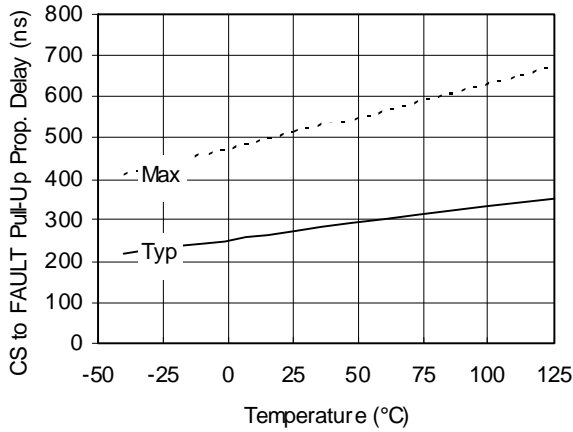


Figure 12A. CS to FAULT Pull-Up Prop. Delay vs. Temperature

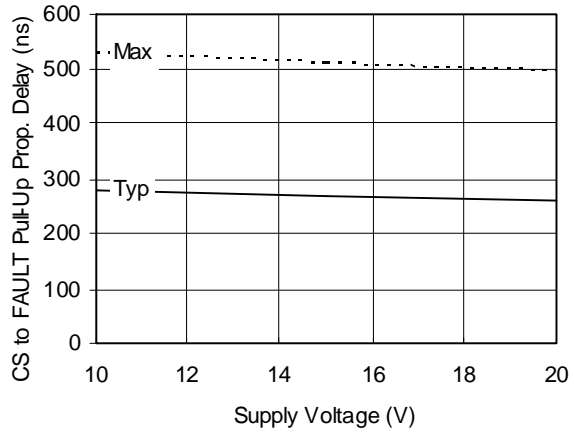


Figure 12B. CS to FAULT Pull-Up Prop. Delay vs. Voltage

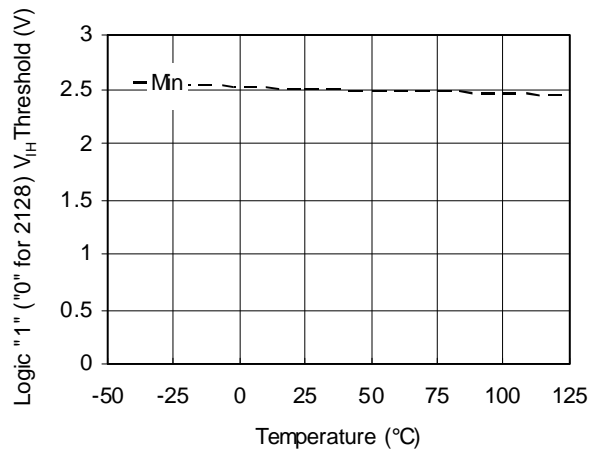


Figure 13A. Logic "1" ("0" for 2128) V_{IH} Threshold vs. Temperature

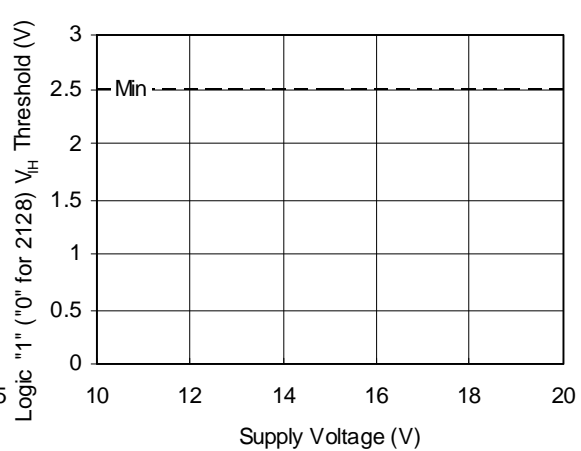


Figure 13B. Logic "1" ("0" for 2128) V_{IH} Threshold vs. Voltage

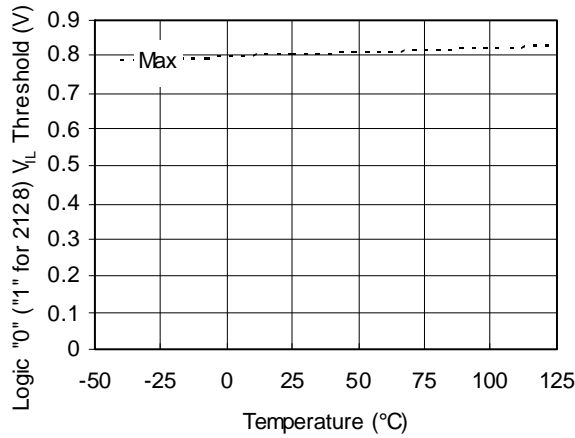


Figure 14A. Logic "0" (V_{IL}) Threshold vs. Temperature

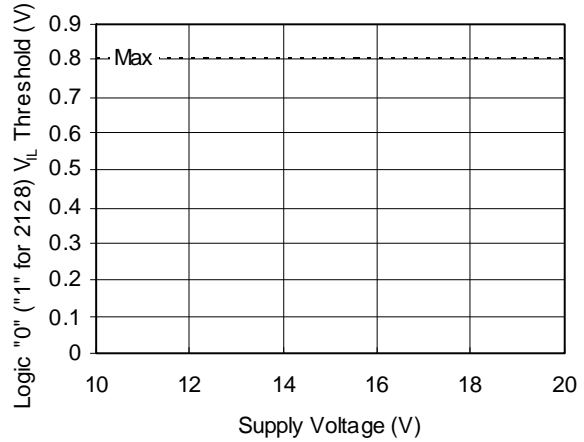


Figure 14B. Logic "0" (V_{IL}) Threshold vs. Voltage

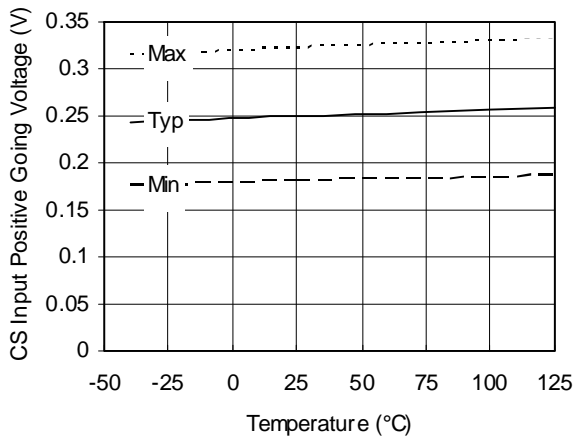


Figure 15A. CS Input Positive Going Voltage vs. Temperature

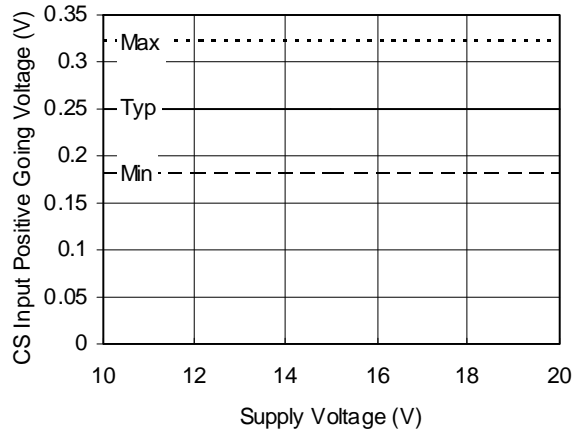


Figure 15B. CS Input Positive Going Voltage vs. Voltage

IRS212(7, 71, 8, 81)(S)PbF

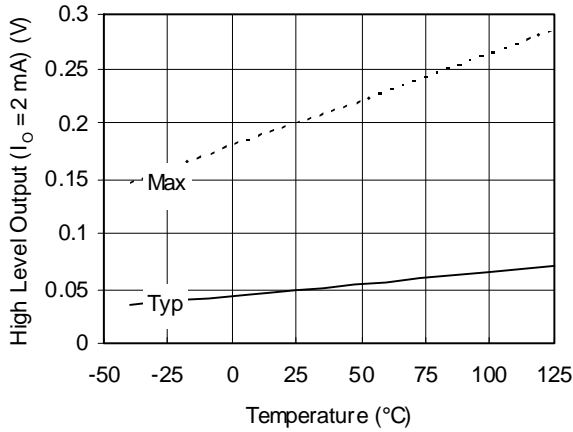


Figure 16A. High Level Output ($I_o = 2 \text{ mA}$) vs. Temperature

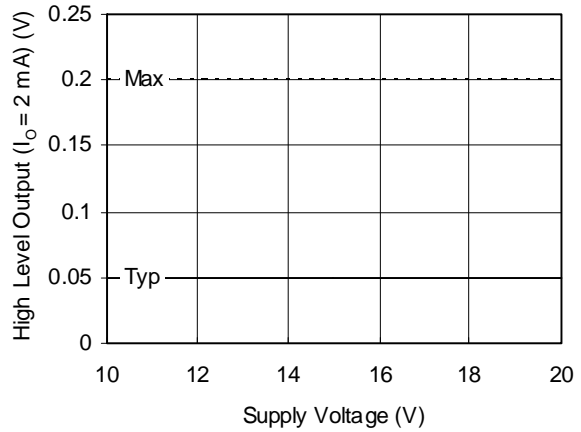


Figure 16B. High Level Output ($I_o = 2 \text{ mA}$) vs. Voltage

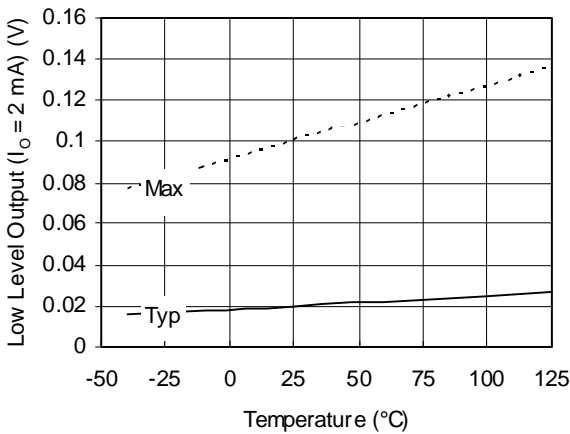


Figure 17A. Low Level Output ($I_o = 2 \text{ mA}$) vs. Temperature

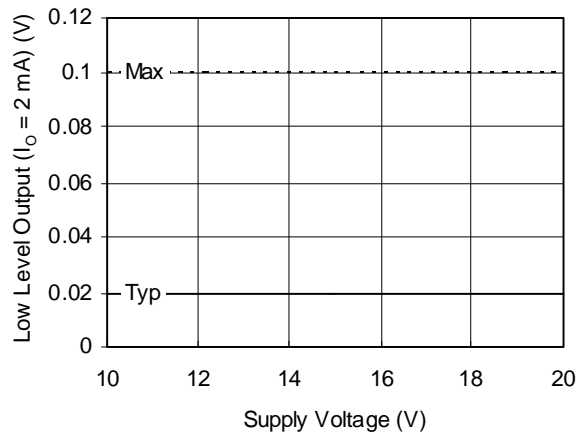


Figure 17B. Low Level Output ($I_o = 2 \text{ mA}$) vs. Voltage

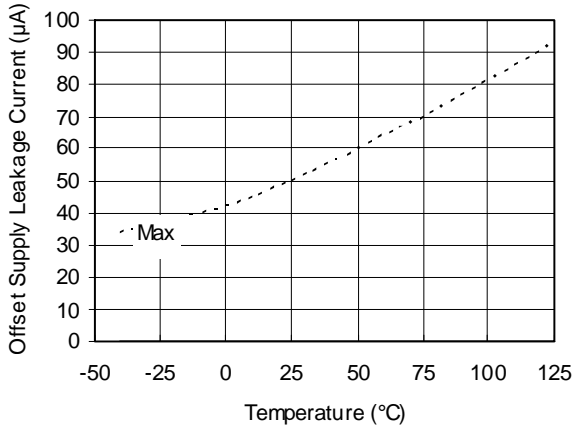


Figure 18A. Offset Supply Leakage Current vs. Temperature

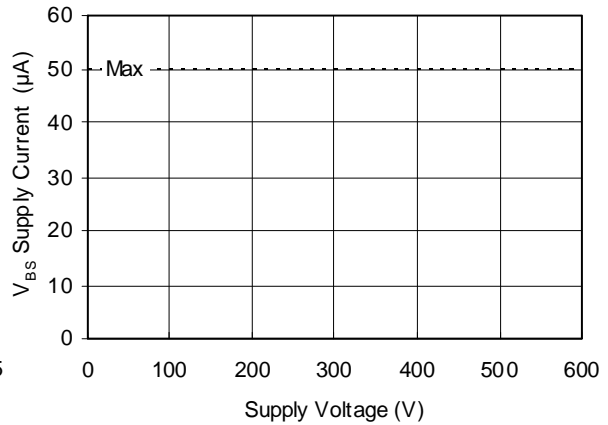


Figure 18B. High-Side Floating Well Offset Supply Leakage vs. Voltage

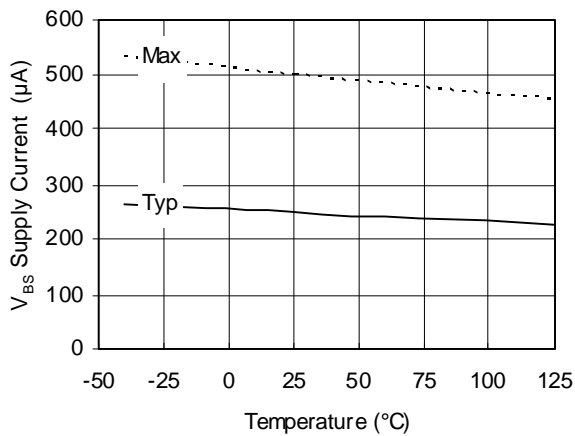


Figure 19A. V_{BS} Supply Current vs. Temperature

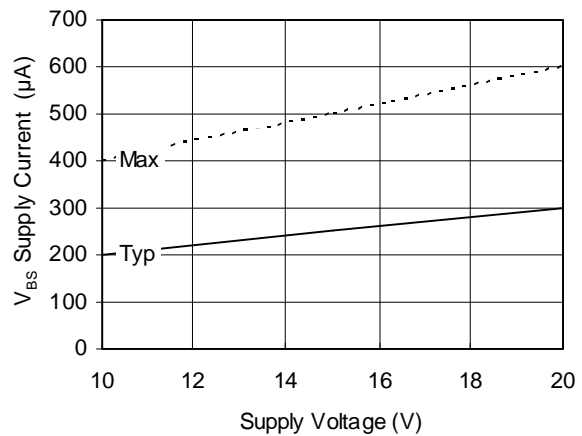


Figure 19B. V_{BS} Supply Current vs. Voltage

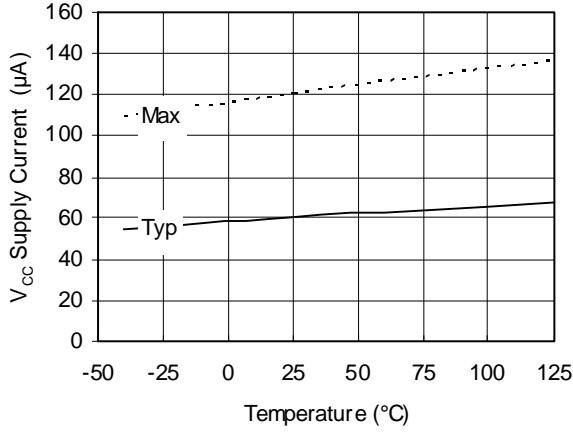


Figure 20A. V_{CC} Supply Current vs. Temperature

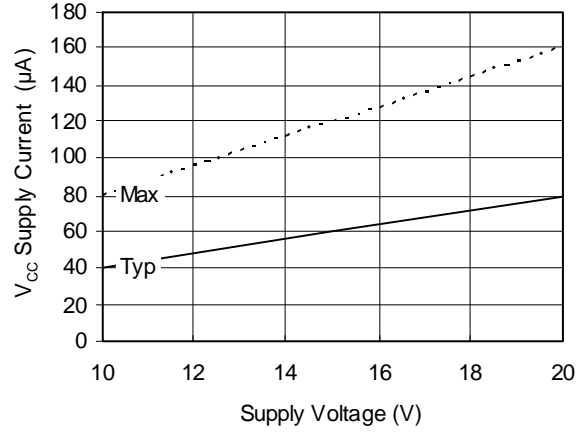


Figure 20B. V_{CC} Supply Current vs. Voltage

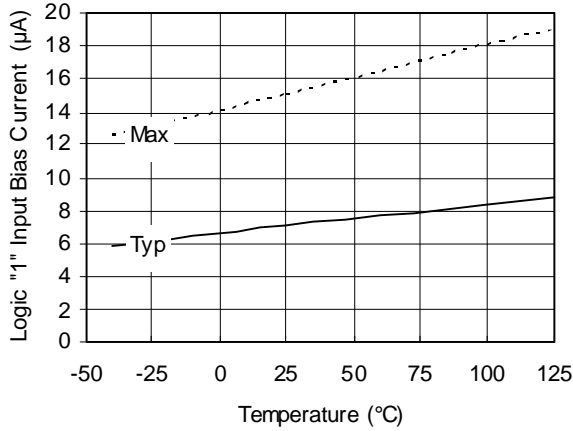


Figure 21A. Logic "1" Input Bias Current vs. Temperature

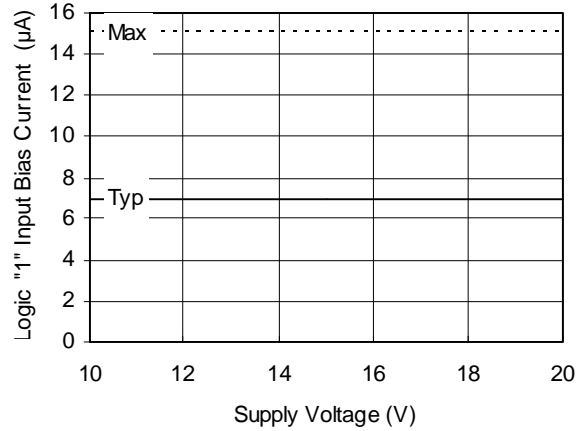


Figure 21B. Logic "1" Input Bias Current vs. Voltage

IRS212(7, 71, 8, 81)(S)PbF

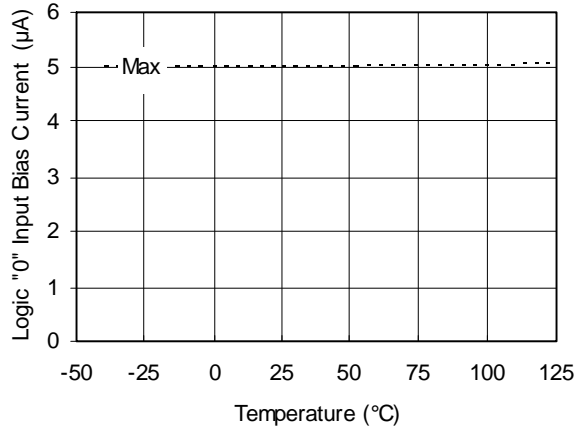


Figure 22A. Logic "0" Input Bias Current vs. Temperature

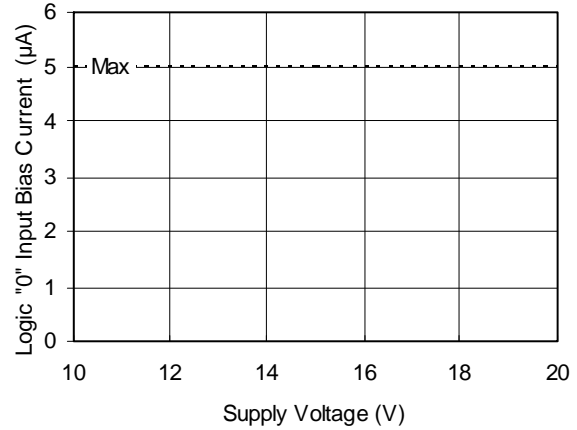


Figure 22B. Logic "0" Input Bias Current vs. Voltage

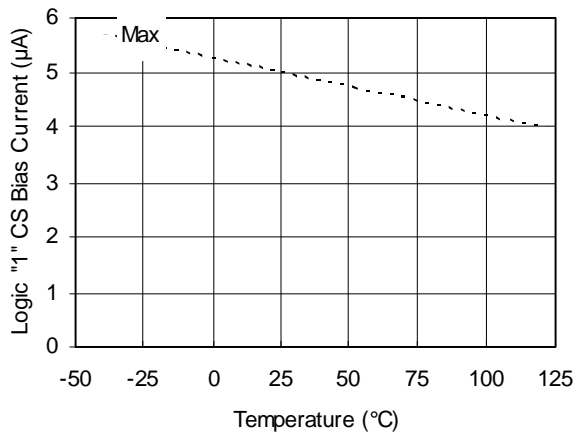


Figure 23A. Logic "1" CS Bias Current vs. Temperature

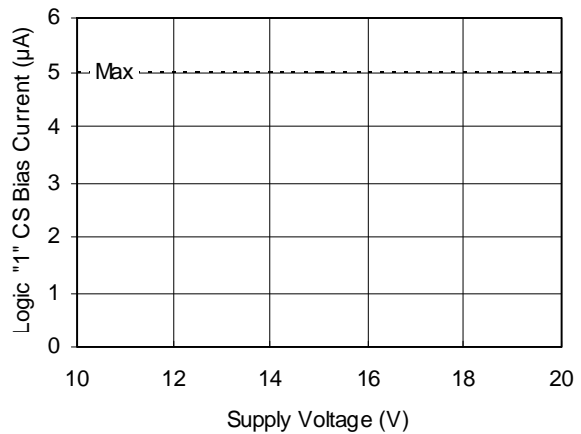


Figure 23B. Logic "1" CS Bias Current vs. Voltage

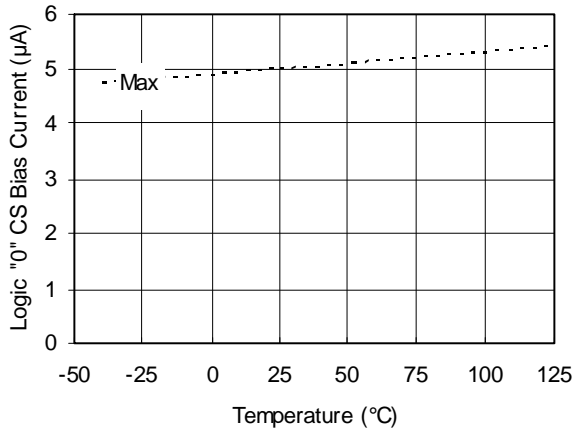


Figure 24A. Logic "0" CS Bias Current vs. Temperature

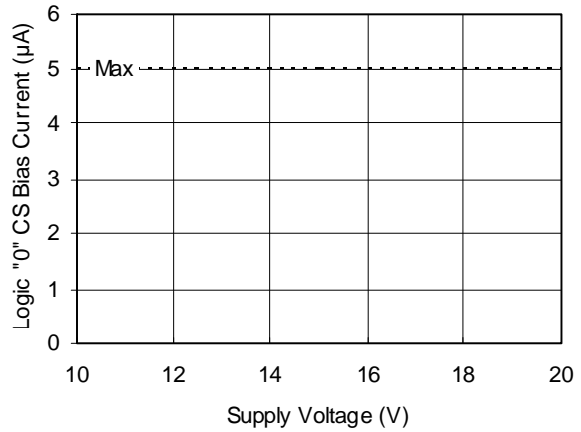


Figure 24B. Logic "0" CS Bias Current vs. Voltage

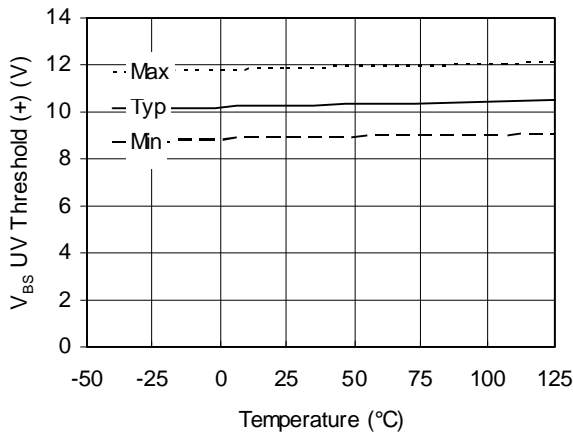


Figure 25A. V_{BS} UV Threshold (+) vs. Temperature

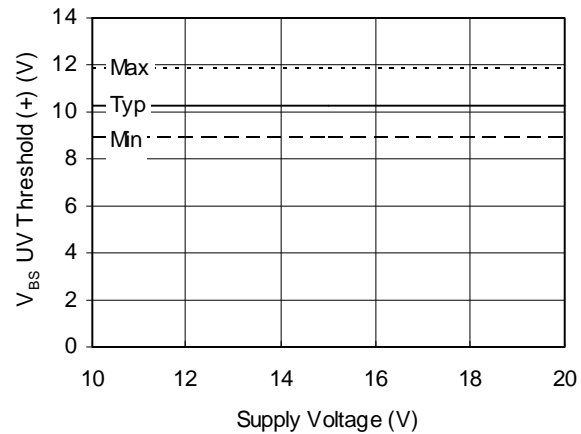


Figure 25B. V_{BS} UV Threshold (+) vs. Voltage

IRS212(7, 71, 8, 81)(S)PbF

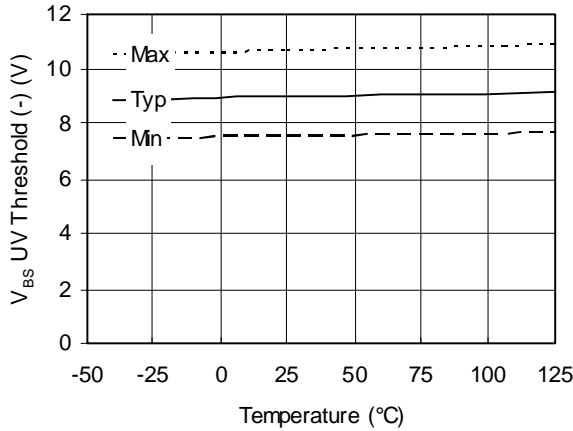


Figure 26A. V_{BS} UV Threshold (-) vs. Temperature

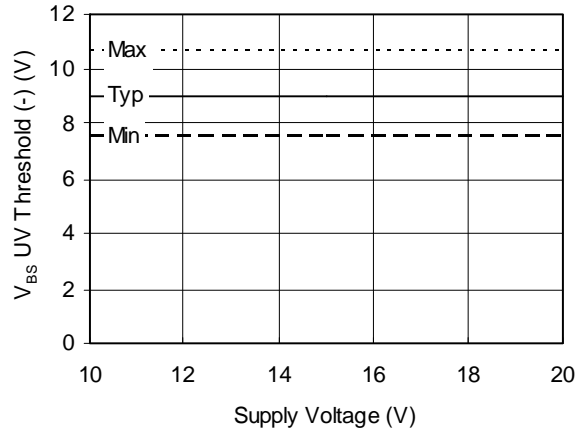


Figure 26B. V_{BS} UV Threshold (-) vs. Voltage

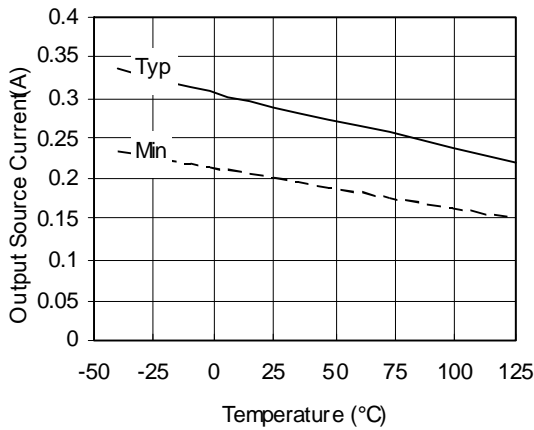


Figure 27A. Output Source Current vs. Temperature

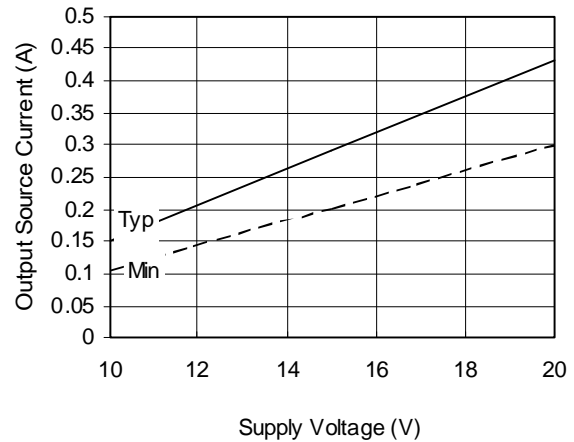


Figure 27B. Output Source Current vs. Voltage

IRS212(7, 71, 8, 81)(S)PbF

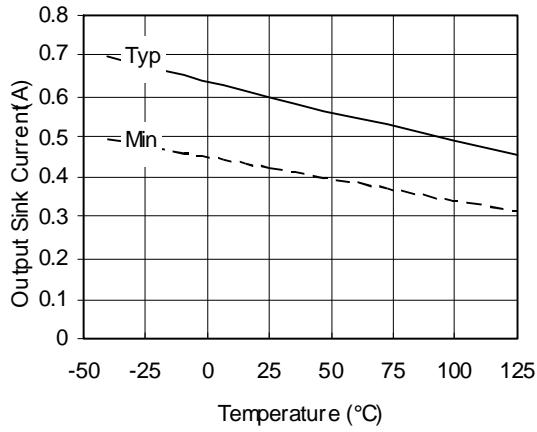


Figure 28A. Output Sink Current vs. Temperature




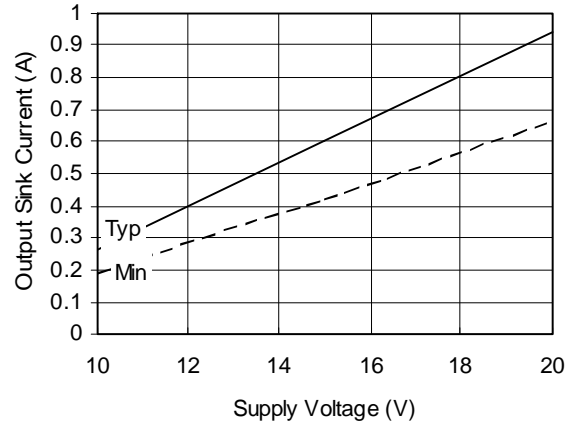


Figure 28B. Output Sink Current vs. Voltage

Case outlines

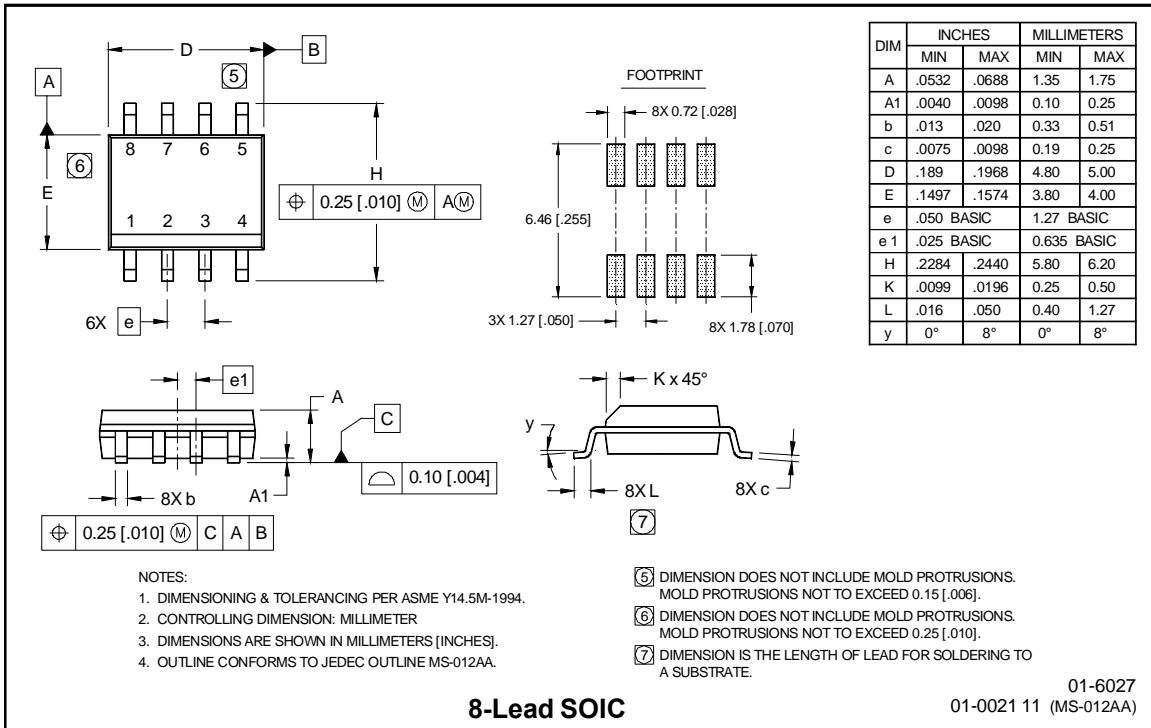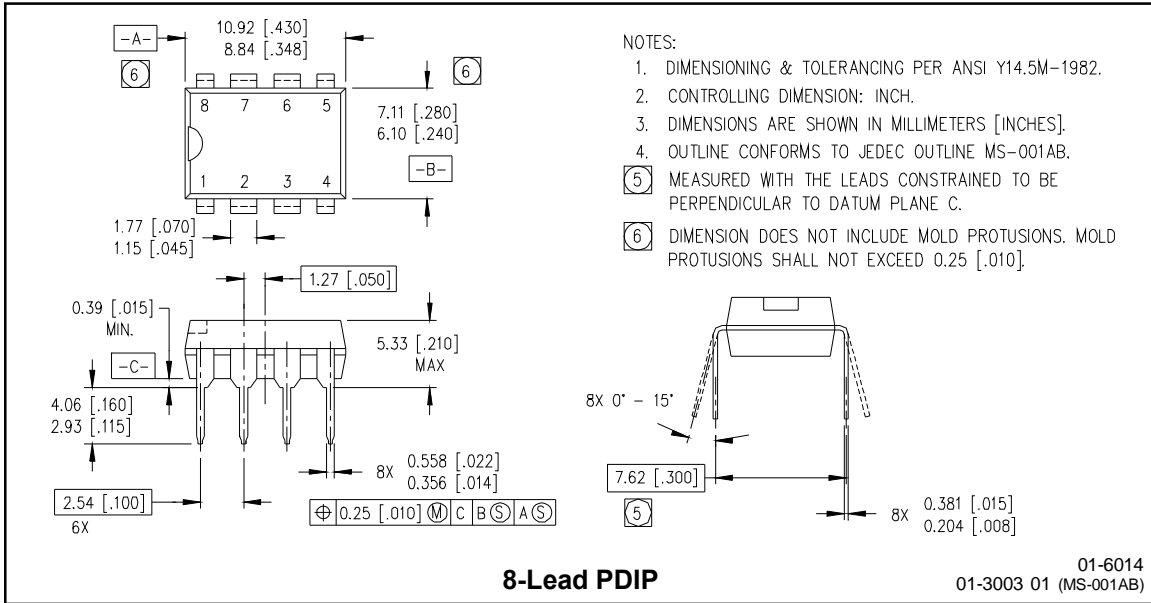


**Tape & Reel
 8-lead SOIC**

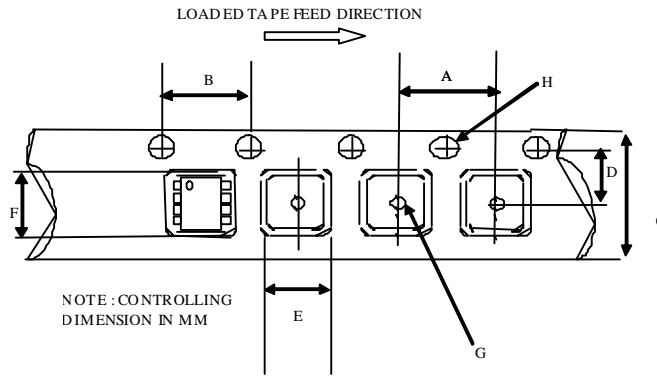

CARRIER TAPE DIMENSION FOR 8SOICN


| Code | Metric | | Imperial | |
|------|--------|-------|----------|-------|
| | Min | Max | Min | Max |
| A | 7.90 | 8.10 | 0.311 | 0.318 |
| B | 3.90 | 4.10 | 0.153 | 0.161 |
| C | 11.70 | 12.30 | 0.46 | 0.484 |
| D | 5.45 | 5.55 | 0.214 | 0.218 |
| E | 6.30 | 6.50 | 0.248 | 0.255 |
| F | 5.10 | 5.30 | 0.200 | 0.208 |
| G | 1.50 | n/a | 0.059 | n/a |
| H | 1.50 | 1.60 | 0.059 | 0.062 |

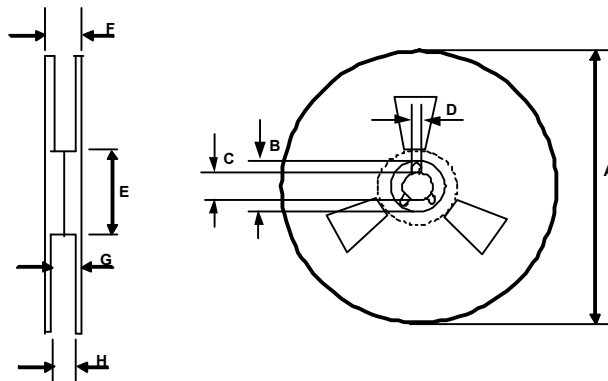

REEL DIMENSIONS FOR 8SOICN

| Code | Metric | | Imperial | |
|------|--------|--------|----------|--------|
| | Min | Max | Min | Max |
| A | 329.60 | 330.25 | 12.976 | 13.001 |
| B | 20.95 | 21.45 | 0.824 | 0.844 |
| C | 12.80 | 13.20 | 0.503 | 0.519 |
| D | 1.95 | 2.45 | 0.767 | 0.096 |
| E | 98.00 | 102.00 | 3.858 | 4.015 |
| F | n/a | 18.40 | n/a | 0.724 |
| G | 14.50 | 17.10 | 0.570 | 0.673 |
| H | 12.40 | 14.40 | 0.488 | 0.566 |

LEADFREE PART MARKING INFORMATION

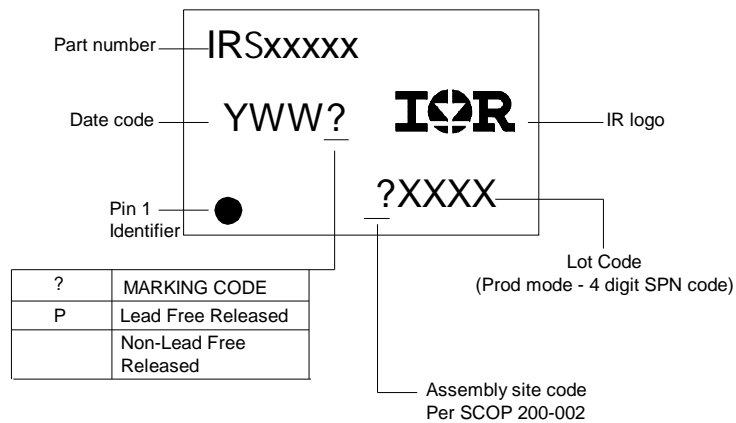

ORDER INFORMATION

8-Lead PDIP IRS2127PbF
 8-Lead PDIP IRS21271PbF
 8-Lead SOIC IRS2127SPbF
 8-Lead SOIC IRS21271SPbF
 8-Lead SOIC Tape & Reel IRS2127STRPbF
 8-Lead SOIC Tape & Reel IRS21271STRPbF

8-Lead PDIP IRS2128PbF
 8-Lead PDIP IRS21281PbF
 8-Lead SOIC IRS2128SPbF
 8-Lead SOIC IRS21281SPbF
 8-Lead SOIC Tape & Reel IRS2128STRPbF
 8-Lead SOIC Tape & Reel IRS21281STRPbF



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.