




Thermal Transfer Labels

Panduit is a global leader in reliable and innovative solutions for identification and safety. Products are engineered for a wide variety of industries and applications – including electrical, electronics, industrial, and network. Panduit offers a complete, leading-edge line of labeling software, high-performance label materials (all RoHS compliant), and printers that provide enhanced productivity, dependability, and value to all infrastructure labeling requirements.



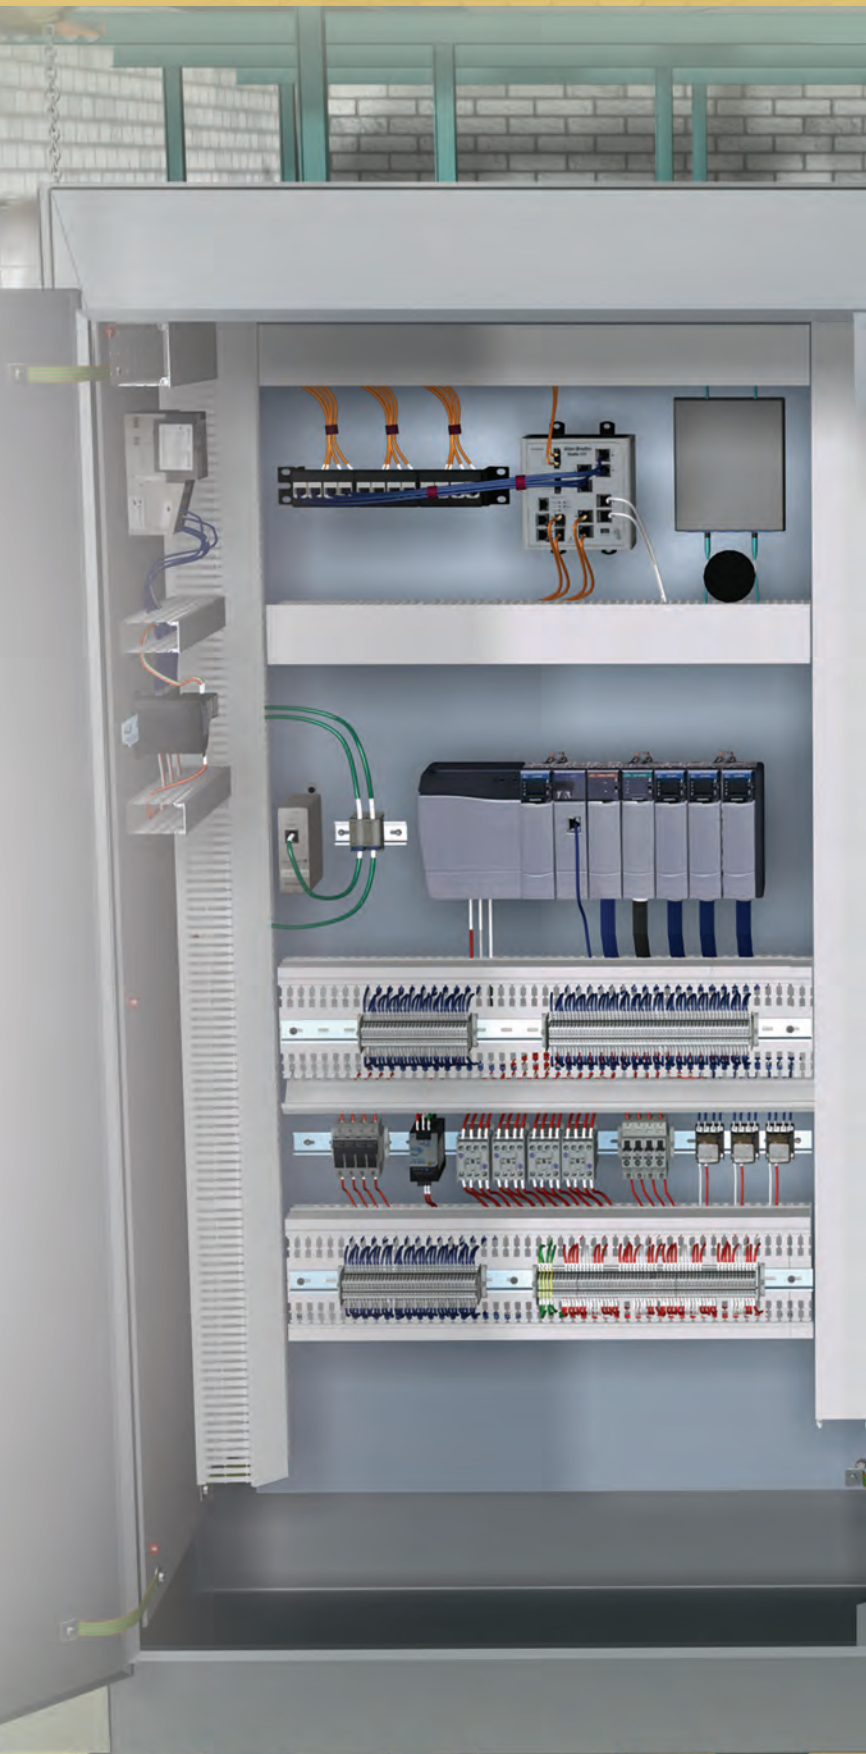

Cable/Wire Labels

| | |
|--|-------|
| Turn-Tell® Labels | 4 |
| Self-Laminating Labels | 5 – 7 |
| LabelCore™ Fiber Optic Cable Identification System | 7 – 8 |
| Flag Labels | 8 |
| Non-Laminated Vinyl Cloth Labels | 9 |
| Non-Laminated Nylon Cloth Labels | 9 |

Marker Plates

| | |
|--|----|
| High-Temperature Flame-Retardant Marker Plates | 10 |
| Halogen-Free Flame-Retardant Marker Plates | 10 |
| Standard Marker Plates | 11 |

Heat Shrink Labels

| | |
|--|----|
| Military Grade – Single-Sided Labels | 12 |
| Military Grade – Two-Sided Labels | 13 |
| Halogen-Free – Two-Sided Labels | 14 |
| Fluid-Resistant – Two-Sided Labels | 15 |

Component Labels/Continuous Tapes

| | |
|---|---------|
| Terminal Block Markers | 16 |
| Raised Panel Labels | 17 – 20 |
| Polyester Component Labels | 21 |
| Super-Tack Polyester Component Labels | 22 |
| Tedlar® Component Labels | 23 |
| Tamper-Evident Polyester Component Labels | 23 |
| Non-Adhesive Polyester Component Labels | 24 |
| Vinyl Cloth Component Labels | 24 |
| Polyimide Component Labels | 25 |
| Paper Component Labels | 26 |
| Continuous Tapes | 26 – 28 |

Safety and Solar Labels

| | |
|---|----|
| Super-Tack Polyester Arc Flash Labels | 29 |
| Raised Panel Arc Flash Labels | 29 |
| Super-Tack Arc Flash Continuous Tapes | 30 |
| Super-Tack Polyester Facility Identification Labels | 30 |
| Polyester Photoluminescent Tapes | 31 |
| Raised Panel Solar Labels | 31 |
| Super-Tack Polyester Solar Labels | 32 |
| Over-Laminate Labels | 32 |
| Reflective Continuous Tapes for Solar Applications | 32 |

Software/Printers/Accessories

| | |
|---|----|
| Software | 33 |
| TDP43ME Printers, Accessories and Ribbons | 34 |
| TDP43HE & TDP46HE Printers, Accessories & Ribbons | 35 |

Tedlar is a registered trademark of E.I. du Pont de Nemours and Company.

Turn-Tell® Labels

PATENTED

- Allows labels to rotate for visibility from any angle, and allows repositioning on the wire/cable to align legends for improved aesthetics

- Ideal for use in high-density or space-constrained cable applications
- Use thermal transfer hybrid ribbon
- Temperature range: -40°F to 150°F (-40°C to 66°C)



| Part Number | Print-On Area Color | Width | | Length | | Print-On Area Height | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Std. Pkg. Qty. | | | | |
|-------------|---|-------|------|--------|-------|----------------------|------|-----------------|------|-----------------|--|---|----------------|----------------|-------|---|------|------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | | | | | |
| R050X075V1T | White | 0.50 | 12.7 | 0.75 | 19.1 | 0.25 | 6.4 | 0.12 | 3.1 | 0.16 | 4.0 | Cat. 6 28 AWG/ 18 – 14 AWG | 8 | 5000 | | | | |
| R050X125V1T | | | | 1.25 | 31.8 | 0.38 | 9.7 | 0.16 | 4.1 | 0.22 | 5.6 | Cat. 3 UTP/12 – 10 AWG | | | | | | |
| R050X150V1T | | | | 1.50 | 38.1 | 0.50 | 12.7 | 0.22 | 5.6 | 0.28 | 7.1 | Cat. 5e UTP/Cat. 6 UTP/ Cat. 6A UTP/Cat. 5e FTP/ 10 – 6 AWG | | | | | | |
| R100X075V1T | TIA Blue TIA Green TIA Gray TIA Red TIA Yellow White TIA Blue TIA Green TIA Gray TIA Red TIA Yellow | 1.00 | 25.4 | 0.75 | 19.1 | 0.25 | 6.4 | 0.12 | 3.1 | 0.16 | 4.0 | Cat. 6 28 AWG/ 18 – 14 AWG | 4 | 2500 | | | | |
| R100X125V1T | | | | 1.25 | 31.8 | 0.38 | 9.7 | 0.16 | 4.1 | 0.22 | 5.6 | Cat. 3 UTP/12 – 10 AWG | | | | | | |
| R100X150V1T | | | | 1.50 | 38.1 | 0.50 | 12.7 | 0.22 | 5.6 | 0.28 | 7.1 | Cat. 5e UTP/Cat. 6 UTP/ Cat. 6A UTP/ | | | | | | |
| R100X150V2T | | | | | | | | | | | | | | | | | | |
| R100X150V3T | | | | | | | | | | | | | | | | | | |
| R100X150V4T | | | | 2.25 | 57.2 | 0.75 | 19.1 | 0.28 | 7.1 | 0.39 | 9.9 | Cat. 6 FTP/Cat. 6 UTP/ Cat. 6A FTP/8-4 AWG | | | | | | |
| R100X150V7T | | | | | | | | | | | | | | | | | | |
| R100X150V8T | | | | | | | | | | | | | | | | | | |
| R100X225V1T | | | | | | | | | | | | | | | | | | |
| R100X225V2T | | | | 4.00 | 101.6 | 1.00 | 25.4 | 0.39 | 9.9 | 0.95 | 24.1 | 2 – 1 AWG | | | | | | |
| R100X225V3T | | | | | | | | | | | | | | | | | | |
| R100X225V4T | | | | | | | | | | | | | | | | | | |
| R100X225V7T | | | | | | | | | | | | | | | | | | |
| R100X225V8T | | | | 1.50 | 38.1 | 1.50 | 38.1 | 0.50 | 12.7 | 0.22 | 5.6 | 0.28 | | | 7.1 | Cat. 5e UTP/Cat. 6 UTP/ Cat. 6A UTP/Cat. 5e FTP/ 10 – 6 AWG | 2 | 1000 |
| R150X150V1T | | | | | | | | | | | | | | | | | | |
| R200X150V1T | | | | | | | | | | | | | | | | | | |
| R200X225V1T | | | | | | | | | | | | | | | | | | |
| R200X400V1T | 2.00 | 50.8 | 2.25 | 57.2 | 0.75 | 19.1 | 0.28 | 7.1 | 0.39 | 9.9 | Cat. 6 FTP/Cat. 6A UTP/ Cat. 6A FTP/8 – 4 AWG | 4 | | | | | | |
| R200X400V1T | | | | | | | | | | | | | | 4.00 | 101.6 | 1.00 | 25.4 | 0.39 |

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Vinyl Self-Laminating Labels

- Includes a colored print-on area and clear overlamine to protect the legend for clear and durable identification
- Sized specifically for wire and cable applications
- Thin and conformable; preferred material for most general wire/cable labeling
- Use thermal transfer hybrid ribbon
- Temperature range: -40°F to 150°F (-40°C to 66°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15-01, File # MH14979



| Part Number | Print-On Area Color | Width | | Length | | Print-On Area Height | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Std. Pkg. Qty. | | |
|---------------|---------------------|-------|------|--------|------|----------------------|------|-----------------|------|---|----------------------------|---|----------------|---|---|------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | | | |
| S050X075VA1Y | White | 0.50 | 12.7 | 0.75 | 19.1 | 0.25 | 6.4 | 0.08 | 2.0 | 0.16 | 4.1 | Cat. 6 28 AWG/ 18 – 14 AWG | 8 | 5000 | | |
| S050X075VATY* | | | | | | | | | | | | | | 2500 | | |
| S050X125VA1Y | | | | 1.25 | 31.8 | 0.38 | 9.7 | 0.12 | 3.1 | 0.28 | 7.0 | | | Cat. 3 UTP/ 12 - 10 AWG | | |
| S050X125VATY* | | | | | | | | | | | | | | | | |
| S050X150VA1Y | | | | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | | | | Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG | |
| S050X150VATY* | | | | | | | | | | | | | | | | |
| S050X250VATY* | | 2.50 | 63.5 | 1.00 | 25.4 | 0.32 | 8.1 | 0.48 | 12.1 | 6 – 2 AWG | | | | | | |
| S075X075VATY* | | 0.75 | 19.1 | 0.75 | 19.1 | 0.25 | 6.4 | 0.08 | 2.0 | 0.16 | 4.0 | Cat. 6 28 AWG/ 18 – 14 AWG | 5 | | | 5000 |
| S075X100VATY* | | | | | | | | | | | | | | | | |
| S075X125VATY* | | | | | | | | | | | | | | | | |
| S075X150VATY* | | | | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | | | Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG | | |
| S100X075VA1Y | | 1.00 | 25.4 | 0.75 | 19.1 | 0.25 | 6.4 | 0.08 | 0.50 | 2.0 | 4.0 | | | Cat. 6 28 AWG/ 18 – 14 AWG | 4 | |
| S100X075VATY* | 5000 | | | | | | | | | | | | | | | |
| S100X125VA1Y | 1.25 | | | 31.8 | 0.38 | 9.7 | 0.12 | 3.1 | 0.28 | 7.0 | Cat. 3 UTP/ 12 - 10 AWG | | | | | |
| S100X125VATY* | | | | | | | | | | | | 2500 | | | | |
| S100X150VA1Y | 1.50 | | | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | | Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 - 6 AWG | | | | |
| S100X150VATY | | | | | | | | | | | | | 2500 | | | |
| S100X150VBTY | TIA Blue | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 - 6 AWG | | | 4 | 5000 | | |
| S100X150VCTY | TIA Brown | | | | | | | | | | | | | | | |
| S100X150VDTY | TIA Green | | | | | | | | | | | | | | | |
| S100X150VETY | TIA Gray | | | | | | | | | | | | | | | |
| S100X150VFTY | TIA Orange | | | | | | | | | | | | | | | |
| S100X150VGTY | TIA Purple | | | | | | | | | | | | | | | |

Order number of labels required in multiples of Standard Package Quantity.

*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Vinyl Self-Laminating Labels (continued)

| Part Number | Print-On Area Color | Width | | Length | | Print-On Area Height | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Std. Pkg. Qty. | | |
|---------------|---------------------|-------|-------|--------|------|----------------------|------|-----------------|------|-----------------|------|---|--|----------------|------|------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | | | |
| S100X150VHTY* | TIA Red | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | Cat. 5e UTP/ Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG | 4 | 5000 | | |
| S100X150VITY* | TIA Yellow | | | | | | | | | | | | | | | |
| S100X150V0TY* | Black | | | | | | | | | | | | | | | |
| S100X150V9TY* | Gold | | | | | | | | | | | | | | | |
| S100X225VA1Y | White | | | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG | | | | |
| S100X225VATY* | White | | | | | | | | | | | | | | | |
| S100X225VBTY* | TIA Blue | | | | | | | | | | | | | | | |
| S100X225VCTY* | TIA Brown | | | | | | | | | | | | | | | |
| S100X225VDTY* | TIA Green | | | | | | | | | | | | | | | |
| S100X225VETY* | TIA Gray | | | | | | | | | | | | | | | |
| S100X225VFTY* | TIA Orange | | | | | | | | | | | | | | | |
| S100X225VGTY* | TIA Purple | | | | | | | | | | | | | | | |
| S100X225VHTY* | TIA Red | | | 2.50 | 63.5 | 1.00 | 25.4 | 0.32 | 8.1 | 0.48 | 12.1 | 6 - 2 AWG | | | 1500 | |
| S100X225VITY* | TIA Yellow | | | | | | | | | | | | | | 5000 | |
| S100X225V0TY* | Black | | | | | | | | | | | | | | 1000 | |
| S100X225V9TY* | Gold | | | | | | | | | | | | | | 2500 | |
| S100X250VA1Y | White | 4.00 | 101.6 | 1.00 | 25.4 | 0.32 | 8.1 | 0.95 | 24.3 | 2 - 1 AWG | 250 | | | | | |
| S100X250VATY* | | | | | | | | | | | 1000 | | | | | |
| S100X400VA1Y | | | | | | | | | | | 2500 | | | | | |
| S100X400VATY* | | | | | | | | | | | 250 | | | | | |
| S100X650VA1Y | | 6.50 | 165.1 | 1.50 | 38.1 | 0.48 | 12.1 | 1.59 | 40.4 | 1/0 - 250 MCM | 1000 | | | | | |
| S100X650VATY* | | | | | | | | | | | 1000 | | | | | |
| S150X150VATY* | | White | 1.50 | 38.1 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG | 2 | 5000 | |
| S150X225VATY* | | | | | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | 8 – 4 AWG | | | |
| S150X400VATY* | | | | | 4.00 | 101.6 | 1.00 | 25.4 | 0.32 | 8.1 | 0.95 | 24.1 | 2 – 1 AWG | | | 2500 |
| S200X150VATY* | | White | 2.00 | 50.8 | 1.50 | 38.1 | 0.50 | 21.7 | 0.16 | 4.0 | 0.32 | 8.1 | Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG | 2 | 5000 | |
| S200X225VA1Y | | | | | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 - 4 AWG | | | 500 |
| S200X225VATY* | | | | | 2.50 | 63.5 | 1.00 | 25.4 | 0.32 | 8.1 | 0.48 | 12.1 | 6 – 2 AWG | | | 1000 |
| S200X250VATY* | | | | | 4.00 | 101.6 | 1.00 | 25.4 | 0.32 | 8.1 | 0.95 | 24.3 | 2 - 1 AWG | | | 500 |
| S200X400VA1Y | | | | | 6.50 | 165.1 | 1.50 | 38.1 | 0.48 | 12.1 | 1.59 | 40.4 | 1/0 - 250 MCM | | | 1000 |
| S200X400VATY* | | | | | | | | | | | | | | | | 250 |
| S200X650VA1Y | | | | | | | | | | | | | | | | 1000 |
| S200X650VATY* | 1000 | | | | | | | | | | | | | | | |

Order number of labels required in multiples of Standard Package Quantity.

*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

PVDF Self-Laminating Labels

- Self-extinguishing material and recommended alternative to Tedlar®
- Sized specifically for wire and cable applications
- Use thermal transfer hybrid ribbon
- Temperature range: -65°F to 275°F (-54°C to 135°C)
- UL969 recognized File # MH14979; cUL recognized C22.2 No. 0.15.01, File # MH149799



| Part Number | Print-On Area Color | Width | | Length | | Print-On Area Height | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Std. Pkg. Qty. |
|-------------|---------------------|-------|------|--------|-------|----------------------|------|-----------------|-----|-----------------|------|---|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | |
| S050X150T1T | White | 0.50 | 12.7 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG | 8 | 5000 |
| S075X125T1T | | 0.75 | 19.1 | 1.25 | 31.8 | 0.38 | 9.7 | 0.12 | 3.1 | 0.28 | 7.0 | Cat. 3 UTP/12 – 10 AWG | 5 | |
| S100X075T1T | | 1.00 | 25.4 | 0.75 | 19.1 | 0.25 | 6.4 | 0.08 | 2.0 | 0.16 | 4.0 | Cat. 6 28 AWG/18 – 14 AWG | 4 | 2500 |
| S100X125T1T | | | | 1.25 | 31.8 | 0.38 | 9.7 | 0.12 | 3.1 | 0.28 | 7.0 | 12 – 10 AWG | | |
| S100X150T1T | | | | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.28 | 7.1 | Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/ 10 - 6 AWG | | |
| S100X225T1T | | | | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | Cat. 6 FTP/Cat. 6A UTP/ Cat. 6A FTP/8 – 4 AWG | | |
| S100X400T1T | | 2.00 | 50.8 | 4.00 | 101.6 | 1.00 | 25.4 | 0.32 | 8.1 | 0.95 | 24.3 | 2 – 1 AWG | 2 | 2500 |
| S200X400T1T | | | | | | | | | | | | | | 500 |

Tedlar® is a registered trademark of E.I. du Pont de Nemours and Company.


Order number of labels required in multiples of Standard Package Quantity.

*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

LabelCore™ Fiber Optic Cable Identification System



- Provides a larger labeling surface on small fiber cables and allows legends to be clearly seen
- Sleeves are made of flexible PVC material
- Locate sleeve on straight section of cable at least 2 inches from fiber boot



| Part Number | Color | Part Description | Std. Pkg. Qty. |
|-------------|--------|--|----------------|
| NWSLC-2Y | Yellow | Yellow cable identification sleeve for 2mm simplex fiber cable, 1" long, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer). | 100 |
| NWSLC-2Y-AQ | Aqua | Aqua cable identification sleeve for 2mm simplex cable, 1" long, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer). | |
| NWSLC-3Y | Orange | Orange cable identification sleeve for 3mm simplex cable, 1" long, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer). | |
| NWSLC-7Y | White | White cable identification sleeve for 3mm duplex fiber cable, 1" long, use with labels: S100X225YAJ (Laser/Inkjet); S100X225VAC (LS8E Hand-held Printer); S100X225VATY or S200X225VATY (Thermal Transfer Printer). | |

Order number of labels required in multiples of Standard Package Quantity.

Contact Technical Support at 866.871.4571.


LabelCore™ Fiber Optic Cable Identification System (continued)

| Part Number | Color | Part Description | Std. Pkg. Qty. |
|--------------|--------|---|----------------|
| NWSLC2-2Y | Yellow | Yellow cable identification sleeve for 2mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer). | 100 |
| NWSLC2-2Y-AQ | Aqua | Aqua cable identification sleeve for 2mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer). | |
| NWSLC2-3Y | Orange | Orange cable identification sleeve for 3mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer). | |
| NWSLC2-7Y | White | White cable identification sleeve for 3mm duplex fiber cable, 2 inches long, use with labels: S200X225YAJ (Laser/Inkjet) S200X225VATY (Thermal Transfer Printer). | |

Order number of labels required in multiples of Standard Package Quantity.

Flag Labels

- Halogen-free, white polyester flag-style marker for wire/cable labeling
- Improved legibility and more information on small wires and cables provide clearer, more complete identification
- Innovative design allows the product to be applied as a permanent adhesive label or as a repositionable non-adhesive label
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979;
- cUL recognized C22.2 No. 0.15-01, File # MH14979



| Part Number | Width | | Height | | Print-On Area | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Std. Pkg. Qty. Roll | | |
|-------------|-------|------|--------|------|---------------|--------|-----------------|------|-----------------|-----|------------|---------------------|-------------|------|
| | In. | mm | In. | mm | Width | Height | In. | mm | In. | mm | | | | |
| F100X150AJT | 1.00 | 25.4 | 1.50 | 38.1 | 0.88 | 22.4 | 0.75 | 19.1 | 0.12 | 3.1 | 0.18 | 5.1 | 12 – 10 AWG | 2500 |
| F100X213AJT | | | 2.13 | 54.1 | | | | | 0.32 | 8.1 | 0.38 | 9.7 | 3 – 2 AWG | |
| F100X300AJT | | | 3.00 | 76.2 | | | 0.09 | 2.3 | 0.28 | 7.1 | 18 – 6 AWG | | | |
| F100X363AJT | | | 3.63 | 92.2 | | | 2.00 | 50.8 | 0.21 | 5.1 | 0.46 | 11.7 | 8 – 1 AWG | |

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Non-Laminated Vinyl Cloth Labels



- Thin and conformable material with repositionable adhesive allows label to be removed and reused in temporary applications
- Works well on Teflon® coated wires*

- Use thermal transfer hybrid ribbon
- Temperature range: -40° F to 170° F (-40° C to 77° C)
- UL969 recognized, File # MH14576 and MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14576

| Part Number | Print-On Area Color | Width | | Length | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Std. Pkg. Qty. | |
|-------------|---------------------|-------|------|--------|------|-----------------|------|-----------------|------|-------------|----------------|----------------|-------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | | | | |
| N025X075CBT | White | 0.25 | 6.4 | 0.75 | 19.1 | 0.12 | 3.1 | 0.16 | 4.1 | 12 – 10 AWG | 7 | 10000 | |
| N025X125CBT | | | | 1.25 | 31.8 | 0.20 | 5.1 | 0.32 | 8.1 | 10 – 6 AWG | | | |
| N025X150CBT | | | | 1.50 | 38.1 | 0.24 | 6.1 | 0.40 | 10.2 | 8 – 2 AWG | | | |
| N025X175CBT | | | | 1.75 | 44.5 | 0.28 | 7.1 | 0.48 | 12.2 | 6 – 1 AWG | | | |
| N050X075CBT | | 0.50 | 12.7 | 0.75 | 19.1 | 0.12 | 3.1 | 0.16 | 4.1 | 12 – 10 AWG | | 7 | 10000 |
| N050X100CBT | | | | 1.00 | 25.4 | 0.16 | 4.1 | 0.24 | 6.1 | 10 – 8 AWG | | | |
| N050X125CBT | | | | 1.25 | 31.8 | 0.20 | 5.1 | 0.32 | 8.1 | 10 – 6 AWG | | | |
| N050X150CBT | | | | 1.50 | 38.1 | 0.24 | 6.1 | 0.40 | 10.2 | 8 – 2 AWG | | | |
| N050X175CBT | | 1.75 | 44.5 | 0.28 | 7.1 | 0.48 | 12.2 | 6 – 1 AWG | | | | | |
| N100X075CBT | | 1.00 | 25.4 | 0.75 | 19.1 | 0.12 | 3.1 | 0.16 | 4.1 | 12 – 10 AWG | 3 | | 10000 |
| N100X125CBT | | | | 1.25 | 31.8 | 0.20 | 4.1 | 0.32 | 8.1 | 10 – 6 AWG | | | 5000 |
| N100X150CBT | | | | 1.50 | 38.1 | 0.24 | 6.1 | 0.40 | 10.2 | 8 – 2 AWG | | | 2500 |
| N100X175CBT | | | | 1.75 | 44.5 | 0.28 | 7.1 | 0.48 | 12.2 | 6 – 1 AWG | | 2500 | |
| N150X075CBT | | 1.50 | 38.1 | 0.75 | 19.1 | 0.12 | 3.1 | 0.16 | 4.1 | 12 – 10 AWG | 1 | 5000 | |

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

*Teflon® is a registered trademark of E. I du Pont de Nemours and Company

Non-Laminated Nylon Cloth Labels



- Offer crisp, clear legends with superior legibility
- Used in flat applications and in a wrap format for wire/cable marking

- Use thermal transfer resin ribbon
- Temperature range: -65°F to 275°F (-54°C to 135°C)

| Part Number | Color | Width | | Length | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Std. Pkg. Qty. | | | | |
|-------------|--------|-------|------|--------|------|-----------------|------|-----------------|------|-------------|----------------|----------------|------|------|------|------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | | | | | | | |
| N050X075C1T | White | 0.50 | 12.7 | 0.75 | 19.1 | 0.12 | 3.1 | 0.16 | 4.1 | 12 – 10 AWG | 5 | 10000 | | | | |
| N050X075C2T | Yellow | | | 1.25 | 31.8 | 0.20 | 5.1 | 0.32 | 8.1 | 10 – 6 AWG | | | | | | |
| N050X125C1T | White | | | 1.50 | 38.1 | 0.24 | 6.1 | 0.40 | 10.5 | 8 – 2 AWG | | | | | | |
| N050X125C2T | Yellow | | | | | | | | | | | | 5000 | | | |
| N050X150C1T | White | | | | | | | | | | | | 1.00 | 25.4 | 0.75 | 19.1 |
| N050X125C2T | Yellow | | | 5000 | | | | | | | | | | | | |
| N100X075C1T | White | 1.25 | 31.8 | 0.20 | 5.1 | 0.32 | 8.1 | 10 – 6 AWG | | | | | | | | |
| N100X075C2T | Yellow | | | | | | | | 5000 | | | | | | | |
| N100X125C1T | White | 1.50 | 38.1 | 0.24 | 6.1 | 0.40 | 10.2 | 8 – 2 AWG | | | | | | | | |
| N100X125C2T | Yellow | | | | | | | | 5000 | | | | | | | |
| N100X150C1T | White | 1.50 | 38.1 | 0.24 | 6.1 | 0.40 | 10.2 | 8 – 2 AWG | | | | | | | | |
| N100X150C2T | Yellow | | | | | | | | 5000 | | | | | | | |

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

High-Temperature Flame-Retardant Marker Plates

- Used for identification markers in (Class 1E) harsh environments
- Compatible with Intermediate Cross Section cable ties
- Use thermal transfer RMER4BL-A or RHER4BL-A resin ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)



| Part Number | Color | Width | | Height | | Print-On Area Width | | Labels Per Roll | Std. Pkg. Qty. (Roll) |
|---------------|-------|-------|------|--------|------|---------------------|------|-----------------|-----------------------|
| | | In. | mm | In. | mm | In. | mm | | |
| M200X042FQT | White | 2.00 | 50.8 | 0.42 | 10.7 | 1.22 | 31.0 | 500 | 1 |
| M200X042FQT-B | | | | | | | | 2000 | |
| M200X080FQT | | | | 0.80 | 20.3 | | | 250 | |
| M200X080FQT-B | | | | | | | | 1000 | |

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Halogen-Free Flame-Retardant Marker Plates

- Used to identify wires, cables, equipment, and many other applications
- Offer crisp, clear legend with superior legibility and engineered to withstand high temperatures, harsh solvents, oils, and chemicals without over-lamination
- Compatible with Intermediate Cross Section cable ties
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 193°F (-40°C to 90°C)




| Part Number | Color | Width | | Height | | Print-On Area Width | | Labels Per Roll | Std. Pkg. Qty. (Roll) |
|---------------|-------|-------|------|--------|------|---------------------|------|-----------------|-----------------------|
| | | In. | mm | In. | mm | In. | mm | | |
| M200X042UPT | White | 2.00 | 50.8 | 0.42 | 10.7 | 1.30 | 33.0 | 500 | 1 |
| M200X042UPT-B | | | | | | | | 2000 | |
| M200X080UPT | | | | 0.80 | 20.3 | | | 500 | |
| M200X080UPT-B | | | | | | | | 2000 | |

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Standard Marker Plates

- Non-adhesive and halogen free; used to identify wires, cables, equipment, and many other applications
- Attachable in horizontal or vertical orientation. The 0.5" Plenum rated and 0.33" non-Plenum rated Hook & Loop Cable Ties can be used in hanging position

- Meets the outgassing requirements of ASTM E-595 suitable for use in air handling spaces
- Available in a variety of colors and sizes
- Use thermal transfer resin ribbon
- Temperature range: -58°F to 221°F (-50°C to 105°C)

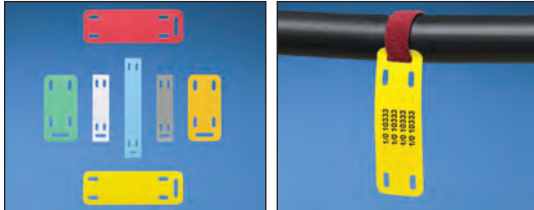

| Part Number | Color | Width | | Height | | Print-On Area Width | | Cable Type | Labels Per Roll | Std. Pkg. Qty. (Roll) |
|---------------|------------|-------|------|--------|------|---------------------|------|---------------------------------------|-----------------|-----------------------|
| | | In. | mm | In. | mm | In. | mm | | | |
| M200X050Y6T | TIA Yellow | 2.00 | 50.8 | 0.50 | 12.7 | 1.07 | 27.3 | Intermediate Cross Section Cable Ties | 500 | 1 |
| M200X050Y7T | White | | | | | | | | | |
| M200X050ACT | TIA Blue | | | | | | | | | |
| M200X050AET | TIA Green | | | | | | | | | |
| M200X050AFT | TIA Gray | | | | | | | | | |
| M200X050AGT | TIA Orange | | | | | | | | | |
| M200X050AIT | TIA Red | | | | | | | | | |
| M200X100Y6T | TIA Yellow | 2.00 | 50.8 | 1.00 | 25.4 | 0.80 | 20.3 | Standard Cross Section Cable Ties | 2000 | |
| M200X100Y6T-B | White | | | | | | | | 500 | |
| M200X100Y7T | White | | | | | | | | 2000 | |
| M200X100Y7T-B | White | | | | | | | | 500 | |
| M200X100ACT | TIA Blue | | | | | | | | 2000 | |
| M200X100AET | TIA Green | | | | | | | | 500 | |
| M200X100AFT | TIA Gray | | | | | | | | 500 | |
| M200X100AGT | TIA Orange | 500 | | | | | | | | |
| M200X100AIT | TIA Red | 500 | | | | | | | | |
| M300X050Y6T | TIA Yellow | 3.00 | 76.2 | 0.50 | 12.7 | 2.07 | 52.6 | Intermediate Cross Section Cable Ties | 500 | |
| M300X050Y7T | White | | | | | | | | | |
| M300X050ACT | TIA Blue | | | | | | | | | |
| M300X050AET | TIA Green | | | | | | | | | |
| M300X050AFT | TIA Gray | | | | | | | | | |
| M300X050AGT | TIA Orange | | | | | | | | | |
| M300X050AIT | TIA Red | | | | | | | | | |
| M300X100Y6T | TIA Yellow | 3.00 | 76.2 | 1.00 | 25.4 | 1.80 | 45.7 | Standard Cross Section Cable Ties | 500 | |
| M300X100Y7T | White | | | | | | | | | |
| M300X100ACT | TIA Blue | | | | | | | | | |
| M300X100AET | TIA Green | | | | | | | | | |
| M300X100AFT | TIA Gray | | | | | | | | | |
| M300X100AGT | TIA Orange | | | | | | | | | |
| M300X100AIT | TIA Red | | | | | | | | | |

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Military Grade Single-Sided Heat Shrink Labels

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Meet UL Standard 224 with a VW-1 rating for flammability and AMS-DTL-23053/5C (Class 1 and Class 3)
- Meet SAE-AS81531, MIL-STD-883F Method 2015.13, Solutions A, B, and D, and MIL-STD-202G Method 215K, Solutions A, C, and D when printed with resin and hybrid thermal transfer ribbons

- Shrink ratio 3:1
- Tested for use as an identification marker in (Class 1E) harsh environments
- Use thermal transfer hybrid ribbon or white resin ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)
- UL224 recognized, File # E205133; CSA certified, C22.2 No. 198.1.06, File # 256205



| Part Number | Part Number | Part Number | Part Number | Diameter | | Width | | Height | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Labels Per Roll | Std. Pkg. Qty. (Roll) |
|--------------|-------------|-------------|-------------|----------|------|-------|------|--------|------|-----------------|------|-----------------|------|------------------|----------------|-----------------|-----------------------|
| | | | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | | |
| H050X025H1T* | H050X025H2T | H050X025H3T | H050X025H4T | 0.13 | 3.1 | 0.50 | 12.7 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.3 | 22 – 18 AWG | 4 | 2000 | 1 |
| H075X025H1T* | H075X025H2T | H075X025H3T | H075X025H4T | | | 0.75 | 19.1 | | | | | | | | 2 | 1000 | |
| H100X025H1T* | H100X025H2T | H100X025H3T | H100X025H4T | | | 1.00 | 25.4 | | | | | | | | 1 | 500 | |
| H150X025H1T* | H150X025H2T | H150X025H3T | H150X025H4T | | | 1.50 | 38.1 | | | | | | | | | | |
| H200X025H1T* | H200X025H2T | H200X025H3T | H200X025H4T | | | 2.00 | 50.8 | | | | | | | | | | |
| H050X034H1T* | H050X034H2T | H050X034H3T | H050X034H4T | 0.19 | 4.7 | 0.50 | 12.7 | 0.34 | 8.6 | 0.06 | 1.5 | 0.19 | 4.8 | 18 – 12 AWG | 4 | 2000 | 1 |
| H075X034H1T* | H075X034H2T | H075X034H3T | H075X034H4T | | | 0.75 | 19.1 | | | | | | | | 2 | 1000 | |
| H100X034H1T* | H100X034H2T | H100X034H3T | H100X034H4T | | | 1.00 | 25.4 | | | | | | | | 1 | 500 | |
| H150X034H1T* | H150X034H2T | H150X034H3T | H150X034H4T | | | 1.50 | 38.1 | | | | | | | | | | |
| H200X034H1T* | H200X034H2T | H200X034H3T | H200X034H4T | | | 2.00 | 50.8 | | | | | | | | | | |
| H050X044H1T* | H050X044H2T | H050X044H3T | H050X044H4T | 0.25 | 6.3 | 0.50 | 12.7 | 0.44 | 11.2 | 0.08 | 2.0 | 0.25 | 6.4 | 16 – 10 AWG | 4 | 2000 | 1 |
| H075X044H1T* | H075X044H2T | H075X044H3T | H075X044H4T | | | 0.75 | 19.1 | | | | | | | | 2 | 1000 | |
| H100X044H1T* | H100X044H2T | H100X044H3T | H100X044H4T | | | 1.00 | 25.4 | | | | | | | | 1 | 500 | |
| H150X044H1T* | H150X044H2T | H150X044H3T | H150X044H4T | | | 1.50 | 38.1 | | | | | | | | | | |
| H200X044H1T* | H200X044H2T | H200X044H3T | H200X044H4T | | | 2.00 | 50.8 | | | | | | | | | | |
| H050X064H1T* | H050X064H2T | H050X064H3T | H050X064H4T | 0.38 | 9.7 | 0.50 | 12.7 | 0.64 | 16.3 | 0.13 | 3.3 | 0.38 | 9.7 | 12 – 6 AWG | 4 | 2000 | 1 |
| H100X064H1T* | H100X064H2T | H100X064H3T | H100X064H4T | | | 1.00 | 25.4 | | | | | | | | 2 | 1000 | |
| H200X064H1T* | H200X064H2T | H200X064H3T | H200X064H4T | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H050X084H1T | — | — | — | 0.50 | 12.7 | 0.50 | 12.7 | 0.84 | 21.3 | 0.17 | 4.3 | 0.50 | 12.7 | 8 – 1 AWG | 4 | 2000 | 1 |
| H100X084H1T | H100X084H2T | H100X084H3T | H100X084H4T | | | 1.00 | 25.4 | | | | | | | | 2 | 1000 | |
| H200X084H1T | H200X084H2T | H200X084H3T | H200X084H4T | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H050X165H1T | — | — | — | 1.00 | 25.4 | 0.50 | 12.7 | 1.65 | 41.9 | 0.33 | 8.4 | 1.00 | 25.4 | 4 AWG – 500 MCM | 4 | 1000 | 1 |
| H100X165H1T | H100X165H2T | H100X165H3T | H100X165H4T | | | 1.00 | 25.4 | | | | | | | | 2 | 500 | |
| H200X165H1T | H200X165H2T | H200X165H3T | H200X165H4T | | | 2.00 | 50.8 | | | | | | | | 1 | 250 | |
| H200X240H1T | H200X240H2T | — | — | 1.50 | 38.1 | 2.00 | 50.8 | 2.40 | 61.0 | 0.50 | 12.7 | 1.50 | 38.1 | 1 AWG – 1000 MCM | 1 | 100 | |

Order number of labels required in multiples of Standard Package Quantity.
 *Available in Bulk packages (5 times Labels Per Roll), add -B to end of part number

Military Grade Two-Sided Heat Shrink Labels

PATENTED

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Can be printed on both sides for improved visibility
- Meet the material requirements and physical properties of AMS-DTL-23053/5C (Class 1 and Class 3) and UL standard 224 with a VW-1 rating
- Meet SAE-AS81531, MIL-STD-883F Method 2015.13, Solutions A, B and D, and MIL-STD-202G Method 215K, Solutions A,C and D when printed using resin or hybrid thermal transfer ribbons

- Shrink ratio 3:1
- Tested as an identification marker for use in (Class 1E) harsh environments
- Use thermal transfer hybrid ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)
- UL224 recognized, File # E205133; CSA certified, C22.2 No. 198.1-06, File # 256205



| Part Number | Part Number | Diameter | | Width | | Height | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Labels Per Roll | Std. Pkg. Qty. (Roll) |
|-----------------|-----------------|----------|------|-------|------|--------|------|-----------------|-----|-----------------|------|-----------------|----------------|-----------------|-----------------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | | |
| H100X025H1T-2 | H100X025H2T-2 | 0.13 | 3.1 | 1.00 | 25.4 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.3 | 22 – 18 AWG | 2 | 1000 | 1 |
| H100X025H1T-2-B | H100X025H2T-2-B | | | 2.00 | 50.8 | | | | | | | | | 5000 | |
| H200X025H1T-2 | H200X025H2T-2 | 0.19 | 4.7 | 2.00 | 50.8 | 0.34 | 8.6 | 0.06 | 1.5 | 0.19 | 4.8 | 18 – 12 AWG | 1 | 500 | 1 |
| H200X025H1T-2-B | H200X025H2T-2-B | | | 2.00 | 50.8 | | | | | | | | | 2500 | |
| H100X034H1T-2 | H100X034H2T-2 | 0.25 | 6.3 | 1.00 | 25.4 | 0.44 | 11.2 | 0.08 | 2.0 | 0.25 | 6.4 | 16 – 10 AWG | 2 | 1000 | 1 |
| H100X034H1T-2-B | H100X034H2T-2-B | | | 2.00 | 50.8 | | | | | | | | | 5000 | |
| H200X034H1T-2 | H200X034H2T-2 | 0.25 | 6.3 | 2.00 | 50.8 | 0.44 | 11.2 | 0.08 | 2.0 | 0.25 | 6.4 | 16 – 10 AWG | 1 | 500 | 1 |
| H200X034H1T-2-B | H200X034H2T-2-B | | | 2.00 | 50.8 | | | | | | | | | 2500 | |
| H100X044H1T-2 | H100X044H2T-2 | 0.38 | 9.7 | 1.00 | 25.4 | 0.64 | 16.3 | 0.13 | 3.3 | 0.38 | 9.7 | 12 – 6 AWG | 2 | 1000 | 1 |
| H100X044H1T-2-B | H100X044H2T-2-B | | | 2.00 | 50.8 | | | | | | | | | 5000 | |
| H200X044H1T-2 | H200X044H2T-2 | 0.38 | 9.7 | 2.00 | 50.8 | 0.64 | 16.3 | 0.13 | 3.3 | 0.38 | 9.7 | 12 – 6 AWG | 1 | 500 | 1 |
| H200X044H1T-2-B | H200X044H2T-2-B | | | 2.00 | 50.8 | | | | | | | | | 2500 | |
| H100X064H1T-2 | H100X064H2T-2 | 0.50 | 12.7 | 1.00 | 25.4 | 0.84 | 21.3 | 0.17 | 4.3 | 0.50 | 12.7 | 8 – 1 AWG | 2 | 1000 | 1 |
| H100X064H1T-2-B | H100X064H2T-2-B | | | 2.00 | 50.8 | | | | | | | | | 5000 | |
| H200X064H1T-2 | H200X064H2T-2 | 0.50 | 12.7 | 2.00 | 50.8 | 0.84 | 21.3 | 0.17 | 4.3 | 0.50 | 12.7 | 8 – 1 AWG | 1 | 500 | 1 |
| H200X064H1T-2-B | H200X064H2T-2-B | | | 2.00 | 50.8 | | | | | | | | | 2500 | |
| H100X084H1T-2 | H100X084H2T-2 | 0.75 | 19.0 | 1.00 | 25.4 | 1.22 | 31.0 | 0.25 | 6.3 | 0.75 | 19.0 | 8 – 4/0 AWG | 2 | 500 | 1 |
| H100X084H1T-2-B | H100X084H2T-2-B | | | 2.00 | 50.8 | | | | | | | | | 250 | |
| H200X084H1T-2 | H200X084H2T-2 | 0.75 | 19.0 | 2.00 | 50.8 | 1.22 | 31.0 | 0.25 | 6.3 | 0.75 | 19.0 | 8 – 4/0 AWG | 1 | 250 | 1 |
| H200X084H1T-2-B | H200X084H2T-2-B | | | 2.00 | 50.8 | | | | | | | | | 250 | |
| H100X122H1T-2 | H100X122H2T-2 | 1.00 | 25.4 | 1.00 | 25.4 | 1.65 | 41.9 | 0.33 | 8.4 | 1.00 | 25.4 | 4 AWG – 500 MCM | 2 | 500 | 1 |
| H200X122H1T-2 | H200X122H2T-2 | | | 2.00 | 25.4 | | | | | | | | | 250 | |
| H100X165H1T-2 | H100X165H2T-2 | 1.00 | 25.4 | 1.00 | 25.4 | 1.65 | 41.9 | 0.33 | 8.4 | 1.00 | 25.4 | 4 AWG – 500 MCM | 1 | 250 | 1 |
| H200X165H1T-2 | H200X165H2T-2 | | | 2.00 | 25.4 | | | | | | | | | 250 | |

Order number of labels required in multiples of Standard Package Quantity.

Halogen-Free Two-Sided Heat Shrink Labels

PATENTED

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Can be printed on both sides for improved visibility
- Meet SAE-AS5942, MIL-STD-883F Method 2015.13, Solutions A, B, and D, and MIL-STD-202G Method 215K, Solutions A, C, and D when printed with resin and hybrid thermal transfer ribbons
- Meet BS6853; 1999 Vehicle Category 1A for burning behavior and toxic gas emissions; Smoke Density Class II
- Shrink ratio 2:1
- Use thermal transfer hybrid ribbon
- Temperature range: -22°F to 221°F (-30°C to 105°C)



| Part Number | Part Number | Diameter | | Width | | Height | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Labels Per Roll | Std. Pkg. Qty. (Roll) |
|---------------|---------------|----------|------|-------|------|--------|------|-----------------|------|-----------------|------|-----------------|----------------|-----------------|-----------------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | | |
| H100X025HFT-2 | H100X025HGT-2 | 0.13 | 3.1 | 1.00 | 25.4 | 0.25 | 6.4 | 0.06 | 1.5 | 0.13 | 3.3 | 22 – 18 AWG | 2 | 1000 | 1 |
| H200X025HFT-2 | H200X025HGT-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X034HFT-2 | H100X034HGT-2 | 0.19 | 4.7 | 1.00 | 25.4 | 0.34 | 8.6 | 0.09 | 2.3 | 0.19 | 4.8 | 18 – 12 AWG | 2 | 1000 | |
| H200X034HFT-2 | H200X034HGT-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X044HFT-2 | H100X044HGT-2 | 0.25 | 6.4 | 1.00 | 25.4 | 0.44 | 11.1 | 0.13 | 3.3 | 0.25 | 6.4 | 16 – 10 AWG | 2 | 1000 | |
| H200X044HFT-2 | H200X044HGT-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X064HFT-2 | H100X064HGT-2 | 0.38 | 9.7 | 1.00 | 25.4 | 0.64 | 16.2 | 0.19 | 4.8 | 0.38 | 9.7 | 12 – 6 AWG | 2 | 1000 | |
| H200X064HFT-2 | H200X064HGT-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X084HFT-2 | H100X084HGT-2 | 0.50 | 12.7 | 1.00 | 25.4 | 0.84 | 21.3 | 0.25 | 6.4 | 0.50 | 12.7 | 8 – 1 AWG | 2 | 1000 | |
| H200X084HFT-2 | H200X084HGT-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X165HFT-2 | H100X165HGT-2 | 1.00 | 25.4 | 1.00 | 25.4 | 1.65 | 41.9 | 0.50 | 12.7 | 1.00 | 25.4 | 8 AWG – 500 MCM | 2 | 500 | |
| H200X165HFT-2 | H200X165HGT-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 250 | |

Order number of labels required in multiples of Standard Package Quantity.

PATENTED

Fluid-Resistant Two-Sided Heat Shrink Labels

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Cross-linked, semi-rigid, fluid-resistant, shrinkable polyolefin material
- Available in yellow only
- Can be printed on both sides for improved visibility
- Meet the material requirements and physical properties AMS-DTL-23053/6 Class 1 and NF F00-608 Class A and H when printed with resin thermal transfer ribbons

- Meet SAE-AS5942, MIL-STD-883F Method 2015.13 Solutions A and D, and MIL-STD-202G Method 215K, Solutions A and D when printed with resin thermal transfer ribbons
- Shrink ratio 3:1
- Use thermal transfer RMER4BL-C resin ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)




| Part Number | Diameter | | Width | | Height | | Min. Cable O.D. | | Max. Cable O.D. | | Wire Range | Labels Per Row | Labels Per Roll | Std. Pkg. Qty. (Roll) |
|---------------|----------|------|-------|------|--------|------|-----------------|-----|-----------------|------|-----------------|----------------|-----------------|-----------------------|
| | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | | |
| H100X034HST-2 | 0.19 | 4.7 | 1.00 | 25.4 | 0.34 | 8.6 | 0.06 | 1.5 | 0.19 | 4.8 | 18 – 12 AWG | 2 | 1000 | 1 |
| H200X034HST-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X044HST-2 | 0.25 | 6.4 | 1.00 | 25.4 | 0.44 | 11.1 | 0.08 | 2.0 | 0.25 | 6.4 | 16 – 10 AWG | 2 | 1000 | |
| H200X044HST-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X064HST-2 | 0.38 | 9.7 | 1.00 | 25.4 | 0.64 | 16.2 | 0.13 | 3.3 | 0.38 | 9.7 | 12 – 6 AWG | 2 | 1000 | |
| H200X064HST-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X084HST-2 | 0.50 | 12.7 | 1.00 | 25.4 | 0.84 | 21.3 | 0.17 | 4.3 | 0.50 | 12.7 | 8 – 1 AWG | 2 | 1000 | |
| H200X084HST-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 500 | |
| H100X165HST-2 | 1.00 | 25.4 | 1.00 | 25.4 | 1.65 | 41.9 | 0.33 | 8.4 | 1.00 | 25.4 | 4 AWG – 500 MCM | 2 | 500 | |
| H200X165HST-2 | | | 2.00 | 50.8 | | | | | | | | 1 | 250 | |

Order number of labels required in multiples of Standard Package Quantity.

NEW! Terminal Block Markers

- Ideally suited for terminal block labeling applications within control panels
- Flexible marker design; create and install single or multiple markers in a single step
- Less marker waste – print only as many as you need
- Flexible halogen-free markers have superior holding strength in terminal blocks, eliminating markers that fall out
- Easy-Mark Plus™ Labeling Software required for printing terminal block markers

- Meets EN61010-1 (VDE 0411-1) for abrasion and wipe resistance
- Meets EN ISO 175 for oil and chemical resistance
- Meets EN 60464-3:2001 for resistance to solvents
- Meets IEC 60947-4-1/2 for resistance to aging
- Meets IEC 60068-2-8 for vibration resistance
- Use thermal transfer RMER1BL resin ribbon
- Temperature range: -40°F to 180°F (-40°C to 82°C)



| Part Number | Color | Description | Width mm | Height mm | Allen-Bradley Terminal Block Compatability | Weldmuller Terminal Block Compatability | Markers Per Roll | Std. Pkg. Qty. |
|----------------|-------|---|----------|-----------|--|---|------------------|----------------|
| TB05X12EWT-AB1 | White | Flexible terminal block markers on continuous rolls | 5.0 | 12.0 | 1492-J3, 1492-W3 | WDU 2.5 | 1000 | 1 |
| TB06X12EWT-AB1 | | | 6.0 | 12.0 | 1492-J4, 1492-W4 | WDU 4 | 1000 | |
| TB08X12EWT-AB1 | | | 8.0 | 12.0 | 1492-J6 | WDU 6 | 750 | |
| TB05X08EWT-AB2 | | | 5.0 | 8.0 | 1492-JD3, 1492-L3 1492-LD3 1493-L3Q | WDR 2.5 | 1000 | |
| TB06X08EWT-AB2 | | | 6.0 | 8.0 | 1492-JD4, 1492-L4 1492-LD4 | WDR 4 | 1000 | |

Order number of markers required in multiples of Standard Package Quantity.

Markers will not fit inside the printer. The external roll stand (TDP43ME-RS) is required.

Terminal Block Adapter Kit (TDP43ME-TB-KIT) is required to print the terminal block markers. (See page 34 for additional information.)

Raised Panel Push Button Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposure)
- Meets DIN 40050-9, IP69K for washdown applications
- Meet ASTM D3389 standard for abrasion resistance and also meet solar application standards
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



| Part Number | Color | Width | | Height | | Print-On Area Height | | Hole Diameter | | Labels Per Row | Std. Pkg. Qty. |
|----------------|--------|-------|------|--------|------|----------------------|------|---------------|------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | | |
| C120X150APT-22 | White | 1.20 | 30.5 | 1.50 | 38.1 | 0.45 | 11.4 | 0.87 | 22.0 | 3 | 500 |
| C120X150A8T-22 | Yellow | | | | | | | | | | |
| C120X150AST-22 | Green | | | | | | | | | | |
| C120X150AWT-22 | Red | | | | | | | | | | |
| C120X150A0T-22 | Black | | | | | | | | | | |
| C120X190APT-22 | White | 1.90 | 48.3 | 0.85 | 21.6 | 1.18 | 30.0 | 2 | | | |
| C120X190A8T-22 | Yellow | | | | | | | | | | |
| C120X190AST-22 | Green | | | | | | | | | | |
| C120X190AWT-22 | Red | | | | | | | | | | |
| C120X190A0T-22 | Black | 2.40 | 61.0 | 2.40 | 61.0 | 0.90 | 22.9 | 1 | | | |
| C180X180APT-30 | White | | | | | | | | | | |
| C180X180A8T-30 | Yellow | | | | | | | | | | |
| C180X180AST-30 | Green | | | | | | | | | | |
| C180X180AWT-30 | Red | | | | | | | | | | |
| C180X180A0T-30 | Black | | | | | | | | | | |
| C240X240APT-30 | White | 2.40 | 61.0 | 2.40 | 61.0 | 0.90 | 22.9 | 1 | | | |
| C240X240A8T-30 | Yellow | | | | | | | | | | |
| C240X240AST-30 | Green | | | | | | | | | | |
| C240X240AWT-30 | Red | | | | | | | | | | |
| C240X240A0T-30 | Black | | | | | | | | | | |

Order number of labels required in multiples of Standard Package Quantity.
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Raised Panel Push Button Over-Laminate Labels

- Provide additional print protection in harsh environments
- Over-laminates are not printable
- Temperature range: -51°F to 275°F (-46°C to 135°C)

| Part Number | Color | Width | | Height | | Hole Diameter | | Labels Per Roll | Std. Pkg. Qty. | |
|---------------|-------|-------|------|--------|------|---------------|------|-----------------|----------------|---|
| | | In. | mm | In. | mm | In. | mm | | | |
| C120X150YK-22 | Clear | 1.20 | 30.5 | 1.50 | 38.1 | 0.87 | 22.0 | 3 | 500 | |
| C120X190YK-22 | | | | 1.90 | 48.3 | | | | | |
| C180X180YK-30 | | 1.80 | 45.7 | 1.80 | 45.7 | 1.18 | 30.0 | | | 2 |
| C240X240YK-30 | | 2.40 | 60.9 | 2.40 | 60.9 | 1.18 | 30.0 | | | 1 |

Order number of labels required in multiples of Standard Package Quantity.

Raised Panel Half Push Button Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



| Part Number | Color | Width | | Height | | Print-On Area Height | | Hole Diameter | | Labels Per Row | Std. Pkg. Qty. |
|-----------------|-------|-------|------|--------|------|----------------------|------|---------------|------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | | |
| C180X130APT-30H | White | 1.80 | 45.7 | 1.30 | 33.0 | 0.73 | 18.5 | 1.18 | 30.0 | 1 | 500 |
| C240X200APT-30H | | 2.40 | 61.0 | 2.00 | 50.8 | 1.43 | 36.3 | | | | |

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Raised Panel Component Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposure)
- Meets DIN 40050-9, IP69K for washdown applications
- Meet ASTM D3389 standard for abrasion resistance, and also meet solar application standards
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



| Part Number | Color | Width | | Height | | Labels Per Row | Std. Pkg. Qty. | |
|-------------|--------|-------|-------|--------|------|----------------|----------------|---|
| | | In. | mm | In. | mm | | | |
| C100X050APT | White | 1.00 | 25.4 | 0.50 | 12.7 | 3 | 500 | |
| C100X050A8T | Yellow | | | | | | | |
| C100X050AST | Green | | | | | | | |
| C100X050AUT | Orange | | | | | | | |
| C100X050AWT | Red | | | | | | | |
| C100X050AOT | Black | | | | | | | |
| C100X050AMT | Silver | 1.25 | 31.8 | 0.30 | 7.6 | 1 | | |
| C125X030APT | White | | | | | | | |
| C125X030AOT | Black | 1.70 | 43.2 | 0.90 | 22.9 | 1 | | |
| C170X090APT | White | | | | | | | |
| C170X090A8T | Yellow | | | | | | | |
| C170X090AST | Green | | | | | | | |
| C170X090AWT | Red | | | | | | | |
| C170X090AMT | Silver | 2.00 | 50.8 | 1.00 | 25.4 | 1 | | |
| C200X100APT | White | | | | | | | |
| C200X100A8T | Yellow | | | | | | | |
| C200X100AST | Green | | | | | | | |
| C200X100AUT | Orange | | | | | | | |
| C200X100AWT | Red | | | | | | | |
| C200X100AOT | Black | | | | | | | |
| C200X100AMT | Silver | 2.52 | 64.0 | 0.30 | 7.6 | 1 | | |
| C252X030APT | White | | | | | | | |
| C252X030AOT | Black | 3.00 | 76.2 | 1.00 | 25.4 | 1 | | |
| C300X100APT | White | | | | | | | |
| C300X100A8T | Yellow | | | | | | | |
| C300X100AUT | Orange | | | | | | | |
| C300X100AWT | Red | | | | | | | |
| C300X100AOT | Black | | | 2.50 | 63.5 | | | 1 |
| C300X250APT | White | | | | | | | |
| C300X250A8T | Yellow | | | | | | | |
| C300X250AST | Green | | | | | | | |
| C300X250AUT | Orange | | | | | | | |
| C300X250AWT | Red | | | | | | | |
| C300X250AOT | Black | 3.50 | 88.9 | 3.00 | 76.2 | 1 | | |
| C300X250AMT | Silver | | | | | | | |
| C350X300APT | White | | | | | | | |
| C350X300A8T | Yellow | 3.79 | 96.3 | 0.30 | 7.6 | 1 | | |
| C350X300AUT | Orange | | | | | | | |
| C350X300AOT | Black | | | | | | | |
| C379X030APT | White | 4.00 | 101.6 | 1.00 | 25.4 | 1 | | |
| C379X030AQT | Blue | | | | | | | |
| C379X030AWT | Red | | | | | | | |
| C379X030AOT | Black | | | | | | | |
| C400X100APT | White | 4.00 | 101.6 | 1.00 | 25.4 | 1 | | |
| C400X100A8T | Yellow | | | | | | | |
| C400X100AST | Green | | | | | | | |
| C400X100AUT | Orange | | | | | | | |
| C400X100AWT | Red | | | | | | | |
| C400X100AOT | Black | | | | | | | |
| C400X100AMT | Silver | | | | | | | |

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Contact Technical Support at 866.871.4571.

Raised Panel Component Over-Laminate Labels


- Provide additional print protection in harsh environments
- Over-laminates are not printable
- Temperature range: -51°F to 275°F (-46°C to 135°C)

| Part Number | Color | Width | | Height | | Labels Per Roll | Std. Pkg. Qty. |
|-------------|-------|-------|-------|--------|------|-----------------|----------------|
| | | In. | mm | In. | mm | | |
| C100X050YK | Clear | 1.00 | 25.4 | 0.50 | 12.7 | 1 | 500 |
| C170X090YK | | 1.70 | 43.2 | 0.90 | 22.9 | | |
| C200X100YK | | 2.00 | 50.8 | 1.00 | 25.4 | | |
| C300X100YK | | 3.00 | 76.2 | 1.00 | 25.4 | | |
| C300X250YK | | | | 2.50 | 63.5 | | |
| C350X300YK | | 3.50 | 88.9 | 3.00 | 76.2 | | |
| C400X100YK | | 4.00 | 101.6 | 1.00 | 25.4 | | |

Order number of labels required in multiples of Standard Package Quantity.

Raised Panel Pre-Printed Emergency Stop Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Meets DIN 40050-9, IP69K for washdown applications
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14576; cUL recognized C22.2 No. 0.15.01, File # MH14576

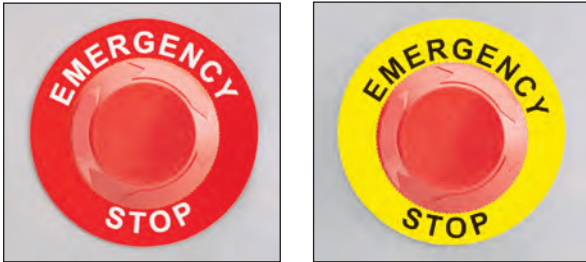

| Part Number | Color | Diameter | | Hole Diameter | | Std. Pkg. Qty. |
|--------------|-----------------|----------|------|---------------|------|----------------|
| | | In. | mm | In. | mm | |
| C235A8-30-ES | Black on Yellow | 2.35 | 60.0 | 1.18 | 30.0 | 25 |
| C235AW-30-ES | White on Red | | | | | |
| C350A8-30-ES | Black on Yellow | 3.50 | 89.0 | | | |
| C350AW-30-ES | White on Red | | | | | |

Order number of labels required in multiples of Standard Package Quantity.

Polyester Component Labels

- Provide durability; high-temperature resistance and dimensional stability; does not easily stretch or tear
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979




| Part Number | Color | Width | | Height | | Labels Per Row | Std. Pkg. Qty. |
|-------------|--------|--------|-------|--------|-------|----------------|----------------|
| | | In. | mm | In. | mm | | |
| C025X025YJT | White | 0.25 | 6.4 | 0.25 | 6.4 | 12 | 10000 |
| C038X038YJT | | 0.38 | 9.7 | 0.38 | 9.7 | 7 | |
| C050X044YJT | | 0.50 | 12.7 | 0.44 | 11.2 | 5 | |
| C060X020YJT | | 0.60 | 15.2 | 0.20 | 5.1 | 3 | |
| C075X025YJT | | Silver | 0.75 | 19.1 | 0.25 | | |
| C075X025YMT | 0.75 | | 19.1 | 0.25 | 6.4 | | |
| C080X020YJT | White | 0.80 | 20.3 | 0.20 | 5.1 | 3 | |
| C090X025YJT | | 0.90 | 22.9 | 0.25 | 6.4 | | |
| C100X025YJT | | 1.00 | 25.4 | 0.25 | 6.4 | | |
| C100X038YJT | | | | 0.38 | 9.7 | | |
| C100X050YJT | | 1.00 | 25.4 | 0.50 | 12.7 | | |
| C100X050YKT | Clear | | | 0.50 | 12.7 | | |
| C100X050YMT | Silver | | | | | | |
| C125X038YJT | White | 1.25 | 31.8 | 0.38 | 9.7 | 3 | |
| C150X050YJT | | 1.50 | 38.1 | 0.50 | 12.7 | | |
| C150X075YJT | | | | 0.75 | 19.1 | | |
| C150X075YMT | Silver | | | | | 5000 | |
| C160X020YJT | White | 1.60 | 40.6 | 0.20 | 5.1 | 10000 | |
| C200X025YJT | | 2.00 | 50.8 | 0.25 | 6.4 | 5000 | |
| C200X038YJT | | | | 0.38 | 9.7 | | |
| C200X050YJT | | | | 0.50 | 12.7 | | |
| C200X100YJT | | Clear | | 1.00 | 25.4 | 2500 | |
| C200X100YKT | | | | | | | |
| C200X100YMT | | | | | | | |
| C275X125YJT | White | 2.75 | 69.9 | 1.25 | 31.8 | 1 | |
| C275X125YMT | Silver | | | | | | |
| C300X025YJT | White | 3.00 | 76.2 | 0.25 | 6.4 | | |
| C300X038YJT | | | | 0.38 | 9.7 | | |
| C300X100YJT | Silver | 3.00 | 76.2 | 1.00 | 25.4 | | |
| C300X100YMT | | | | 1.00 | 25.4 | | |
| C300X200YJT | White | 4.00 | 101.6 | 2.00 | 50.8 | | |
| C300X200YMT | Silver | | | 2.00 | 50.8 | | |
| C350X100YJT | White | 3.50 | 88.9 | 1.00 | 25.4 | | |
| C400X100YJT | | 3.50 | 88.9 | 1.00 | 25.4 | | |
| C400X200YJT | Silver | 4.00 | 101.6 | 2.00 | 50.8 | | |
| C400X200YMT | | | | 2.00 | 50.8 | | |
| C400X300YJT | White | 4.00 | 101.6 | 3.00 | 76.2 | | |
| C400X400YJT | | | | 4.00 | 101.6 | | |
| C400X600YJT | | | | 6.00 | 152.4 | | |

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Contact Technical Support at 866.871.4571.

Super-Tack Polyester Component Labels

- Provide durability; high-temperature resistance and dimensional stability; does not stretch or easily tear; and has high-tack permanent adhesive
- Used to identify patch panels, faceplates, punchdown blocks, and other network systems hardware
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



| Part Number | Color | Width | | Height | | Type of Application | Labels Per Row | Std. Pkg. Qty. | | | | | | | | |
|----------------|------------|----------|-------|--------|--------|---------------------|----------------|----------------|-------------------------|------|------|-----------|------|--------------------|---|------|
| | | In. | mm | In. | mm | | | | | | | | | | | |
| C061X030YPT | White | 0.61 | 15.5 | 0.30 | 7.6 | 1-port | 4 | 2500 | | | | | | | | |
| C100X050YPT | | 1.00 | 25.4 | 0.50 | 12.7 | general identifier | 3 | 10000 | | | | | | | | |
| C125X030YPT | | 1.25 | 31.8 | 0.30 | 7.6 | 2-port | | | | | | | | | | |
| C138X019YPT | | 1.38 | 35.1 | 0.19 | 4.8 | module | | | | | | | | | | |
| C188X030YPT | 1.88 | 47.8 | 0.30 | 7.6 | 3-port | | | | | | | | | | | |
| C200X100YPT | White | 2.00 | 50.8 | 1.00 | 25.4 | 3-port | 1 | 2500 | | | | | | | | |
| C200X100Y0T | Black | | | | | general identifier | | | | | | | | | | |
| C252X030YPT | White | 2.52 | 64.0 | 0.30 | 7.6 | 4-port | 1 | 2500 | | | | | | | | |
| C252X030YPT-P* | | | | | | TIA Blue | | | 1, 2, 3, or 4-port | | | | | | | |
| C252X030YQT-P* | | | | | | TIA Brown | | | | | | | | | | |
| C252X030YRT-P* | | | | | | TIA Green | | | | | | | | | | |
| C252X030YST-P* | | | | | | TIA Gray | | | | | | | | | | |
| C252X030YTT-P* | | | | | | TIA Orange | | | | | | | | | | |
| C252X030YUT-P* | | | | | | TIA Purple | | | | | | | | | | |
| C252X030YVT-P* | | | | | | TIA Red | | | | | | | | | | |
| C252X030YWT-P* | | | | | | Black | | | | | | | | | | |
| C252X030Y0T-P* | | | | | | TIA Yellow | | | | | | | | | | |
| C252X030Y8T-P* | | | | | | Gold | | | | | | | | | | |
| C252X030Y9T-P* | | | | | | | | | | | | | | | | |
| C261X030YPT | | | | | | White | | | | 2.61 | 66.3 | 0.30 | 7.6 | 4-port | 1 | 2500 |
| C275X125YPT | | | | | | | | | | 2.75 | 69.9 | 1.25 | 31.8 | general identifier | | |
| C275X125Y0T | Black | | | | | | | | | | | | | | | |
| C288X030YPT | White | 2.88 | 73.2 | 0.30 | 7.6 | 5-port | 1 | 2500 | | | | | | | | |
| C300X200YPT | | 3.00 | 76.2 | 2.00 | 50.8 | general identifier | | | | | | | | | | |
| C315X030YPT | | 3.15 | 80.0 | 0.30 | 7.6 | 5-port | | | | | | | | | | |
| C379X030YPT | | | | | | 6-port | | | | | | | | | | |
| C379X030YPT-P* | | TIA Blue | 3.79 | 96.3 | 0.30 | 7.6 | | | 1, 2, 3, 4, 5 or 6-port | 1 | 2500 | | | | | |
| C379X030YQT-P* | | | | | | | | | | | | TIA Brown | | | | |
| C379X030YRT-P* | TIA Green | | | | | | | | | | | | | | | |
| C379X030YST-P* | TIA Gray | | | | | | | | | | | | | | | |
| C379X030YTT-P* | TIA Orange | | | | | | | | | | | | | | | |
| C379X030YUT-P* | TIA Purple | | | | | | | | | | | | | | | |
| C379X030YVT-P* | TIA Red | | | | | | | | | | | | | | | |
| C379X030YWT-P* | Black | | | | | | | | | | | | | | | |
| C379X030Y0T-P* | TIA Yellow | | | | | | | | | | | | | | | |
| C379X030Y8T-P* | Gold | | | | | | | | | | | | | | | |
| C379X030Y9T-P* | | | | | | | | | | | | | | | | |
| C400X200Y8T | Yellow | 4.00 | 101.6 | 2.00 | 50.8 | general identifier | 1000 | | | | | | | | | |
| C400X300YPT | White | | | 3.00 | 76.2 | | 2500 | | | | | | | | | |

*Label is perforated to be used in 1, 2, 3, 4, or 6-Port position applications.
 Order number of labels required in multiples of Standard Package Quantity.
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Tedlar® Component Labels

- Self-extinguishing and ideal for labeling high-temperature areas
- Meet Federal Motor Vehicle Safety Standard (FMVSS-302) for flammability
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 225°F (-40°C to 106°C); tests at 275°F have shown acceptable results



| Part Number | Color | Width | | Height | | Labels Per Row | Std. Pkg. Qty. |
|-------------|-------|-------|------|--------|------|----------------|----------------|
| | | In. | mm | In. | mm | | |
| C060X020TJT | White | 0.60 | 15.2 | 0.20 | 5.1 | 3 | 10000 |
| C090X025TJT | | 0.90 | 22.9 | 0.25 | 6.4 | | |
| C100X038TJT | | 1.00 | 25.4 | 0.38 | 9.7 | | |
| C100X050TJT | | | | 0.50 | 12.7 | | |
| C125X038TJT | | 1.25 | 31.8 | 0.38 | 9.7 | 1 | 2500 |
| C200X038TJT | | 2.00 | 50.8 | | | | 1.00 |
| C200X100TJT | | | | 1.00 | 25.4 | 2500 | |
| C300X038TJT | | | | 3.00 | 76.2 | 0.38 | 9.7 |

Tedlar® is a registered trademark of E.I. du Pont de Nemours and Company. Order number of labels required in multiples of Standard Package Quantity. Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Tamper-Evident Polyester Component Labels

- Leaves a checkerboard of silver material allowing you to see if label has been tampered with
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979



| Part Number | Color | Width | | Height | | Labels Per Row | Std. Pkg. Qty. |
|-------------|--------|-------|------|--------|------|----------------|----------------|
| | | In. | mm | In. | mm | | |
| C075X025AAT | Silver | 0.75 | 19.1 | 0.25 | 6.4 | 3 | 10000 |
| C100X050AAT | | 1.00 | 25.4 | 0.50 | 12.7 | | |
| C200X100AAT | | 2.00 | 50.8 | 1.00 | 25.4 | 1 | 2500 |
| C275X125AAT | | 2.75 | 69.9 | 1.25 | 31.8 | | |

Order number of labels required in multiples of Standard Package Quantity. Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Non-Adhesive Polyester Component Labels

- Used to identify patch panels, faceplates, punchdown blocks, and other network systems hardware
- Use thermal transfer resin ribbon
- Temperature range: -10°F to 302°F (-23°C to 150°C)



| Part Number | Color | Width | | Height | | Application | Labels Per Row | Std. Pkg. Qty. |
|-------------|-------|-------|-------|--------|------|-----------------------|----------------|----------------|
| | | In. | mm | In. | mm | | | |
| C150X030Y1T | White | 1.50 | 38.1 | 0.30 | 7.6 | 3-port identifier | 2 | 1000 |
| C195X040Y1T | | 1.95 | 49.5 | 0.40 | 10.2 | Single-gang faceplate | | |
| C261X035Y1T | | 2.61 | 66.3 | 0.35 | 8.9 | 4-port identifier | | |
| C288X040Y1T | | 2.88 | 73.2 | 0.40 | 10.2 | Double-gang faceplate | | |
| C390X030Y1T | | 3.90 | 99.1 | 0.30 | 7.6 | 6-port identifier | | |
| C750X050Y1T | | 7.50 | 190.5 | 0.50 | 12.7 | 110 block | | |
| C788X050Y1T | | 7.88 | 200.2 | 0.50 | 12.7 | GP6™ Punchdown System | | |

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Vinyl Cloth Component Labels

- Ideal for temporary marking of chips, boards, and ICs
- Removable without leaving any residue
- Pliable material is suitable for rough texture surfaces
- Use thermal transfer hybrid ribbon
- Temperature range: 50°F to 170°F (10°C to 77°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14576



| Part Number | Color | Width | | Height | | Labels Per Row | Std. Pkg. Qty. | | | | |
|-------------|-------|-------|-------|--------|------|----------------|----------------|------|------|------|------|
| | | In. | mm | In. | mm | | | | | | |
| C050X044CBT | White | 0.50 | 12.7 | 0.44 | 11.2 | 5 | 10000 | | | | |
| C060X020CBT | | 0.60 | 15.2 | 0.20 | 5.1 | 3 | | | | | |
| C075X025CBT | | 0.75 | 19.1 | 0.25 | 6.4 | | | | | | |
| C100X025CBT | | 1.00 | 25.4 | | | | | 0.38 | 9.7 | | |
| C100X038CBT | | | | 0.50 | 12.7 | | | | | | |
| C100X050CBT | | | | 1 | 2.00 | 50.8 | | 0.50 | 12.7 | | |
| C150X075CBT | | 1.50 | 38.1 | | | | | | | 0.75 | 19.1 |
| C160X020CBT | | 1.60 | 40.6 | | | | | | | 0.20 | 5.1 |
| C200X050CBT | | 2.00 | 50.8 | | | | | | | 0.50 | 12.7 |
| C400X100CBT | | 4.00 | 101.6 | 1.00 | 25.4 | | | 2500 | | | |

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Polyimide Component Labels

- Ideal for electronic components and internal circuitry applications
- Intended for applications requiring solvent and high-temperature resistance performance, such as the wave solder process

- Use thermal transfer RMER4BL-C or RHER4BL-C resin ribbon on white polyimide
- Use thermal transfer hybrid ribbon on tan polyimide
- Temperature range: -40°F to 350°F (-40°C to 177°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



| Part Number | Color | Width | | Height | | Labels Per Row | Std. Pkg. Qty. |
|-------------|-------|-------|------|--------|------|----------------|----------------|
| | | In. | mm | In. | mm | | |
| C025X025KBT | White | 0.25 | 6.4 | 0.25 | 6.4 | 12 | 10000 |
| C025X025KCT | Tan | | | | | | |
| C038X038KBT | White | 0.38 | 9.7 | 0.38 | 9.7 | 7 | |
| C038X038KCT | Tan | | | | | | |
| C050X013KBT | White | 0.50 | 12.7 | 0.13 | 3.3 | 5 | |
| C050X013KCT | Tan | | | | | | |
| C050X020KBT | White | | | 0.20 | 5.1 | | |
| C050X044KBT | White | 0.50 | 12.7 | 0.44 | 11.2 | 5 | |
| C050X044KCT | Tan | | | | | | |
| C060X020KBT | White | 0.60 | 15.3 | 0.20 | 5.1 | 3 | |
| C060X020KCT | Tan | | | | | | |
| C065X019KBT | White | 0.65 | 16.5 | 0.19 | 4.8 | 3 | |
| C075X025KBT | | 0.75 | 19.1 | 0.25 | 6.4 | | |
| C080X020KBT | | 0.80 | 20.3 | 0.20 | 5.1 | | |
| C090X025KBT | | 0.90 | 22.9 | 0.25 | 6.4 | | |
| C100X019KBT | | 0.19 | 4.8 | | | | |
| C100X025KBT | | 0.25 | 6.4 | | | | |
| C100X025KCT | | Tan | 1.00 | 25.4 | | | |
| C100X038KBT | White | | | 0.38 | 9.7 | | |
| C100X038KCT | Tan | | | | | | |
| C125X025KBT | White | 1.25 | 31.8 | 0.25 | 6.4 | 2 | |
| C150X025KBT | | 1.50 | 38.1 | | | | |
| C160X020KBT | | 1.60 | 40.6 | 0.20 | 5.1 | 1 | |
| C200X025KBT | | 2.00 | 50.8 | 0.25 | 6.4 | | |
| C200X038KBT | | | | 0.38 | 9.7 | | |
| C300X025KBT | | | | 3.00 | 76.2 | 0.25 | 6.4 |

Order number of labels required in multiples of Standard Package Quantity.
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Paper Component Labels

- General purpose material
- Use thermal transfer hybrid ribbon

- Temperature range: -65°F to 160°F (-54°C to 71°C)
- UL969 recognized, File # MH14576 and File # MH14979



| Part Number | Color | Width | | Height | | Labels Per Row | Std. Pkg. Qty. |
|-------------|-------|-------|-------|--------|-------|----------------|----------------|
| | | In. | mm | In. | mm | | |
| C075X025PBT | White | 0.75 | 19.1 | 0.25 | 6.4 | 3 | 10000 |
| C100X050PBT | | 1.00 | 25.4 | 0.50 | 12.7 | | |
| C150X075PBT | | 1.50 | 38.1 | 0.75 | 19.1 | | |
| C200X100PBT | | 2.00 | 50.8 | 1.00 | 25.4 | 1 | 5000 |
| C300X200PBT | | 3.00 | 76.2 | 2.00 | 50.8 | | 2500 |
| C400X100PBT | | 4.00 | 101.6 | 1.00 | 25.4 | | 1000 |
| C400X200PBT | | | | 2.00 | 50.8 | | 2500 |
| C400X300PBT | | | | 3.00 | 76.2 | | 1000 |
| C400X500PBT | | | | 5.00 | 127.0 | | 2500 |
| C400X600PBT | | 6.00 | 152.4 | 1000 | | | |

Order number of labels required in multiples of Standard Package Quantity.
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Reflective Continuous Tapes

- Used for illuminating or highlighting a range of objects
- Offer crisp, clear legends with superior legibility
- Conformable material for flat applications and safety and facility identification
- Can be over-laminated to increase durability (see page 28)

- Use thermal transfer resin ribbon
- Temperature range: -40°F to 180°F (-40°C to 82°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



| Part Number | Color | Width | | Length | | Std. Pkg. Qty. (Roll) |
|-------------|--------|-------|-------|--------|------|-----------------------|
| | | In. | mm | Ft. | m | |
| T100X000RP1 | White | 1.00 | 25.4 | 50.0 | 15.2 | 1 |
| T100X000RU1 | Orange | | | | | |
| T100X000RW1 | Red | | | | | |
| T100X000RX1 | Yellow | | | | | |
| T200X000RP1 | White | 2.00 | 50.8 | | | |
| T200X000RU1 | Orange | | | | | |
| T200X000RW1 | Red | | | | | |
| T200X000RX1 | Yellow | | | | | |
| T300X000RP1 | White | 3.00 | 76.2 | | | |
| T400X000RP1 | White | | | | | |
| T400X000RQ1 | Blue | 4.00 | 101.6 | | | |
| T400X000RU1 | Orange | | | | | |
| T400X000RW1 | Red | | | | | |
| T400X000RX1 | Yellow | | | | | |

Order number of labels required in multiples of Standard Package Quantity.

Continuous Tapes

- Offer crisp, clear legends with superior legibility
- Conformable material for flat applications and safety and facility identification
- Can be over-laminated to increase durability (see page 28)

- Use thermal transfer resin ribbon
- For white, black, clear, blue, and yellow vinyl continuous tapes only: UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979




| Part Number | Color | Material | Temperature Range | Width | | Length | | Std. Pkg. Qty. (Roll) | | | | | | | |
|--------------|--------|------------|---------------------------------|-------|------|--------|------|-----------------------|-----------|---------------------------------|------|-------|--|--|--|
| | | | | In. | mm | Ft. | m | | | | | | | | |
| T024X000FJT* | White | Polyolefin | -40°F to 180°F (-40°C to 82°C) | 0.24 | 6.1 | | | | | | | | | | |
| T031X000FJT* | | | | 0.31 | 7.9 | | | | | | | | | | |
| T038X000FJT* | | | | 0.38 | 9.7 | | | | | | | | | | |
| T050X000FJT* | | | | 0.50 | 12.7 | | | | | | | | | | |
| T100X000VP1Y | | | | | | | | | | | | | | | |
| T100X000VQ1Y | Blue | Vinyl | -58°F to 176°F (-50°C to 80°C) | 1.00 | 25.4 | | | | | | | | | | |
| T100X000VS1Y | Green | | | | | | | | | | | | | | |
| T100X000VU1Y | Orange | | | | | | | | | | | | | | |
| T100X000VW1Y | Red | | | | | | | | | | | | | | |
| T100X000VX1Y | Yellow | | | | | | | | | | | | | | |
| T100X000VY1Y | Black | | | | | | | | | | | | | | |
| T100X000YK1 | Clear | Polyester | -40°F to 302°F (-40°C to 150°C) | | | | | | | | | | | | |
| T200X000VP1Y | White | Vinyl | -58°F to 176°F (-50°C to 80°C) | 2.00 | 50.8 | 100.0 | 30.5 | 1 | | | | | | | |
| T200X000VQ1Y | Blue | | | | | | | | | | | | | | |
| T200X000VR1Y | Brown | | | | | | | | | | | | | | |
| T200X000VS1Y | Green | | | | | | | | | | | | | | |
| T200X000VT1Y | Gray | | | | | | | | | | | | | | |
| T200X000VU1Y | Orange | | | | | | | | | | | | | | |
| T200X000VV1Y | Purple | | | | | | | | | | | | | | |
| T200X000VW1Y | Red | | | | | | | | | | | | | | |
| T200X000VX1Y | Yellow | | | | | | | | | | | | | | |
| T200X000VY1Y | Black | | | | | | | | | | | | | | |
| T200X000YK1 | Clear | | | | | | | | Polyester | -40°F to 302°F (-40°C to 150°C) | | | | | |
| T400X000VP1Y | White | | | | | | | | Vinyl | -58°F to 176°F (-50°C to 80°C) | 4.00 | 101.6 | | | |
| T400X000VQ1Y | Blue | | | | | | | | | | | | | | |
| T400X000VR1Y | Brown | | | | | | | | | | | | | | |
| T400X000VS1Y | Green | | | | | | | | | | | | | | |
| T400X000VT1Y | Gray | | | | | | | | | | | | | | |
| T400X000VU1Y | Orange | | | | | | | | | | | | | | |
| T400X000VV1Y | Purple | | | | | | | | | | | | | | |
| T400X000VW1Y | Red | | | | | | | | | | | | | | |
| T400X000VX1Y | Yellow | | | | | | | | | | | | | | |
| T400X000VY1Y | Black | | | | | | | | | | | | | | |
| T400X000YK1 | Clear | Polyester | -40°F to 302°F (-40°C to 150°C) | | | | | | | | | | | | |

Order number of rolls required in multiples of Standard Package Quantity.

*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Super-Tack Polyester Continuous Tapes

- Thermal transfer printable continuous tape format
- Super-tack polyester has ultra-aggressive adhesive
- Ideal for rough, textured, and coated surfaces
- Applications include rack unit labeling, cabinets, cable tray, pathways, control panels, enclosures, pipes, and much more
- Meets DIN 40050-9, IP69K for washdown applications.
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH14979



| Part Number | Color | Material | Width | | Length | | Std. Pkg. Qty. (Roll) |
|-------------|--------|-----------|-------|-------|--------|------|-----------------------|
| | | | In. | mm | Ft. | m | |
| T038X000Y01 | Black | Polyester | 0.38 | 9.7 | 100.0 | 30.5 | 1 |
| T038X000YP1 | White | | | | | | |
| T050X000Y01 | Black | | | | | | |
| T050X000YP1 | White | | | | | | |
| T100X000Y01 | Black | | | | | | |
| T100X000Y81 | Yellow | | | | | | |
| T100X000YP1 | White | | | | | | |
| T100X000YQ1 | Blue | | | | | | |
| T100X000YS1 | Green | | | | | | |
| T100X000YU1 | Orange | | | | | | |
| T100X000YW1 | Red | | | | | | |
| T200X000Y01 | Black | | 2.00 | 50.8 | | | |
| T200X000Y81 | Yellow | | | | | | |
| T200X000YP1 | White | | | | | | |
| T200X000YQ1 | Blue | | | | | | |
| T200X000YS1 | Green | | | | | | |
| T200X000YU1 | Orange | | | | | | |
| T200X000YW1 | Red | | | | | | |
| T400X000Y01 | Black | | 4.00 | 101.6 | | | |
| T400X000Y81 | Yellow | | | | | | |
| T400X000YP1 | White | | | | | | |
| T400X000YQ1 | Blue | | | | | | |
| T400X000YS1 | Green | | | | | | |
| T400X000YU1 | Orange | | | | | | |
| T400X000YW1 | Red | | | | | | |

Order number of labels required in multiples of Standard Package Quantity.

Non-Printable Clear Over-Laminate Continuous Tapes

- Over-laminates can be used for additional protection over the 2" and 4" continuous tapes
- When over-laminates are used with Super-Tack Polyester Labels, the labels meet DIN 40050-9, IP69K for washdown applications
- Temperature range: -40°F to 302°F (-40°C to 150°C)

| Part Number | Color | Material | Width | | Length | | Std. Pkg. Qty. |
|-------------|-------|-----------|-------|-------|--------|------|----------------|
| | | | In. | mm | Ft. | m | |
| T225X000YK1 | Clear | Polyester | 2.25 | 57.2 | 100.0 | 30.5 | 1 |
| T425X000YK1 | | | 4.25 | 107.9 | | | |

Order number of labels required in multiples of Standard Package Quantity.

Super-Tack Polyester Arc Flash Labels

- Provide employees with the highest degree of safety through proper identification and communication
- Detailed formats compliant with NFPA 70E standard for Arc Flash labeling
- Clearly visible and recognizable hazard information to communicate arc flash hazards present
- Meets DIN 40050-9, IP69K for washdown applications
- Labels are constructed of durable polyester designed to withstand UV exposure, outdoor use, water and abrasion
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized; File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



C200X400A51



C200X400YZ1



C400X400A51



C400X400YZ1



C400X600A51



C400X600YX1



C400X600YZ1

| Part Number | Width | | Height | | Part Description | Std. Pkg. Qty. (Roll) | | |
|-------------|---|-------|--------|-------|---|-----------------------|-------|---|
| | In. | mm | In | mm | | | | |
| C200X400A51 | 2.00 | 50.8 | 4.00 | 101.6 | Polyester safety label, WARNING header orange and black, 250 labels per roll. | 1 | | |
| C200X400YZ1 | | | | | Polyester safety label, DANGER header red and white, 250 labels per roll. | | | |
| C400X400A51 | 4.00 | 101.6 | 4.00 | 101.6 | Polyester safety label, WARNING header orange and black, 250 labels per roll. | | | |
| C400X400YZ1 | | | | | Polyester safety label, DANGER header red and white, 250 labels per roll. | | | |
| C400X600A51 | | | 6.00 | 152.4 | 6.00 | | 152.4 | Polyester safety label, WARNING header orange and black, 100 labels per roll. |
| C400X600YX1 | | | | | | | | Polyester safety label, orange header, 100 labels per roll. |
| C400X600YZ1 | Polyester safety label, DANGER header red and white, 100 labels per roll. | | | | | | | |

Order number of labels required in multiples of Standard Package Quantity

Raised Panel Arc Flash Labels

- Super-Tack adhesive provides strong holding power for rough, textured, and powered-coated surfaces
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposures)
- Meet ASTM D3389 standard for abrasion resistance, and also meets solar application standards
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbon
- Temperature Range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH 14979



C400X400AOT



C400X400ANT

| Part Number | Color | Width | | Height | | Part Description | Std. Pkg. Qty. (Roll) |
|-------------|--------|-------|-------|--------|-------|---|-----------------------|
| | | In. | mm | In | mm | | |
| C400X400ANT | Orange | 4.00 | 101.6 | 4.00 | 101.6 | Raised Panel Safety Label, WARNING header, White and Orange/Black | 1 |
| | White | | | | | | |
| C400X400AOT | Red | 4.00 | 101.6 | 4.00 | 101.6 | Raised Panel Safety Label, DANGER header, White and Red/Black | |
| | White | | | | | | |

Order number of labels required in multiples of Standard Package Quantity

Contact Technical Support at 866.871.4571.

Super-Tack Polyester Arc Flash Continuous Tapes



T400X000YX1



T400X000A91

| Part Number | Width | | Height | | Part Description | Std. Pkg. Qty. (Roll) |
|-------------|-------|-------|--------|------|---|-----------------------|
| | In. | mm | Ft | M | | |
| T400X000YX1 | 4.00 | 101.6 | 50.0 | 15.2 | Polyester arc flash continuous tape, orange header. | 1 |
| T400X000A91 | | | | | Polyester arc flash continuous tape, red header. | |

Order number of labels required in multiples of Standard Package Quantity

Super-Tack Polyester Facility Identification Labels

- Facility Identification created quickly to comply with workplace safety regulations contributing to the protection of employees and equipment from unexpected hazards
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized; File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



C400X600A41



C400X600A61



C400X600AX1



C400X600AY1



C400X600AZ1



C400X600Y81

| Part Number | Width | | Height | | Part Description | Labels Per Row | Std. Pkg. Qty. (Roll) |
|-------------|-------|-------|--------|-------|--|----------------|-----------------------|
| | In. | mm | In | mm | | | |
| C400X600A41 | 4.00 | 101.6 | 6.00 | 152.4 | Polyester safety label, DANGER header, red and black/white, 100 labels per roll. | 1 | 1 |
| C400X600A61 | | | | | Polyester safety label, CAUTION header, yellow/black, 100 labels per roll. | | |
| C400X600AX1 | | | | | Polyester safety label, NOTICE header, blue/white, 100 labels per roll. | | |
| C400X600AY1 | | | | | Polyester safety label, SAFETY FIRST header, green/ white, 100 labels per roll. | | |
| C400X600AZ1 | | | | | Polyester safety label, yellow header, 100 labels per roll. | | |
| C400X600Y81 | | | | | Polyester safety label, yellow, 100 labels per roll. | | |

Order number of labels required in multiples of Standard Package Quantity

Polyester Photoluminescent Tapes

- Used to mark egress routes, fire alarms, and fire equipment
- Clearly visible for up to ten hours after power is lost
- Absorbs energy from ambient light and releases this energy in the form of a glow when power is lost
- Can be over-laminated to increase durability (see page 28)
- Use thermal transfer resin ribbon
- Temperature range: 40°F to 230°F (4.4°C to 110°C)
- UL969 recognized, File # MH14979



Normal Lighting



Blackout

| Part Number | Color | Width | | Length | | Std. Pkg. Qty. (Roll) |
|-------------|------------------|-------|-------|--------|-----|-----------------------|
| | | In. | mm | Ft | M | |
| T200X000Y2T | Photoluminescent | 2.00 | 50.8 | 15.0 | 4.5 | 1 |
| T400X000Y2T | | 4.00 | 101.6 | | | |

Order number of labels required in multiples of Standard Package Quantity

Raised Panel Solar Labels


- Print customized labels for solar applications
- Strong holding power for rough, textured, and coated surfaces
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposures)
- Use thermal transfer resin ribbon
- Temperature Range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH 14979



| Part Number | Color | Width | | Height | | Labels Per Row | Std. Pkg. Qty. |
|-------------|-------|-------|-------|--------|------|----------------|----------------|
| | | In. | mm | In. | mm | | |
| C200X100AWT | Red | 2.00 | 50.8 | 1.00 | 25.4 | 1 | 500 |
| C300X250AWT | | 3.00 | 76.2 | 2.50 | 63.5 | | |
| C400X100AWT | | 4.00 | 101.6 | 1.00 | 25.4 | | |

Order number of labels required in multiples of Standard Package Quantity

Super-Tack Polyester Solar Labels



- Solar Labels are designed to meet required safety standards for PV installation labeling.
- Certain labels leave blank spaces where variable thermal transfer printing can be added when specific on-site power and series data is required.
- Meets DIN 40050-9, IP69K for washdown applications
- This product solution has an optional clear over-laminate to function in harsh environments.

- All labels are outdoor rated and are designed to have high resistance to direct UV exposure.
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 180°F (-40°C to 82°C)
- UL969 recognized; File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979

| Part Number | Color | Width | | Height | | Application | Legend | Std. Pkg. Qty. (Roll) |
|-----------------|--------------|-------|-------|--------|---------------|------------------------------|-----------------------------------|-----------------------|
| | | In. | mm | In. | mm | | | |
| C400X200SP1-AD | White on Red | 4.00 | 101.6 | 2.00 | 50.8 | AC Disconnect | VOLTAGE AND CURRENT RATINGS | 50 |
| C400X400SP1-ASM | | | | 4.00 | 101.6 | AC Photovoltaic Module | VOLTAGE CURRENT AND POWER RATINGS | |
| C400X400SP1-DD | | | | | | DC Disconnect | VOLTAGE AND CURRENT RATINGS | |
| C400X400SP1-DSM | | | | | | DC Photovoltaic Module | VOLTAGE CURRENT AND POWER RATINGS | |
| C400X400SP1-PS | | | | | | Photovoltaic Power Source | VOLTAGE AND CURRENT RANTINGS | |
| C600X175SP1-AD | 6.00 | 152.4 | 1.75 | 44.5 | AC Disconnect | PHOTOVOLTAIC - AC DISCONNECT | | |
| C600X175SP1-DD | | | | | DC Disconnect | PHOTOVOLTAIC - DC DISCONNECT | | |

Order number of labels required in multiples of Standard Package Quantity

Over-Laminate Labels

| Part Number | Color | Width | | Height | | Application | Std. Pkg. Qty. |
|----------------|-------|-------|-------|--------|-------|---------------------------------------|----------------|
| | | In. | mm | In. | mm | | |
| C300X150SL1-OL | Clear | 1.50 | 38.1 | 3.00 | 76.2 | Additional Abrasion and UV Protection | 250 |
| C400X200SL1-OL | | 2.00 | 50.8 | 4.00 | 101.6 | Additional Abrasion and UV Protection | |
| C400X400SL1-OL | | 4.00 | 101.6 | | | Additional Abrasion and UV Protection | |
| C600X175SL1-OL | | 1.75 | 44.5 | 6.00 | 152.4 | Additional Abrasion and UV Protection | |

Order number of labels required in multiples of Standard Package Quantity

Reflective Continuous Tapes for Solar Applications



- Used for illuminating or highlighting a range of objects
- Conformable material for flat applications and safety and facility identification
- Use thermal transfer resin ribbon

- Temperature Range: -40°F to 180°F (-40°C to 82°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH 14979

| Part Number | Color | Material | Width | | Height | | Std. Pkg. Qty. (Roll) |
|-------------|-------|-----------|-------|-------|--------|------|-----------------------|
| | | | In. | mm | Ft. | M | |
| T400X000RW1 | Red | Polyester | 4.00 | 101.6 | 50.0 | 15.2 | 1 |

Order number of labels required in multiples of Standard Package Quantity

NEW! Easy-Mark Plus™ Labeling Software

PATENTED

- Powerful, easy-to-use, and affordable software that provides innovative features and functionality to address unique labeling needs
- Quickly create simple or complex labels with text boxes, lines, frames, or tables, and other useful tools
- Design detailed labels with multiple zones and objects for applications such as rating plates, arc flash labels, and fiber optic enclosures
- Simple user interface shows labels on the screen as they will be printed
- Create and print labels using QR codes, or any of the other 21 included barcode symbologies
- Upgrades available at <http://www.panduit.com/emp>

System Requirements:

- 300 MB hard drive space and 2 GB Memory
- Windows XP, Vista, 7, 8, 8.1 or 10
- 32 or 64 bit operating systems
- Microsoft.NET Framework 2.0 or higher
- Mouse or compatible pointing device
- Keyboard
- Optical Disc Drive or USB Port



| Part Number | Description | Std Pkg. Qty | Std. Ctn. Qty. |
|----------------------|--|--------------|----------------|
| EMPLUS-CD | Easy-Mark Plus™ Labeling Software, CD-ROM. | 1 | 10 |
| EMPLUS-DL | Easy-Mark Plus™ Labeling Software, online download. | | |
| EMPLUS-2GO | Easy-Mark Plus™ Portable Application, USB flash drive. | | |
| EMPLUS-SERVER | Easy-Mark Plus™ Labeling Software, networkable server based version. | | |

^Windows is a registered trademark of Microsoft Corp. in the United States and/or other countries.

CAD-Connect™ Labeling Software

- Facilitates quick and easy organization of identifiers from CAD for printing within Easy-Mark Plus™ Labeling Software
- Easily captures and organizes CAD data for future use and documentation
- Saves time and reduces errors by utilizing identifiers previously created in CAD files to eliminate manual entry of data into labeling software
- Compatible with full versions of AutoCAD* 2002 to 2017 and Visio version 2002 or newer
- Exports to alternative formats such as Excel^ (XLS) or Text (CSV) files for future use and documentation
- Upgrades available at www.panduit.com

System Requirements:

- 64 MB hard drive space and 64 MB RAM (256 MB RAM recommended)
- Windows 2000, XP, Vista, 7, 8, 8.1 or 10
- 32 or 64 bit operating systems
- Microsoft.NET Framework 2.0 or higher
- Mouse or compatible pointing device
- Keyboard
- Optical Disc Drive



| Part Number | Color | Std Pkg. Qty | Std. Ctn. Qty. |
|------------------|--|--------------|----------------|
| PROG-CCCD | CAD-Connect™ Labeling Software, including Easy-Mark Plus™ Labeling Software, CD-ROM. | 1 | 10 |

^Visio, Windows and EXCEL are registered trademarks of Microsoft Corp. in the United States and/or other countries.

*AutoCAD is a registered trademark of Autodesk, Inc.

TDP43ME Desktop Printer and Accessories

- Creates durable, crisp, clear legends and graphics that offer superior legibility
- Prints durable legends for harsh industrial environments
- Fine resolution for small type characters and images
- Easy-Mark Plus™ Labeling Software included with printer
- Up to 4 inches per second print speed
- Auto-sensing label gap and black mark sensors
- One-button operation, and automatic self test
- Connects quickly and easily to PC, and offers connectivity flexibility to print by USB, parallel serial, or Ethernet
- Easy ribbon loading reduces printer down time
- Able to connect to a network for sharing capability
- UL60950 listed, File # E165747



| Part Number | Part Description | Std. Pkg. Qty. |
|-----------------|---|----------------|
| TDP43ME | 300 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RMEH4BL black hybrid ribbon, AC power adapter with US power cord, USB cable, user manual, quick start card, and driver disk; for use in North America. | 1 |
| TDP43ME/E | 300 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RMEH4BL black hybrid ribbon, EuroPlug cord, USB cable, user manual, quick start card, and driver disk; for use outside North America. | |
| TDP43ME-KIT | TDP43ME printer kit. Includes: printer, Panduit® Easy-Mark Plus™ Labeling Software, RMEH4BL black hybrid ribbon, AC power adapter with US power cord, USB cable, user manual, quick start card, TDP43ME-RS Roll Stand, TDP43ME-CASE, one roll of S100X150VATY labels, and driver disk; for use in North America. | |
| TDP43ME/E-KIT | TDP43ME/E printer kit. Includes: printer, Panduit® Easy-Mark Plus™ Labeling Software, RMEH4BL black hybrid ribbon, AC power adapter with EuroPlug cord, USB cable, user manual, quick start card, TDP43ME-RS Roll Stand, TDP43ME-CASE, one roll of S100X150VATY labels, and driver disk; for use outside North America. | |
| TDP43ME-AC | Replacement AC power adapter with power cord (US cord only). | |
| TDP43ME-CASE | Hardside carrying case accommodates printer, AC power adapter, ribbons, printer cable, external roll stand, labels, and tools. | |
| TDP43ME-CUTTER | Optional power/automatic cutter for TDP43ME thermal transfer desktop printer; easy to install for automatic cutting of labels. | |
| TDP43ME-RS | External label roll stand for TDP43ME printer; used to rear feed labels that are supplied on 3" cores. | |
| TDP43ME-SPINDLE | Replacement ribbon spindle for TDP43ME Thermal Transfer Desktop Printer, Package of Two Spools. | |
| TDP43ME-TB-KIT | Terminal block marker adapter kit. | |
| PTR-CLN | Printer cleaning kit – contains (1) cleaning pen, (8) cleaning solution soaked wipes, (8) foam swabs pre-saturated with cleaning solution, MSDS, and cleaning instructions. | |

TDP43ME Desktop Printer Ribbons

| Part Number | Part Description | Width | | Length | | Std. Pkg. Qty. |
|-------------|--|-------|-------|--------|------|----------------|
| | | In. | mm | Ft. | m | |
| RMER1BL | Black resin thermal transfer ribbon. Use with terminal block markers. | 1.1 | 27.9 | | | 1 |
| RMEH4BL* | Black hybrid thermal transfer ribbon. Use with heat shrink, self-laminating, Turn-Tell®, tan polyimide labels, and vinyl cloth labels. | | | | | |
| RMER4BL*A | Black resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels. | 4.25 | 108.0 | 300.0 | 91.4 | |
| RMER4BL-A | Black resin thermal transfer ribbon. Use with high-temperature marker plates. | | | | | |
| RMER4BL-C | Black resin thermal transfer ribbon. Use with fluid-resistant heat shrink labels and white polyimide labels. | | | | | |

Order number of ribbons required in multiples of Standard Package Quantity.

*For 2.5" wide ribbons, replace 4 in part number with 2. For example, the part number of a 2.5" wide black hybrid thermal transfer ribbon is RMEH2BL.

^Other colors available, change "BL" to: BU for Blue, GR for Green, RD for Red, or WH for White (Example: RMER4BU = Blue Resin Ribbon).

TDP43HE and TDP46HE Desktop Printers and Accessories

- Convenient, easy setup; quickly begin producing labels
- Durable, clear communication through superior legibility
- Print small, fine characters and high-quality images and bar codes
- Allow continuous use in construction, industrial, and harsh environments
- Reduce time required to switch between label styles
- Fast label production without sacrificing print quality
- Easy-Mark Plus™ Labeling Software included with printer
- Up to 8 inches per second print speed
- Connect quickly and easily to PC, and offers connectivity flexibility to print by USB, parallel, Ethernet or serial
- Available with 300 or 600 dots per inch print resolution
- Able to connect to a network for sharing capability
- UL60950 listed, File # E165747



| Part Number | Part Description | Std. Pkg. Qty. |
|-------------|---|----------------|
| TDP43HE | 300 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk and US power cord; for use in North America. | 1 |
| TDP43HE/E | 300 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk, and the following power cords: EuroPlug, Swiss, UK, and Japan JIS 8303 3-pin; for use outside North America. | |
| TDP46HE | 600 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk, and US power cord; for use in North America. | |
| TDP46HE/E | 600 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk, and the following power cords: Europlug, Swiss, UK, and Japan JIS 8303 3-pin; for use outside North America. | |
| PTR-CLN | Printer cleaning kit – contains (1) cleaning pen, (8) cleaning solution soaked wipes, (8) foam swabs pre-saturated with cleaning solution, MSDS, and cleaning instructions. | |

TDP43HE and TDP46HE Desktop Printer Ribbons

| Part Number | Part Description | Width | | Length | | Std. Pkg. Qty. |
|-------------|---|-------|-------|--------|-------|----------------|
| | | In. | mm | Ft. | m | |
| RHEH4BL | Black hybrid thermal transfer ribbon. Use with heat shrink, self-laminating, Turn-Tell®, and vinyl cloth and tan polyimide labels. | 4.33 | 110.0 | 1181.0 | 363.0 | 1 |
| RHER4BL | Black resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels. | | | | | |
| RHER4WH | White resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels. | | | | | |
| RHER4BL-A | Black resin thermal transfer ribbon. Use with high-temperature marker plates. | 4.33 | 110.0 | 1345.0 | 410.0 | |
| RHER4BL-C | Black resin thermal transfer ribbon. Use with fluid resistant heat shrink markers and white polyimide labels. | | | | | |
| RHER4BL-E | Black resin thermal transfer ribbon. Used with standard marker plates and component labels for extra durability for harsh environments. | | | | | |

Order number of ribbons required in multiples of Standard Package Quantity.



PANDUIT®

Panduit Corp.
World Headquarters
Tinley Park, IL 60487

cs@panduit.com
US and Canada: 800.777.3300
Europe, Middle East, and Africa:
44.20.8601.7200
Latin America: 52.33.3777.6000
Asia Pacific: 65.6305.7575

www.panduit.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.