


**BTA30-600CW3G**

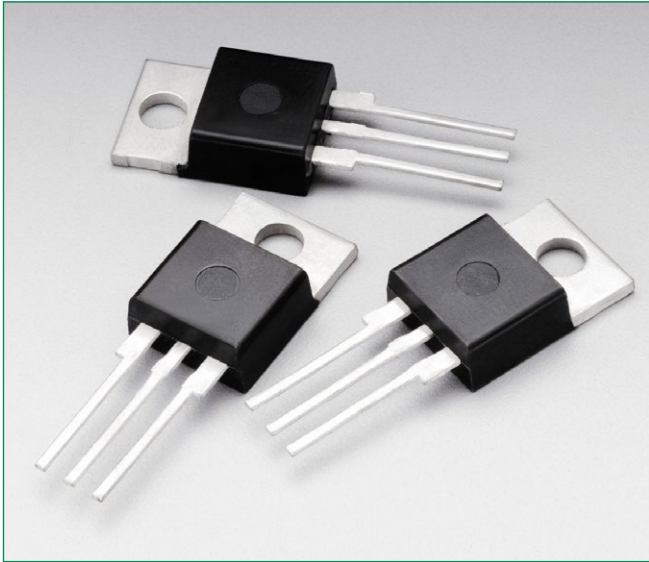


**Description**

Designed for high performance full-wave ac control applications where high noise immunity and high commutating di/dt are required.


**Features**

- Blocking Voltage to 600 V
- On-State Current Rating of 30 A RMS at 95°C
- Uniform Gate Trigger Currents in Three Quadrants
- High Immunity to dV/dt – 500 V/μs minimum at 125°C
- Minimizes Snubber Networks for Protection
- Industry Standard TO-220AB Package
- High Commutating di/dt – 4.0 A/ms minimum at 125°C
- Internally Isolated (2500 V<sub>RMS</sub>)
- These are Pb-Free Devices

**Pin Out**

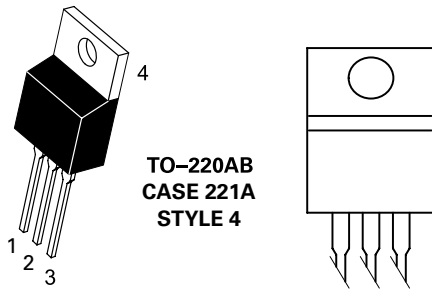

**Functional Diagram**



**Additional Information**



Datasheet



Resources



Samples

**OBSOLETE** DATE: 10/29/2018 PCN/ECN# ESW490-30  
REPLACED BY: Q6030LH5TP

### Maximum Ratings ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Peak Repetitive Off-State Voltage (Note 1) (Gate Open, Sine Wave 50 to 60 Hz, $T_J = -40^\circ$ to $150^\circ\text{C}$ ) BTA30-600CW3G	$V_{\text{DRM}}$ $V_{\text{RRM}}$	600	V
On-State RMS Current (Full Cycle Sine Wave, 60 Hz, $T_C = 95^\circ\text{C}$ )	$I_{\text{T (RMS)}}$	30	A
Peak Non-Repetitive Surge Current (One Full Cycle Sine Wave, 60 Hz, $T_{\text{J (initial)}} = 25^\circ\text{C}$ )	$I_{\text{TSM}}$	400	A
Circuit Fusing Consideration ( $t = 8.3$ ms)	$I^2t$	667	A <sup>2</sup> sec
Non-Repetitive Surge Peak Off-State Voltage ( $T_J = 25^\circ\text{C}$ , $t = 8.3$ ms)	$V_{\text{DSM}}/V_{\text{RSM}}$	$V_{\text{DSM}}/V_{\text{RSM}} + 100$	V
Peak Gate Current ( $T_J = 125^\circ\text{C}$ , $t \leq 20\mu\text{s}$ )	$I_{\text{GM}}$	4.0	W
Average Gate Power ( $T_J = 125^\circ\text{C}$ )	$P_{\text{G(AV)}}$	0.5	W
Operating Junction Temperature Range	$T_J$	-40 to +125	$^\circ\text{C}$
Storage Temperature Range	$T_{\text{stg}}$	-40 to +125	$^\circ\text{C}$
RMS Isolation Voltage ( $t = 300$ ms, R.H. $\leq 30\%$ , $T_A = 25^\circ\text{C}$ )	$V_{\text{iso}}$	2500	V

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

- $V_{\text{DRM}}$  and  $V_{\text{RRM}}$  for all types can be applied on a continuous basis. Ratings apply for zero or negative gate voltage; however, positive gate voltage shall not be applied concurrent with negative potential on the anode. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.

### Thermal Characteristics

Rating	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case (AC) Junction-to-Ambient	$R_{\theta\text{JC}}$ $R_{\theta\text{JA}}$	1.8 60	$^\circ\text{C/W}$
Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 10 seconds	$T_L$	260	$^\circ\text{C}$

**Electrical Characteristics - OFF** ( $T_J = 25^\circ\text{C}$  unless otherwise noted ; Electricals apply in both directions)

Characteristic	Symbol	Min	Typ	Max	Unit
Peak Repetitive Blocking Current ( $V_D = V_{DRM} = V_{RRM}$ ; Gate Open)	$T_J = 25^\circ\text{C}$ $I_{DRM}$	-	-	0.005	mA
	$T_J = 150^\circ\text{C}$ $I_{RRM}$	-	-	3	

**Electrical Characteristics - ON** ( $T_J = 25^\circ\text{C}$  unless otherwise noted; Electricals apply in both directions)

Characteristic	Symbol	Min	Typ	Max	Unit
Forward On-State Voltage (Note 2) ( $I_{TM} = \pm 22.5$ A Peak)	$V_{TM}$	-	-	1.55	V
Gate Trigger Current (Continuous dc) ( $V_D = 12$ V, $R_L = 30$ $\Omega$ )	MT2(+), G(+)	-	-	35	mA
	MT2(+), G(-)	-	-	35	
	MT2(-), G(-)	-	-	35	
Holding Current ( $V_D = 12$ V, Gate Open, Initiating Current = $\pm 500$ mA)	$I_H$	-	-	50	mA
Latching Current ( $V_D = 12$ V, $I_G = 42$ mA)	MT2(+), G(+)	-	-	75	mA
	MT2(+), G(-)	-	-	75	
	MT2(-), G(-)	-	-	75	
Gate Trigger Voltage ( $V_D = 12$ V, $R_L = 30$ $\Omega$ )	MT2(+), G(+)	-	-	1.3	V
	MT2(+), G(-)	-	-	1.3	
	MT2(-), G(-)	-	-	1.3	
Gate Non-Trigger Voltage ( $T_J = 150^\circ\text{C}$ )	MT2(+), G(+)	0.15	-	-	V
	MT2(+), G(-)	0.15	-	-	
	MT2(-), G(-)	0.15	-	-	


2. Indicates Pulse Test: Pulse Width  $\leq 2.0$  ms, Duty Cycle  $\leq 2\%$ .

**Dynamic Characteristics**


Characteristic	Symbol	Min	Typ	Max	Unit
Rate of Change of Commutating Current, See Figure 10. (Gate Open, $T_j = 110^\circ\text{C}$ , No Snubber)	$(di/dt)_c$	4.0	-	-	A/ms
Critical Rate of Rise of On-State Current ( $T_j = 110^\circ\text{C}$ , $f = 120\text{ Hz}$ , $I_G = 20\text{ mA}$ , $tr \leq 100\text{ ns}$ )	$di/dt$	-	-	50	A/ $\mu\text{s}$
Critical Rate of Rise of Off-State Voltage ( $V_D = 0.66 \times V_{DRM}$ , Exponential Waveform, Gate Open, $T_j = 110^\circ\text{C}$ )	$dV/dt$	500	-	-	V/ $\mu\text{s}$

**Voltage Current Characteristic of SCR**

Symbol	Parameter
$V_{DRM}$	Peak Repetitive Forward Off State Voltage
$I_{DRM}$	Peak Forward Blocking Current
$V_{RRM}$	Peak Repetitive Reverse Off State Voltage
$I_{RRM}$	Peak Reverse Blocking Current
$V_{TM}$	Maximum On State Voltage
$I_H$	Holding Current

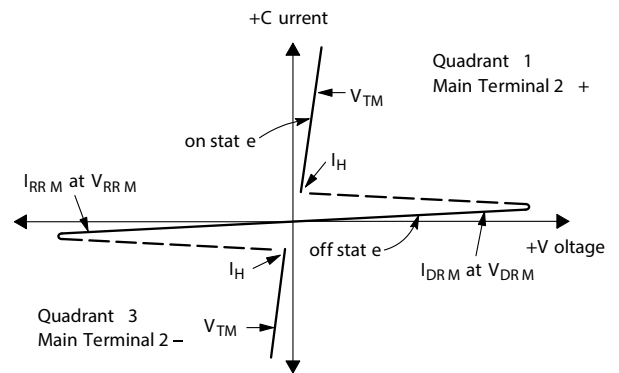


**Quadrant Definitions for a Triac**

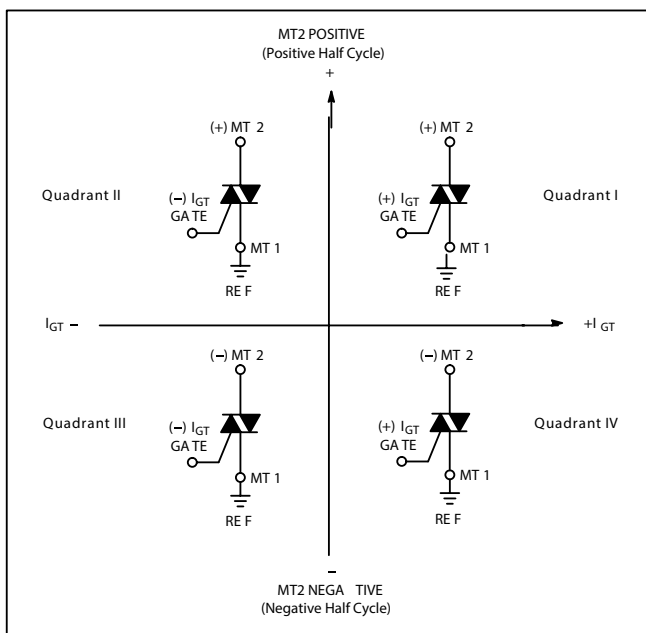


All polarities are referenced to MT1.  
With in-phase signals (using standard AC lines) quadrants I and III are used


**Figure 1. RMS Current Derating**

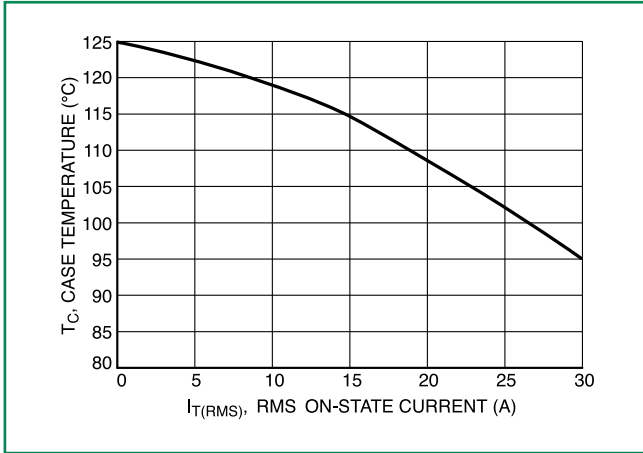


**Figure 2. On-State Power Dissipation**

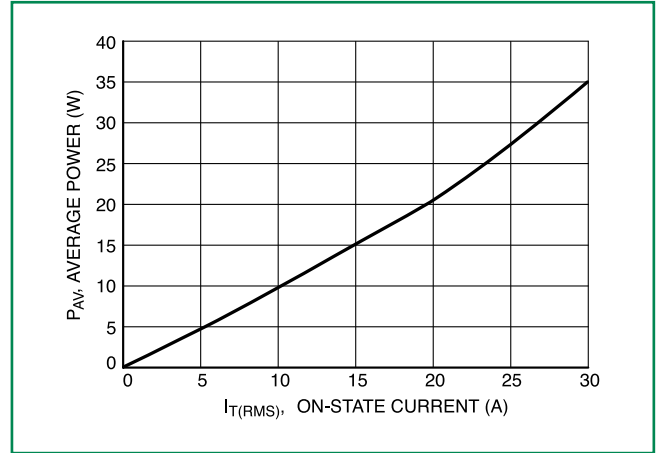


**Figure 3. On-State Characteristics**

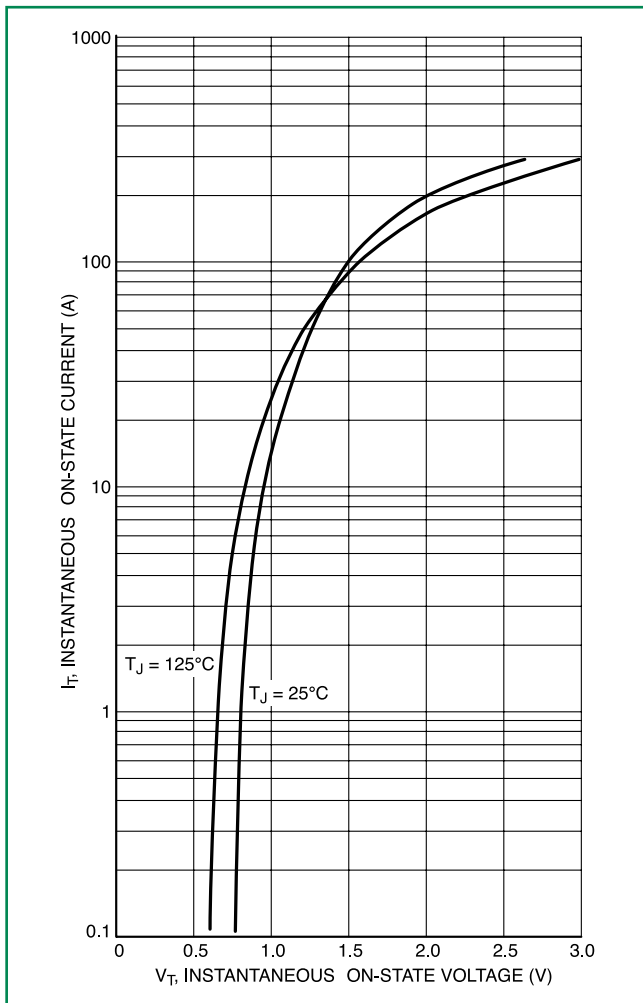


**Figure 4. Thermal Response**

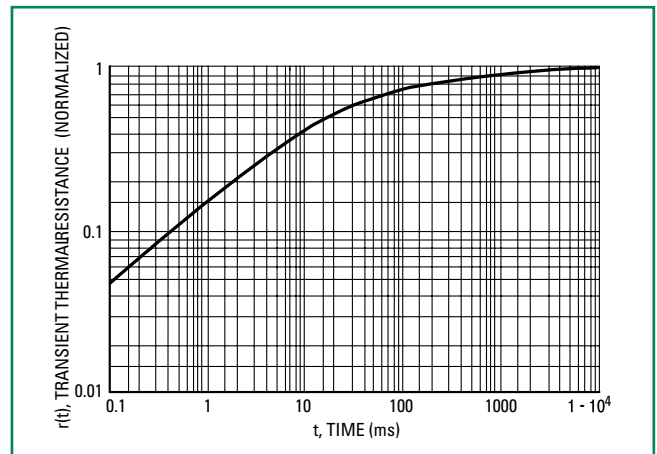


**Figure 5. Hold Current Variation**

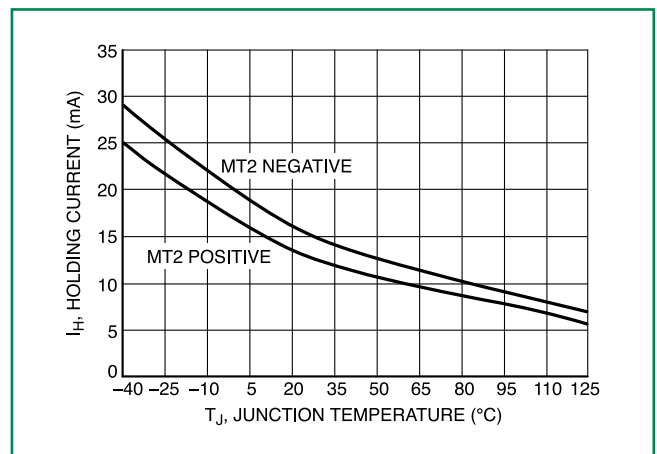


**Figure 6. Gate Trigger Current Variation**

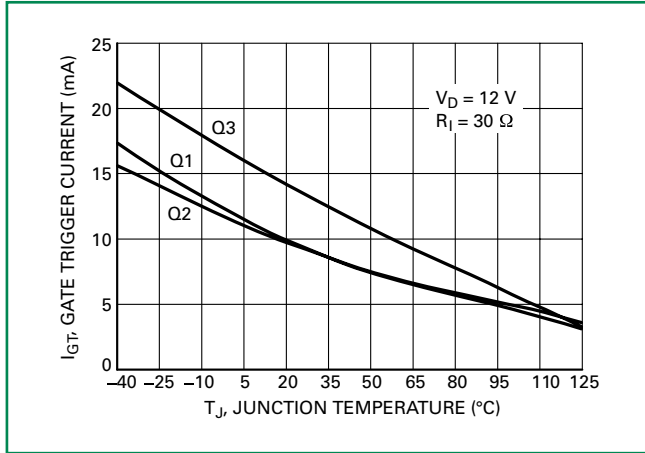


**Figure 7. Gate Trigger Voltage Variation**

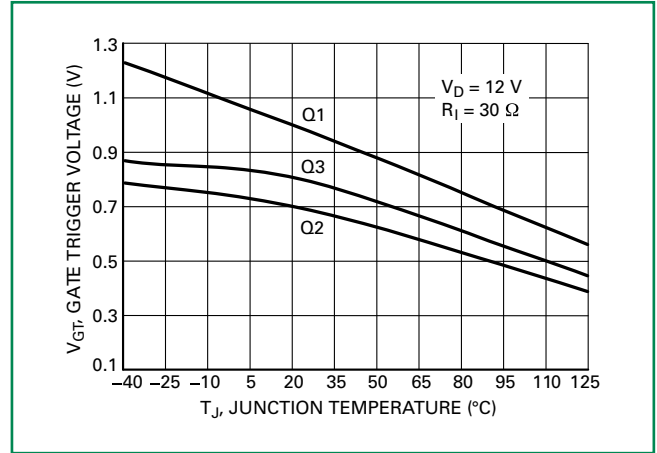


**Figure 8. Critical Rate of Rise of Off-State Voltage (Exponential Waveform)**

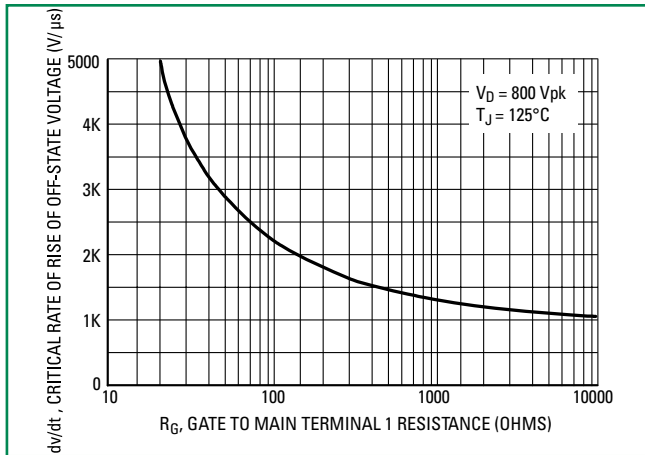

**Figure 9. Latching Current Variation**

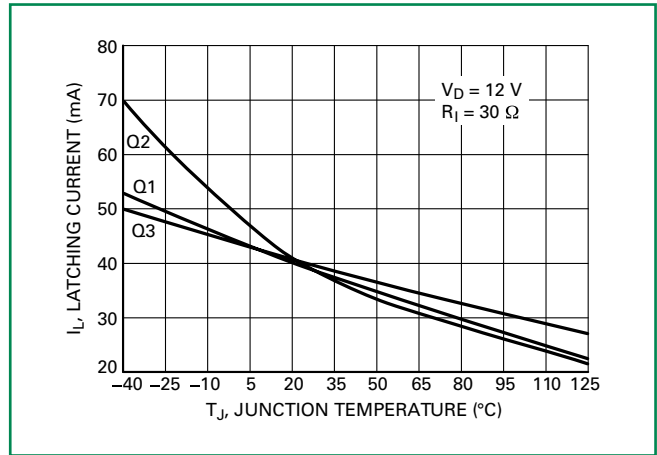


**Figure 10. Simplified Test Circuit to Measure the Critical Rate of Rise of Commutating Current ( $di/dt$ )**

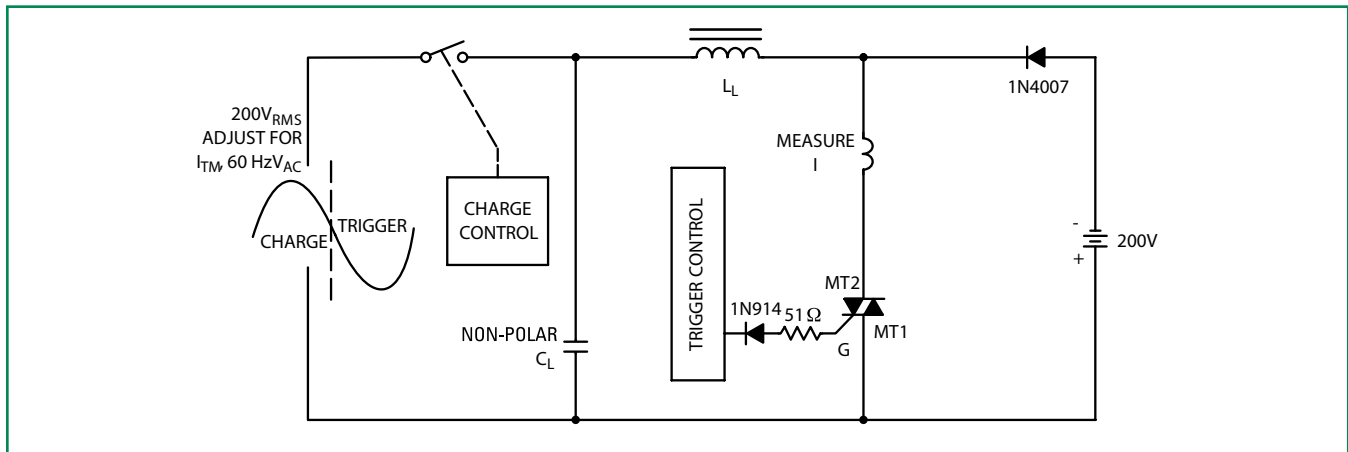

Note: Component values are for verification of rated ( $di/dt$ )<sub>c</sub>. See AN1048 for additional information


**Dimensions**

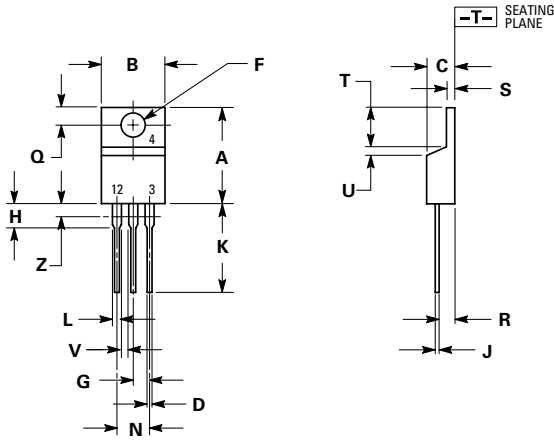

Dim	Inches		Millimeters	
	Min	Max	Min	Max
A	0.590	0.620	14.99	15.75
B	0.380	0.420	9.65	10.67
C	0.178	0.188	4.52	4.78
D	0.025	0.035	0.64	0.89
F	0.142	0.147	3.61	3.73
G	0.095	0.105	2.41	2.67
H	0.110	0.130	2.79	3.30
J	0.018	0.024	0.46	0.61
K	0.540	0.575	13.72	14.61
L	0.060	0.075	1.52	1.91
N	0.195	0.205	4.95	5.21
Q	0.105	0.115	2.67	2.92
R	0.085	0.095	2.16	2.41
S	0.045	0.060	1.14	1.52
T	0.235	0.255	5.97	6.47
U	0.000	0.050	0.00	1.27
V	0.045	---	1.15	---
Z	---	0.080	---	2.04

1. DIMENSIONING AND TOLERANCING PER ANS IY14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

**Part Marking System**

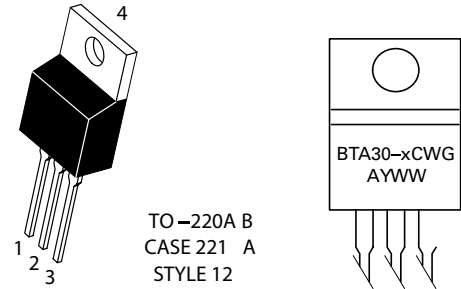

TO-220A B  
CASE 221 A  
STYLE 12

x= 6 or 8  
A= Assembly Location  
Y= Year  
WW = Work Week  
G= Pb-Free Package

**Pin Assignment**

1	Main Terminal 1
2	Main Terminal 2
3	Gate
4	No Connection

**Ordering Information**

Device	Package	Shipping
BTA30-600CW3G	TO-220AB (Pb-Free)	500 Units / Rail

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.