

**SERIES:** SWI12-SC | **DESCRIPTION:** AC-DC POWER SUPPLY


**FEATURES**

- 12 W power
- universal input (90~264 Vac)
- single regulated 12~24 Vdc output
- short circuit, over current, and over voltage protections
- UL 60950 & UL 1310 safety approvals
- level VI efficiency



MODEL	output voltage	output current max	output power max	ripple and noise <sup>1</sup> max	efficiency level
	(Vdc)	(A)	(W)	(mVp-p)	
SWI12-12-N-SC	12	1	12	120	VI
SWI12-15-N-SC	15	0.8	12	150	VI
SWI12-24-N-SC	24	0.5	12	240	VI

Notes: 1. At full load, nominal input, 20 MHz bandwidth oscilloscope, each output terminated with 0.1  $\mu$ F multilayer ceramic and 10  $\mu$ F low ESR electrolytic capacitors.

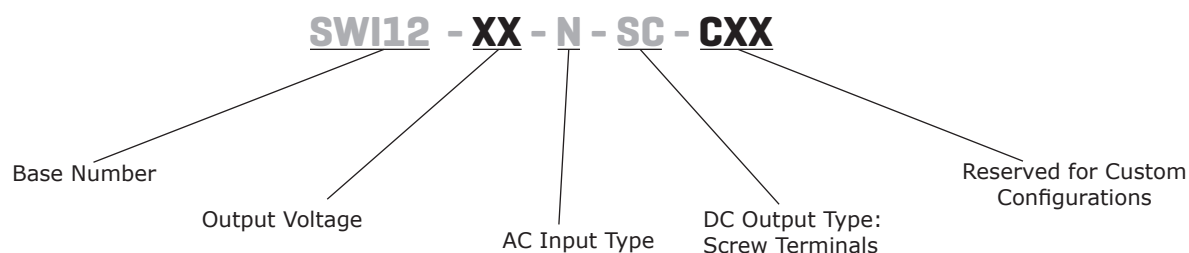**PART NUMBER KEY**


## INPUT

parameter	conditions/description	min	typ	max	units
voltage		90		264	Vac
frequency		47		63	Hz
current	at full load			0.4	A
inrush current	at 115 Vac, full load, 25°C, cold start			30	A
leakage current				0.25	mA
no load power consumption	at 230 Vac			0.1	W

## OUTPUT

parameter	conditions/description	min	typ	max	units
regulation			±5		%
start-up time	at 110 Vac/50 Hz, 80% load			2	s
hold-up time	at 110 Vac/50 Hz, 80% load	10			ms

## PROTECTIONS

parameter	conditions/description	min	typ	max	units
over voltage protection	output shutdown			200	%
over current protection	output shut down, auto recovery			200	%
short circuit protection	output shut down, auto recovery				

## SAFETY & COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output at 10 mA for 1 minute		3,000		Vac
isolation resistance	input to output at 500 Vdc	10			MΩ
safety approvals	UL/cUL (UL 60950, UL 1310), LPS				
EMI/EMC	FCC Part 15B Class B				
MTBF	as per Telcordia SR-332, 25°C	300,000			hours
RoHS	2011/65/EU				

## ENVIRONMENTAL


parameter	conditions/description	min	typ	max	units
operating temperature		0		40	°C
storage temperature		-25		85	°C
operating humidity	non-condensing	10		95	%
storage humidity	non-condensing	10		95	%

**MECHANICAL**

parameter	conditions/description	min	typ	max	units
dimensions	98 x 49 x 32.5				mm
input plug	US 2-pin				

**MECHANICAL DRAWING**

units: mm  
tolerance:  $\pm 1$  mm

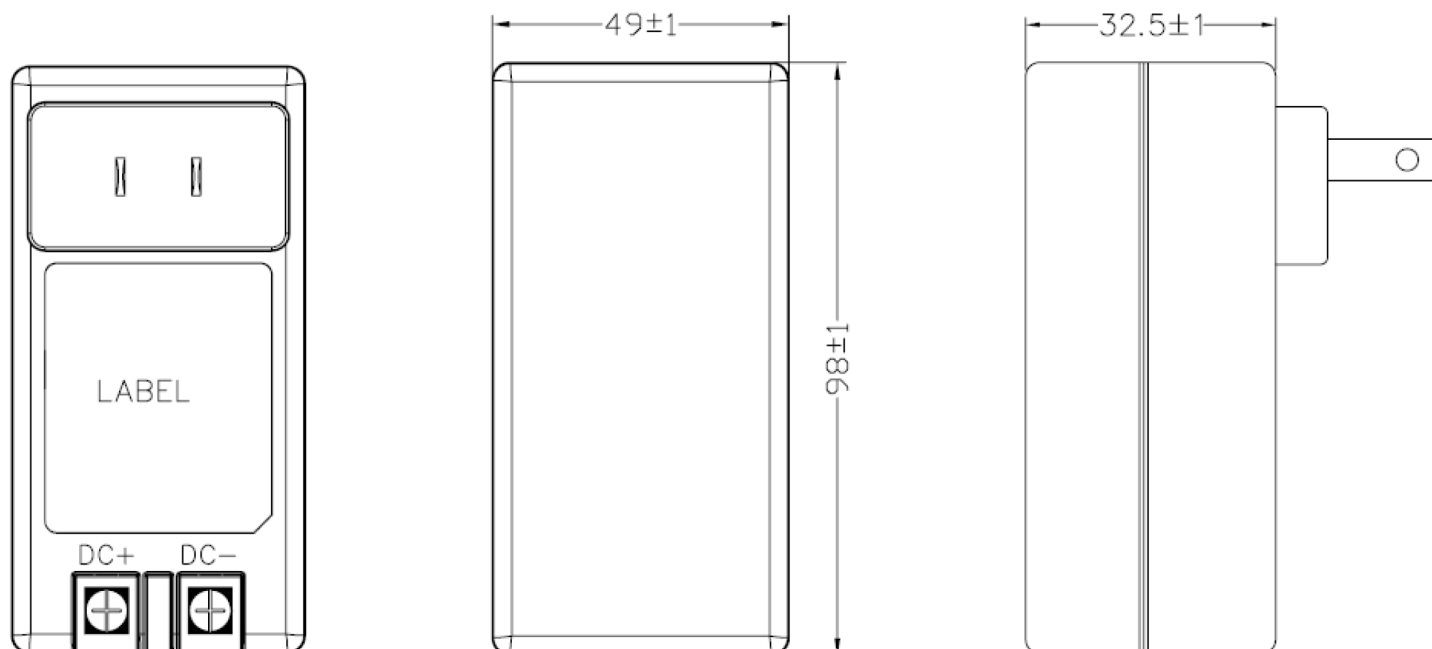

MAXIMUM RECOMMENDED CABLE LENGTH TO MAINTAIN $\pm 5\%$ OUTPUT VOLTAGE TOLERANCE		
MODEL NO.	CABLE GAUGE	MAX CABLE LENGTH
SWI12-12-N-SC	18 AWG	7.5 m
SWI12-12-N-SC	20 AWG	5.0 m
SWI12-12-N-SC	22 AWG	3.0 m
SWI12-12-N-SC	24 AWG	2.0 m
SWI12-15-N-SC	18 AWG	8.5 m
SWI12-15-N-SC	20 AWG	6.0 m
SWI12-15-N-SC	22 AWG	5.0 m
SWI12-15-N-SC	24 AWG	2.5 m
SWI12-24-N-SC	18 AWG	15.5 m
SWI12-24-N-SC	20 AWG	12 m
SWI12-24-N-SC	22 AWG	9.5 m
SWI12-24-N-SC	24 AWG	6.5 m

## REVISION HISTORY

---

rev.	description	date
1.0	initial release	12/04/2014
1.01	added max cable length information	02/10/2015
1.02	updated datasheet	10/12/2015

The revision history provided is for informational purposes only and is believed to be accurate.



**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

CUI offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.