

# Type CS (Capstick®) Metallized Polymer Network

## Radial Multi-pin Metallized Polymer Network for DC to DC Converters



The Type CS multi-pin metallized polymer network is ideal for the low ESR/ESL requirements in DC to DC converters and switching power supply applications. This unique, robust, capacitor design offers high ripple current capability and high capacitance in a small package. It is available with straight pins on 0.10" centers for through-hole mounting or with gull wing leads for surface mount assembly. Type CS (Capstick®) is encapsulated in a rugged conformal coating and is packaged in anti-static tubes for easy handling.

### Highlights

- ◆ Rugged conformal coated case meets UL94V-0
- ◆ Low ESR/ESL
- ◆ High ripple current
- ◆ High capacitance in a small package
- ◆ Non-inductive design
- ◆ Non-polar
- ◆ Surface mount or through hole assembly
- ◆ Multi-pin leads on 0.10" centers

### Specifications

RoHS Compliant


|   |   |
|---|---|
| <b>Capacitance Range:</b>                                   | 0.33 $\mu$ F to 20.0 $\mu$ F  |
| <b>Voltage Range:</b>                                       | 50 Vdc, 100 Vdc, 250 Vdc, 400 Vdc, 500 Vdc                              |
| <b>Capacitance Tolerance:</b>                               | $\pm$ 10%   |
| <b>Operating Temperature Range for 50, 100 and 250 Vdc:</b> | -55 °C to +125 °C (with 50% Vdc derating >85 °C)                        |
| <b>Operating Temperature Range for 400 and 500 Vdc:</b>     | -55 °C to +125 °C with no derating                                      |
| <b>Construction:</b>  | Multilayer metallized polymer dielectric                                |
| <b>Temperature Coefficient:</b>                             | +6% from -55 °C to +85 °C   |
| <b>Dielectric Withstand Voltage:</b>                        | 1.3 x rated voltage: 50/100/250/500 Vdc<br>1.6 x rated voltage: 400 Vdc |
| <b>Dissipation Factor (DF):</b>                             | $\leq$ 1.0% @ 1 kHz   |
| <b>Total Self Inductance (L):</b>                           | <6 nH typical (CS6)<br><4 nH typical (CS4)                              |
| <b>Lead Material:</b>                                       | Tinned copper alloy frame   |
| <b>Insulation Resistance:</b>                               | $\geq$ 1000 M $\Omega$ • $\mu$ F - need not exceed 1000 M $\Omega$      |

### Part Numbering System

|                            |                  |                |               |                    |                       |
|----------------------------|------------------|----------------|---------------|--------------------|-----------------------|
| <b>405</b>                 | <b>K</b>         | <b>100</b>     | <b>CS</b>     | <b>4</b>           | <b>G</b>              |
|                            |                  |                |               |                    |                       |
| <b>Cap</b>                 |                  |                |               | <b>Pin</b>         | <b>"Optional"</b>     |
| <b>(<math>\mu</math>F)</b> | <b>Tolerance</b> | <b>Voltage</b> | <b>Series</b> | <b>Spacing</b>     | <b>(.)</b>            |
| 334 = 0.33 $\mu$ F         | K = $\pm$ 10%    | 050 = 50 Vdc   | CS            | 4 = 0.4" (10.0 mm) | Blank = Straight Pins |
| 405 = 4.0 $\mu$ F          |                  | 100 = 100 Vdc  |               | 6 = 0.6" (15.0 mm) | G = Gull Wing         |
| 206 = 20.0 $\mu$ F         |                  | 400 = 400 Vdc  |               |                    |                       |

# Type CS (Capstick®) Metallized Polymer Network

## Capacitor Outline Drawing

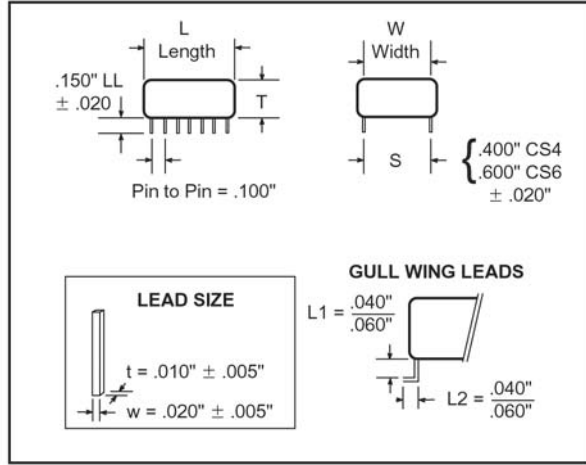

## Test Method and Performance

| Accelerated Dry Life                |   |
|-------------------------------------|---|
| <b>Test Conditions</b>              |   |
| Temperature:                        | +85 °C ±5 °C  |
| Applied Voltage:                    | 1.25 x rated voltage  |
| Test Duration:                      | 1000 hours performance  |
| <b>Requirements</b>                 |   |
| Capacitance :                       | Change of ≤5.0%   |
| Dissipation Factor:                 | ≤1.0% @ 1 kHz   |
| Insulation Resistance:              | ≥1K MΩ • μF, need not exceed 1 K MΩ                                       |
| Humidity                            |   |
| <b>Test Conditions</b>              |   |
| Temperature:                        | +85 °C ±2.0 °C  |
| Applied Voltage:                    | Zero voltage  |
| Humidity:                           | 85% ±2% RH  |
| Test Duration:                      | 21 days   |
| <b>Performance Requirements</b>     |   |
| Capacitance                         | Change of ≤7.0%   |
| Dissipation Factor                  | ≤1.0% @ 1 kHz   |
| Insulation Resistance               | ≥ 30% of limit value  |
| Soldering                           |   |
| <b>Test Conditions</b>              |   |
| Soldering Temperature:              | +250 °C ±5 °C   |
| Soldering Duration:                 | 5 sec ±1 sec  |
| <b>Performance Requirements</b>     |   |
| Capacitance:                        | Change of ≤ ±2%   |
| Capacitance Drift:                  | ≤2.0% over 2 years between 0 °C and 35 °C and a RH of between 35% and 65% |
| Vibration                           |   |
| Conforms to MIL-STD-202 Method 204D |   |

**Note:** The 400 Vdc rating can handle a 450 Vdc surge and is built to a 640 Vdc high potential.

## Ratings

RoHS Compliant

| Catalog Part Number | Cap (μF) | DC Voltage @ 500 kHz | ESR Ω @ 500 kHz | RMS Current @ 500 kHz | W Max. Inches (mm) | T Max. Inches (mm) | L Max. Inches (mm) | Nom. L.S. Inches (mm) | Leads Per Side | Tube Quantity |
|---------------------|----------|----------------------|-----------------|-----------------------|--------------------|--------------------|--------------------|-----------------------|----------------|---------------|
| <b>50 Vdc</b>       |          |                      |                 |                       |                    |                    |                    |                       |                |               |
| 106K050CS4*         | 10.00    | 50                   | 0.0030          | 15.3                  | 0.5 (12.7)         | 0.32 (8.1)         | 0.620 (15.7)       | 0.4 (10)              | 5              | 32            |
| 156K050CS4*         | 15.00    | 50                   | 0.0027          | 16.7                  | 0.5 (12.7)         | 0.32 (8.1)         | 0.880 (22.4)       | 0.4 (10)              | 7              | 22            |
| 206K050CS4*         | 20.00    | 50                   | 0.0025          | 17.8                  | 0.5 (12.7)         | 0.32 (8.1)         | 1.150 (29.2)       | 0.4 (10)              | 9              | 16            |
| <b>100 Vdc</b>      |          |                      |                 |                       |                    |                    |                    |                       |                |               |
| 405K100CS4*         | 4.00     | 100                  | 0.007           | 11.5                  | 0.5 (12.7)         | 0.25 (6.4)         | 0.450 (11.4)       | 0.4 (10)              | 3              | 44            |
| 475K100CS4*         | 4.70     | 100                  | 0.006           | 12.2                  | 0.5 (12.7)         | 0.25 (6.4)         | 0.525 (13.3)       | 0.4 (10)              | 3              | 38            |
| 685K100CS4*         | 6.80     | 100                  | 0.005           | 13.7                  | 0.5 (12.7)         | 0.25 (6.4)         | 0.700 (17.8)       | 0.4 (10)              | 5              | 35            |
| 106K100CS4*         | 10.00    | 100                  | 0.003           | 15.3                  | 0.5 (12.7)         | 0.25 (6.4)         | 0.995 (25.3)       | 0.4 (10)              | 7              | 20            |
| <b>250 Vdc</b>      |          |                      |                 |                       |                    |                    |                    |                       |                |               |
| 105K250CS6*         | 1.00     | 250                  | 0.012           | 5.2                   | 0.7 (17.8)         | 0.30 (7.6)         | 0.440 (11.2)       | 0.6 (15)              | 3              | 44            |
| <b>400 Vdc</b>      |          |                      |                 |                       |                    |                    |                    |                       |                |               |
| 334K400CS6*         | 0.33     | 400                  | 0.012           | 6.0                   | 0.7 (17.8)         | 0.32 (8.1)         | 0.435 (11.0)       | 0.6 (15)              | 3              | 44            |
| 474K400CS6*         | 0.47     | 400                  | 0.011           | 6.2                   | 0.7 (17.8)         | 0.32 (8.1)         | 0.460 (11.7)       | 0.6 (15)              | 3              | 42            |
| 105K400CS6*         | 1.00     | 400                  | 0.008           | 9.5                   | 0.7 (17.8)         | 0.32 (8.1)         | 0.880 (22.4)       | 0.6 (15)              | 7              | 22            |
| <b>500 Vdc</b>      |          |                      |                 |                       |                    |                    |                    |                       |                |               |
| 474K500CS6*         | 0.47     | 500                  | 0.011           | 6.2                   | 0.7 (17.8)         | 0.32 (8.1)         | 0.625 (15.9)       | 0.6 (15)              | 4              | 32            |
| 105K500CS6*         | 1.00     | 500                  | 0.008           | 9.5                   | 0.7 (17.8)         | 0.32 (8.1)         | 1.135 (28.8)       | 0.6 (15)              | 8              | 16            |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.