



EASY SERIAL-
TO-ETHERNET
CONNECTIVITY



PORTSERVER® TS

Simple, reliable and cost-effective RS-232
serial-to-Ethernet connectivity

PortServer TS serial servers offer a simple, reliable and cost-effective solution for connecting multiple serial devices over industry standard Ethernet. Target applications include retail/point-of-sale, building control and medical point-of-care.

Digi's patented RealPort®, with encryption and user authentication*, makes it possible to establish a connection between the host and networked serial device by creating a local COM or TTY port on the host computer, allowing software applications to work with networked device servers instead of requiring a host adapter.

PortServer TS is easy to install locally or remotely through a variety of IP addressing methods (DHCP, RARP, ARP-Ping) along with an application included on the installation CD that will automatically detect all PortServer devices on your network.

*The RealPort encryption feature is compatible with AIX, HP-UX, Solaris, Linux, Windows 2000, Windows XP, Windows 7, Windows 8, Windows 8.1, Windows 10, Windows Server 2003, Windows Server 2008 and Windows Server 2012. The RealPort authentication feature is compatible only with Windows 2000, Windows XP, Windows 7, Windows 8, Windows 8.1, Windows 10, Windows Server 2003, Windows Server 2008 and Windows Server 2012.

BENEFITS

- 1, 2 or 4 RS-232 serial ports for standard serial-to-Ethernet connectivity
- Ideal for applications requiring COM ports, serial tunneling, TCP/UDP sockets, or multiple unicast functionality
- Patented RealPort for COM/TTY port control and management
- Modem emulation
- Monitoring and diagnostic utility
- Secure communication via SSHv2
- Tunable for low latency or optimized for throughput
- Easy web-based configuration (HTTP/HTTPS)

RELATED PRODUCTS



PortServer®
TS ME1



ConnectPort®
TS



ConnectPort®
LTS




Digi One® SP




Cables

APPLICATION EXAMPLE

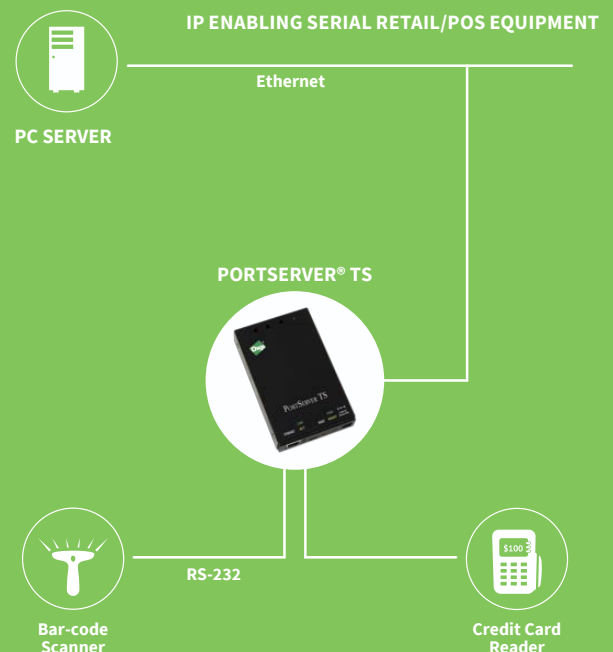


SPECIFICATIONS	PortServer® TS 1 PortServer® TS 2 PortServer® TS 4		
FEATURES			
MANAGEMENT	HTTP/HTTPS, CLI, SNMP (read/write), Digi Port Authority-Remote management diagnostics and auto-discovery tool		
PROTOCOLS	UDP/TCP, DHCP/RARP/ARP-Ping for IP Address assignment, PPP, Extended Telnet RFC 2217, Telnet, Reverse Telnet, Modbus to Modbus/TCP protocol conversion support, RADIUS, Reverse SSH		
SECURITY	SSHv2, SSL/TLS		
SOFTWARE	Supports Digi's Realport® COM port redirector		
STATUS LEDS	Link, Activity, Power, Status		
OPERATING SYSTEMS	AIX, HP-UX, Solaris, Linux, Windows 2000, Windows XP, Windows 7, Windows 8, Windows 8.1, Windows 10, Windows Server 2003, Windows Server 2008, Windows Server 2012. Note: TCP/UDP socket services are operating system independent.		
DIMENSIONS (L X W X D)	5.25 in x 3.33 in x 0.95 in (13.34 cm x 8.46 cm x 2.42 cm)		
WEIGHT	2.25 oz (64.00 g)		
OTHER	Full modem and hardware flow control, Modem emulation, Port buffering, RJ-45/DB-9F console adapter included for optional serial configuration		
INTERFACES			
SERIAL			
PORTS	1 RS-232 RJ-45; Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD	2 RS-232 RJ-45; Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD	4 RS-232 RJ-45; Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD
ETHERNET			
PORTS	1 RJ-45 10/100 Mbps 10/100Base-T (auto-sensing); Full or half duplex		
POWER REQUIREMENTS			
POWER INPUT	9-30 VDC with locking barrel power connector		
POWER SUPPLY (INCLUDED)	North America: 12 VDC/.5A max out; 120 VAC in (wall mount); International: 12 VDC/.5A max out; 100-240 VAC in (small brick)		
POWER SUPPLY (OPTIONAL)	12VDC extended temperature power supply sold separately		
POWER CONSUMPTION	Typical: 4 W; Max: 6 W		
PRODUCT SURGE PROTECTION (ESD)	4 kV burst (EFT) per EN61000-4-4, 2 kV surge transient per EN61000-4-5		
ENVIRONMENTAL			
OPERATING TEMPERATURE	0° C to +60° C (32° F to 140° F)		
STORAGE TEMPERATURE	-40° C to +85° C (-40° F to +185° F)		
RELATIVE HUMIDITY	5% to 95% (non-condensing)		
ETHERNET ISOLATION	1500 VAC min per IEEE802.3/ANSI X3.263		
SERIAL PORT PROTECTION (ESD)	15kV Human Body Model		
APPROVALS			
SAFETY	UL/CUL 60950, IEC 60950 & CB		
EMISSIONS/IMMUNITY	CE, FCC Part 15 (Class A), EN55024, EN55022 Class A, AS/NZS 3548, CISPR 22, VCCI V-3/99.05		

PORTSERVER TS FAMILY - FRONT

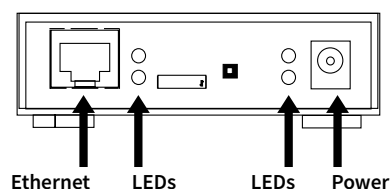

PORTSERVER TS FAMILY - BACK

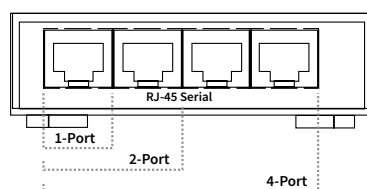

PART NUMBERS	DESCRIPTION
70002041	PortServer TS 1
70002042	PortServer TS 1 (International)
70002043	PortServer TS 2
70002044	PortServer TS 2 (International)
70002045	PortServer TS 4
70002046	PortServer TS 4 (International)

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001359
D1/915

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.