

# NCP500

## 150 mA CMOS Low Noise Low-Dropout Voltage Regulator

The NCP500 series of fixed output low dropout linear regulators are designed for portable battery powered applications which require low noise operation, fast enable response time, and low dropout. The device achieves its low noise performance without the need of an external noise bypass capacitor. Each device contains a voltage reference unit, an error amplifier, a PMOS power transistor, and resistors for setting output voltage, and current limit and temperature limit protection circuits.


The NCP500 has been designed to be used with low cost ceramic capacitors and requires a minimum output capacitor of 1.0  $\mu$ F.

### Features

- Ultra-Low Dropout Voltage of 170 mV at 150 mA
- Fast Enable Turn-On Time of 20  $\mu$ sec
- Wide Operating Voltage Range of 1.8 V to 6.0 V
- Excellent Line and Load Regulation
- High Accuracy Output Voltage of 2.5%
- Enable Can Be Driven Directly by 1.0 V Logic
- Typical RMS Noise Voltage 50  $\mu$ V with No Bypass Capacitor (BW = 10 Hz to 100 kHz)
- Very Small DFN 2x2.2 Package
- Pb-Free Packages are Available

### Typical Applications

- Noise Sensitive Circuits – VCO's, RF Stages, etc.
- SMPS Post-Regulation
- Hand-Held Instrumentation
- Camcorders and Cameras

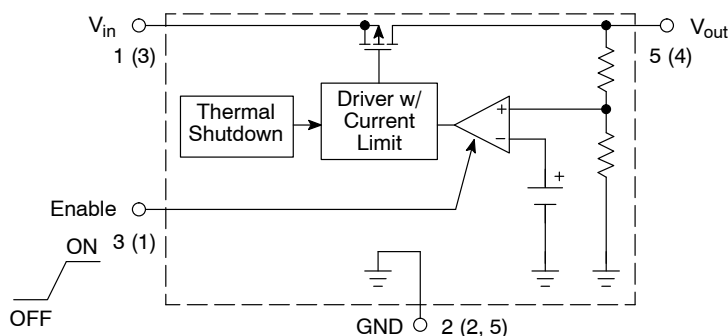


NOTE: Pin numbers in parenthesis indicate DFN package.

Figure 1. Simplified Block Diagram




ON Semiconductor®

<http://onsemi.com>




TSOP-5  
SN SUFFIX  
CASE 483




DFN 2x2.2 MM  
SQL SUFFIX  
CASE 506BA

### PIN CONNECTIONS AND MARKING DIAGRAMS



xxx = Specific Device Code  
A = Assembly Location  
Y = Year  
W = Work Week  
▪ = Pb-Free Package  
(Note: Microdot may be in either location)



xx = Specific Device Code  
M = Date Code

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 17 of this data sheet.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# NCP500

## PIN FUNCTION DESCRIPTION

| TSOP-5<br>Pin No. | DFN 2x2<br>Pin No. | Pin Name         | Description                                                                                                                                                                                                    |
|-------------------|--------------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                 | 3                  | V <sub>in</sub>  | Positive power supply input voltage.                                                                                                                                                                           |
| 2                 | 2, 5               | GND              | Power supply ground.                                                                                                                                                                                           |
| 3                 | 1                  | Enable           | This input is used to place the device into low-power standby. When this input is pulled to a logic low, the device is disabled. If this function is not used, Enable should be connected to V <sub>in</sub> . |
| 4                 | 6                  | N/C              | No internal connection.                                                                                                                                                                                        |
| 5                 | 4                  | V <sub>out</sub> | Regulated output voltage.                                                                                                                                                                                      |

## MAXIMUM RATINGS

| Rating                                                            | Symbol              | Value                        | Unit |
|-------------------------------------------------------------------|---------------------|------------------------------|------|
| Input Voltage                                                     | V <sub>in</sub>     | 0 to 6.0                     | V    |
| Enable Voltage                                                    | V <sub>on/off</sub> | -0.3 to V <sub>in</sub> +0.3 | V    |
| Output Voltage                                                    | V <sub>out</sub>    | -0.3 to V <sub>in</sub> +0.3 | V    |
| Output Short Circuit Duration                                     | –                   | Infinite                     | –    |
| Thermal Resistance, Junction-to-Ambient<br>TSOP-5<br>DFN (Note 3) | R <sub>θJA</sub>    | 250<br>225                   | °C/W |
| Operating Junction Temperature                                    | T <sub>J</sub>      | +125                         | °C   |
| Storage Temperature                                               | T <sub>stg</sub>    | -65 to +150                  | °C   |

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

- This device series contains ESD protection and exceeds the following tests:  
Human Body Model 2000 V per MIL-STD-883, Method 3015  
Machine Model Method 200 V Latch up capability (85°C) ± 100 mA.
- Device is internally limited to 160°C by thermal shutdown.
- For more information, refer to application note, AND8080/D.

**ELECTRICAL CHARACTERISTICS** (V<sub>in</sub> = 2.35 V, C<sub>in</sub> = 1.0 μF, C<sub>out</sub> = 1.0 μF, for typical value T<sub>A</sub> = 25°C, for min and max values T<sub>A</sub> = -40°C to 85°C, T<sub>jmax</sub> = 125°C, unless otherwise noted)

| Characteristic                                                                                                                                                                   | Symbol                            | Min         | Typ                | Max               | Unit |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-------------|--------------------|-------------------|------|
| <b>-1.8 V</b>                                                                                                                                                                    |                                   |             |                    |                   |      |
| Output Voltage (T <sub>A</sub> = -40°C to 85°C, I <sub>out</sub> = 1.0 mA to 150 mA)                                                                                             | V <sub>out</sub>                  | 1.755       | 1.8                | 1.845             | V    |
| Line Regulation (V <sub>in</sub> = 2.3 V to 6.0 V, I <sub>out</sub> = 1.0 mA)                                                                                                    | Reg <sub>line</sub>               | –           | 1.0                | 10                | mV   |
| Load Regulation (I <sub>out</sub> = 1.0 mA to 150 mA)                                                                                                                            | Reg <sub>load</sub>               | –           | 15                 | 45                | mV   |
| Dropout Voltage (Measured at V <sub>out</sub> -2.0%, T <sub>A</sub> = -40°C to 85°C)<br>(I <sub>out</sub> = 1.0 mA)<br>(I <sub>out</sub> = 75 mA)<br>(I <sub>out</sub> = 150 mA) | V <sub>in</sub> -V <sub>out</sub> | –<br>–<br>– | 2.0<br>140<br>270  | 10<br>200<br>350  | mV   |
| Output Short Circuit Current                                                                                                                                                     | I <sub>out(max)</sub>             | 200         | 540                | 700               | mA   |
| Ripple Rejection<br>(V <sub>in</sub> = V <sub>out</sub> (nom.) + 1.0 V + 0.5 V <sub>pp</sub> , f = 1.0 kHz, I <sub>o</sub> = 60 mA)                                              | RR                                | –           | 62                 | –                 | dB   |
| Quiescent Current<br>(Enable Input = 0 V)<br>(Enable Input = 0.9 V, I <sub>out</sub> = 1.0 mA)<br>(Enable Input = 0.9 V, I <sub>out</sub> = 150 mA)                              | I <sub>Q</sub>                    | –<br>–<br>– | 0.01<br>175<br>175 | 1.0<br>300<br>300 | μA   |
| Enable Input Threshold Voltage<br>(Voltage Increasing, Output Turns On, Logic High)<br>(Voltage Decreasing, Output Turns Off, Logic Low)                                         | V <sub>th(EN)</sub>               | 0.9<br>–    | –<br>–             | –<br>0.15         | V    |
| Enable Input Bias Current                                                                                                                                                        | I <sub>IB(EN)</sub>               | –           | 3.0                | 100               | nA   |

# NCP500

**ELECTRICAL CHARACTERISTICS (continued)** ( $V_{in} = 2.35\text{ V}$ ,  $C_{in} = 1.0\text{ }\mu\text{F}$ ,  $C_{out} = 1.0\text{ }\mu\text{F}$ , for typical value  $T_A = 25^\circ\text{C}$ , for min and max values  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$ ,  $T_{jmax} = 125^\circ\text{C}$ , unless otherwise noted)

| Output Turn On Time (Enable Input = 0 V to $V_{in}$ )                                                                                                                                                | –                   | –           | 20                 | 100               | $\mu\text{s}$ |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------|--------------------|-------------------|---------------|
| Characteristic                                                                                                                                                                                       | Symbol              | Min         | Typ                | Max               | Unit          |
| <b>–1.85 V</b>                                                                                                                                                                                       |                     |             |                    |                   |               |
| Output Voltage ( $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ , $I_{out} = 1.0\text{ mA}$ to $150\text{ mA}$ )                                                                                    | $V_{out}$           | 1.804       | 1.85               | 1.896             | V             |
| Line Regulation ( $V_{in} = 2.3\text{ V}$ to $6.0\text{ V}$ , $I_{out} = 1.0\text{ mA}$ )                                                                                                            | $\text{Reg}_{line}$ | –           | 1.0                | 10                | mV            |
| Load Regulation ( $I_{out} = 1.0\text{ mA}$ to $150\text{ mA}$ )                                                                                                                                     | $\text{Reg}_{load}$ | –           | 15                 | 45                | mV            |
| Dropout Voltage (Measured at $V_{out} - 2.0\%$ , $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ )<br>( $I_{out} = 1.0\text{ mA}$ )<br>( $I_{out} = 75\text{ mA}$ )<br>( $I_{out} = 150\text{ mA}$ ) | $V_{in} - V_{out}$  | –<br>–<br>– | 2.0<br>–<br>–      | 10<br>–<br>–      | mV            |
| Output Short Circuit Current                                                                                                                                                                         | $I_{out(max)}$      | 200         | 540                | 700               | mA            |
| Ripple Rejection<br>( $V_{in} = V_{out(nom.)} + 1.0\text{ V} + 0.5\text{ V}_{pp}$ , $f = 1.0\text{ kHz}$ , $I_o = 60\text{ mA}$ )                                                                    | RR                  | –           | 62                 | –                 | dB            |
| Quiescent Current<br>(Enable Input = 0 V)<br>(Enable Input = 0.9 V, $I_{out} = 1.0\text{ mA}$ )<br>(Enable Input = 0.9 V, $I_{out} = 150\text{ mA}$ )                                                | $I_Q$               | –<br>–<br>– | 0.01<br>175<br>175 | 1.0<br>300<br>300 | $\mu\text{A}$ |
| Enable Input Threshold Voltage<br>(Voltage Increasing, Output Turns On, Logic High)<br>(Voltage Decreasing, Output Turns Off, Logic Low)                                                             | $V_{th(EN)}$        | 0.9<br>–    | –<br>–             | –<br>0.15         | V             |
| Enable Input Bias Current                                                                                                                                                                            | $I_{IB(EN)}$        | –           | 3.0                | 100               | nA            |
| Output Turn On Time (Enable Input = 0 V to $V_{in}$ )                                                                                                                                                | –                   | –           | 20                 | 100               | $\mu\text{s}$ |

**ELECTRICAL CHARACTERISTICS (continued)** ( $V_{in} = 3.0\text{ V}$ ,  $C_{in} = 1.0\text{ }\mu\text{F}$ ,  $C_{out} = 1.0\text{ }\mu\text{F}$ , for typical value  $T_A = 25^\circ\text{C}$ , for min and max values  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$ ,  $T_{jmax} = 125^\circ\text{C}$ , unless otherwise noted)

| Characteristic                                                                                                                                                                                       | Symbol              | Min         | Typ                | Max               | Unit          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------|--------------------|-------------------|---------------|
| <b>–2.5 V</b>                                                                                                                                                                                        |                     |             |                    |                   |               |
| Output Voltage<br>( $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ , $I_{out} = 1.0\text{ mA}$ to $150\text{ mA}$ )                                                                                 | $V_{out}$           | 2.438       | 2.5                | 2.563             | V             |
| Line Regulation ( $V_{in} = 3.0\text{ V}$ to $6.0\text{ V}$ , $I_{out} = 1.0\text{ mA}$ )                                                                                                            | $\text{Reg}_{line}$ | –           | 1.0                | 10                | mV            |
| Load Regulation ( $I_{out} = 1.0\text{ mA}$ to $150\text{ mA}$ )                                                                                                                                     | $\text{Reg}_{load}$ | –           | 15                 | 45                | mV            |
| Dropout Voltage (Measured at $V_{out} - 2.0\%$ , $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ )<br>( $I_{out} = 1.0\text{ mA}$ )<br>( $I_{out} = 75\text{ mA}$ )<br>( $I_{out} = 150\text{ mA}$ ) | $V_{in} - V_{out}$  | –<br>–<br>– | 2.0<br>100<br>190  | 10<br>170<br>270  | mV            |
| Output Short Circuit Current                                                                                                                                                                         | $I_{out(max)}$      | 200         | 540                | 700               | mA            |
| Ripple Rejection<br>( $V_{in} = V_{out(nom.)} + 1.0\text{ V} + 0.5\text{ V}_{pp}$ , $f = 1.0\text{ kHz}$ , $I_o = 60\text{ mA}$ )                                                                    | RR                  | –           | 62                 | –                 | dB            |
| Quiescent Current<br>(Enable Input = 0 V)<br>(Enable Input = 0.9 V, $I_{out} = 1.0\text{ mA}$ )<br>(Enable Input = 0.9 V, $I_{out} = 150\text{ mA}$ )                                                | $I_Q$               | –<br>–<br>– | 0.01<br>180<br>180 | 1.0<br>300<br>300 | $\mu\text{A}$ |
| Enable Input Threshold Voltage<br>(Voltage Increasing, Output Turns On, Logic High)<br>(Voltage Decreasing, Output Turns Off, Logic Low)                                                             | $V_{th(EN)}$        | 0.9<br>–    | –<br>–             | –<br>0.15         | V             |
| Enable Input Bias Current                                                                                                                                                                            | $I_{IB(EN)}$        | –           | 3.0                | 100               | nA            |
| Output Turn On Time (Enable Input = 0 V to $V_{in}$ )                                                                                                                                                | –                   | –           | 20                 | 100               | $\mu\text{s}$ |

# NCP500

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 3.1\text{ V}$ ,  $C_{in} = 1.0\text{ }\mu\text{F}$ ,  $C_{out} = 1.0\text{ }\mu\text{F}$ , for typical value  $T_A = 25^\circ\text{C}$ , for min and max values  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$ ,  $T_{jmax} = 125^\circ\text{C}$ , unless otherwise noted)

| Characteristic                                                                                                                                                                                       | Symbol             | Min         | Typ                | Max               | Unit          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-------------|--------------------|-------------------|---------------|
| <b>-2.6 V</b>                                                                                                                                                                                        |                    |             |                    |                   |               |
| Output Voltage<br>( $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ , $I_{out} = 1.0\text{ mA}$ to $150\text{ mA}$ )                                                                                 | $V_{out}$          | 2.535       | 2.6                | 2.665             | V             |
| Line Regulation ( $V_{in} = 3.0\text{ V}$ to $6.0\text{ V}$ , $I_{out} = 1.0\text{ mA}$ )                                                                                                            | $Reg_{line}$       | –           | 1.0                | 10                | mV            |
| Load Regulation ( $I_{out} = 1.0\text{ mA}$ to $150\text{ mA}$ )                                                                                                                                     | $Reg_{load}$       | –           | 15                 | 45                | mV            |
| Dropout Voltage (Measured at $V_{out} - 2.0\%$ , $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ )<br>( $I_{out} = 1.0\text{ mA}$ )<br>( $I_{out} = 75\text{ mA}$ )<br>( $I_{out} = 150\text{ mA}$ ) | $V_{in} - V_{out}$ | –<br>–<br>– | 2.0<br>–<br>–      | 10<br>–<br>–      | mV            |
| Output Short Circuit Current                                                                                                                                                                         | $I_{out(max)}$     | 200         | 540                | 700               | mA            |
| Ripple Rejection<br>( $V_{in} = V_{out(nom.)} + 1.0\text{ V} + 0.5\text{ V}_{pp}$ , $f = 1.0\text{ kHz}$ , $I_o = 60\text{ mA}$ )                                                                    | RR                 | –           | 62                 | –                 | dB            |
| Quiescent Current<br>(Enable Input = 0 V)<br>(Enable Input = 0.9 V, $I_{out} = 1.0\text{ mA}$ )<br>(Enable Input = 0.9 V, $I_{out} = 150\text{ mA}$ )                                                | $I_Q$              | –<br>–<br>– | 0.01<br>180<br>180 | 1.0<br>300<br>300 | $\mu\text{A}$ |
| Enable Input Threshold Voltage<br>(Voltage Increasing, Output Turns On, Logic High)<br>(Voltage Decreasing, Output Turns Off, Logic Low)                                                             | $V_{th(EN)}$       | 0.9<br>–    | –<br>–             | –<br>0.15         | V             |
| Enable Input Bias Current                                                                                                                                                                            | $I_{IB(EN)}$       | –           | 3.0                | 100               | nA            |
| Output Turn On Time (Enable Input = 0 V to $V_{in}$ )                                                                                                                                                | –                  | –           | 20                 | 100               | $\mu\text{s}$ |

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 3.2\text{ V}$ ,  $C_{in} = 1.0\text{ }\mu\text{F}$ ,  $C_{out} = 1.0\text{ }\mu\text{F}$ , for typical value  $T_A = 25^\circ\text{C}$ , for min and max values  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$ ,  $T_{jmax} = 125^\circ\text{C}$ , unless otherwise noted)

| Characteristic                                                                                                                                                                                       | Symbol             | Min         | Typ                | Max               | Unit          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-------------|--------------------|-------------------|---------------|
| <b>-2.7 V</b>                                                                                                                                                                                        |                    |             |                    |                   |               |
| Output Voltage<br>( $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ , $I_{out} = 1.0\text{ mA}$ to $150\text{ mA}$ )                                                                                 | $V_{out}$          | 2.633       | 2.7                | 2.768             | V             |
| Line Regulation ( $V_{in} = 3.2\text{ V}$ to $6.0\text{ V}$ , $I_{out} = 1.0\text{ mA}$ )                                                                                                            | $Reg_{line}$       | –           | 1.0                | 10                | mV            |
| Load Regulation ( $I_{out} = 1.0\text{ mA}$ to $150\text{ mA}$ )                                                                                                                                     | $Reg_{load}$       | –           | 15                 | 45                | mV            |
| Dropout Voltage (Measured at $V_{out} - 2.0\%$ , $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ )<br>( $I_{out} = 1.0\text{ mA}$ )<br>( $I_{out} = 75\text{ mA}$ )<br>( $I_{out} = 150\text{ mA}$ ) | $V_{in} - V_{out}$ | –<br>–<br>– | 2.0<br>90<br>180   | 10<br>160<br>260  | mV            |
| Output Short Circuit Current                                                                                                                                                                         | $I_{out(max)}$     | 200         | 540                | 700               | mA            |
| Ripple Rejection<br>( $V_{in} = V_{out(nom.)} + 1.0\text{ V} + 0.5\text{ V}_{pp}$ , $f = 1.0\text{ kHz}$ , $I_o = 60\text{ mA}$ )                                                                    | RR                 | –           | 62                 | –                 | dB            |
| Quiescent Current<br>(Enable Input = 0 V)<br>(Enable Input = 0.9 V, $I_{out} = 1.0\text{ mA}$ )<br>(Enable Input = 0.9 V, $I_{out} = 150\text{ mA}$ )                                                | $I_Q$              | –<br>–<br>– | 0.01<br>185<br>185 | 1.0<br>300<br>300 | $\mu\text{A}$ |
| Enable Input Threshold Voltage<br>(Voltage Increasing, Output Turns On, Logic High)<br>(Voltage Decreasing, Output Turns Off, Logic Low)                                                             | $V_{th(EN)}$       | 0.9<br>–    | –<br>–             | –<br>0.15         | V             |
| Enable Input Bias Current                                                                                                                                                                            | $I_{IB(EN)}$       | –           | 3.0                | 100               | nA            |
| Output Turn On Time (Enable Input = 0 V to $V_{in}$ )                                                                                                                                                | –                  | –           | 20                 | 100               | $\mu\text{s}$ |

# NCP500

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 3.3\text{ V}$ ,  $C_{in} = 1.0\text{ }\mu\text{F}$ ,  $C_{out} = 1.0\text{ }\mu\text{F}$ , for typical value  $T_A = 25^\circ\text{C}$ , for min and max values  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$ ,  $T_{jmax} = 125^\circ\text{C}$ , unless otherwise noted)

| Characteristic                                                                                                                                                                                       | Symbol             | Min         | Typ                | Max               | Unit          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-------------|--------------------|-------------------|---------------|
| <b>-2.8 V</b>                                                                                                                                                                                        |                    |             |                    |                   |               |
| Output Voltage<br>( $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ , $I_{out} = 1.0\text{ mA}$ to $150\text{ mA}$ )                                                                                 | $V_{out}$          | 2.730       | 2.8                | 2.870             | V             |
| Line Regulation ( $V_{in} = 3.3\text{ V}$ to $6.0\text{ V}$ , $I_{out} = 1.0\text{ mA}$ )                                                                                                            | $Reg_{line}$       | –           | 1.0                | 10                | mV            |
| Load Regulation ( $I_{out} = 1.0\text{ mA}$ to $150\text{ mA}$ )                                                                                                                                     | $Reg_{load}$       | –           | 15                 | 45                | mV            |
| Dropout Voltage (Measured at $V_{out} - 2.0\%$ , $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ )<br>( $I_{out} = 1.0\text{ mA}$ )<br>( $I_{out} = 75\text{ mA}$ )<br>( $I_{out} = 150\text{ mA}$ ) | $V_{in} - V_{out}$ | –<br>–<br>– | 2.0<br>90<br>170   | 10<br>150<br>250  | mV            |
| Output Short Circuit Current                                                                                                                                                                         | $I_{out(max)}$     | 200         | 540                | 700               | mA            |
| Ripple Rejection<br>( $V_{in} = V_{out(nom.)} + 1.0\text{ V} + 0.5\text{ V}_{pp}$ , $f = 1.0\text{ kHz}$ , $I_o = 60\text{ mA}$ )                                                                    | RR                 | –           | 62                 | –                 | dB            |
| Quiescent Current<br>(Enable Input = 0 V)<br>(Enable Input = 0.9 V, $I_{out} = 1.0\text{ mA}$ )<br>(Enable Input = 0.9 V, $I_{out} = 150\text{ mA}$ )                                                | $I_Q$              | –<br>–<br>– | 0.01<br>185<br>185 | 1.0<br>300<br>300 | $\mu\text{A}$ |
| Enable Input Threshold Voltage<br>(Voltage Increasing, Output Turns On, Logic High)<br>(Voltage Decreasing, Output Turns Off, Logic Low)                                                             | $V_{th(EN)}$       | 0.9<br>–    | –<br>–             | –<br>0.15         | V             |
| Enable Input Bias Current                                                                                                                                                                            | $I_{IB(EN)}$       | –           | 3.0                | 100               | nA            |
| Output Turn On Time (Enable Input = 0 V to $V_{in}$ )                                                                                                                                                | –                  | –           | 20                 | 100               | $\mu\text{s}$ |

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 3.5\text{ V}$ ,  $C_{in} = 1.0\text{ }\mu\text{F}$ ,  $C_{out} = 1.0\text{ }\mu\text{F}$ , for typical value  $T_A = 25^\circ\text{C}$ , for min and max values  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$ ,  $T_{jmax} = 125^\circ\text{C}$ , unless otherwise noted)

| Characteristic                                                                                                                                                                                       | Symbol             | Min         | Typ                | Max               | Unit          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-------------|--------------------|-------------------|---------------|
| <b>-3.0 V</b>                                                                                                                                                                                        |                    |             |                    |                   |               |
| Output Voltage<br>( $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ , $I_{out} = 1.0\text{ mA}$ to $150\text{ mA}$ )                                                                                 | $V_{out}$          | 2.925       | 3.0                | 3.075             | V             |
| Line Regulation ( $V_{in} = 3.5\text{ V}$ to $6.0\text{ V}$ , $I_{out} = 1.0\text{ mA}$ )                                                                                                            | $Reg_{line}$       | –           | 1.0                | 10                | mV            |
| Load Regulation ( $I_{out} = 1.0\text{ mA}$ to $150\text{ mA}$ )                                                                                                                                     | $Reg_{load}$       | –           | 15                 | 45                | mV            |
| Dropout Voltage (Measured at $V_{out} - 2.0\%$ , $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ )<br>( $I_{out} = 1.0\text{ mA}$ )<br>( $I_{out} = 75\text{ mA}$ )<br>( $I_{out} = 150\text{ mA}$ ) | $V_{in} - V_{out}$ | –<br>–<br>– | 2.0<br>85<br>165   | 10<br>130<br>240  | mV            |
| Output Short Circuit Current                                                                                                                                                                         | $I_{out(max)}$     | 200         | 540                | 700               | mA            |
| Ripple Rejection<br>( $V_{in} = V_{out(nom.)} + 1.0\text{ V} + 0.5\text{ V}_{pp}$ , $f = 1.0\text{ kHz}$ , $I_o = 60\text{ mA}$ )                                                                    | RR                 | –           | 62                 | –                 | dB            |
| Quiescent Current<br>(Enable Input = 0 V)<br>(Enable Input = 0.9 V, $I_{out} = 1.0\text{ mA}$ )<br>(Enable Input = 0.9 V, $I_{out} = 150\text{ mA}$ )                                                | $I_Q$              | –<br>–<br>– | 0.01<br>190<br>190 | 1.0<br>300<br>300 | $\mu\text{A}$ |
| Enable Input Threshold Voltage<br>(Voltage Increasing, Output Turns On, Logic High)<br>(Voltage Decreasing, Output Turns Off, Logic Low)                                                             | $V_{th(EN)}$       | 0.9<br>–    | –<br>–             | –<br>0.15         | V             |
| Enable Input Bias Current                                                                                                                                                                            | $I_{IB(EN)}$       | –           | 3.0                | 100               | nA            |
| Output Turn On Time (Enable Input = 0 V to $V_{in}$ )                                                                                                                                                | –                  | –           | 20                 | 100               | $\mu\text{s}$ |

# NCP500

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 3.8\text{ V}$ ,  $C_{in} = 1.0\text{ }\mu\text{F}$ ,  $C_{out} = 1.0\text{ }\mu\text{F}$ , for typical value  $T_A = 25^\circ\text{C}$ , for min and max values  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$ ,  $T_{jmax} = 125^\circ\text{C}$ , unless otherwise noted)

| Characteristic                                                                                                                                                                                       | Symbol             | Min         | Typ                | Max               | Unit          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-------------|--------------------|-------------------|---------------|
| <b>-3.3 V</b>                                                                                                                                                                                        |                    |             |                    |                   |               |
| Output Voltage<br>( $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ , $I_{out} = 1.0\text{ mA}$ to $150\text{ mA}$ )                                                                                 | $V_{out}$          | 3.218       | 3.3                | 3.383             | V             |
| Line Regulation ( $V_{in} = 3.8\text{ V}$ to $6.0\text{ V}$ , $I_{out} = 1.0\text{ mA}$ )                                                                                                            | $Reg_{line}$       | –           | 1.0                | 10                | mV            |
| Load Regulation ( $I_{out} = 1.0\text{ mA}$ to $150\text{ mA}$ )                                                                                                                                     | $Reg_{load}$       | –           | 15                 | 45                | mV            |
| Dropout Voltage (Measured at $V_{out} - 2.0\%$ , $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ )<br>( $I_{out} = 1.0\text{ mA}$ )<br>( $I_{out} = 75\text{ mA}$ )<br>( $I_{out} = 150\text{ mA}$ ) | $V_{in} - V_{out}$ | –<br>–<br>– | 2.0<br>80<br>150   | 10<br>110<br>230  | mV            |
| Output Short Circuit Current                                                                                                                                                                         | $I_{out(max)}$     | 200         | 540                | 700               | mA            |
| Ripple Rejection<br>( $V_{in} = V_{out(nom.)} + 1.0\text{ V} + 0.5\text{ V}_{pp}$ , $f = 1.0\text{ kHz}$ , $I_o = 60\text{ mA}$ )                                                                    | RR                 | –           | 62                 | –                 | dB            |
| Quiescent Current<br>(Enable Input = 0 V)<br>(Enable Input = 0.9 V, $I_{out} = 1.0\text{ mA}$ )<br>(Enable Input = 0.9 V, $I_{out} = 150\text{ mA}$ )                                                | $I_Q$              | –<br>–<br>– | 0.01<br>195<br>195 | 1.0<br>300<br>300 | $\mu\text{A}$ |
| Enable Input Threshold Voltage<br>(Voltage Increasing, Output Turns On, Logic High)<br>(Voltage Decreasing, Output Turns Off, Logic Low)                                                             | $V_{th(EN)}$       | 0.9<br>–    | –<br>–             | –<br>0.15         | V             |
| Enable Input Bias Current                                                                                                                                                                            | $I_{IB(EN)}$       | –           | 3.0                | 100               | nA            |
| Output Turn On Time (Enable Input = 0 V to $V_{in}$ )                                                                                                                                                | –                  | –           | 20                 | 100               | $\mu\text{s}$ |

# NCP500

**ELECTRICAL CHARACTERISTICS** ( $V_{in} = 5.5\text{ V}$ ,  $C_{in} = 1.0\text{ }\mu\text{F}$ ,  $C_{out} = 1.0\text{ }\mu\text{F}$ , for typical value  $T_A = 25^\circ\text{C}$ , for min and max values  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$ ,  $T_{jmax} = 125^\circ\text{C}$ , unless otherwise noted)

| Characteristic                                                                                                                                                                                       | Symbol             | Min         | Typ                | Max               | Unit          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-------------|--------------------|-------------------|---------------|
| <b>-5.0 V</b>                                                                                                                                                                                        |                    |             |                    |                   |               |
| Output Voltage<br>( $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ , $I_{out} = 1.0\text{ mA}$ to $150\text{ mA}$ )                                                                                 | $V_{out}$          | 4.875       | 5.0                | 5.125             | V             |
| Line Regulation ( $V_{in} = 5.5\text{ V}$ to $6.0\text{ V}$ , $I_{out} = 1.0\text{ mA}$ )                                                                                                            | $Reg_{line}$       | –           | 1.0                | 10                | mV            |
| Load Regulation ( $I_{out} = 1.0\text{ mA}$ to $150\text{ mA}$ )                                                                                                                                     | $Reg_{load}$       | –           | 15                 | 45                | mV            |
| Dropout Voltage (Measured at $V_{out} - 2.0\%$ , $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ )<br>( $I_{out} = 1.0\text{ mA}$ )<br>( $I_{out} = 75\text{ mA}$ )<br>( $I_{out} = 150\text{ mA}$ ) | $V_{in} - V_{out}$ | –<br>–<br>– | 2.0<br>60<br>120   | 10<br>100<br>180  | mV            |
| Output Short Circuit Current                                                                                                                                                                         | $I_{out(max)}$     | 200         | 540                | 700               | mA            |
| Ripple Rejection<br>( $V_{in} = V_{out(nom.)} + 1.0\text{ V} + 0.5\text{ V}_{pp}$ , $f = 1.0\text{ kHz}$ , $I_o = 60\text{ mA}$ )                                                                    | RR                 | –           | 62                 | –                 | dB            |
| Quiescent Current<br>(Enable Input = 0 V)<br>(Enable Input = 0.9 V, $I_{out} = 1.0\text{ mA}$ )<br>(Enable Input = 0.9 V, $I_{out} = 150\text{ mA}$ )                                                | $I_Q$              | –<br>–<br>– | 0.01<br>210<br>210 | 1.0<br>300<br>300 | $\mu\text{A}$ |
| Enable Input Threshold Voltage<br>(Voltage Increasing, Output Turns On, Logic High)<br>(Voltage Decreasing, Output Turns Off, Logic Low)                                                             | $V_{th(EN)}$       | 0.9<br>–    | –<br>–             | –<br>0.15         | V             |
| Enable Input Bias Current                                                                                                                                                                            | $I_{IB(EN)}$       | –           | 3.0                | 100               | nA            |
| Output Turn On Time (Enable Input = 0 V to $V_{in}$ )                                                                                                                                                | –                  | –           | 20                 | 100               | $\mu\text{s}$ |

4. Maximum package power dissipation limits must be observed.

$$P_D = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

5. Low duty cycle pulse techniques are used during testing to maintain the junction temperature as close to ambient as possible.

# NCP500

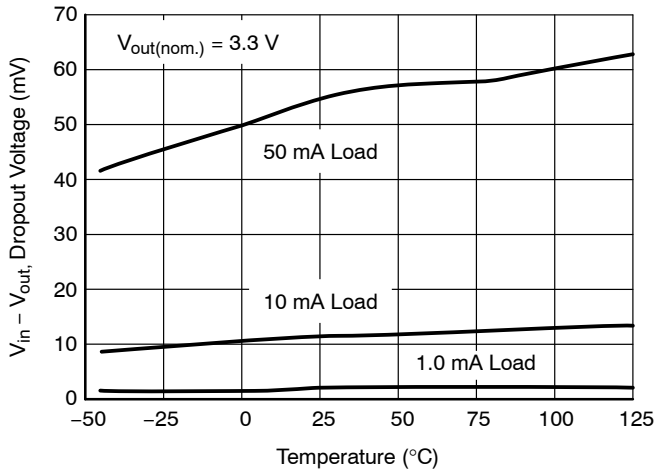


Figure 2. Dropout Voltage vs. Temperature

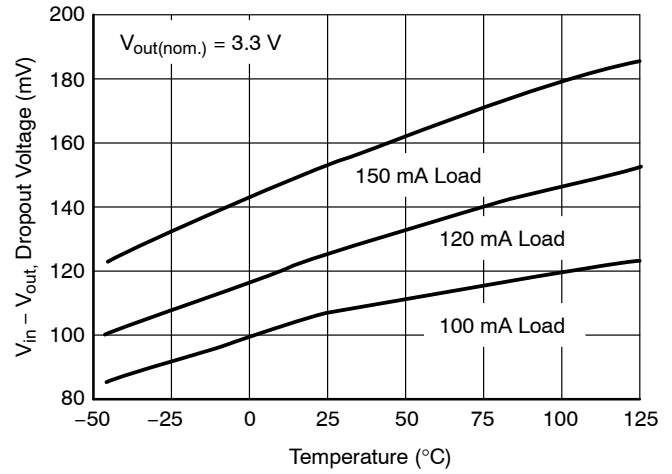


Figure 3. Dropout Voltage vs. Temperature

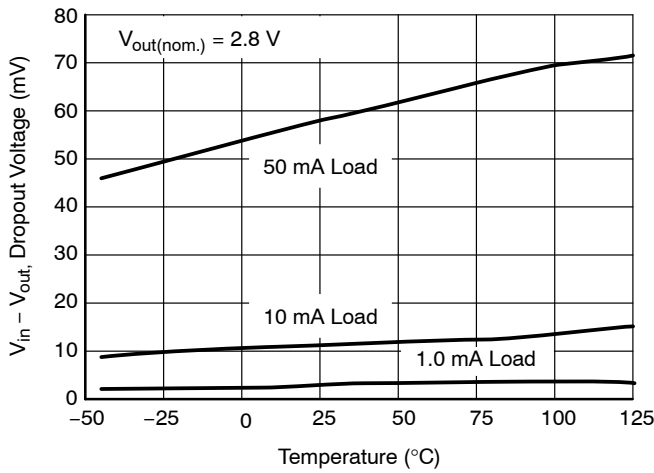


Figure 4. Dropout Voltage vs. Temperature

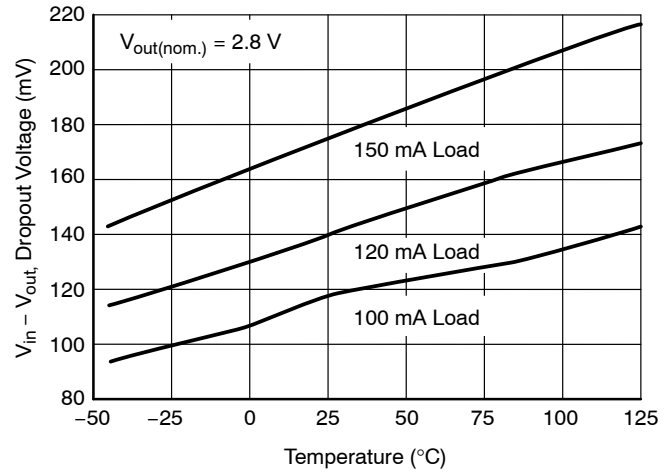


Figure 5. Dropout Voltage vs. Temperature

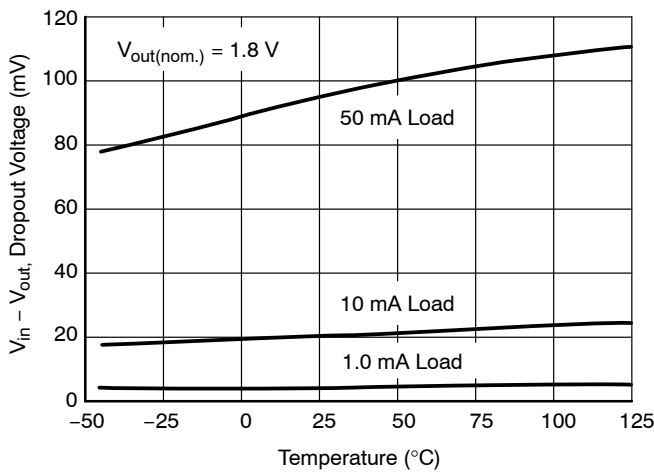


Figure 6. Dropout Voltage vs. Temperature

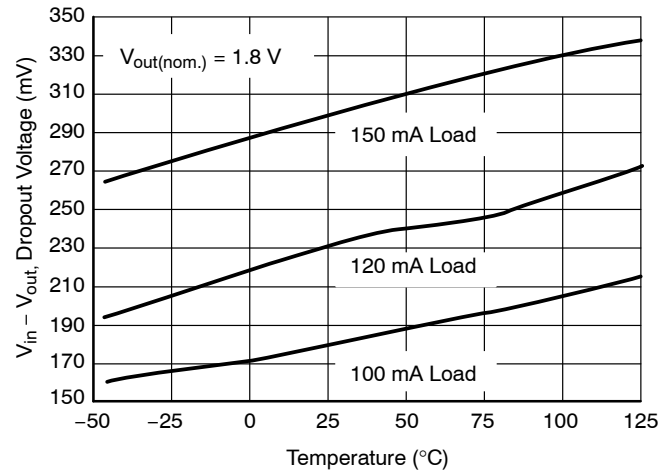


Figure 7. Dropout Voltage vs. Temperature



# NCP500

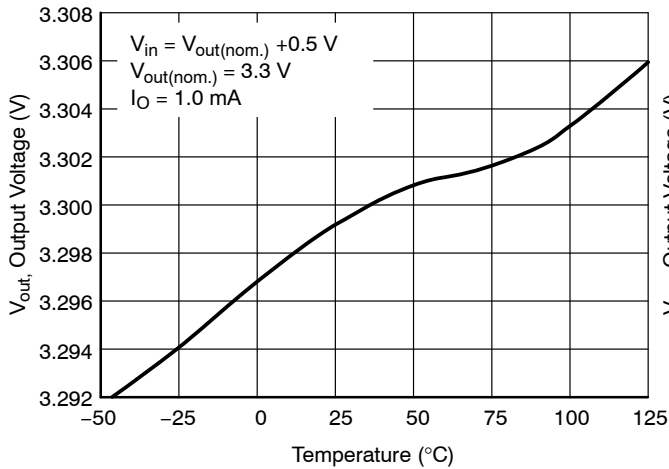


Figure 8. Output Voltage vs. Temperature

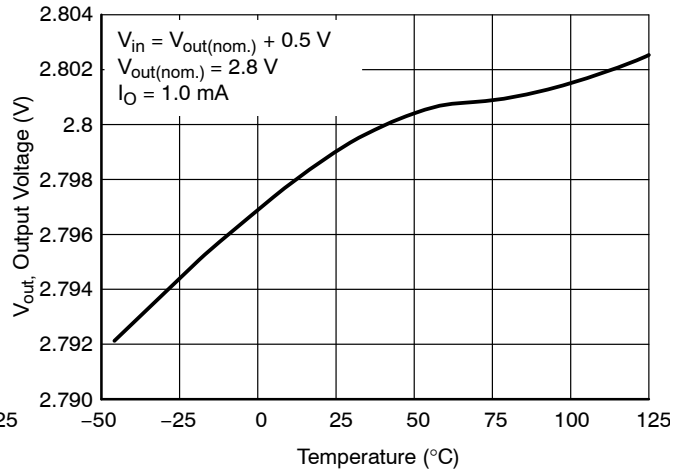


Figure 9. Output Voltage vs. Temperature

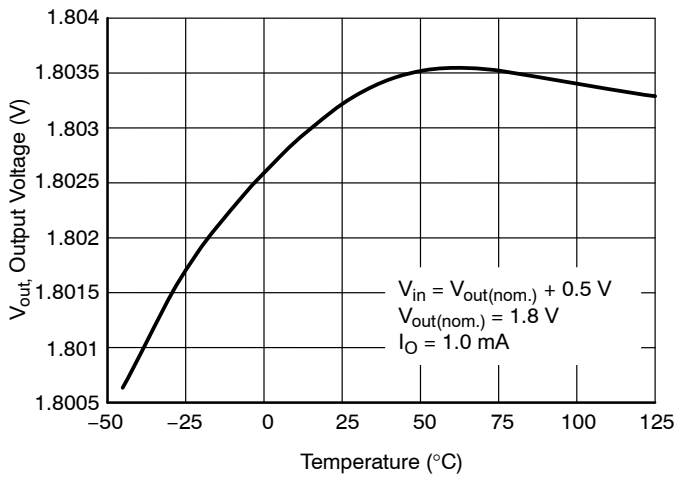


Figure 10. Output Voltage vs. Temperature

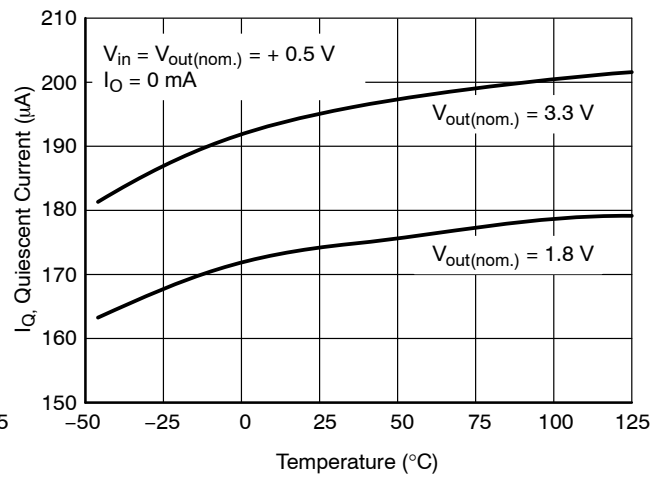


Figure 11. Quiescent Current vs. Temperature

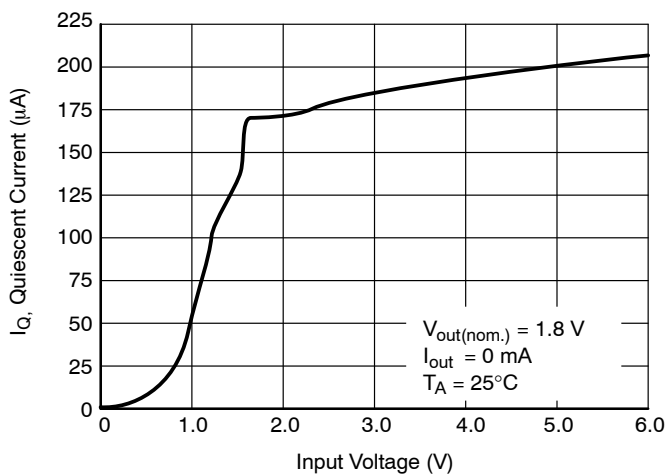


Figure 12. Quiescent Current vs. Input Voltage

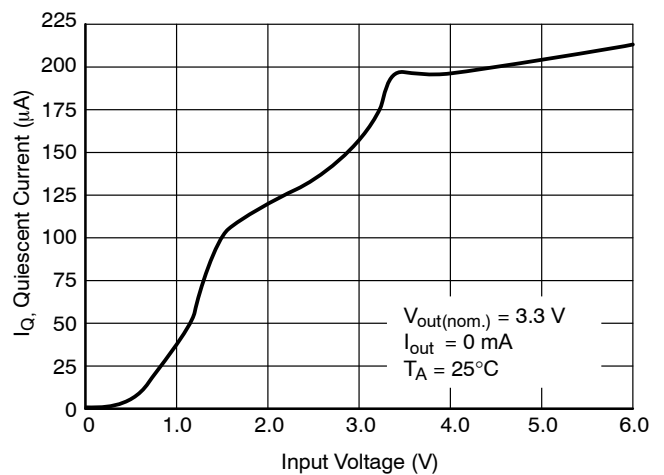


Figure 13. Quiescent Current vs. Input Voltage

# NCP500

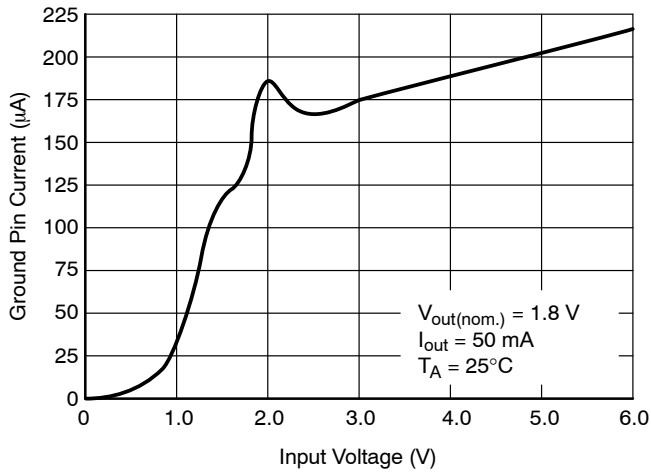


Figure 14. Ground Pin Current vs. Input Voltage

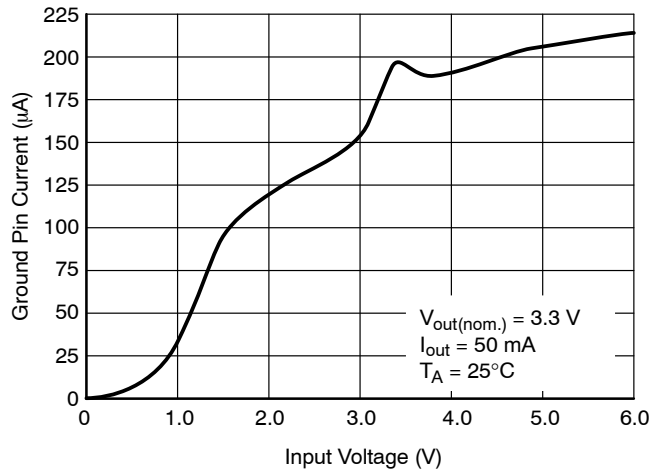


Figure 15. Ground Pin Current vs. Input Voltage

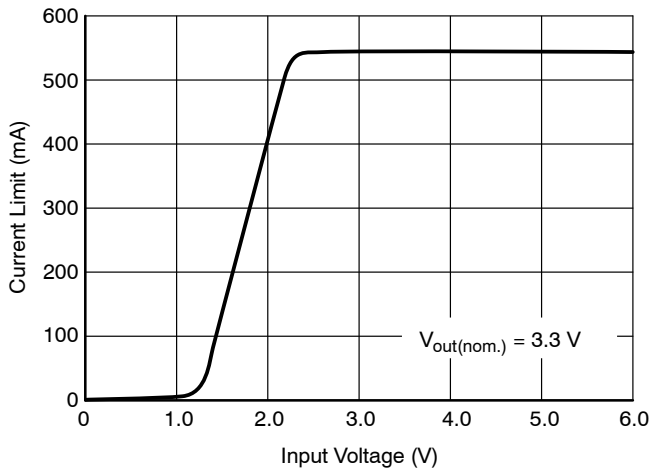


Figure 16. Current Limit vs. Input Voltage

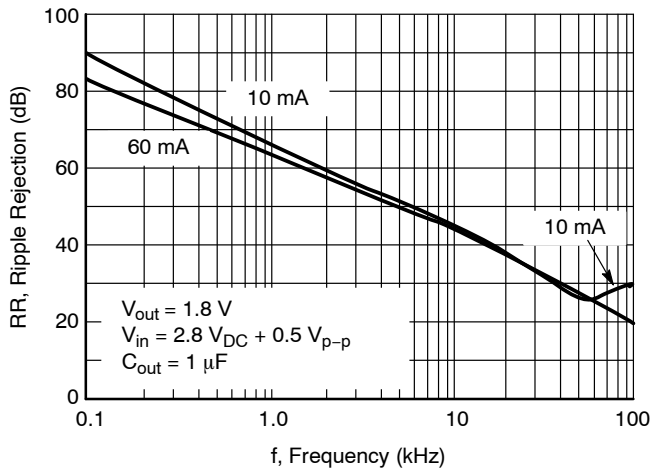


Figure 17. Ripple Rejection vs. Frequency

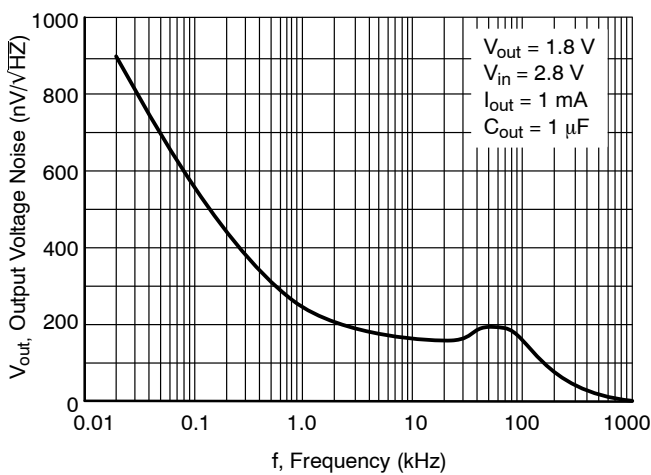


Figure 18. Output Noise Density

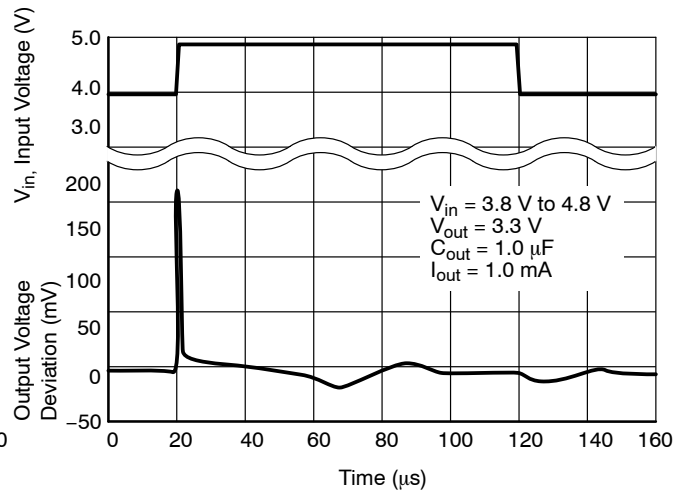


Figure 19. Line Transient Response

# NCP500

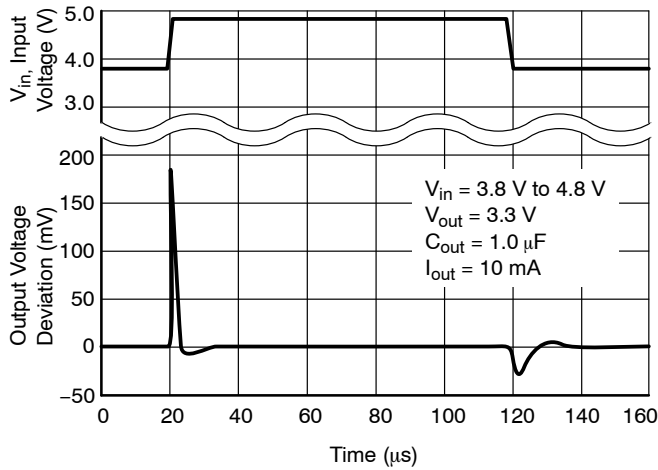


Figure 20. Line Transient Response

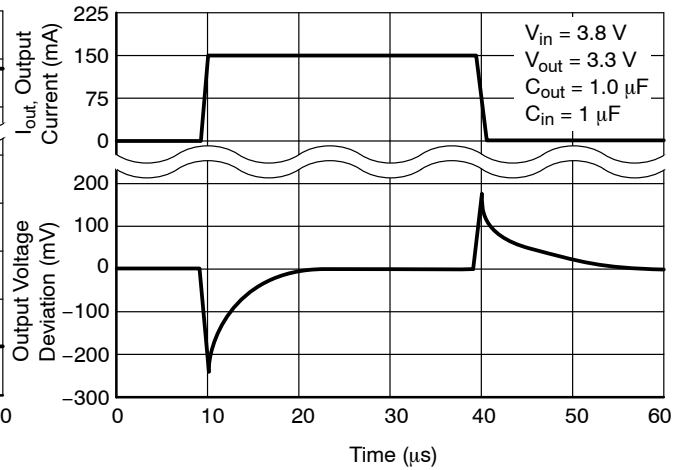


Figure 21. Load Transient Response

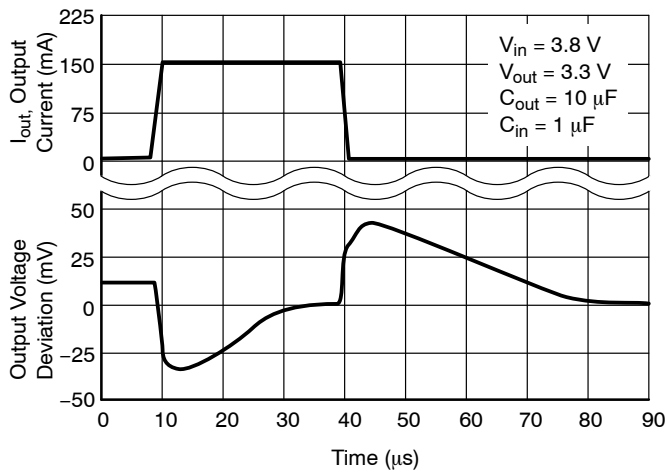


Figure 22. Load Transient Response

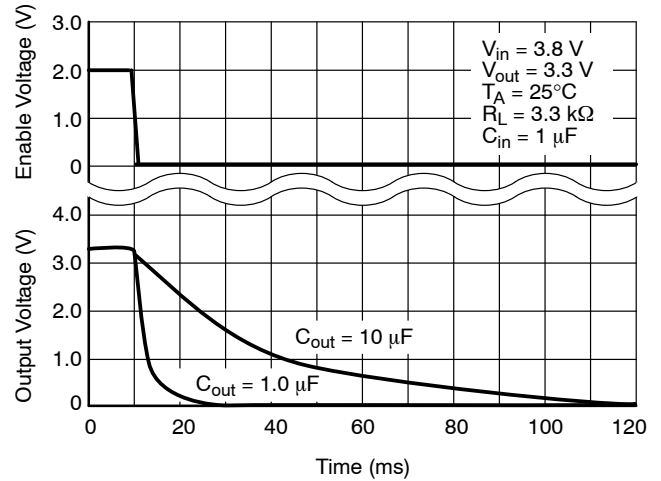


Figure 23. Turn-off Response

# NCP500

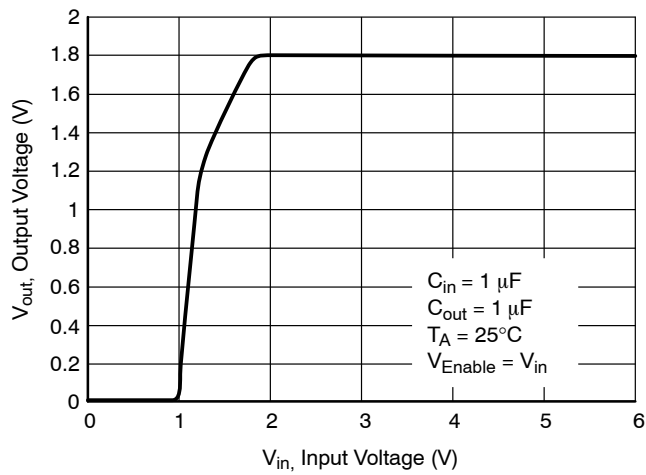


Figure 24. Output Voltage vs. Input Voltage

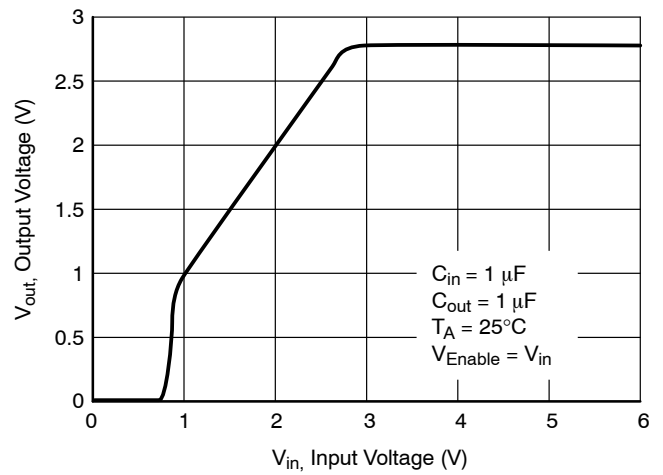


Figure 25. Output Voltage vs. Input Voltage

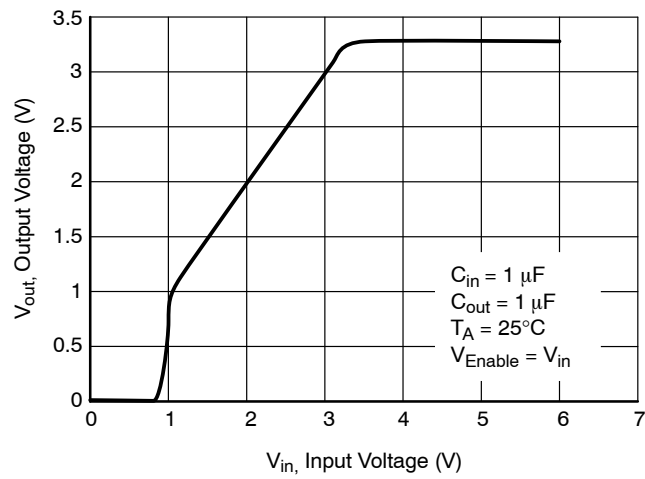


Figure 26. Output Voltage vs. Input Voltage

## DEFINITIONS

### Load Regulation

The change in output voltage for a change in output load current at a constant temperature.

### Dropout Voltage

The input/output differential at which the regulator output no longer maintains regulation against further reductions in input voltage. Measured when the output drops 2% below its nominal. The junction temperature, load current, and minimum input supply requirements affect the dropout level.

### Output Noise Voltage

This is the integrated value of the output noise over a specified frequency range. Input voltage and output load current are kept constant during the measurement. Results are expressed in  $\mu\text{VRMS}$  or  $\text{nV}/\sqrt{\text{Hz}}$ .

### Quiescent Current

The current which flows through the ground pin when the regulator operates without a load on its output: internal IC operation, bias, etc. When the LDO becomes loaded, this term is called the Ground current. It is actually the difference between the input current (measured through the LDO input pin) and the output current.

### Line Regulation

The change in output voltage for a change in input voltage. The measurement is made under conditions of low dissipation or by using pulse technique such that the average chip temperature is not significantly affected.

### Line Transient Response

Typical over and undershoot response when input voltage is excited with a given slope.

### Thermal Protection

Internal thermal shutdown circuitry is provided to protect the integrated circuit in the event that the maximum junction temperature is exceeded. When activated at typically  $160^{\circ}\text{C}$ , the regulator turns off. This feature is provided to prevent failures from accidental overheating.

### Maximum Package Power Dissipation

The power dissipation level at which the junction temperature reaches its maximum operating value, i.e.  $125^{\circ}\text{C}$ .

## APPLICATIONS INFORMATION

The NCP500 series regulators are protected with internal thermal shutdown and internal current limit. A typical application circuit is shown in Figure 27.

**Input Decoupling (C1)**

A 1.0  $\mu\text{F}$  capacitor either ceramic or tantalum is recommended and should be connected close to the NCP500 package. Higher values and lower ESR will improve the overall line transient response.

**Output Decoupling (C2)**

The NCP500 is a stable component and does not require a minimum Equivalent Series Resistance (ESR) or a minimum output current. The minimum decoupling value is 1.0  $\mu\text{F}$  and can be augmented to fulfill stringent load transient requirements. The regulator accepts ceramic chip capacitors as well as tantalum devices. Larger values improve noise rejection and load regulation transient response. Figure 29 shows the stability region for a range of operating conditions and ESR values.

**Noise Decoupling**

The NCP500 is a low noise regulator without the need of an external bypass capacitor. It typically reaches a noise level of 50  $\mu\text{VRMS}$  overall noise between 10 Hz and 100 kHz. The classical bypass capacitor impacts the start up phase of standard LDOs. However, thanks to its low noise architecture, the NCP500 operates without a bypass element and thus offers a typical 20  $\mu\text{s}$  start up phase.

**Enable Operation**

The enable pin will turn on or off the regulator. These limits of threshold are covered in the electrical specification section of this data sheet. The turn-on/turn-off transient voltage being supplied to the enable pin should exceed a slew rate of 10 mV/ $\mu\text{s}$  to ensure correct operation. If the enable is not to be used then the pin should be connected to  $V_{\text{in}}$ .

**Thermal**

As power across the NCP500 increases, it might become necessary to provide some thermal relief. The maximum power dissipation supported by the device is dependent upon board design and layout. Mounting pad configuration on the PCB, the board material, and the ambient temperature effect the rate of junction temperature rise for the part. This is stating that when the NCP500 has good thermal conductivity through the PCB, the junction temperature will be relatively low with high power dissipation applications.

The maximum dissipation the package can handle is given by:

$$PD = \frac{T_{J(\text{max})} - T_A}{R_{\theta JA}}$$

If  $T_J$  is not recommended to exceed 125°C, then the NCP500 can dissipate up to 400 mW @ 25°C.

The power dissipated by the NCP500 can be calculated from the following equation:

$$P_{\text{tot}} = [V_{\text{in}} * I_{\text{gnd}} (I_{\text{out}})] + [V_{\text{in}} - V_{\text{out}}] * I_{\text{out}}$$

or

$$V_{\text{inMAX}} = \frac{P_{\text{tot}} + V_{\text{out}} * I_{\text{out}}}{I_{\text{gnd}} + I_{\text{out}}}$$

If a 150 mA output current is needed the ground current is extracted from the data sheet curves: 200  $\mu\text{A}$  @ 150 mA. For a NCP500SN18T1 (1.8 V), the maximum input voltage will then be 4.4 V, good for a 1 Cell Li-ion battery.

**Hints**

Please be sure the  $V_{\text{in}}$  and GND lines are sufficiently wide. When the impedance of these lines is high, there is a chance to pick up noise or cause the regulator to malfunction.

Set external components, especially the output capacitor, as close as possible to the circuit, and make leads as short as possible.

**Package Placement**

DFN packages can be placed using standard pick and place equipment with an accuracy of  $\pm 0.05$  mm. Component pick and place systems are composed of a vision system that recognizes and positions the component and a mechanical system which physically performs the pick and place operation. Two commonly used types of vision systems are: (1) a vision system that locates a package silhouette and (2) a vision system that locates individual bumps on the interconnect pattern. The latter type renders more accurate place but tends to be more expensive and time consuming. Both methods are acceptable since the parts align due to a self-centering feature of the DFN solder joint during solder re-flow.

**Solder Paste**

Type 3 or Type 4 solder paste is acceptable.

**Re-flow and Cleaning**

The DFN may be assembled using standard IR/IR convection SMT re-flow processes without any special considerations. As with other packages, the thermal profile for specific board locations must be determined. Nitrogen purge is recommended during solder for no-clean fluxes. The DFN is qualified for up to three re-flow cycles at 235°C peak (J-STD-020). The actual temperature of the DFN is a function of:

- Component density
- Component location on the board
- Size of surrounding components

## NCP500

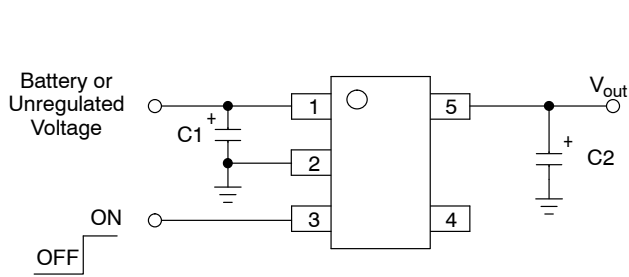


Figure 27. Typical Application Circuit

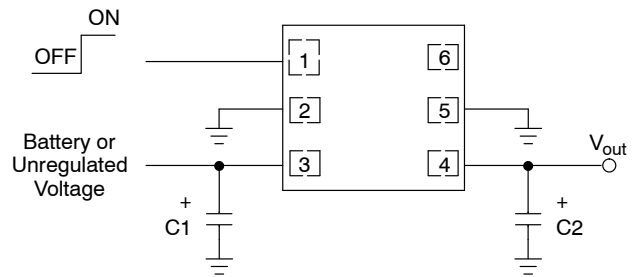


Figure 28. Typical Application Circuit

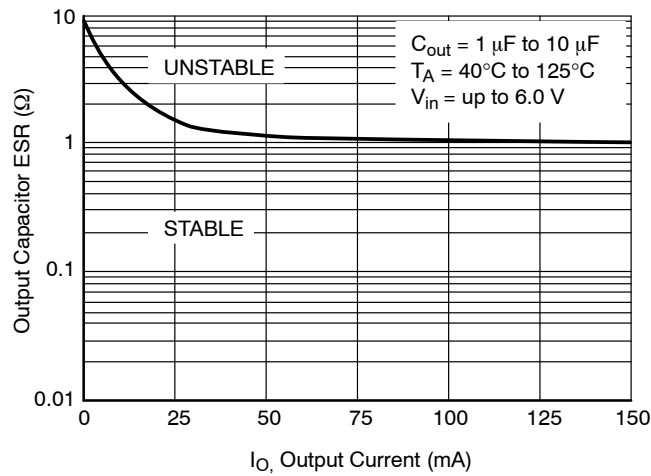


Figure 29. Stability

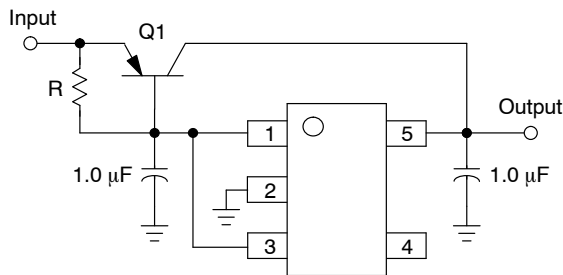


Figure 30. Current Boost Regulator

The NCP500 series can be current boosted with a PNP transistor. Resistor R in conjunction with  $V_{BE}$  of the PNP determines when the pass transistor begins conducting; this circuit is not short circuit proof. Input/Output differential voltage minimum is increased by  $V_{BE}$  of the pass resistor.


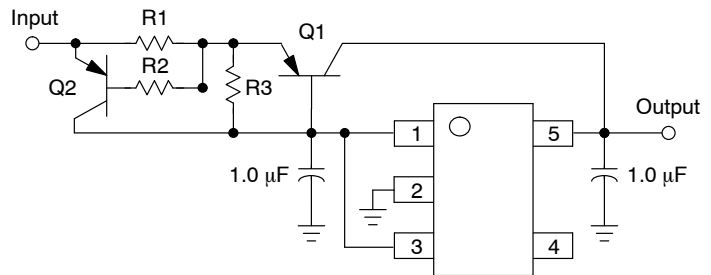


Figure 31. Current Boost Regulator with Short Circuit Limit


Short circuit current limit is essentially set by the  $V_{BE}$  of Q2 and R1.  $I_{SC} = ((V_{BEQ2} - I_B \cdot R2) / R1) + I_{O(max)} \text{ Regulator}$

## NCP500

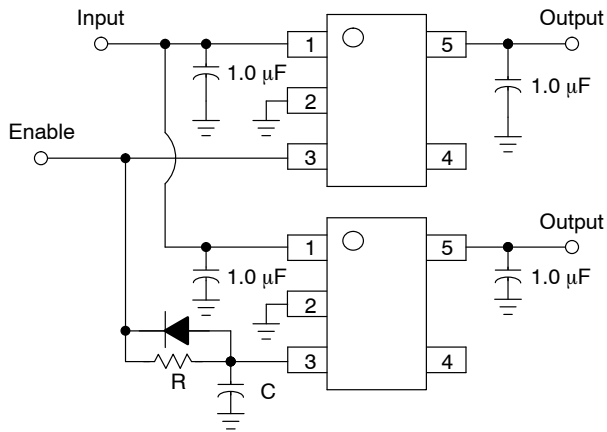


**Figure 32. Delayed Turn-on**

If a delayed turn-on is needed during power up of several voltages then the above schematic can be used. Resistor R, and capacitor C, will delay the turn-on of the bottom regulator. A few values were chosen and the resulting delay can be seen in Figure 33.

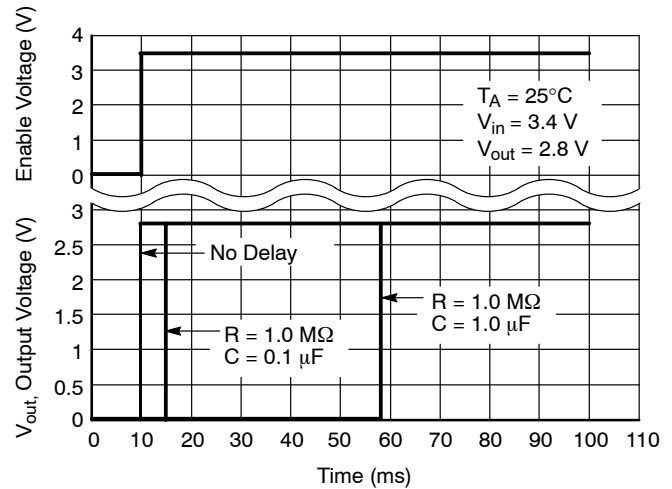

**Figure 33. Delayed Turn-on**

The graph shows the delay between the enable signal and output turn-on for various resistor and capacitor values.

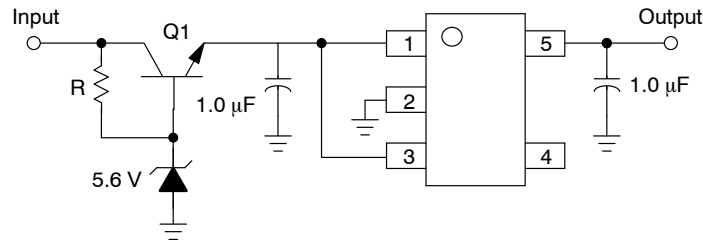

**Figure 34. Input Voltages Greater than 6.0 V**

A regulated output can be achieved with input voltages that exceed the 6.0 V maximum rating of the NCP500 series with the addition of a simple pre-regulator circuit. Care must be taken to prevent Q1 from overheating when the regulated output ( $V_{out}$ ) is shorted to  $G_{nd}$ .



# NCP500

## ORDERING INFORMATION

| Device*        | Nominal<br>Output Voltage | Marking | Package    | Shipping†                     |
|----------------|---------------------------|---------|------------|-------------------------------|
| NCP500SN18T1   | 1.8                       | LCS     | TSOP-5     | 3000 Units/<br>7" Tape & Reel |
| NCP500SN18T1G  | 1.8                       | LCS     |            |                               |
| NCP500SN185T1  | 1.85                      | LFL     |            |                               |
| NCP500SN185T1G | 1.85                      | LFL     |            |                               |
| NCP500SN25T1   | 2.5                       | LCT     |            |                               |
| NCP500SN25T1G  | 2.5                       | LCT     |            |                               |
| NCP500SN26T1   | 2.6                       | LFM     |            |                               |
| NCP500SN26T1G  | 2.6                       | LFM     |            |                               |
| NCP500SN27T1   | 2.7                       | LCU     |            |                               |
| NCP500SN27T1G  | 2.7                       | LCU     |            |                               |
| NCP500SN28T1   | 2.8                       | LCV     |            |                               |
| NCP500SN28T1G  | 2.8                       | LCV     |            |                               |
| NCP500SN30T1   | 3.0                       | LCW     |            |                               |
| NCP500SN30T1G  | 3.0                       | LCW     |            |                               |
| NCP500SN33T1   | 3.3                       | LCX     |            |                               |
| NCP500SN33T1G  | 3.3                       | LCX     |            |                               |
| NCP500SN50T1   | 5.0                       | LCY     |            |                               |
| NCP500SN50T1G  | 5.0                       | LCY     |            |                               |
| NCP500SQL18T1  | 1.8                       | LD      | DFN6 2x2.2 |                               |
| NCP500SQL18T1G | 1.8                       | LD      |            |                               |
| NCP500SQL25T1  | 2.5                       | LE      |            |                               |
| NCP500SQL25T1G | 2.5                       | LE      |            |                               |
| NCP500SQL27T1  | 2.7                       | LF      |            |                               |
| NCP500SQL27T1G | 2.7                       | LF      |            |                               |
| NCP500SQL28T1  | 2.8                       | LG      |            |                               |
| NCP500SQL28T1G | 2.8                       | LG      |            |                               |
| NCP500SQL30T1  | 3.0                       | LH      |            |                               |
| NCP500SQL30T1G | 3.0                       | LH      |            |                               |
| NCP500SQL33T1  | 3.3                       | LJ      |            |                               |
| NCP500SQL33T1G | 3.3                       | LJ      |            |                               |
| NCP500SQL50T1  | 5.0                       | LK      |            |                               |
| NCP500SQL50T1G | 5.0                       | LK      |            |                               |

For availability of other output voltages, please contact your local ON Semiconductor Sales Representative.


†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*The "G" suffix indicates Pb-Free package available.

# NCP500

## PACKAGE DIMENSIONS

TSOP-5  
SN SUFFIX  
CASE 483-02  
ISSUE E

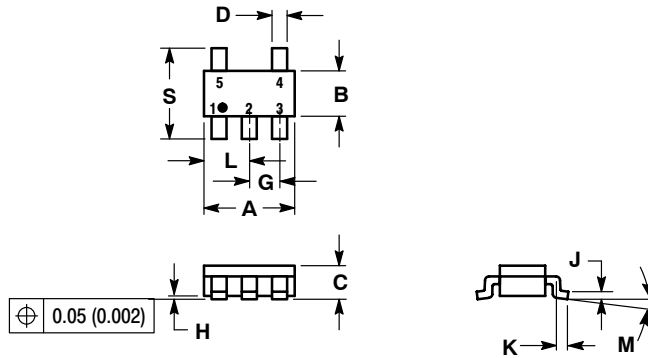


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. A AND B DIMENSIONS DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

| DIM | MILLIMETERS |       | INCHES |        |
|-----|-------------|-------|--------|--------|
|     | MIN         | MAX   | MIN    | MAX    |
| A   | 2.90        | 3.10  | 0.1142 | 0.1220 |
| B   | 1.30        | 1.70  | 0.0512 | 0.0669 |
| C   | 0.90        | 1.10  | 0.0354 | 0.0433 |
| D   | 0.25        | 0.50  | 0.0098 | 0.0197 |
| G   | 0.85        | 1.05  | 0.0335 | 0.0413 |
| H   | 0.013       | 0.100 | 0.0005 | 0.0040 |
| J   | 0.10        | 0.26  | 0.0040 | 0.0102 |
| K   | 0.20        | 0.60  | 0.0079 | 0.0236 |
| L   | 1.25        | 1.55  | 0.0493 | 0.0610 |
| M   | 0           | 10    | 0      | 10     |
| S   | 2.50        | 3.00  | 0.0985 | 0.1181 |

### SOLDERING FOOTPRINT\*



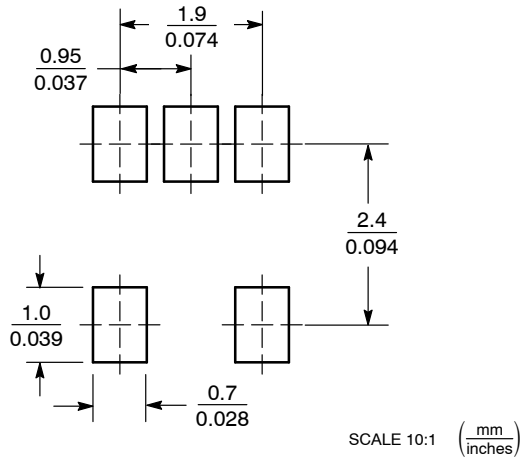


\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# NCP500

## PACKAGE DIMENSIONS

DFN6, 2x2.2, 0.65P  
CASE 506BA-01  
ISSUE A

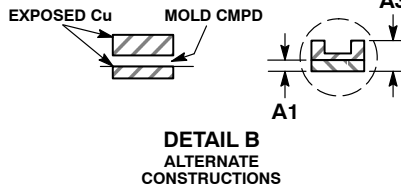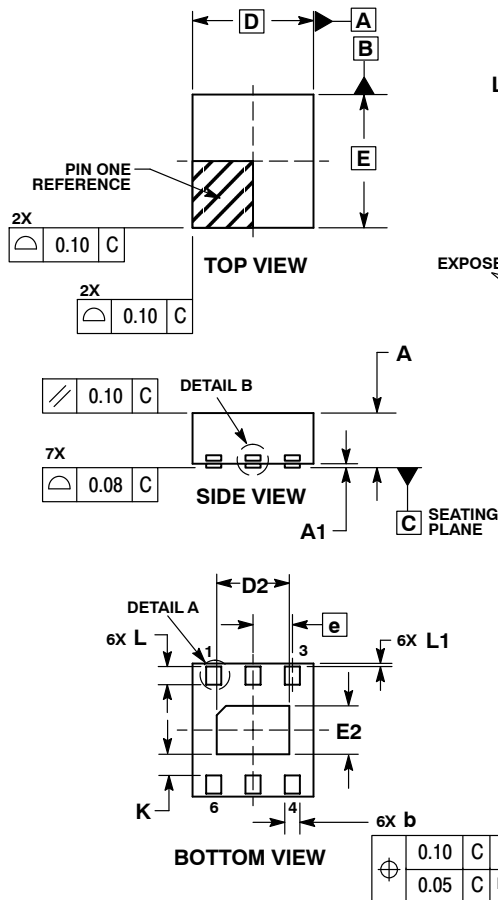


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.20 mm FROM TERMINAL.
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

| MILLIMETERS |      |      |
|-------------|------|------|
| DIM         | MIN  | MAX  |
| A           | 0.80 | 1.00 |
| A1          | 0.00 | 0.05 |
| b           | 0.20 | 0.30 |
| D           | 2.00 | BSC  |
| D2          | 1.10 | 1.30 |
| E           | 2.20 | BSC  |
| E2          | 0.70 | 0.90 |
| e           | 0.65 | BSC  |
| K           | 0.20 | ---  |
| L           | 0.25 | 0.35 |
| L1          | 0.00 | 0.10 |

### SOLDERING FOOTPRINT\*

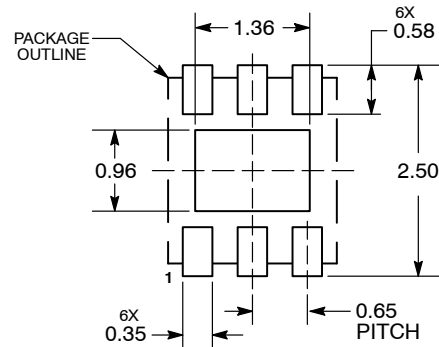

DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada  
Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910  
Japan Customer Focus Center  
Phone: 81-3-5817-1050

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.