



OptiMOS® 2 Power-Transistor
Features

- Ideal for high-frequency dc/dc converters
- Qualified according to JEDEC¹⁾ for target application
- N-channel - Logic level
- Excellent gate charge x $R_{DS(on)}$ product (FOM)
- Very low on-resistance $R_{DS(on)}$
- Superior thermal resistance
- 175 °C operating temperature
- dv/dt rated
- Pb-free lead plating; RoHS compliant

Product Summary

V_{DS}	30	V
$R_{DS(on),max}$	3.1	mΩ
I_D	80	A

PG-TO220-3-1


Type	Package	Marking
IPP03N03LB G	PG-TO220-3-1	03N03LB

Maximum ratings, at $T_j=25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Continuous drain current	I_D	$T_C=25\text{ °C}^{2)}$	80	A
		$T_C=100\text{ °C}$	80	
Pulsed drain current	$I_{D,pulse}$	$T_C=25\text{ °C}^{3)}$	320	
Avalanche energy, single pulse	E_{AS}	$I_D=80\text{ A}$, $R_{GS}=25\text{ Ω}$	580	mJ
Reverse diode dv/dt	dv/dt	$I_D=80\text{ A}$, $V_{DS}=20\text{ V}$, $di/dt=200\text{ A/μs}$, $T_{j,max}=175\text{ °C}$	6	kV/μs
Gate source voltage ⁴⁾	V_{GS}		±20	V
Power dissipation	P_{tot}	$T_C=25\text{ °C}$	150	W
Operating and storage temperature	T_j , T_{stg}		-55 ... 175	°C
IEC climatic category; DIN IEC 68-1			55/175/56	

¹⁾ J-STD20 and JESD22

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

Thermal characteristics

Thermal resistance, junction - case	R_{thJC}		-	-	1.2	K/W
SMD version, device on PCB	R_{thJA}	minimal footprint	-	-	62	
		6 cm ² cooling area ⁵⁾	-	-	40	

Electrical characteristics, at $T_j=25\text{ °C}$, unless otherwise specified

Static characteristics

Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS}=0\text{ V}, I_D=1\text{ mA}$	30	-	-	V
Gate threshold voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=100\text{ }\mu\text{A}$	1.2	1.6	2	
Zero gate voltage drain current	I_{DSS}	$V_{DS}=30\text{ V}, V_{GS}=0\text{ V}, T_j=25\text{ °C}$	-	0.1	1	μA
		$V_{DS}=30\text{ V}, V_{GS}=0\text{ V}, T_j=125\text{ °C}$	-	10	100	
Gate-source leakage current	I_{GSS}	$V_{GS}=20\text{ V}, V_{DS}=0\text{ V}$	-	10	100	nA
Drain-source on-state resistance	$R_{DS(on)}$	$V_{GS}=4.5\text{ V}, I_D=55\text{ A}$	-	3.4	4.2	m Ω
		$V_{GS}=10\text{ V}, I_D=55\text{ A}$	-	2.6	3.1	
Gate resistance	R_G		-	0.9	-	Ω
Transconductance	g_{fs}	$ V_{DS} >2 I_D R_{DS(on)max}, I_D=55\text{ A}$		134	-	S

²⁾ Current is limited by bondwire; with an $R_{thJC}=1\text{ K/W}$ the chip is able to carry 164 A.

³⁾ See figure 3

⁴⁾ $T_{j,max}=150\text{ °C}$ and duty cycle $D<0.25$ for $V_{GS}<-5\text{ V}$

⁵⁾ Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm² (one layer, 70 μm thick) copper area for drain connection. PCB is vertical in still air.

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

Dynamic characteristics

Input capacitance	C_{iss}	$V_{GS}=0\text{ V}, V_{DS}=15\text{ V},$ $f=1\text{ MHz}$	-	5732	7624	pF
Output capacitance	C_{oss}		-	2036	2708	
Reverse transfer capacitance	C_{rss}		-	256	384	
Turn-on delay time	$t_{d(on)}$	$V_{DD}=15\text{ V}, V_{GS}=10\text{ V},$ $I_D=20\text{ A}, R_G=2.7\ \Omega$	-	12	18	ns
Rise time	t_r		-	10	16	
Turn-off delay time	$t_{d(off)}$		-	49	73	
Fall time	t_f		-	7.4	11.1	

Gate Charge Characteristics⁶⁾

Gate to source charge	Q_{gs}	$V_{DD}=15\text{ V}, I_D=40\text{ A},$ $V_{GS}=0\text{ to }5\text{ V}$	-	16.9	22	nC
Gate charge at threshold	$Q_{g(th)}$		-	9.2	12.2	
Gate to drain charge	Q_{gd}		-	11.2	16.9	
Switching charge	Q_{sw}		-	19	27	
Gate charge total	Q_g		-	44	59	
Gate plateau voltage	$V_{plateau}$		-	3.0	-	V
Gate charge total, sync. FET	$Q_{g(sync)}$	$V_{DS}=0.1\text{ V},$ $V_{GS}=0\text{ to }5\text{ V}$	-	39	52	nC
Output charge	Q_{oss}	$V_{DD}=15\text{ V}, V_{GS}=0\text{ V}$	-	46	61	


Reverse Diode

Diode continuous forward current	I_S	$T_C=25\text{ °C}$	-	-	78	A
Diode pulse current	$I_{S,pulse}$		-	-	320	
Diode forward voltage	V_{SD}	$V_{GS}=0\text{ V}, I_F=80\text{ A},$ $T_j=25\text{ °C}$	-	0.92	1.2	V
Reverse recovery charge	Q_{rr}	$V_R=15\text{ V}, I_F=I_S,$ $di_F/dt=400\text{ A}/\mu\text{s}$	-	-	20	nC

⁶⁾ See figure 16 for gate charge parameter definition


1 Power dissipation

$$P_{\text{tot}} = f(T_C)$$

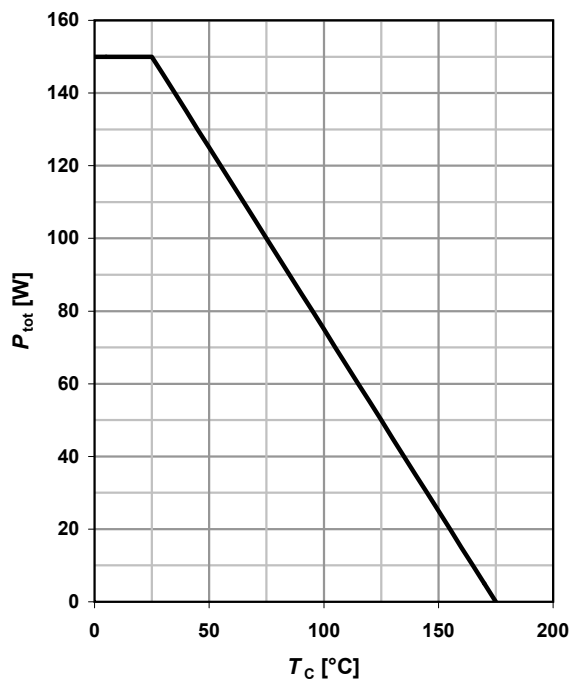

2 Drain current


$$I_D = f(T_C); V_{GS} \geq 10 \text{ V}$$

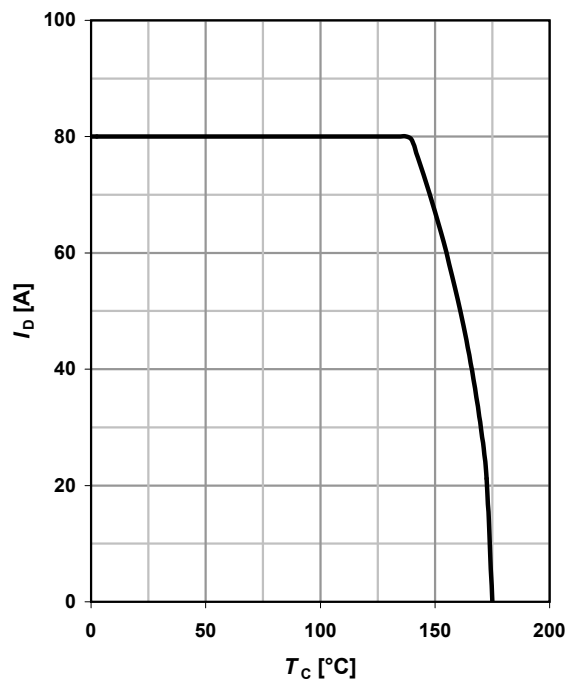

3 Safe operating area

$$I_D = f(V_{DS}); T_C = 25 \text{ °C}; D = 0$$


parameter: t_p

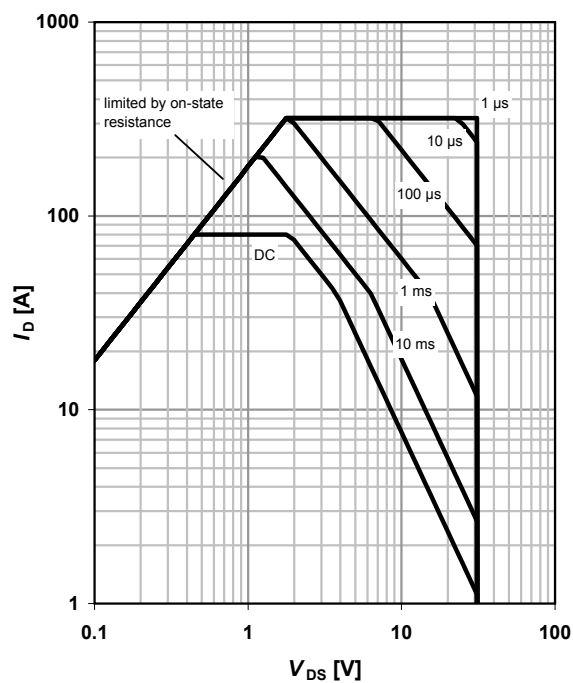

4 Max. transient thermal impedance

$$Z_{\text{thJC}} = f(t_p)$$


parameter: $D = t_p / T$

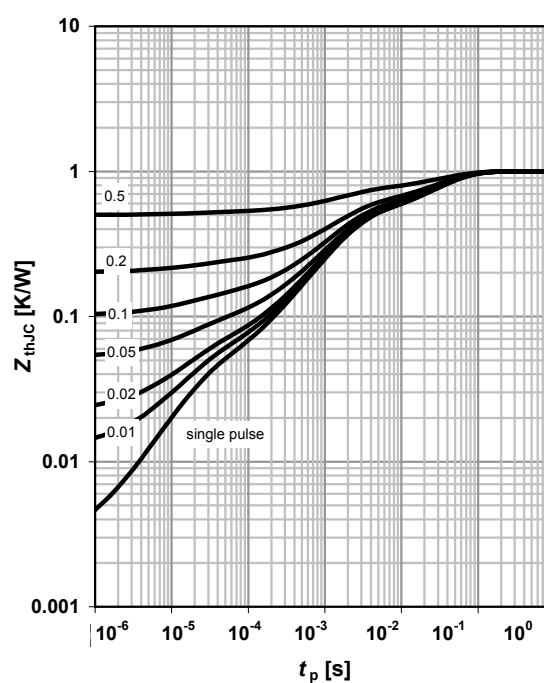

5 Typ. output characteristics

$$I_D = f(V_{DS}); T_j = 25^\circ\text{C}$$


parameter: V_{GS}

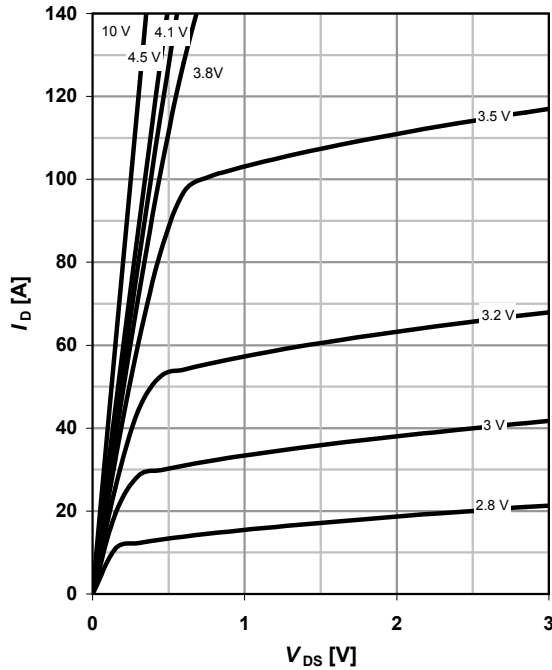

6 Typ. drain-source on resistance

$$R_{DS(on)} = f(I_D); T_j = 25^\circ\text{C}$$


parameter: V_{GS}

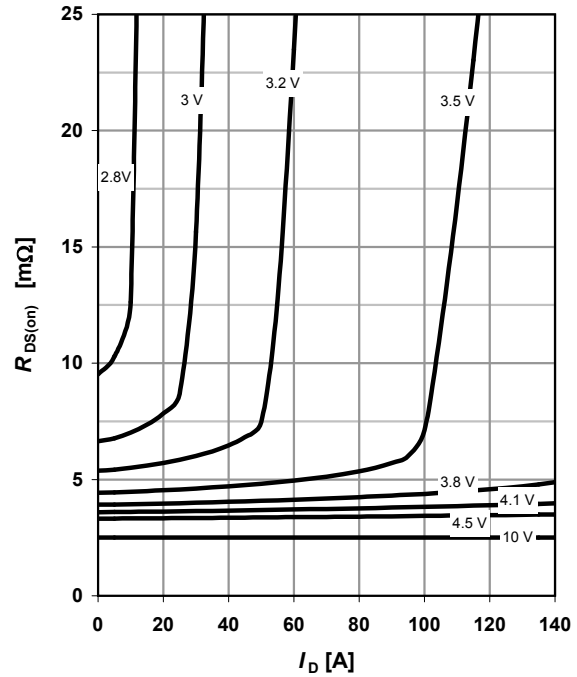

7 Typ. transfer characteristics


$$I_D = f(V_{GS}); |V_{DS}| > 2|I_D|R_{DS(on)\max}$$

parameter: T_j

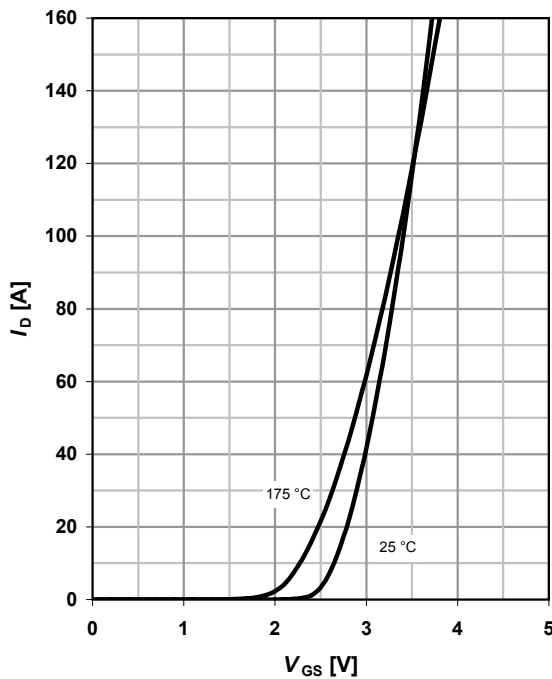


8 Typ. forward transconductance

$$g_{fs} = f(I_D); T_j = 25^\circ\text{C}$$

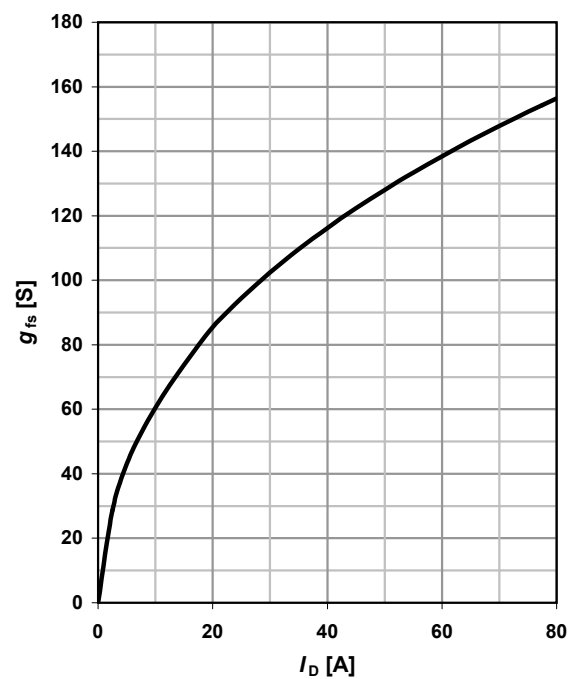

9 Drain-source on-state resistance


$$R_{DS(on)} = f(T_j); I_D = 55 \text{ A}; V_{GS} = 10 \text{ V}$$

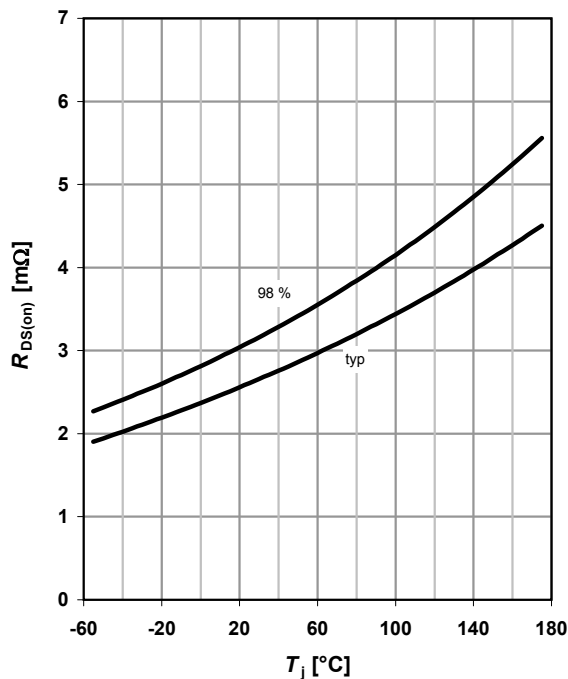

10 Typ. gate threshold voltage


$$V_{GS(th)} = f(T_j); V_{GS} = V_{DS}$$

parameter: I_D

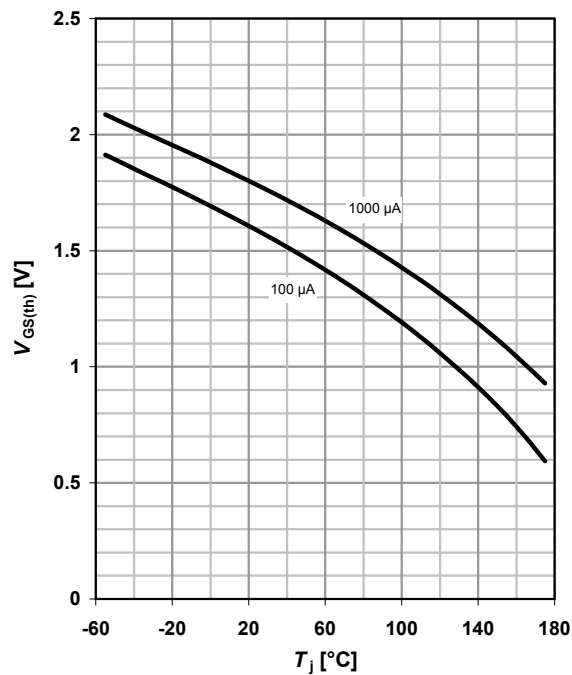

11 Typ. Capacitances


$$C = f(V_{DS}); V_{GS} = 0 \text{ V}; f = 1 \text{ MHz}$$

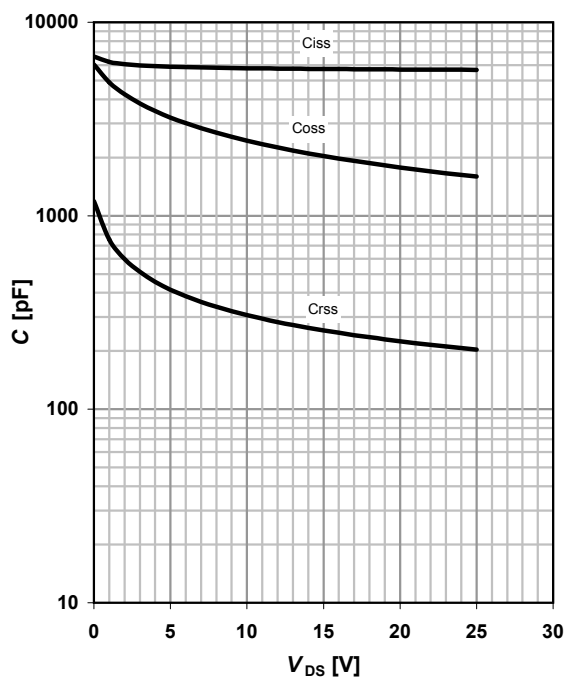

12 Forward characteristics of reverse diode

$$I_F = f(V_{SD})$$


parameter: T_j

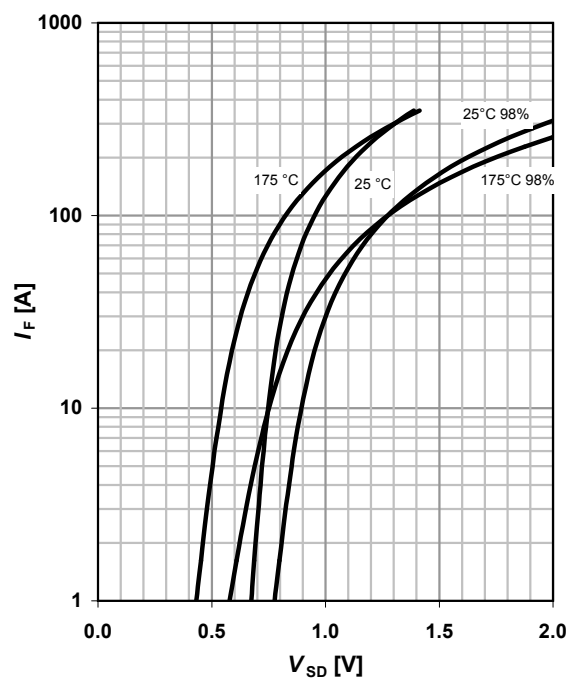

13 Avalanche characteristics

$$I_{AS}=f(t_{AV}); R_{GS}=25\ \Omega$$


parameter: $T_{j(\text{start})}$

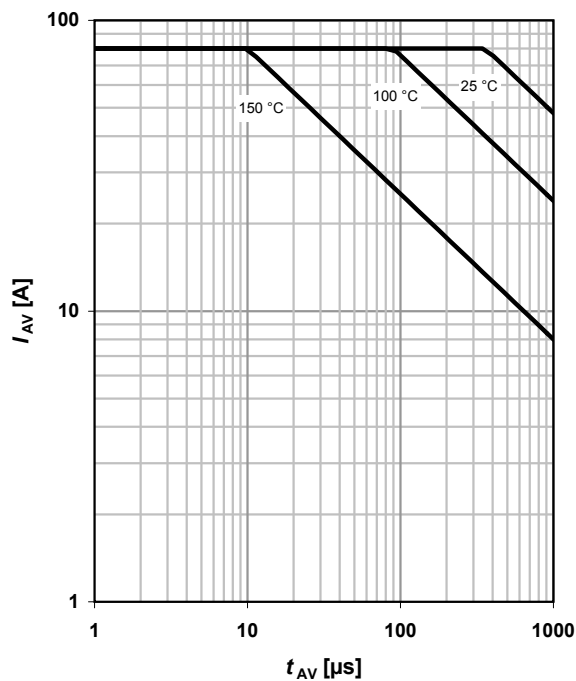

14 Typ. gate charge


$$V_{GS}=f(Q_{\text{gate}}); I_D=40\ \text{A pulsed}$$

parameter: V_{DD}

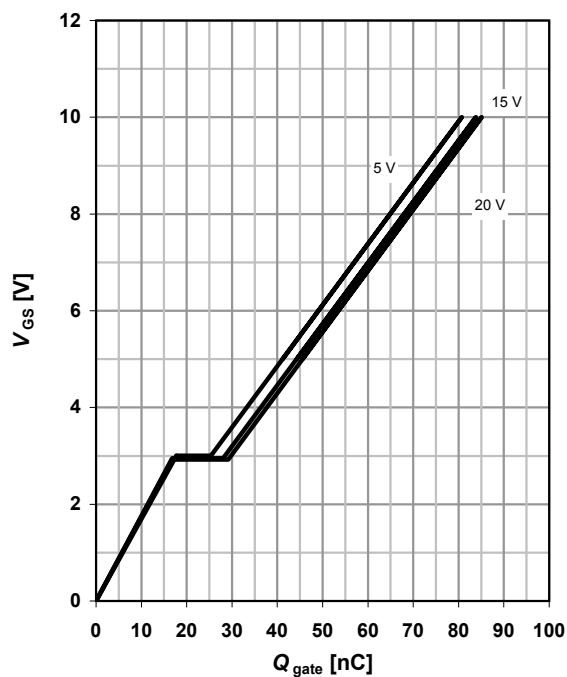



15 Drain-source breakdown voltage

$$V_{BR(DSS)}=f(T_j); I_D=1\ \text{mA}$$

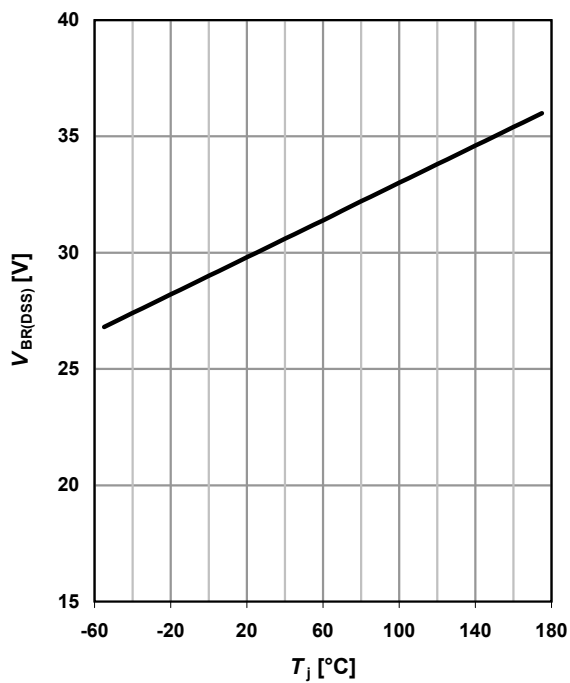

16 Gate charge waveforms

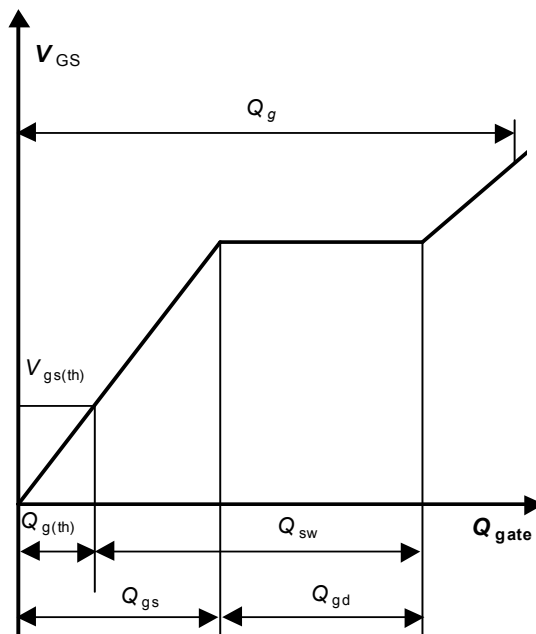

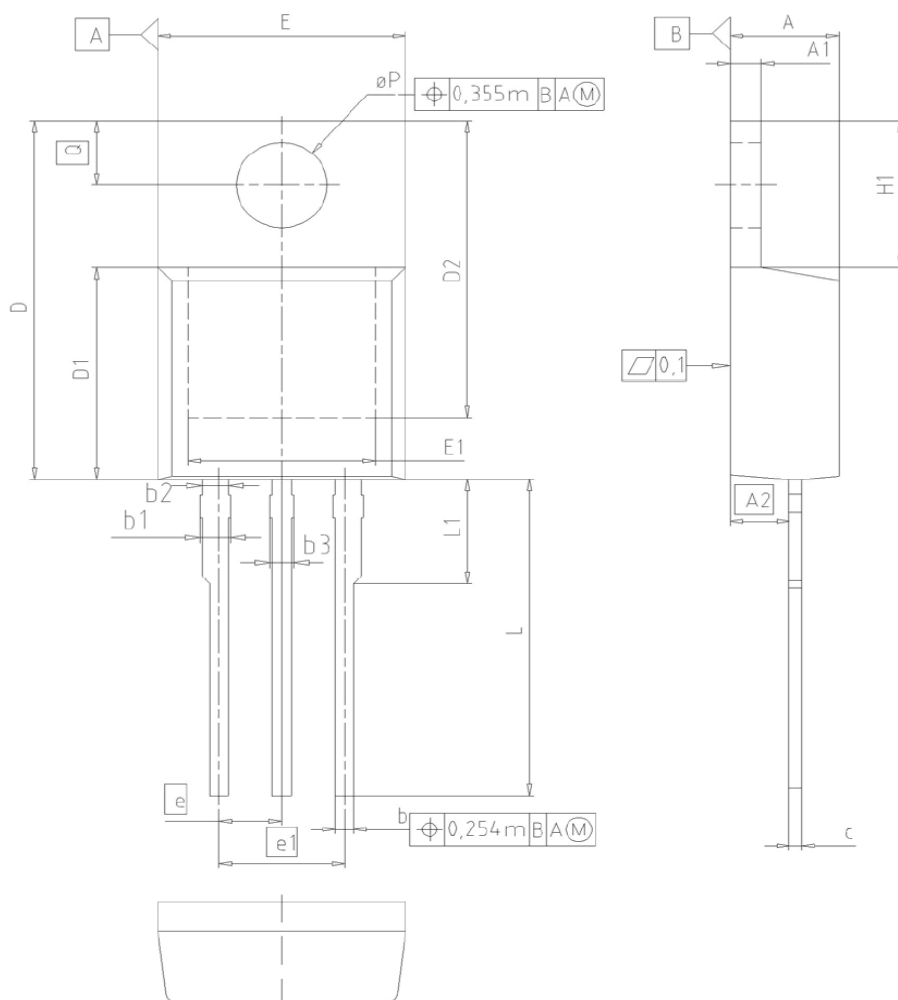PG-TO220-3-1


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.30	4.57	0.169	0.180
A1	1.17	1.40	0.046	0.055
A2	2.15	2.72	0.085	0.107
b	0.65	0.86	0.026	0.034
b1	0.95	1.40	0.037	0.055
b2	0.95	1.15	0.037	0.045
b3	0.65	1.15	0.026	0.045
c	0.33	0.80	0.013	0.024
D	14.81	15.95	0.583	0.628
D1	8.51	9.45	0.335	0.372
D2	12.19	13.10	0.480	0.516
E	9.70	10.36	0.382	0.408
E1	6.50	8.60	0.256	0.339
e	2.54		0.100	
e1	5.08		0.200	
N	3		3	
H1	5.90	6.90	0.232	0.272
L	13.00	14.00	0.512	0.551
L1	-	4.80	-	0.189
L2	-	4.80	-	0.189
L3	-	4.80	-	0.189
L4	-	4.80	-	0.189
L5	-	4.80	-	0.189
L6	-	4.80	-	0.189
L7	-	4.80	-	0.189
L8	-	4.80	-	0.189
L9	-	4.80	-	0.189
L10	-	4.80	-	0.189
L11	-	4.80	-	0.189
L12	-	4.80	-	0.189
L13	-	4.80	-	0.189
L14	-	4.80	-	0.189
L15	-	4.80	-	0.189
L16	-	4.80	-	0.189
L17	-	4.80	-	0.189
L18	-	4.80	-	0.189
L19	-	4.80	-	0.189
L20	-	4.80	-	0.189
L21	-	4.80	-	0.189
L22	-	4.80	-	0.189
L23	-	4.80	-	0.189
L24	-	4.80	-	0.189
L25	-	4.80	-	0.189
L26	-	4.80	-	0.189
L27	-	4.80	-	0.189
L28	-	4.80	-	0.189
L29	-	4.80	-	0.189
L30	-	4.80	-	0.189
L31	-	4.80	-	0.189
L32	-	4.80	-	0.189
L33	-	4.80	-	0.189
L34	-	4.80	-	0.189
L35	-	4.80	-	0.189
L36	-	4.80	-	0.189
L37	-	4.80	-	0.189
L38	-	4.80	-	0.189
L39	-	4.80	-	0.189
L40	-	4.80	-	0.189
L41	-	4.80	-	0.189
L42	-	4.80	-	0.189
L43	-	4.80	-	0.189
L44	-	4.80	-	0.189
L45	-	4.80	-	0.189
L46	-	4.80	-	0.189
L47	-	4.80	-	0.189
L48	-	4.80	-	0.189
L49	-	4.80	-	0.189
L50	-	4.80	-	0.189
L51	-	4.80	-	0.189
L52	-	4.80	-	0.189
L53	-	4.80	-	0.189
L54	-	4.80	-	0.189
L55	-	4.80	-	0.189
L56	-	4.80	-	0.189
L57	-	4.80	-	0.189
L58	-	4.80	-	0.189
L59	-	4.80	-	0.189
L60	-	4.80	-	0.189
L61	-	4.80	-	0.189
L62	-	4.80	-	0.189
L63	-	4.80	-	0.189
L64	-	4.80	-	0.189
L65	-	4.80	-	0.189
L66	-	4.80	-	0.189
L67	-	4.80	-	0.189
L68	-	4.80	-	0.189
L69	-	4.80	-	0.189
L70	-	4.80	-	0.189
L71	-	4.80	-	0.189
L72	-	4.80	-	0.189
L73	-	4.80	-	0.189
L74	-	4.80	-	0.189
L75	-	4.80	-	0.189
L76	-	4.80	-	0.189
L77	-	4.80	-	0.189
L78	-	4.80	-	0.189
L79	-	4.80	-	0.189
L80	-	4.80	-	0.189
L81	-	4.80	-	0.189
L82	-	4.80	-	0.189
L83	-	4.80	-	0.189
L84	-	4.80	-	0.189
L85	-	4.80	-	0.189
L86	-	4.80	-	0.189
L87	-	4.80	-	0.189
L88	-	4.80	-	0.189
L89	-	4.80	-	0.189
L90	-	4.80	-	0.189
L91	-	4.80	-	0.189
L92	-	4.80	-	0.189
L93	-	4.80	-	0.189
L94	-	4.80	-	0.189
L95	-	4.80	-	0.189
L96	-	4.80	-	0.189
L97	-	4.80	-	0.189
L98	-	4.80	-	0.189
L99	-	4.80	-	0.189
L100	-	4.80	-	0.189
øP	3.60	3.89	0.142	0.153
Q	2.60	3.00	0.102	0.118

DOCUMENT NO. Z8B00003318
SCALE 0 2.5 5mm
EUROPEAN PROJECTION
ISSUE DATE 23-08-2007
REVISION 05

Published by
Infineon Technologies AG
81726 Munich, Germany
© 2008 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please [contact the nearest Infineon Technologies Office \(www.infineon.com\)](http://www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.