


# SMT Power Inductors

High Current Composite Inductor - PA5002.XXXNLT and PM2202.XXXNLT

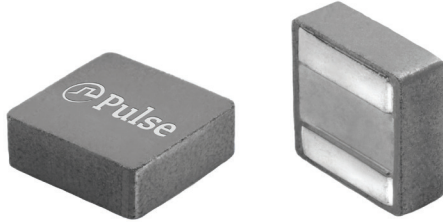

-  **Height:** 2.1mm Max
-  **Footprint:** 5.7mm x 5.5mm Max
-  **Current Rating:** up to 30A<sub>pk</sub>
-  **Inductance Range:** 0.15uH to 1.5uH
-  High current, low DCR, and high efficiency
-  High reliability
-  Minimized acoustic noise and minimized leakage flux noise
-  Available in Commercial (PA5002) and Automotive (PM2202) grades

## Electrical Specifications @ 25°C, Operating Temperature Range per Below<sup>4,5</sup>

| Part Number                    |                                             | Inductance<br>100KHz, 0.1V<br><br>uH±20% | Rated <sup>3</sup><br>Current<br><br>A | DC Resistance |      | Saturation <sup>2</sup><br>Current<br>(25°C)<br><br>A | K Factor<br>for<br>Core Loss |
|--------------------------------|---------------------------------------------|------------------------------------------|----------------------------------------|---------------|------|-------------------------------------------------------|------------------------------|
| Commerical<br>(-40°C to 125°C) | Automotive <sup>6</sup><br>(-55°C to 155°C) |                                          |                                        | TYP.          | MAX. |                                                       |                              |
|                                |                                             |                                          |                                        | mΩ            | mΩ   |                                                       |                              |
| PA5002.151NLT                  | PM2202.151NLT                               | 0.15                                     | 18.8                                   | 4             | 4.6  | 30                                                    | 458.5                        |
| PA5002.161NLT                  | PM2202.161NLT                               | 0.16                                     | 18.8                                   | 4             | 4.6  | 30                                                    | -                            |
| PA5002.331NLT                  | PM2202.331NLT                               | 0.33                                     | 14.4                                   | 6.1           | 7    | 26                                                    | 291.7                        |
| PA5002.471NLT                  | PM2202.471NLT                               | 0.47                                     | 14.1                                   | 7             | 8.05 | 22                                                    | 213.9                        |
| PA5002.561NLT                  | PM2202.561NLT                               | 0.56                                     | 13.9                                   | 8.7           | 9.54 | 19                                                    | 213.9                        |
| PA5002.681NLT                  | PM2202.681NLT                               | 0.68                                     | 13.4                                   | 8.9           | 10.2 | 16                                                    | 168.9                        |
| PA5002.801NLT                  | PM2202.801NLT                               | 0.8                                      | 13                                     | 10.3          | 11.8 | 15.5                                                  | 168.9                        |
| PA5002.821NLT                  | PM2202.821NLT                               | 0.82                                     | 12                                     | 11            | 12.7 | 15                                                    | 168.9                        |
| PA5002.102NLT                  | PM2202.102NLT                               | 1                                        | 10.5                                   | 12            | 13.8 | 14.5                                                  | 139.5                        |
| PA5002.122NLT                  | PM2202.122NLT                               | 1.2                                      | 9.4                                    | 14.2          | 16.3 | 14                                                    | 118.9                        |
| PA5002.152NLT                  | PM2202.152NLT                               | 1.5                                      | 8.8                                    | 16.2          | 18.7 | 13.3                                                  | 118.9                        |

### Notes:


- Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
- The saturation current is the current at which the initial inductance drops approximately 30% at the stated ambient temperature. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
- The rated current is the DC current required to raise the component temperature by approximately 40 °C. Take note that the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- The part temperature (ambient+temp rise) should not exceed 125 °C under worst case operating conditions. Circuit design, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
- Parts shown in bold are standard catalog parts and are available through sample stock and distribution. Parts in lighter font are available but are not necessarily held in sample stock or distribution and lead times may be longer. Please contact Pulse for availability.
- The PM2202.XXXNLT part numbers are AEC-Q200 and IATF16949 certified. The mechanical dimensions are 100% tested in production but do not necessarily meet a product capability index (Cpk) >1.33 and therefore may not strictly conform to PPAP.

# SMT Power Inductors


High Current Composite Inductor - PA5002.XXXNLT and PM2202.XXXNLT

## Mechanical

### PA5002.XXXNLT and PM2202.XXXNLT

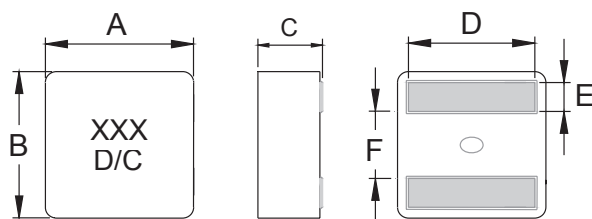

FINAL LAYOUT




SUGGESTED PAD LAYOUT

| Series        | A       | B       | C       | D       | E       | F        | L         | G         | H         |
|---------------|---------|---------|---------|---------|---------|----------|-----------|-----------|-----------|
| PA5002/PM2202 | 5.5±0.2 | 5.3±0.2 | 1.9±0.2 | 4.3±0.3 | 1.1±0.2 | 2.3±0.25 | 4.5 (REF) | 2.0 (REF) | 4.7 (REF) |

All Dimensions in mm.



### TAPE & REEL INFO

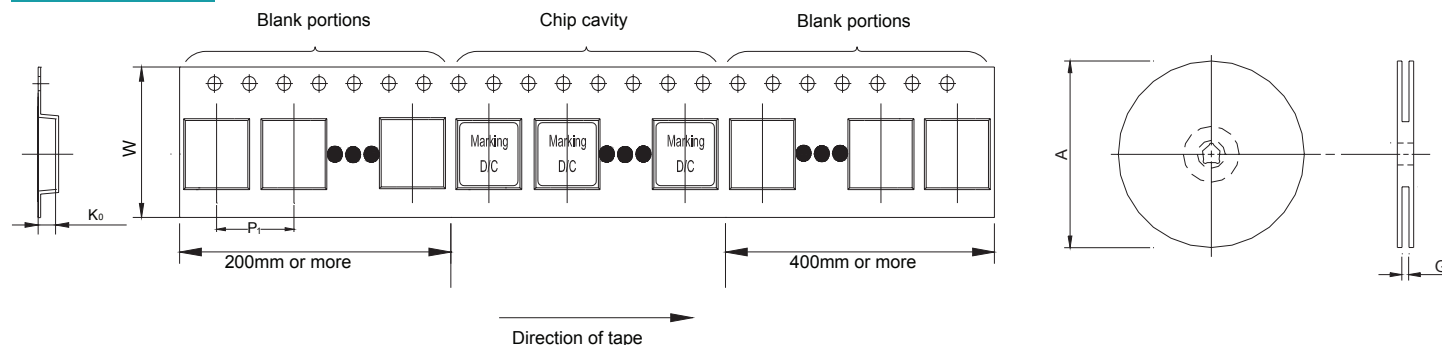

#### SURFACE MOUNTING TYPE, REEL/TAPE LIST







|               | REEL SIZE (mm) |      | TAPE SIZE (mm) |    |                | QTY  |
|---------------|----------------|------|----------------|----|----------------|------|
|               | A              | G    | P <sub>1</sub> | W  | K <sub>0</sub> |      |
| PA5002/PM2202 | Ø330           | 12.4 | 8              | 12 | 2.3            | 3000 |

### Typical Performance Curves

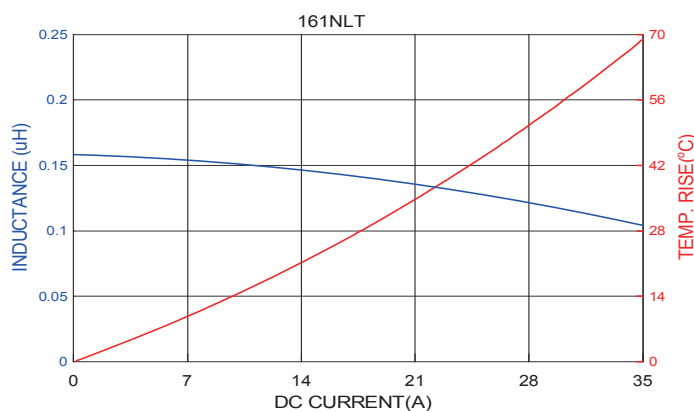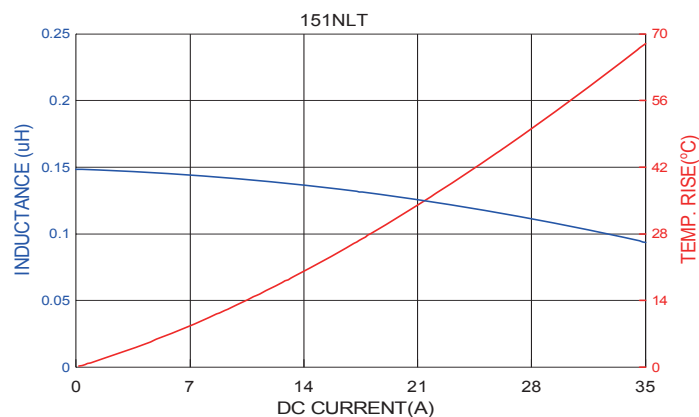




# SMT Power Inductors

High Current Composite Inductor - PA5002.XXXNLT and PM2202.XXXNLT

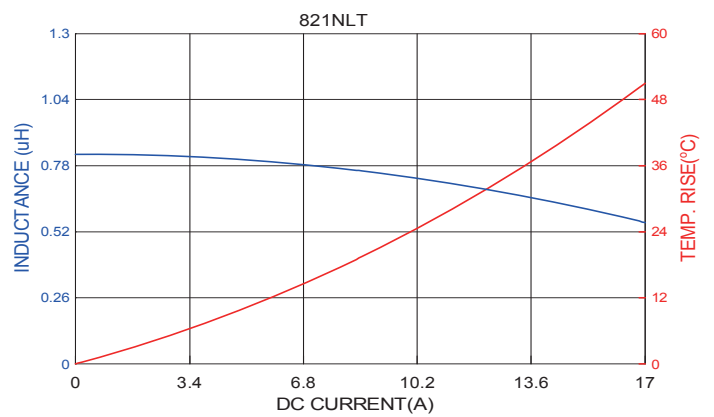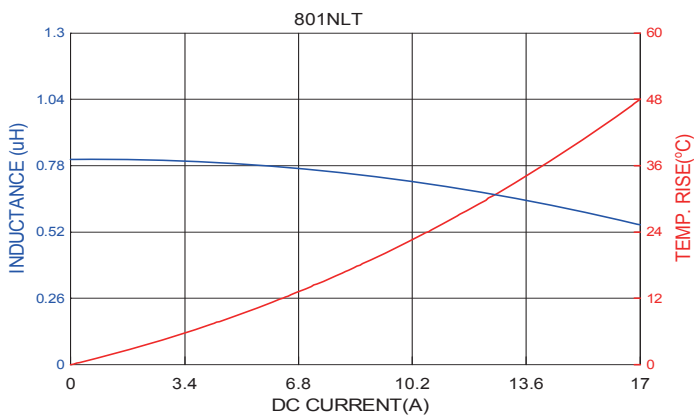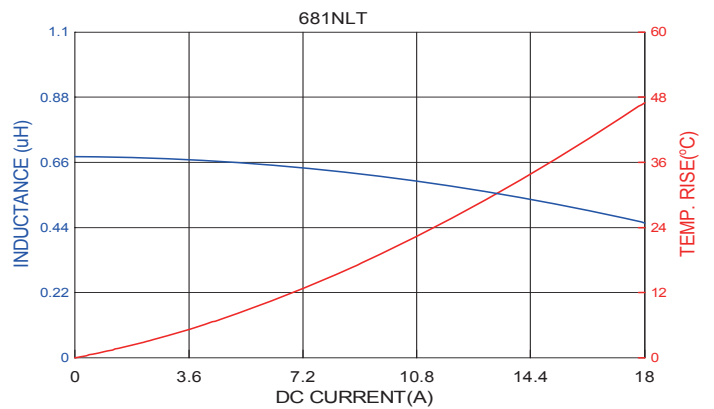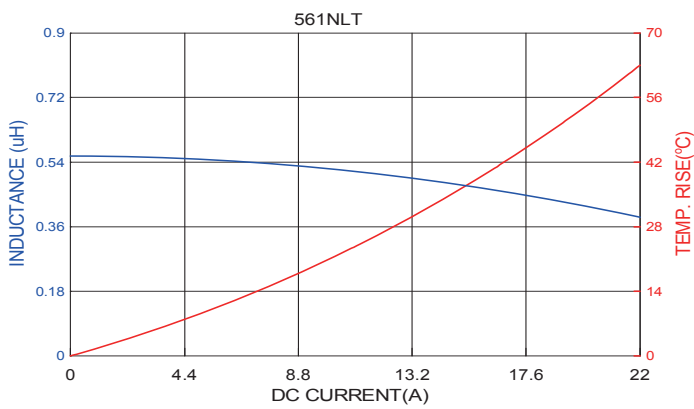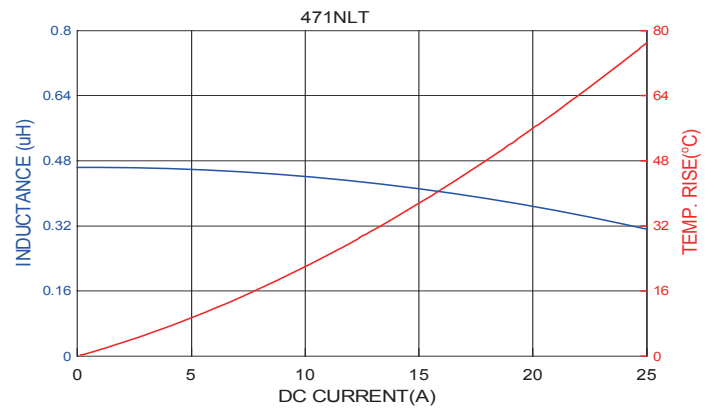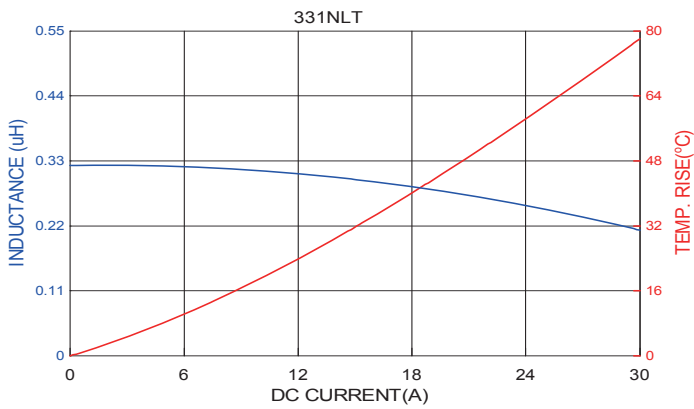


# SMT Power Inductors

High Current Composite Inductor - PA5002.XXXNLT and PM2202.XXXNLT

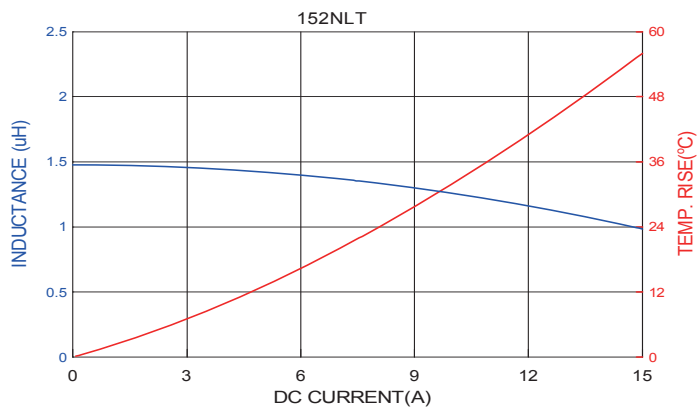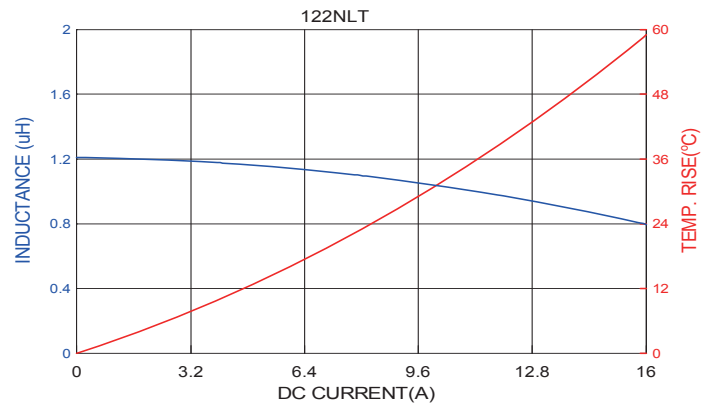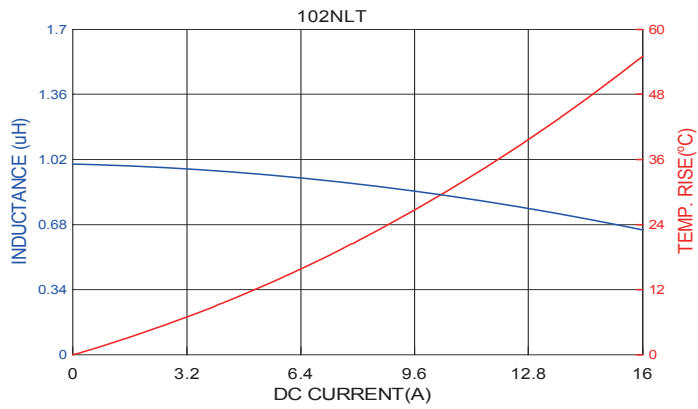

## CORE LOSS vs FLUX DENSITY

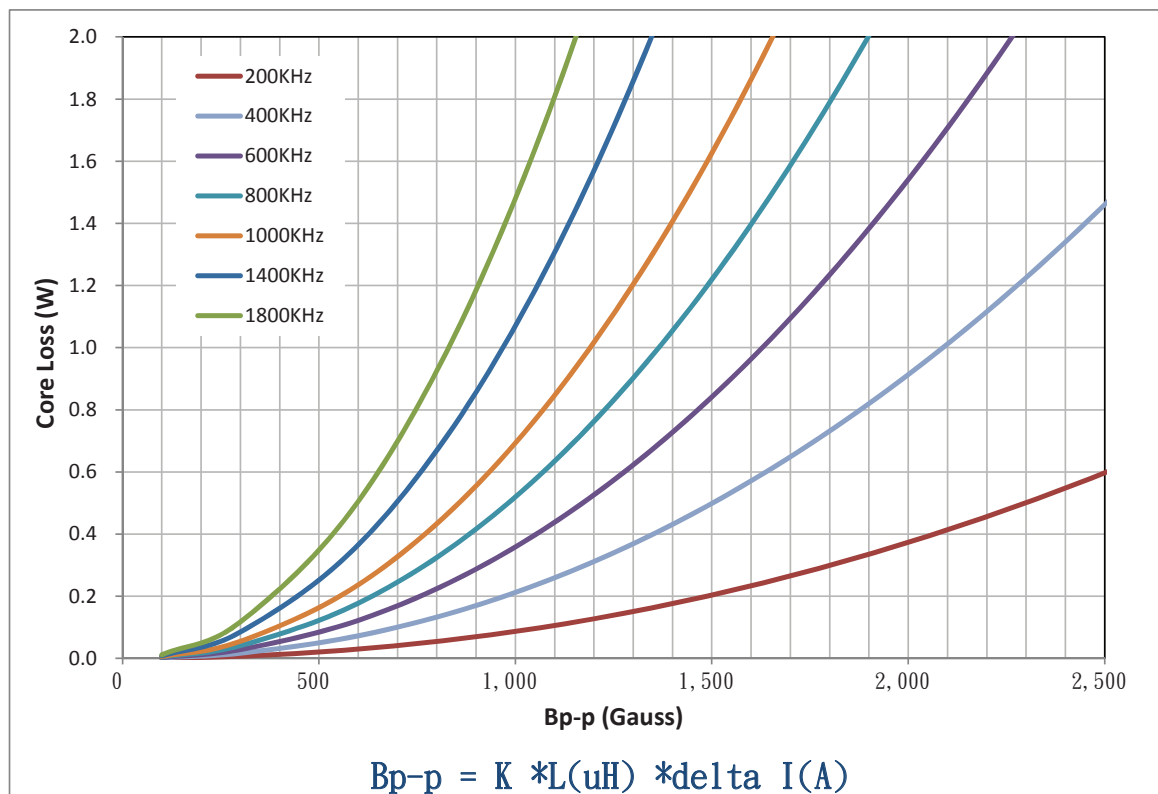

### For More Information

#### Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100  
San Diego, CA 92128  
U.S.A.

Tel: 858 674 8100  
Fax: 858 674 8262

#### Pulse Europe

Pulse Electronics GmbH  
Am Rottland 12  
58540 Meinerzhagen  
Germany

Tel: 49 2354 777 100  
Fax: 49 2354 777 168

#### Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD  
D708, Shenzhen Academy of  
Aerospace Technology,  
The 10th Keji South Road,  
Nanshan District, Shenzhen,  
P.R. China 518057

Tel: 86 755 33966678  
Fax: 86 755 33966700

#### Pulse North China

Room 2704/2705  
Super Ocean Finance Ctr.  
2067 Yan An Road West  
Shanghai 200336  
China

Tel: 86 21 62787060  
Fax: 86 2162786973

#### Pulse South Asia

3 Fraser Street  
0428 DUO Tower  
Singapore 189352

Tel: 65 6287 8998  
Fax: 65 6280 0080

#### Pulse North Asia

1F., No.111 Xiyuan Rd  
Zhongli City  
Taoyuan City 32057  
Taiwan (R.O.C)

Tel: 886 3 4356768  
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2018, Pulse Electronics, Inc. All rights reserved.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.