

Applications

- Military radar
- Civilian radar
- Land mobile and military radio communications
- Test instrumentation
- Wideband or narrowband amplifiers
- Jammers

Product Features

- Frequency: 30 MHz to 3.0 GHz
- Output Power (P_{3dB}): 11 W at 2.4 GHz
- Linear Gain: 17.1 dB at 2.4 GHz
- Typical PAE_{3dB} : 62.7% at 2.4 GHz
- Operating Voltage: 32 V
- Low thermal resistance package
- CW and Pulse capable
- 3 x 3 mm package


General Description

The TriQuint TGF3015-SM is a 10W (P_{3dB}), 50 Ω -input matched discrete GaN on SiC HEMT which operates from 30MHz to 3.0 GHz. The integrated input matching network enables wideband gain and power performance, while the output can be matched on board to optimize power and efficiency for any region within the band.


The device is housed in an industry-standard 3 x 3 mm package that saves real estate of already space-constrained handheld radios.

Lead-free and ROHS compliant

Evaluation boards are available upon request.

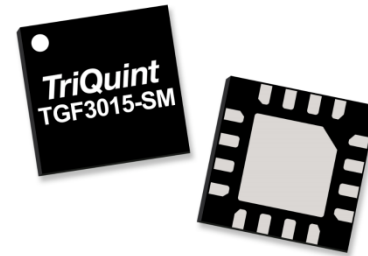

Functional Block Diagram

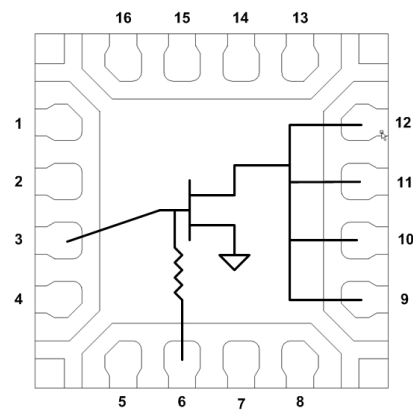

Pin Configuration

Pin No.	Label
9 - 12	V_D / RF OUT
3	V_G / RF IN
6	Off-chip Shunt Cap for Low-Frequency Gain
Back side	Source

Ordering Information

Part	ECCN	Description
TGF3015-SM	EAR99	QFN Packaged Part
TGF3015-SM-EVB1	EAR99	0.5 – 3 GHz EVB

Absolute Maximum Ratings

Parameter	Value
Breakdown Voltage (V_{DG})	100 V min.
Gate Voltage Range (V_G)	-50 to 0 V
Drain Current (I_D)	1.5 A
Gate Current (I_G)	-2.5 to 4.2 mA
Power Dissipation (P_D)	15 W
RF Input Power, CW, $T = 25^\circ\text{C}$ (P_{IN})	27.5 dBm
Channel Temperature (T_{CH})	275 °C
Mounting Temperature (30 Seconds)	320 °C
Storage Temperature	-40 to 150 °C

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

Recommended Operating Conditions

Parameter ¹	Value
Drain Voltage (V_D)	32 V (Typ.)
Drain Quiescent Current (I_{DQ})	50 mA (Typ.)
Peak Drain Current (I_D)	557 mA (Typ.)
Gate Voltage (V_G)	-2.7 V (Typ.)
Channel Temperature (T_{CH})	225 °C (Max)
Power Dissipation, CW (P_D)	9.9 W (Max)
Power Dissipation, Pulse (P_D) ²	15.3 W (Max)

¹ Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

² 100uS Pulse Width, 20% Duty Cycle

RF Characterization – Load Pull Performance at 1.0 GHz

Test conditions unless otherwise noted: $T_A = 25^\circ\text{C}$, $V_D = 32\text{ V}$, $I_{DQ} = 50\text{ mA}$, Pulse: 100uS Pulse Width, 20% Duty Cycle

Symbol	Parameter	Min	Typical	Max	Units
G_{LIN}	Linear Gain, Power Tuned		16.2		dB
P_{3dB}	Output Power at 3 dB Gain Compression, Power Tuned		40.2		dBm
PAE_{3dB}	Power-Added Efficiency at 3 dB Gain Compression, Efficiency Tuned		70.9		%
G_{3dB}	Gain at 3 dB Compression, Power Tuned		13.2		dB

RF Characterization – Load Pull Performance at 2.0 GHz

Test conditions unless otherwise noted: $T_A = 25^\circ\text{C}$, $V_D = 32\text{ V}$, $I_{DQ} = 50\text{ mA}$, Pulse: 100uS Pulse Width, 20% Duty Cycle

Symbol	Parameter	Min	Typical	Max	Units
G_{LIN}	Linear Gain, Power Tuned		16.5		dB
P_{3dB}	Output Power at 3 dB Gain Compression, Power Tuned		40.6		dBm
PAE_{3dB}	Power-Added Efficiency at 3 dB Gain Compression, Efficiency Tuned		61.7		%
G_{3dB}	Gain at 3 dB Compression, Power Tuned		13.5		dB

RF Characterization – Load Pull Performance at 2.4 GHz

Test conditions unless otherwise noted: $T_A = 25\text{ }^{\circ}\text{C}$, $V_D = 32\text{ V}$, $I_{DQ} = 50\text{ mA}$, Pulse: 100uS Pulse Width, 20% Duty Cycle

Symbol	Parameter	Min	Typical	Max	Units
G_{LIN}	Linear Gain, Power Tuned		17.1		dB
P_{3dB}	Output Power at 3 dB Gain Compression, Power Tuned		40.4		dBm
PAE_{3dB}	Power-Added Efficiency at 3 dB Gain Compression, Efficiency Tuned		62.7		%
G_{3dB}	Gain at 3 dB Compression, Power Tuned		14.1		dB

RF Characterization – Load Pull Performance at 2.7 GHz

Test conditions unless otherwise noted: $T_A = 25\text{ }^{\circ}\text{C}$, $V_D = 32\text{ V}$, $I_{DQ} = 50\text{ mA}$, Pulse: 100uS Pulse Width, 20% Duty Cycle

Symbol	Parameter	Min	Typical	Max	Units
G_{LIN}	Linear Gain, Power Tuned		16.3		dB
P_{3dB}	Output Power at 3 dB Gain Compression, Power Tuned		40.5		dBm
PAE_{3dB}	Power-Added Efficiency at 3 dB Gain Compression, Efficiency Tuned		63.7		%
G_{3dB}	Gain at 3 dB Compression, Power Tuned		13.3		dB

RF Characterization – Load Pull Performance at 3.0 GHz

Test conditions unless otherwise noted: $T_A = 25\text{ }^{\circ}\text{C}$, $V_D = 32\text{ V}$, $I_{DQ} = 50\text{ mA}$, Pulse: 100uS Pulse Width, 20% Duty Cycle

Symbol	Parameter	Min	Typical	Max	Units
G_{LIN}	Linear Gain, Power Tuned		15.4		dB
P_{3dB}	Output Power at 3 dB Gain Compression, Power Tuned		40.5		dBm
PAE_{3dB}	Power-Added Efficiency at 3 dB Gain Compression, Efficiency Tuned		58.6		%
G_{3dB}	Gain at 3 dB Compression, Power Tuned		12.4		dB

RF Characterization – EVB Performance at 2.4 GHz

Test conditions unless otherwise noted: $T_A = 25\text{ }^{\circ}\text{C}$, $V_D = 32\text{ V}$, $I_{DQ} = 50\text{ mA}$, Pulse: 100uS Pulse Width, 20% Duty Cycle

Symbol	Parameter	Min	Typical	Max	Units
G_{LIN}	Linear Gain		17.0		dB
P_{3dB}	Output Power at 3 dB Gain Compression		9.3		W
DE_{3dB}	Drain Efficiency at 3 dB Gain Compression		50.7		%
G_{3dB}	Gain at 3 dB Compression		14.0		dB

RF Characterization – Mismatch Ruggedness at 3.0 GHz

Test conditions unless otherwise noted: $T_A = 25\text{ }^{\circ}\text{C}$, $V_D = 32\text{ V}$, $I_{DQ} = 50\text{ mA}$

Driving input power is determined at 3dB Pulsed compression under matched condition at EVB output connector.

Symbol	Parameter	Typical
VSWR	Impedance Mismatch Ruggedness	10:1

Thermal and Reliability Information - CW ¹

Parameter	Test Conditions	Value	Units
Thermal Resistance (θ_{JC})	Vds = 32V, Idq = 50mA 85 °C Case 2.5 W Pdiss, CW	11.6	°C/W
Channel Temperature (T_{CH})		114	°C
Median Lifetime (T_M)		2.15E11	Hrs
Thermal Resistance (θ_{JC})	Vds = 32V, Idq = 50mA 85 °C Case 5 W Pdiss, CW	12.2	°C/W
Channel Temperature (T_{CH})		146	°C
Median Lifetime (T_M)		3.89E9	Hrs
Thermal Resistance (θ_{JC})	Vds = 32V, Idq = 50mA 85 °C Case 7.5 W Pdiss, CW	13.1	°C/W
Channel Temperature (T_{CH})		183	°C
Median Lifetime (T_M)		7.82E7	Hrs
Thermal Resistance (θ_{JC})	Vds = 32V, Idq = 50mA 85 °C Case 10 W Pdiss, CW	14.2	°C/W
Channel Temperature (T_{CH})		227	°C
Median Lifetime (T_M)		1.54E6	Hrs
Thermal Resistance (θ_{JC})	Vds = 32V, Idq = 50mA 85 °C Case 12.5 W Pdiss, CW	15.5	°C/W
Channel Temperature (T_{CH})		279	°C
Median Lifetime (T_M)		3.35E4	Hrs

Notes:

1. Thermal resistance measured to bottom of package.


Thermal and Reliability Information - Pulsed ¹

Parameter	Test Conditions	Value	Units
Thermal Resistance (θ_{JC})	Vds = 32V, Idq = 50mA 85 °C Case 10 W Pdiss, 100uS PW, 20%	8.4	°C/W
Channel Temperature (T_{CH})		169	°C
Median Lifetime (T_M)		3.18E8	Hrs
Thermal Resistance (θ_{JC})	Vds = 32V, Idq = 50mA 85 °C Case 12.5 W Pdiss, 100uS PW, 20%	8.7	°C/W
Channel Temperature (T_{CH})		194	°C
Median Lifetime (T_M)		2.73E7	Hrs
Thermal Resistance (θ_{JC})	Vds = 32V, Idq = 50mA 85 °C Case 15 W Pdiss, 100uS PW, 20%	9.1	°C/W
Channel Temperature (T_{CH})		221	°C
Median Lifetime (T_M)		2.54E6	Hrs


Notes:

1. Thermal resistance measured to bottom of package.

Median Lifetime

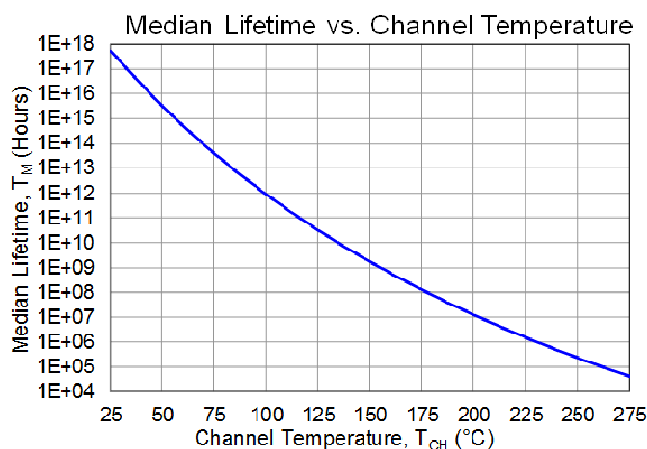

Maximum Channel Temperature

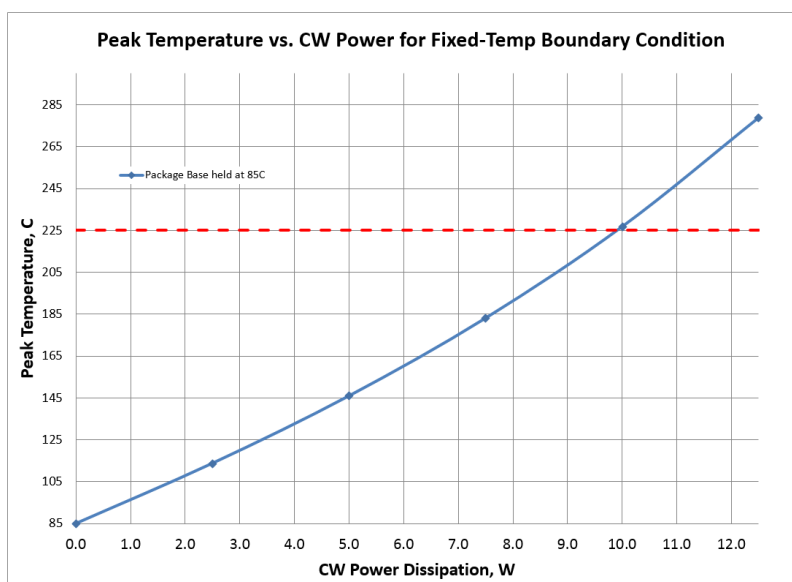

Load Pull Smith Charts ^(1, 2)

RF performance that the device typically exhibits when placed in the specified impedance environment. The impedances are not the impedances of the device, they are the impedances presented to the device via an RF circuit or load-pull system. The impedances listed follow an optimized trajectory to maintain high power and high efficiency.


Notes:

1. 32V, 50mA, Pulsed signal with 100uS pulse width and 20% duty cycle. 3dB compression referenced at peak gain.
2. See page 18 for load pull and source pull reference planes.

1GHz, Load-pull

$Z_s(f_0) = 50.18 - 2.82i\Omega$
 $Z_s(2f_0) = 38.17 - 12.93i\Omega$
 $Z_s(3f_0) = 33.86 + 8.44i\Omega$
 $Z_l(2f_0) = 26.76 - 50.31i\Omega$
 $Z_l(3f_0) = 26.14 - 39.51i\Omega$

Max Power is 40.2dBm
 at $Z = 32.025 + 16.241i\Omega$
 $\Gamma = -0.1731 + 0.2323i$
 Max Gain is 14dB
 at $Z = 30.831 + 42.221i\Omega$
 $\Gamma = 0.028 + 0.5077i$
 Max PAE is 70.9%
 at $Z = 38.474 + 50.971i\Omega$
 $\Gamma = 0.1514 + 0.4889i$

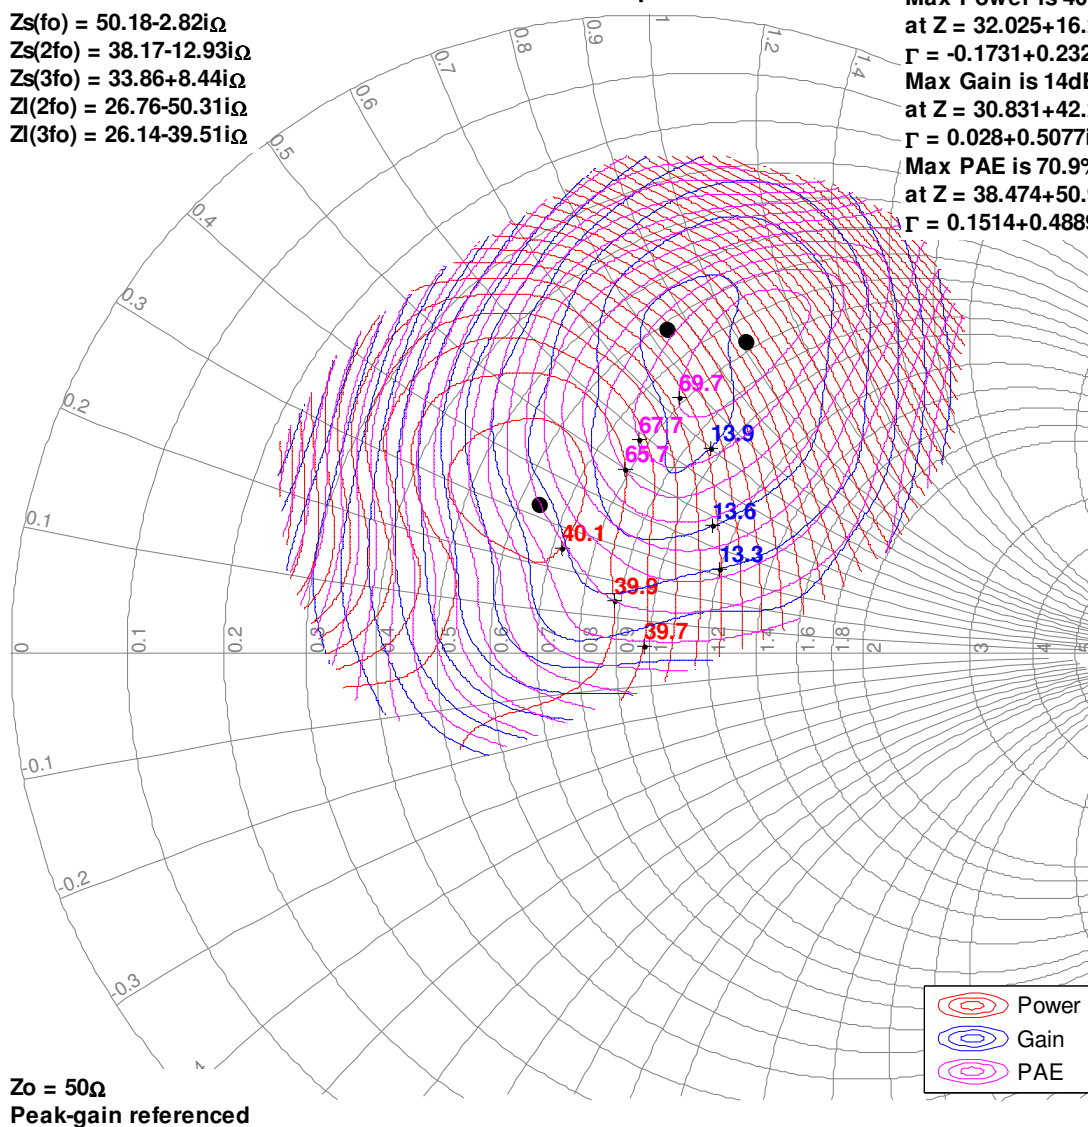


Load Pull Smith Charts ^(1, 2)

RF performance that the device typically exhibits when placed in the specified impedance environment. The impedances are not the impedances of the device, they are the impedances presented to the device via an RF circuit or load-pull system. The impedances listed follow an optimized trajectory to maintain high power and high efficiency.

Notes:

1. 32V, 50mA, Pulsed signal with 100uS pulse width and 20% duty cycle. 3dB compression referenced at peak gain.
2. See page 18 for load pull and source pull reference planes.

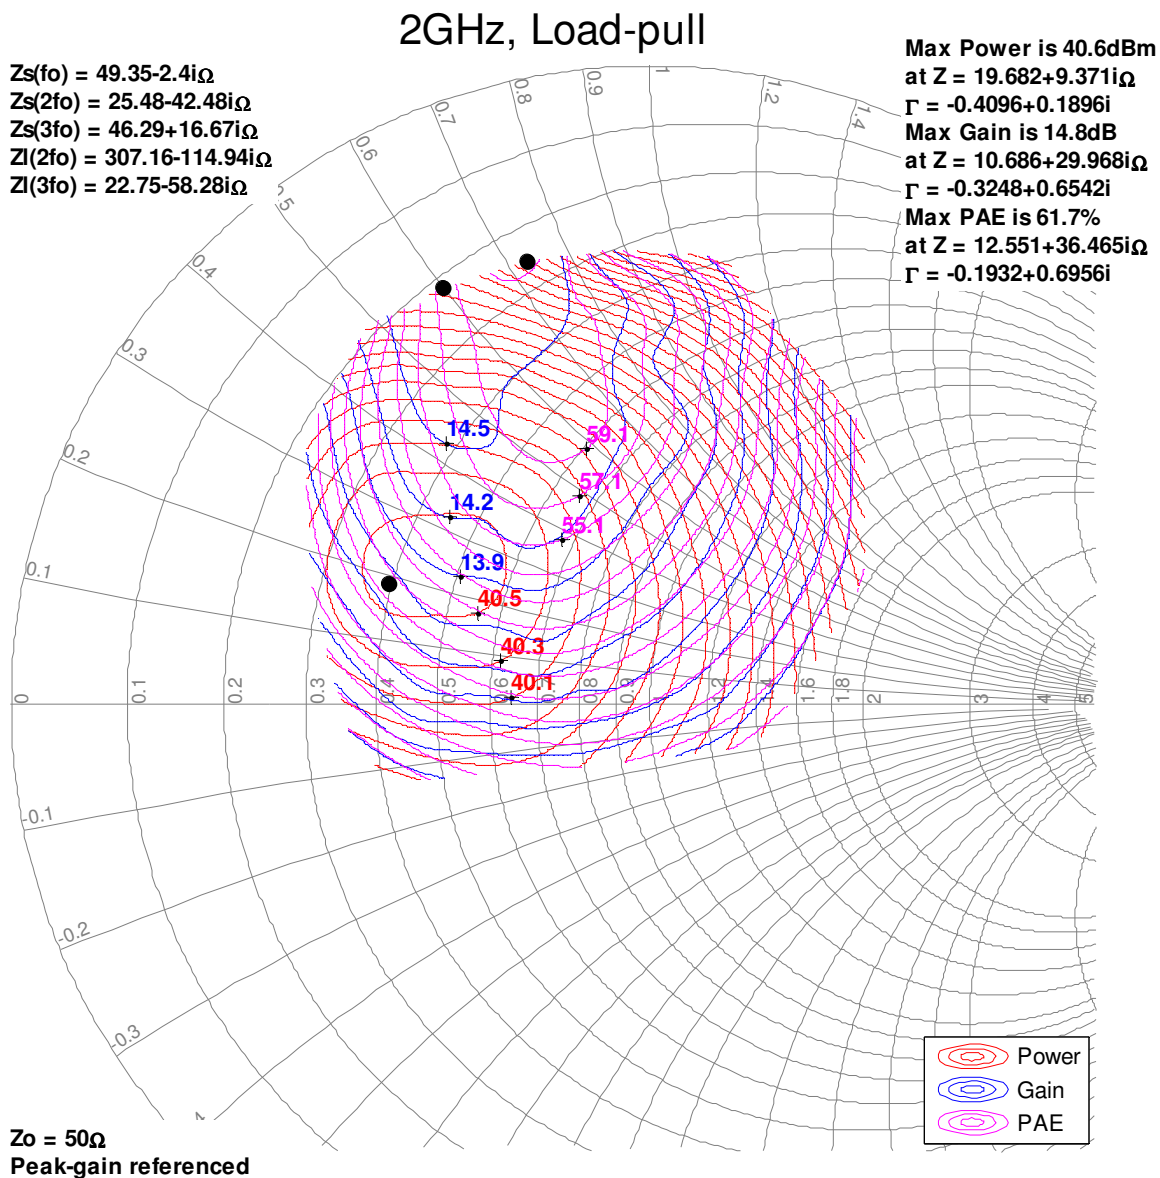

Load Pull Smith Charts ^(1, 2)

RF performance that the device typically exhibits when placed in the specified impedance environment. The impedances are not the impedances of the device, they are the impedances presented to the device via an RF circuit or load-pull system. The impedances listed follow an optimized trajectory to maintain high power and high efficiency.


Notes:

1. 32V, 50mA, Pulsed signal with 100uS pulse width and 20% duty cycle. 3dB compression referenced at peak gain.
2. See page 18 for load pull and source pull reference planes.

2.4GHz, Load-pull

$Z_s(f_0) = 52.24 + 0.73i\Omega$
 $Z_s(2f_0) = 19.84 - 11.07i\Omega$
 $Z_s(3f_0) = 42.02 - 17.18i\Omega$
 $Z_l(2f_0) = 61.1 + 11.34i\Omega$
 $Z_l(3f_0) = 29.82 - 7.89i\Omega$

Max Power is 40.4dBm
at $Z = 18.166 + 11.298i\Omega$
 $\Gamma = -0.4278 + 0.2366i$
Max Gain is 14.4dB
at $Z = 15.289 + 22.193i\Omega$
 $\Gamma = -0.373 + 0.4667i$
Max PAE is 62.7%
at $Z = 13.992 + 28.16i\Omega$
 $\Gamma = -0.3092 + 0.5761i$

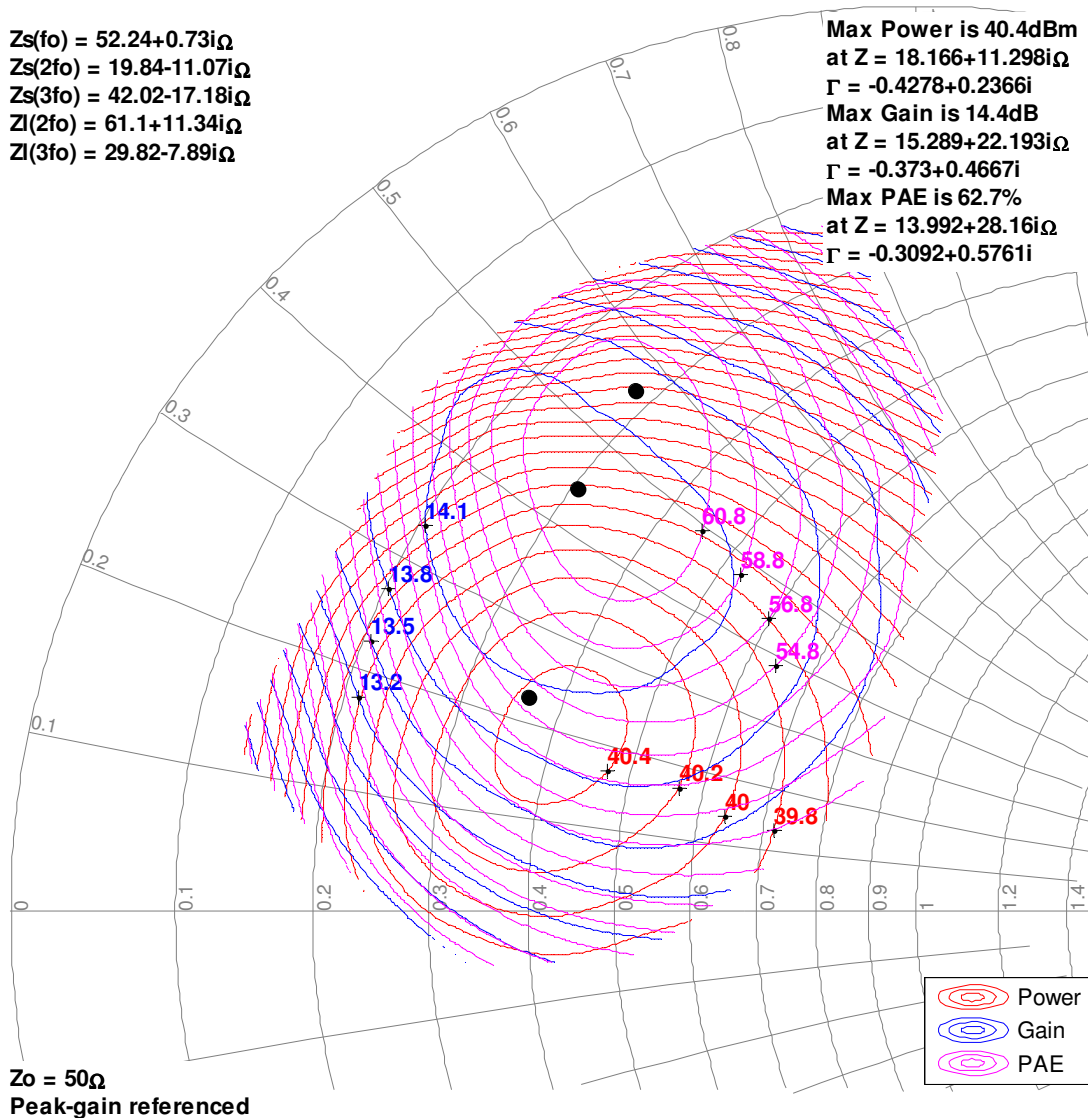

Load Pull Smith Charts ^(1, 2)

RF performance that the device typically exhibits when placed in the specified impedance environment. The impedances are not the impedances of the device, they are the impedances presented to the device via an RF circuit or load-pull system. The impedances listed follow an optimized trajectory to maintain high power and high efficiency.


Notes:

1. 32V, 50mA, Pulsed signal with 100uS pulse width and 20% duty cycle. 3dB compression referenced at peak gain.
2. See page 18 for load pull and source pull reference planes.

2.7GHz, Load-pull

$Z_s(f_0) = 47.41 + 2.82i \Omega$
 $Z_s(2f_0) = 26.43 - 27.99i \Omega$
 $Z_s(3f_0) = 27.13 - 2.6i \Omega$
 $Z_l(2f_0) = 110.59 - 87.56i \Omega$
 $Z_l(3f_0) = 24.54 - 6.19i \Omega$

Max Power is 40.5dBm
at $Z = 18.277 + 11.064i \Omega$
 $\Gamma = -0.4271 + 0.2313i$
Max Gain is 13.6dB
at $Z = 13.801 + 16.01i \Omega$
 $\Gamma = -0.4745 + 0.37i$
Max PAE is 63.7%
at $Z = 12.205 + 20.142i \Omega$
 $\Gamma = -0.455 + 0.4711i$

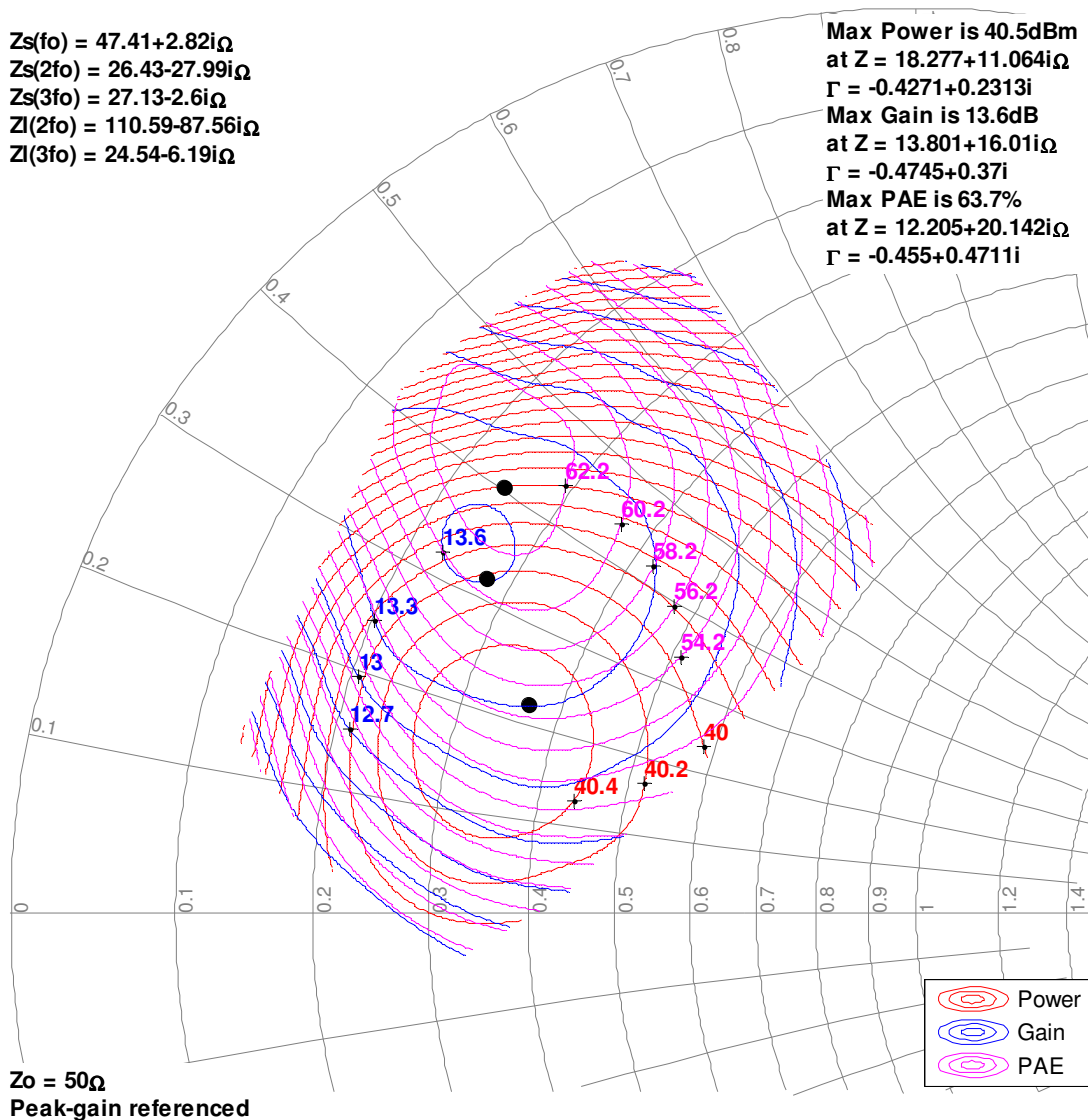

Load Pull Smith Charts ^(1, 2)

RF performance that the device typically exhibits when placed in the specified impedance environment. The impedances are not the impedances of the device, they are the impedances presented to the device via an RF circuit or load-pull system. The impedances listed follow an optimized trajectory to maintain high power and high efficiency.


Notes:

1. 32V, 50mA, Pulsed signal with 100uS pulse width and 20% duty cycle. 3dB compression referenced at peak gain.
2. See page 18 for load pull and source pull reference planes.

3GHz, Load-pull

$Z_s(f_0) = 49.59 - 1.28i\Omega$
 $Z_s(2f_0) = 44 + 10.41i\Omega$
 $Z_s(3f_0) = 25.67 - 8.3i\Omega$
 $Z_l(2f_0) = 65.18 + 44.62i\Omega$
 $Z_l(3f_0) = 38.87 - 26.64i\Omega$






Max Power is 40.5dBm
at $Z = 18.327 + 11.73i\Omega$
 $\Gamma = -0.4216 + 0.2441i$
Max Gain is 12.4dB
at $Z = 12.252 + 20.075i\Omega$
 $\Gamma = -0.4551 + 0.4692i$
Max PAE is 58.6%
at $Z = 10.574 + 22.744i\Omega$
 $\Gamma = -0.4469 + 0.5433i$

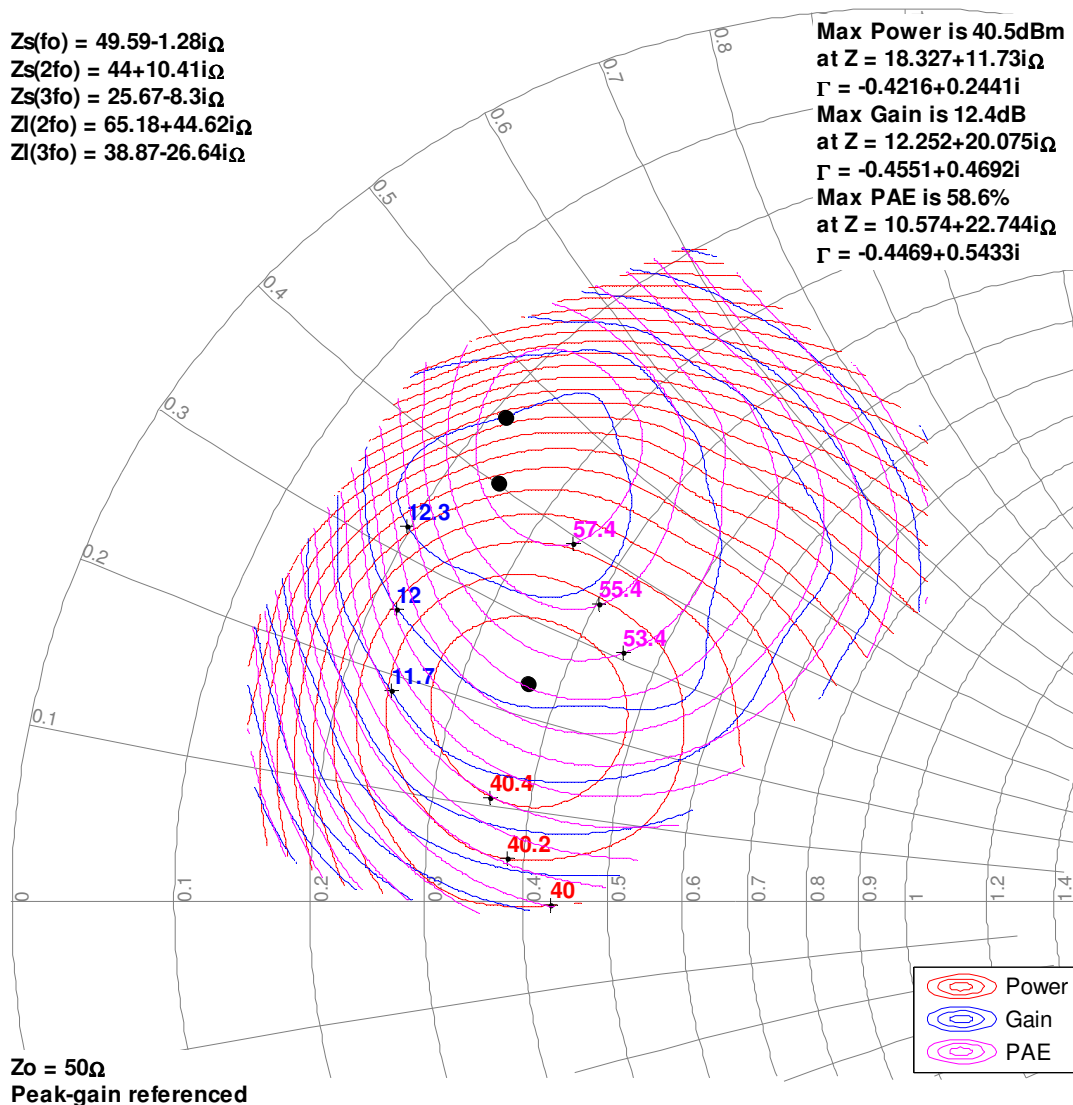

Typical Performance – Power Tuned^(1,2,3)

Notes:






1. Pulsed signal with 100uS pulse width and 20% duty cycle
2. See page 18 for load pull and source pull reference planes.
3. Performance is measured at device reference planes.

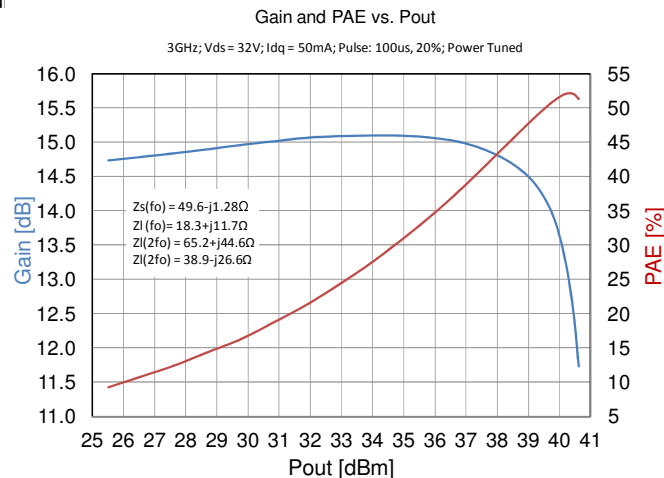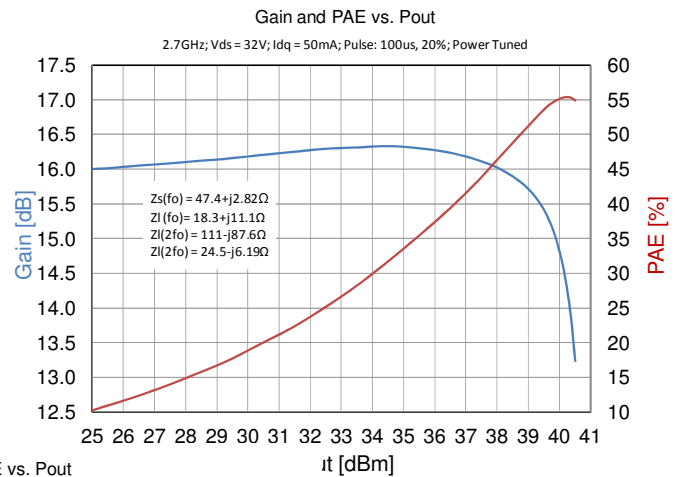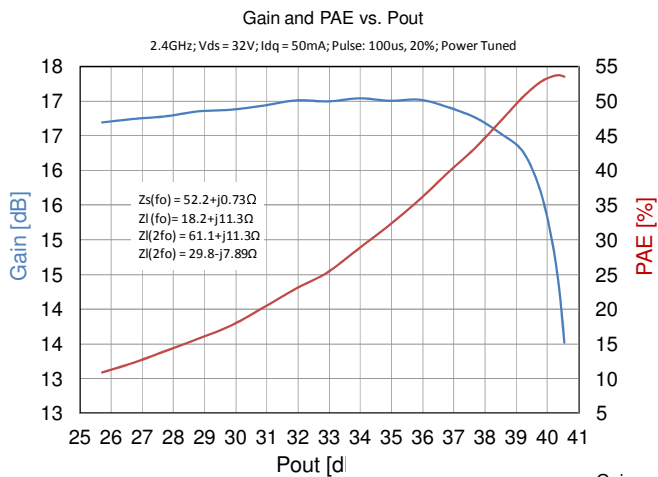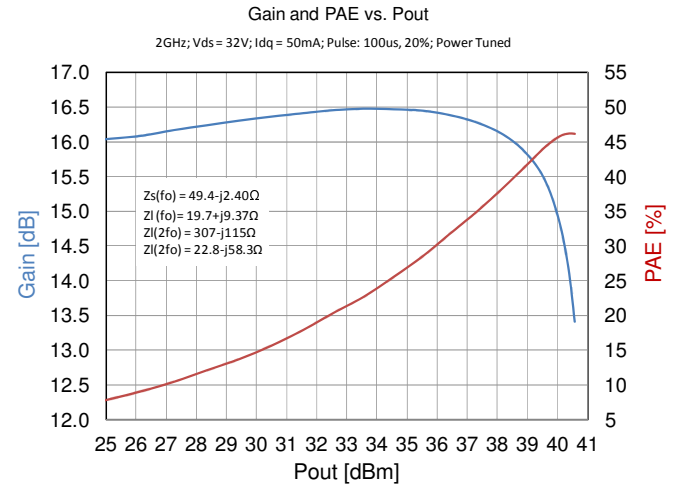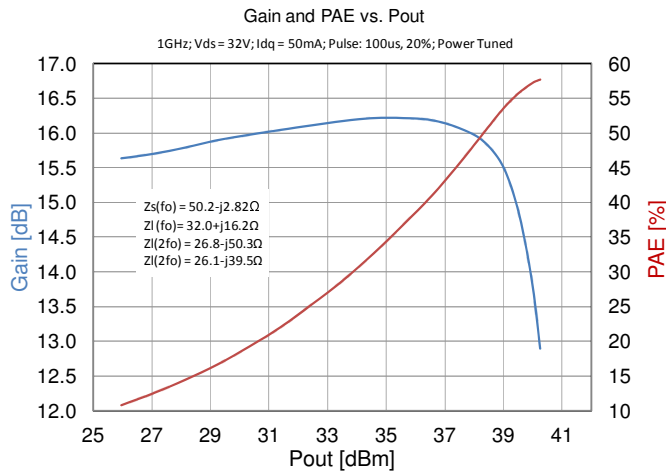

Typical Performance – Efficiency Tuned^(1,2,3)




Notes:

1. Pulsed signal with 100us pulse width and 20% duty cycle
2. See page 18 for load pull and source pull reference planes.

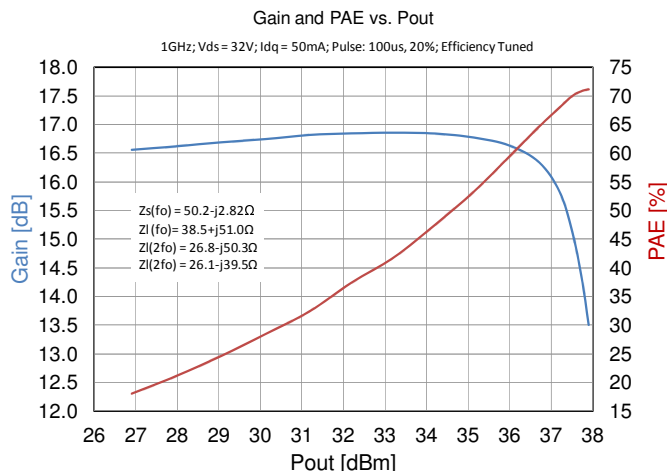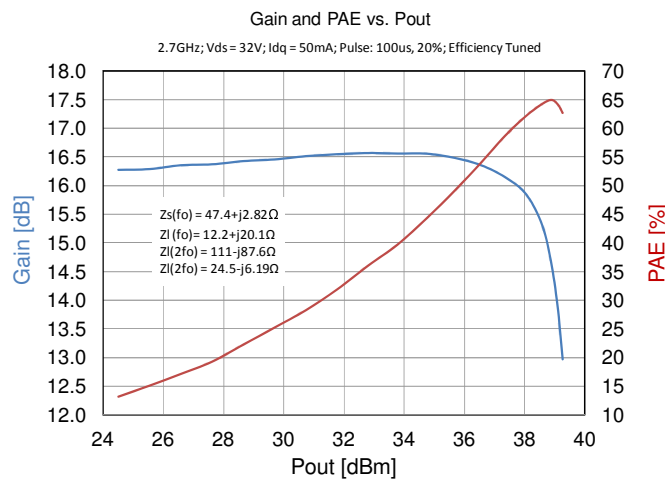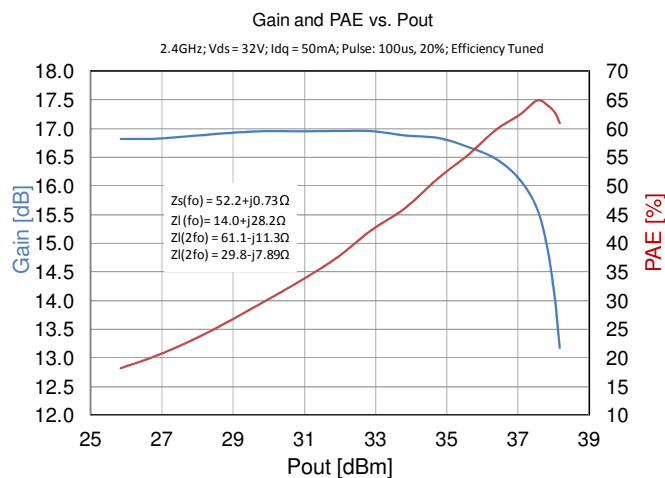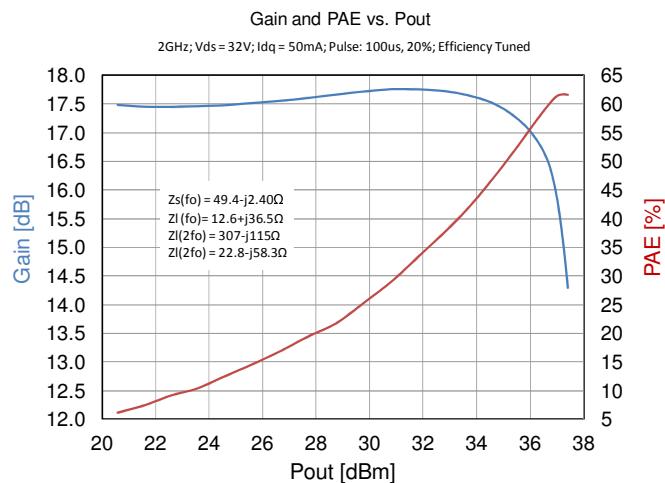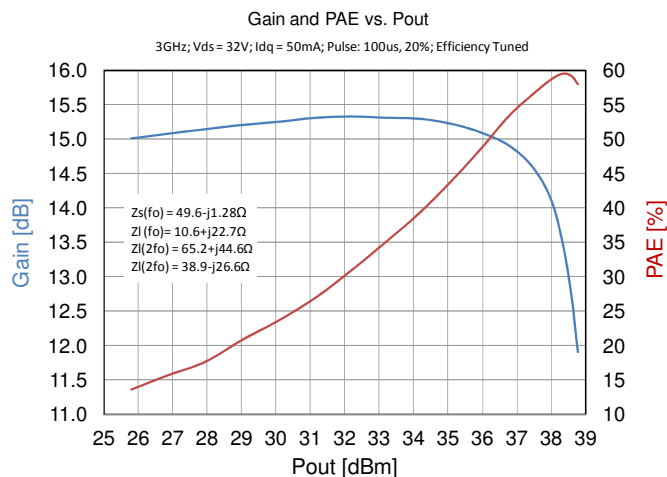

Evaluation Board Performance Over Temperature (1, 2)

Performance measured on TriQuint's 0.5 GHz to 3 GHz Evaluation Board

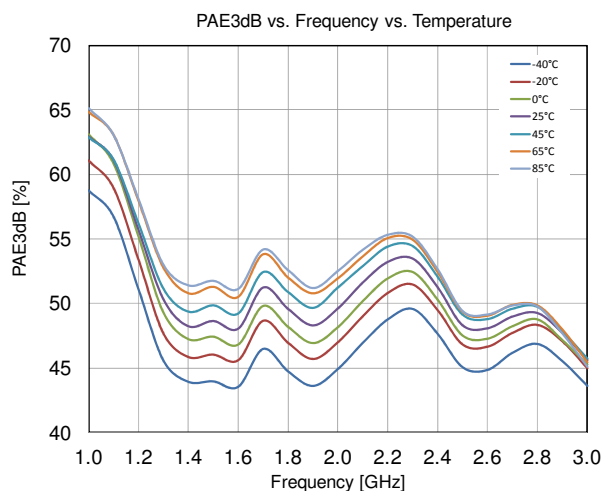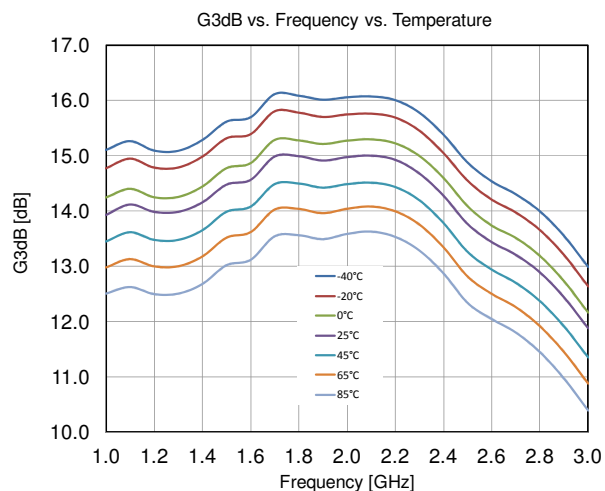
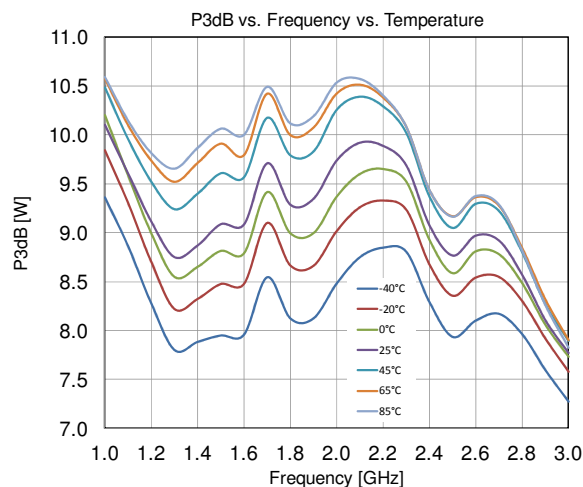


Notes:

1. Test Conditions: $V_{DS} = 32 \text{ V}$, $I_{DQ} = 50 \text{ mA}$
2. Test Signal: Pulse Width = 100 μs , Duty Cycle = 20%

Evaluation Board Performance At 25 °C^(1, 2)


Performance measured on TriQuint's 0.5 GHz to 3.0 GHz Evaluation Board

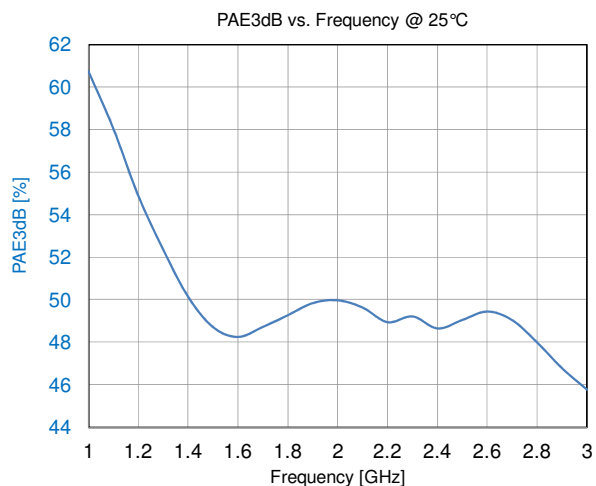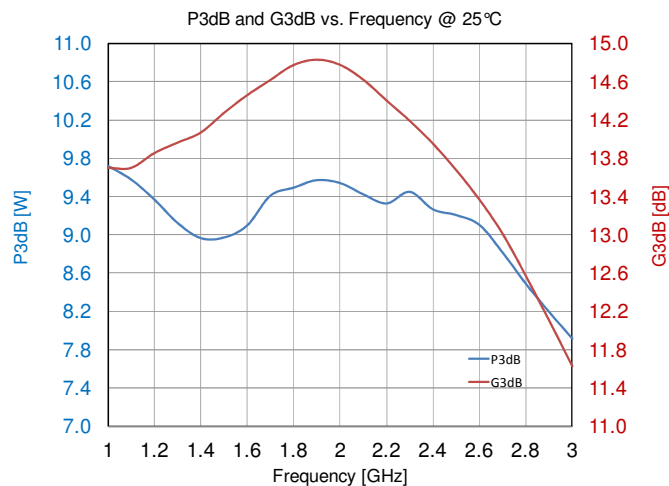

Notes:

1. Test Conditions: $V_{DS} = 32$ V, $I_{DQ} = 50$ mA, 25 °C
2. Test Signal: Pulse Width = 100 μ s, Duty Cycle = 20 %

Application Circuit

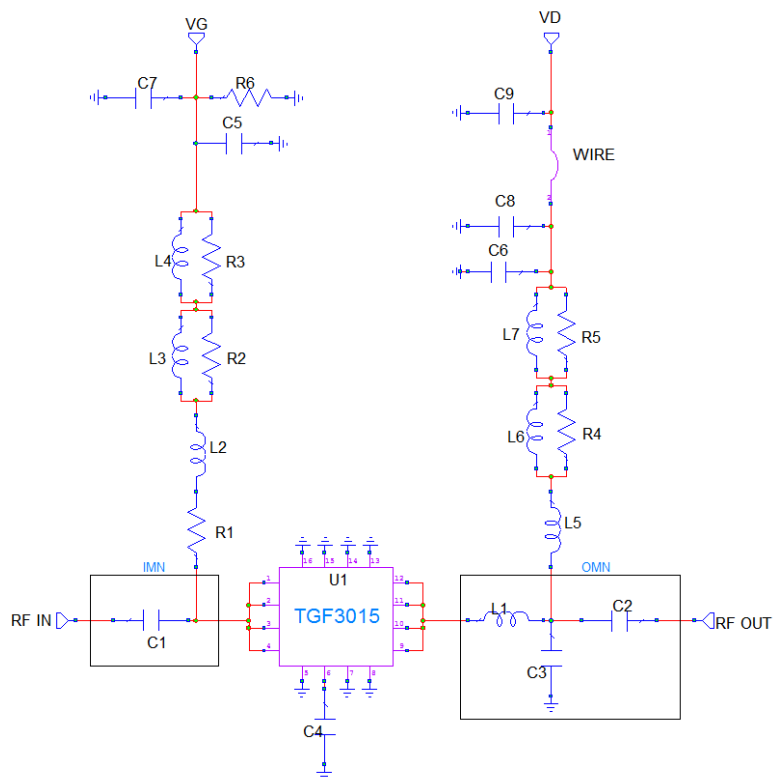

Bias-up Procedure

Set gate voltage (V_G) to -5.0V

Set drain voltage (V_D) to 32 V

Slowly increase V_G until quiescent I_D is 50 mA.

Apply RF signal

Bias-down Procedure


Turn off RF signal

Turn off V_D and wait 1 second to allow drain capacitor dissipation

Turn off V_G

Evaluation Board Layout


Top RF layer is 0.020" thick Rogers RO4350B, $\epsilon_r = 3.48$. The pad pattern shown has been developed and tested for optimized assembly at TriQuint Semiconductor. The PCB land pattern has been developed to accommodate lead and package tolerances.

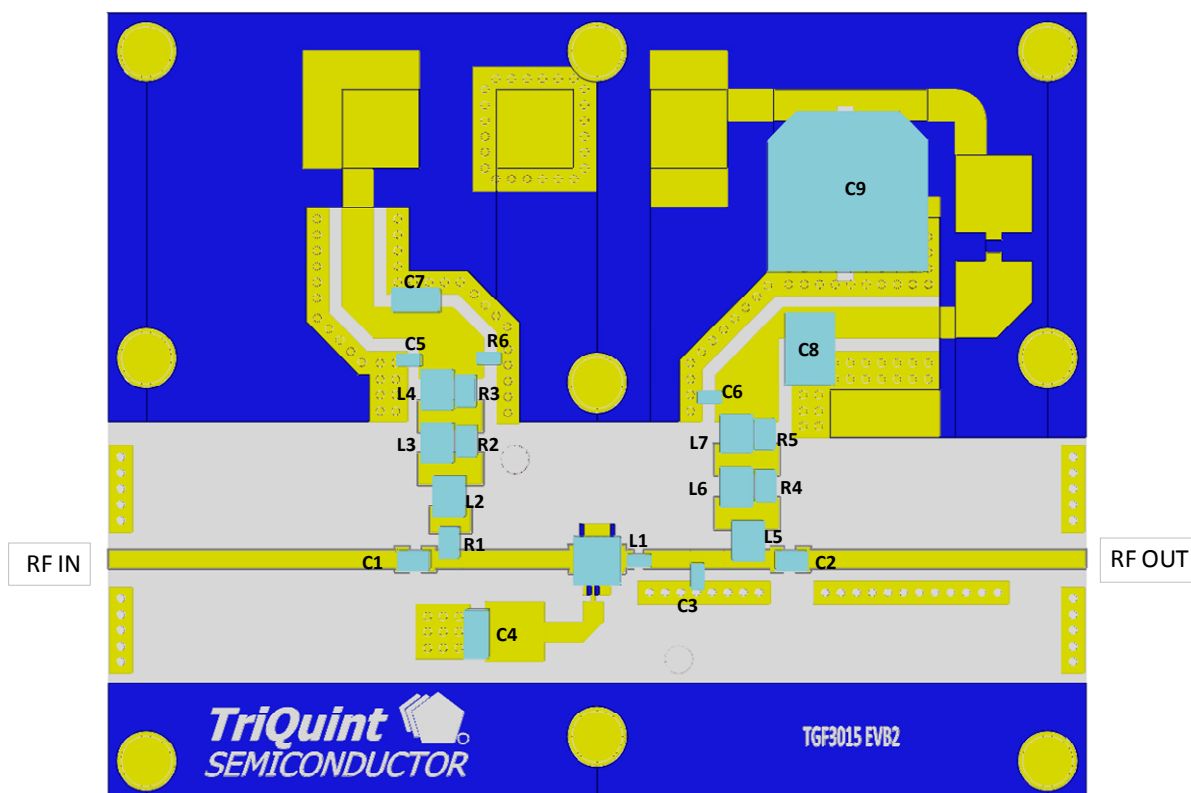

Bill of Materials

Reference Design	Value	Qty	Manufacturer	Part Number
R1	500Ω	1		Generic 0603
R2, R3, R4, R5	400Ω	4		Generic 0603
R6	1kΩ	1		Generic 0603
C1, C2, C5, C6	2400pF	4	Dielectric Labs	C08BL242X-5UN-X0B
C3	0.5pF	1	ATC	600S005BT250XT
C4, C7	10uF	2	TDK	C1632X5R0J106M130AC
C8	1uF	1	AVX	18121C105KAT2A
C9	220uF		United Chemicon	EMVY500ADA221MJA0G
L1	1.6nH	1	CoilCraft	0603HC-1N6XJLU
L2, L5	82nH	2	CoilCraft	1008CS-820XGLB
L3, L6	100nH	2	CoilCraft	1008CS-101XGLB
L4, L7	900nH	2	CoilCraft	1008AF-901XJLB

Pin Layout

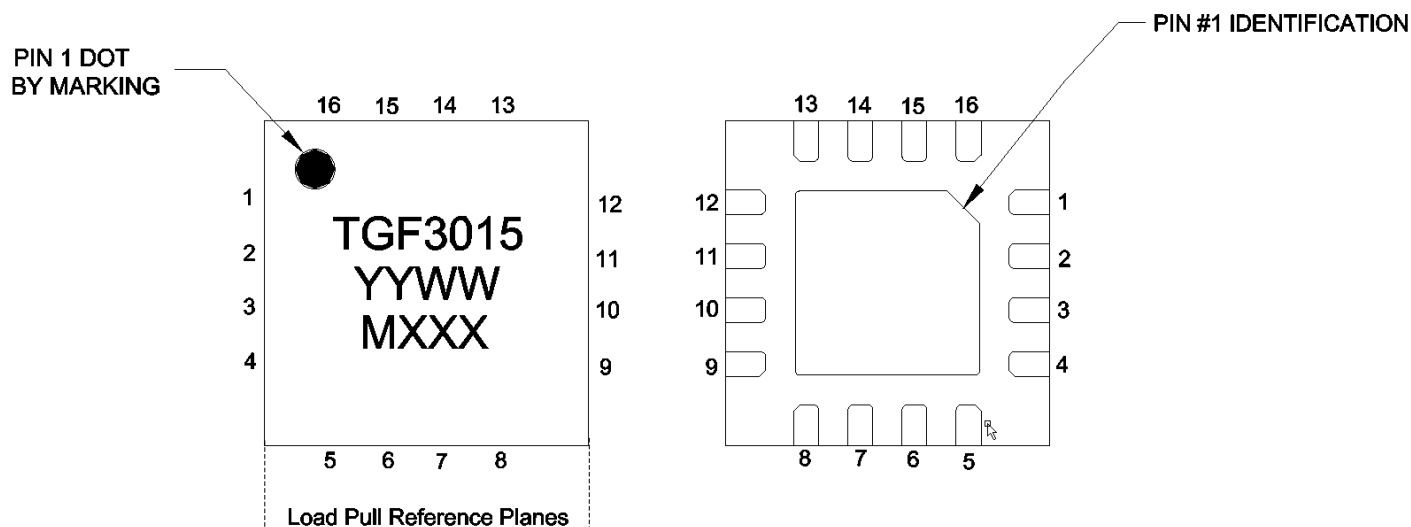

Pin Description

Pin	Symbol	Description
9, 10, 11, 12	V_D / RF OUT	Drain voltage / RF Output to be matched to 50 ohms; see EVB Layout on page 17 as an example.
3	V_G / RF IN	Gate voltage / RF Input to be matched to 50 ohms; see EVB Layout on page 17 as an example.
6	Off-Chip Cap	Off-chip cap to extend low frequency gain.
Back side	Source	Source connected to ground



Notes:

Thermal resistance measured to back side of package


The TGF3015-SM will be marked with the "TGF3015" designator and a lot code marked below the part designator. The "YY" represents the last two digits of the calendar year the part was manufactured, the "WW" is the work week of the assembly lot start, and the "MXXX" is the production lot number.

Mechanical Information

All dimensions are in millimeters.

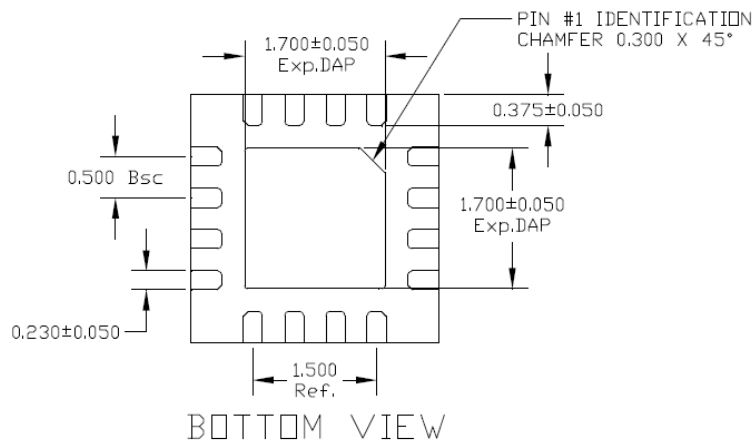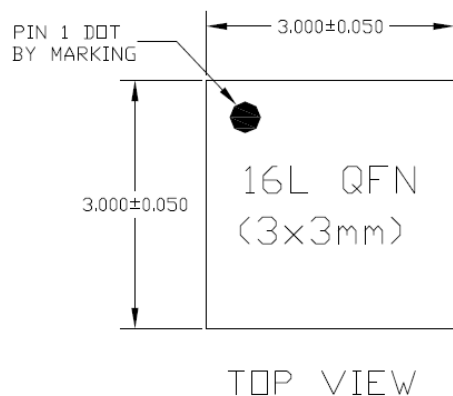

A		QFN
	MAX.	0.900
	NOM.	0.850
	MIN.	0.800

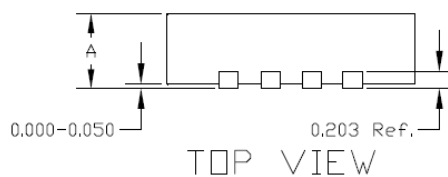

Note:

Unless otherwise noted, all dimension tolerances are +/-0.127 mm.

This package is lead-free/RoHS-compliant. The plating material on the leads is NiAu. It is compatible with both lead-free (maximum 260 °C reflow temperature) and tin-lead (maximum 245 °C reflow temperature) soldering processes.

Product Compliance Information

ESD Sensitivity Ratings



Caution! ESD-Sensitive Device

ESD Rating: TBD
 Value: Passes $\geq$ TBD V min.
 Test: Human Body Model (HBM)
 Standard: JEDEC Standard JESD22-A114

MSL Rating

The part is rated Moisture Sensitivity Level 3 at 260°C per JEDEC standard IPC/JEDEC J-STD-020.

ECCN

US Department of Commerce EAR99

Solderability

Compatible with the latest version of J-STD-020, Lead free solder, 260°C


RoHS Compliance

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A ($C_{15}H_{12}Br_4O_2$) Free
- PFOS Free
- SVHC Free

Recommended Soldering Temperature Profile

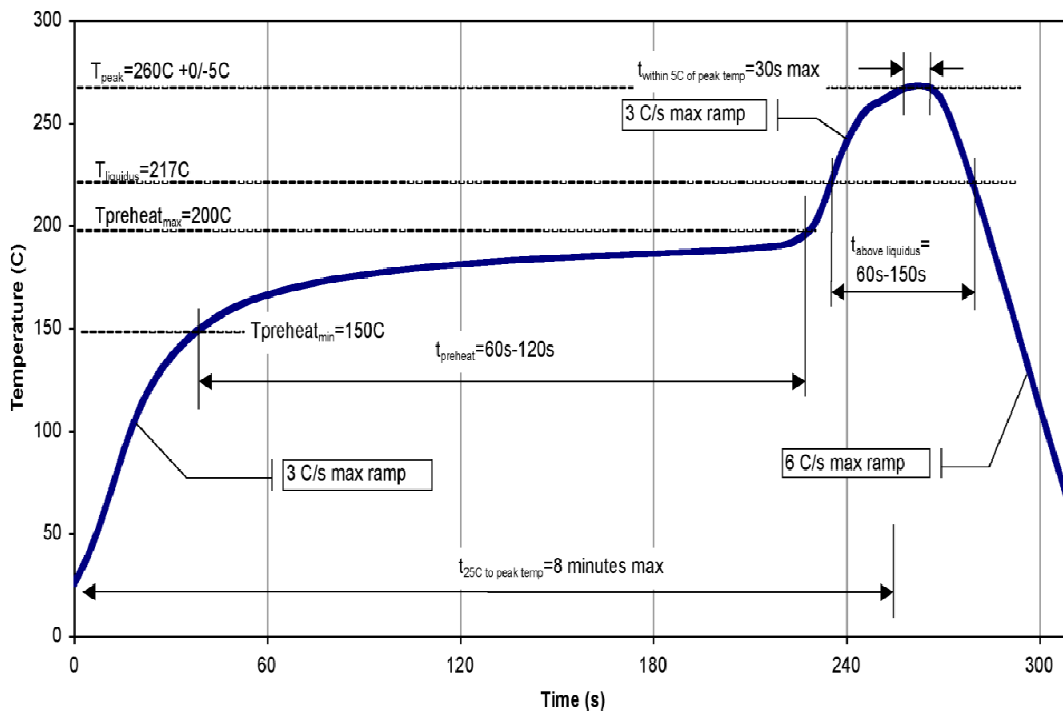

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: www.triquint.com
Email: info-sales@triquint.com

Tel: +1.972.994.8465
Fax: +1.972.994.8504

For technical questions and application information: **Email:** info-products@triquint.com

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.