



## Optocoupler, Phototransistor Output, with Base Connection

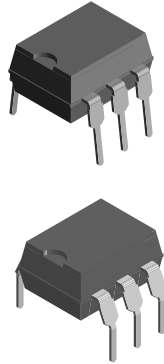

17186



### DESCRIPTION

The CNY75A/B/C/GA/GB/GC consists of a phototransistor optically coupled to a gallium arsenide infrared-emitting diode in a 6 pin plastic dual in-line package.

The elements are mounted on one leadframe providing a fixed distance between input and output for highest safety requirements.

### VDE STANDARDS

These couplers perform safety functions according to the following equipment standards:

- **DIN EN 60747-5-5**  
Optocoupler for electrical safety requirements
- **IEC 60950/EN 60950**  
Office machines (applied for reinforced isolation for mains voltage  $\leq 400 V_{RMS}$ )
- **VDE 0804**  
Telecommunication apparatus and data processing
- **IEC 60065**  
Safety for mains-operated electronic and related household apparatus

### FEATURES

- Isolation materials according to UL94-VO
- Pollution degree 2 (DIN/VDE 0110/resp. IEC 60664)
- Climatic classification 55/100/21 (IEC 60068 part 1)
- Special construction: therefore, extra low coupling capacity of typical 0.2 pF, high common mode rejection
- Low temperature coefficient of CTR
- CTR offered in 3 groups
- Rated isolation voltage (RMS includes DC)  $V_{IOWM} = 600 V_{RMS}$  (848 V peak)
- Rated recurring peak voltage (repetitive)  $V_{IORM} = 600 V_{RMS}$
- Rated impulse voltage (transient overvoltage)  $V_{IOTM} = 6 kV_{peak}$
- Isolation test voltage (partial discharge test voltage)  $V_{pd} = 1.6 kV$
- Creepage current resistance according to VDE 0303/ IEC 60112 comparative tracking index: **CTI**  $\geq 275$
- Thickness through insulation  $\geq 0.75$  mm
- Lead (Pb)-free component
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



**RoHS**  
COMPLIANT

### APPLICATIONS

- Switch-mode power supplies
- Line receiver
- Computer peripheral interface
- Microprocessor system interface
- Circuits for safe protective separation against electrical shock according to safety class II (reinforced isolation):
  - for appl. class I - IV at mains voltage  $\leq 300$  V
  - for appl. class I - III at mains voltage  $\leq 600$  V according to DIN EN 60747-5-5.

### AGENCY APPROVALS

- UL1577, file no. E76222 system code A, double protection
- BSI: BS EN 41003, BS EN 60095 (BS 415), BS EN 60950 (BS 7002), certificate number 7081 and 7402
- DIN EN 60747-5-5
- FIMKO (SETI): EN 60950, certificate no. 12399



| ORDER INFORMATION |                         |
|-------------------|-------------------------|
| PART              | REMARKS                 |
| CNY75A            | CTR 63 to 125 %, DIP-6  |
| CNY75B            | CTR 100 to 200 %, DIP-6 |
| CNY75C            | CTR 160 to 320 %, DIP-6 |
| CNY75GA           | CTR 63 to 125 %, DIP-6  |
| CNY75GB           | CTR 100 to 200 %, DIP-6 |
| CNY75GC           | CTR 160 to 320 %, DIP-6 |

**Note**

G = leadform 10.16 mm; G is not marked on the body.

| ABSOLUTE MAXIMUM RATINGS (1)    |                                       |            |               |           |
|---------------------------------|---------------------------------------|------------|---------------|-----------|
| PARAMETER                       | TEST CONDITION                        | SYMBOL     | VALUE         | UNIT      |
| <b>INPUT</b>                    |                                       |            |               |           |
| Reverse voltage                 |                                       | $V_R$      | 5.0           | V         |
| Forward current                 |                                       | $I_F$      | 60            | mA        |
| Forward surge current           | $t_p \leq 10 \mu\text{s}$             | $I_{FSM}$  | 3.0           | A         |
| Power dissipation               |                                       | $P_{diss}$ | 100           | mW        |
| Junction temperature            |                                       | $T_j$      | 125           | °C        |
| <b>OUTPUT</b>                   |                                       |            |               |           |
| Collector base voltage          |                                       | $V_{CBO}$  | 90            | V         |
| Collector emitter voltage       |                                       | $V_{CEO}$  | 90            | V         |
| Emitter collector voltage       |                                       | $V_{ECO}$  | 7.0           | V         |
| Collector current               |                                       | $I_C$      | 50            | mA        |
| Collector peak current          | $t_p/T = 0.5, t_p \leq 10 \text{ ms}$ | $I_{CM}$   | 100           | mA        |
| Power dissipation               |                                       | $P_{diss}$ | 150           | mW        |
| Junction temperature            |                                       | $T_j$      | 125           | °C        |
| <b>COUPLER</b>                  |                                       |            |               |           |
| AC isolation test voltage (RMS) | $t = 1 \text{ min}$                   | $V_{ISO}$  | 3750          | $V_{RMS}$ |
| Total power dissipation         |                                       | $P_{tot}$  | 250           | mW        |
| Ambient temperature range       |                                       | $T_{amb}$  | - 55 to + 100 | °C        |
| Storage temperature range       |                                       | $T_{stg}$  | - 55 to + 125 | °C        |
| Soldering temperature (2)       | 2 mm from case, $t \leq 10 \text{ s}$ | $T_{sld}$  | 260           | °C        |

**Note**(1)  $T_{amb} = 25 \text{ }^\circ\text{C}$ , unless otherwise specified.

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to absolute maximum ratings for extended periods of the time can adversely affect reliability.

(2) Refer to wave profile for soldering conditions for through hole devices.

| ELECTRICAL CHARACTERISTICS |  |      |        |      |      |      |               |
|----------------------------|--|------|--------|------|------|------|---------------|
| PARAMETER                  | TEST CONDITION                         | PART | SYMBOL | MIN. | TYP. | MAX. | UNIT          |
| <b>INPUT</b>               |  |      |        |      |      |      |               |
| Forward voltage            | $I_F = 50 \text{ mA}$                  |      | $V_F$  |      | 1.25 | 1.6  | V             |
| Reverse current            | $V_R = 6 \text{ V}$                    |      | $I_R$  |      |      | 10   | $\mu\text{A}$ |
| Junction capacitance       | $V_R = 0 \text{ V}, f = 1 \text{ MHz}$ |      | $C_j$  |      | 50   |      | pF            |

| ELECTRICAL CHARACTERISTICS           |   |      |             |      |      |      |      |
|--------------------------------------|---|------|-------------|------|------|------|------|
| PARAMETER                            | TEST CONDITION  | PART | SYMBOL      | MIN. | TYP. | MAX. | UNIT |
| <b>OUTPUT</b>                        |   |      |             |      |      |      |      |
| Collector base voltage               | $I_C = 100 \mu A$   |      | $V_{CBO}$   | 90   |      |      | V    |
| Collector emitter voltage            | $I_C = 1 \text{ mA}$  |      | $V_{CEO}$   | 90   |      |      | V    |
| Emitter collector voltage            | $I_E = 100 \mu A$   |      | $V_{ECO}$   | 7    |      |      | V    |
| Collector emitter leakage current    | $V_{CE} = 20 \text{ V}, I_F = 0 \text{ A}$                    |      | $I_{CEO}$   |      |      | 150  | nA   |
| <b>COUPLER</b>                       |   |      |             |      |      |      |      |
| Collector emitter saturation voltage | $I_F = 10 \text{ mA}, I_C = 1 \text{ mA}$                     |      | $V_{CEsat}$ |      |      | 0.3  | V    |
| Cut-off frequency                    | $V_{CE} = 5 \text{ V}, I_F = 10 \text{ mA}, R_L = 100 \Omega$ |      | $f_c$       |      | 110  |      | kHz  |
| Coupling capacitance                 | $f = 1 \text{ MHz}$   |      | $C_k$       |      | 0.3  |      | pF   |

**Note**

$T_{amb} = 25 \text{ }^\circ\text{C}$ , unless otherwise specified.

Minimum and maximum values were tested requirements. Typical values are characteristics of the device and are the result of engineering evaluations. Typical values are for information only and are not part of the testing requirements.

| CURRENT TRANSFER RATIO |   |         |        |      |      |      |      |
|------------------------|---|---------|--------|------|------|------|------|
| PARAMETER              | TEST CONDITION                              | PART    | SYMBOL | MIN. | TYP. | MAX. | UNIT |
| $I_C/I_F$              | $V_{CE} = 5 \text{ V}, I_F = 1 \text{ mA}$  | CNY75GA | CTR    | 15   |      |      | %    |
|                        |   | CNY75GB | CTR    | 30   |      |      | %    |
|                        |   | CNY75GC | CTR    | 60   |      |      | %    |
|                        | $V_{CE} = 5 \text{ V}, I_F = 10 \text{ mA}$ | CNY75GA | CTR    | 63   |      | 125  | %    |
|                        |   | CNY75GB | CTR    | 100  |      | 200  | %    |
|                        |   | CNY75GC | CTR    | 160  |      | 320  | %    |

| SWITCHING CHARACTERISTICS |  |         |           |     |      |     |               |
|---------------------------|--|---------|-----------|-----|------|-----|---------------|
| PARAMETER                 | TEST CONDITION   | PART    | SYMBOL    | MIN | TYP. | MAX | UNIT          |
| Current time              | $V_{CC} = 5 \text{ V}, R_L = 100 \Omega$<br>(see figure 3) | CNY75GA | $I_F$     |     | 10   |     | mA            |
|                           |  | CNY75GB | $I_F$     |     | 10   |     | mA            |
|                           |  | CNY75GC | $I_F$     |     | 10   |     | mA            |
| Delay time                | $V_{CC} = 5 \text{ V}, R_L = 100 \Omega$<br>(see figure 3) | CNY75GA | $t_d$     |     | 2    |     | $\mu\text{s}$ |
|                           |  | CNY75GB | $t_d$     |     | 2.5  |     | $\mu\text{s}$ |
|                           |  | CNY75GC | $t_d$     |     | 2.8  |     | $\mu\text{s}$ |
| Rise time                 | $V_{CC} = 5 \text{ V}, R_L = 100 \Omega$<br>(see figure 3) | CNY75GA | $t_r$     |     | 2.5  |     | $\mu\text{s}$ |
|                           |  | CNY75GB | $t_r$     |     | 3    |     | $\mu\text{s}$ |
|                           |  | CNY75GC | $t_r$     |     | 4.2  |     | $\mu\text{s}$ |
| Fall time                 | $V_{CC} = 5 \text{ V}, R_L = 100 \Omega$<br>(see figure 3) | CNY75GA | $t_f$     |     | 2.7  |     | $\mu\text{s}$ |
|                           |  | CNY75GB | $t_f$     |     | 3.7  |     | $\mu\text{s}$ |
|                           |  | CNY75GC | $t_f$     |     | 4.7  |     | $\mu\text{s}$ |
| Storage time              | $V_{CC} = 5 \text{ V}, R_L = 100 \Omega$<br>(see figure 3) | CNY75GA | $t_s$     |     | 0.3  |     | $\mu\text{s}$ |
|                           |  | CNY75GB | $t_s$     |     | 0.3  |     | $\mu\text{s}$ |
|                           |  | CNY75GC | $t_s$     |     | 0.3  |     | $\mu\text{s}$ |
| Turn-on time              | $V_{CC} = 5 \text{ V}, R_L = 100 \Omega$<br>(see figure 3) | CNY75GA | $t_{on}$  |     | 4.5  |     | $\mu\text{s}$ |
|                           |  | CNY75GB | $t_{on}$  |     | 5.5  |     | $\mu\text{s}$ |
|                           |  | CNY75GC | $t_{on}$  |     | 7    |     | $\mu\text{s}$ |
| Turn-off time             | $V_{CC} = 5 \text{ V}, R_L = 100 \Omega$<br>(see figure 3) | CNY75GA | $t_{off}$ |     | 3    |     | $\mu\text{s}$ |
|                           |  | CNY75GB | $t_{off}$ |     | 4    |     | $\mu\text{s}$ |
|                           |  | CNY75GC | $t_{off}$ |     | 5    |     | $\mu\text{s}$ |



| SWITCHING CHARACTERISTICS |  |         |           |     |      |     |               |
|---------------------------|--|---------|-----------|-----|------|-----|---------------|
| PARAMETER                 | TEST CONDITION   | PART    | SYMBOL    | MIN | TYP. | MAX | UNIT          |
| Turn-on time              | $V_{CC} = 5\text{ V}$ , $R_L = 1\text{ k}\Omega$<br>(see figure 4) | CNY75GA | $t_{on}$  |     | 10   |     | $\mu\text{s}$ |
|                           |  | CNY75GB | $t_{on}$  |     | 16.5 |     | $\mu\text{s}$ |
|                           |  | CNY75GC | $t_{on}$  |     | 11   |     | $\mu\text{s}$ |
| Turn-off time             | $V_{CC} = 5\text{ V}$ , $R_L = 1\text{ k}\Omega$<br>(see figure 4) | CNY75GA | $t_{off}$ |     | 25   |     | $\mu\text{s}$ |
|                           |  | CNY75GB | $t_{off}$ |     | 20   |     | $\mu\text{s}$ |
|                           |  | CNY75GC | $t_{off}$ |     | 37.5 |     | $\mu\text{s}$ |

| MAXIMUM SAFETY RATINGS |                |            |      |      |      |                    |
|------------------------|----------------|------------|------|------|------|--------------------|
| PARAMETER              | TEST CONDITION | SYMBOL     | MIN. | TYP. | MAX. | UNIT               |
| <b>INPUT</b>           |                |            |      |      |      |                    |
| Forward current        |                | $I_F$      |      |      | 130  | mA                 |
| <b>OUTPUT</b>          |                |            |      |      |      |                    |
| Power dissipation      |                | $P_{diss}$ |      |      | 265  | mW                 |
| <b>COUPLER</b>         |                |            |      |      |      |                    |
| Rated impulse voltage  |                | $V_{IOTM}$ |      |      | 6    | kV                 |
| Safety temperature     |                | $T_{si}$   |      |      | 150  | $^{\circ}\text{C}$ |

**Note**

According to DIN EN 60747-5-5 (see figure 1). This optocoupler is suitable for safe electrical isolation only within the safety ratings. Compliance with the safety ratings shall be ensured by means of suitable protective circuits.

| INSULATION RATED PARAMETERS                             |  |            |           |      |      |          |
|---|--|------------|-----------|------|------|----------|
| PARAMETER   | TEST CONDITION   | SYMBOL     | MIN.      | TYP. | MAX. | UNIT     |
| Partial discharge test voltage - routine test           | 100 %, $t_{test} = 1\text{ s}$   | $V_{pd}$   | 1.6       |      |      | kV       |
| Partial discharge test voltage - lot test (sample test) | $t_{Tr} = 60\text{ s}$ , $t_{test} = 10\text{ s}$ ,<br>(see figure 2)                            | $V_{IOTM}$ | 6.0       |      |      | kV       |
|   |  | $V_{pd}$   | 1.3       |      |      | kV       |
| Insulation resistance                                   | $V_{IO} = 500\text{ V}$  | $R_{IO}$   | $10^{12}$ |      |      | $\Omega$ |
|   | $V_{IO} = 500\text{ V}$ , $T_{amb} \leq 100\text{ }^{\circ}\text{C}$                             | $R_{IO}$   | $10^{11}$ |      |      | $\Omega$ |
|   | $V_{IO} = 500\text{ V}$ , $T_{amb} \leq 150\text{ }^{\circ}\text{C}$<br>(construction test only) | $R_{IO}$   | $10^9$    |      |      | $\Omega$ |

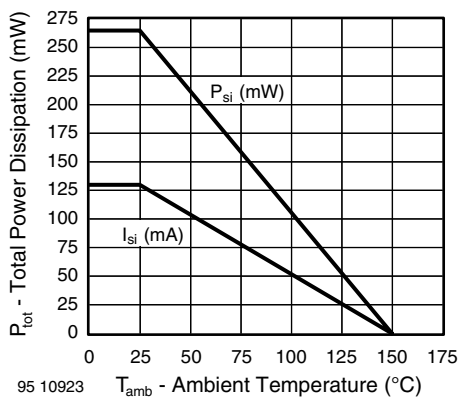


Fig. 1 - Derating Diagram

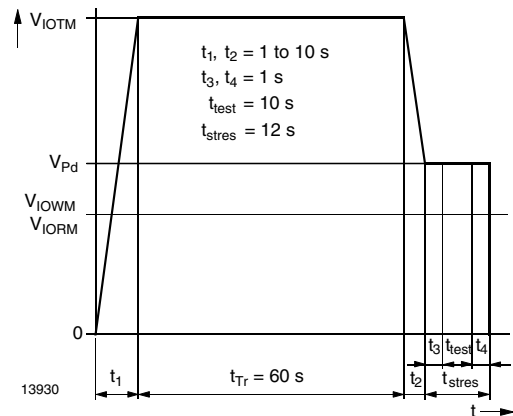


Fig. 2 - Test Pulse Diagram for Sample Test according to DIN EN 60747-5-5/DIN EN 60747-; IEC60747

**TYPICAL CHARACTERISTICS**

$T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

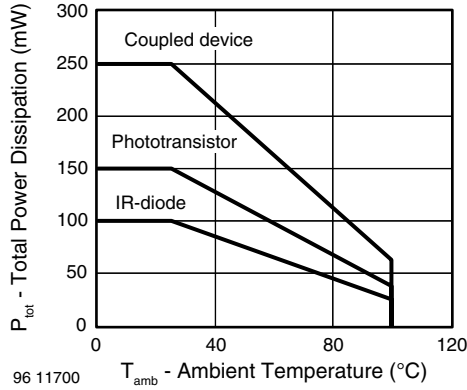


Fig. 3 - Total Power Dissipation vs. Ambient Temperature

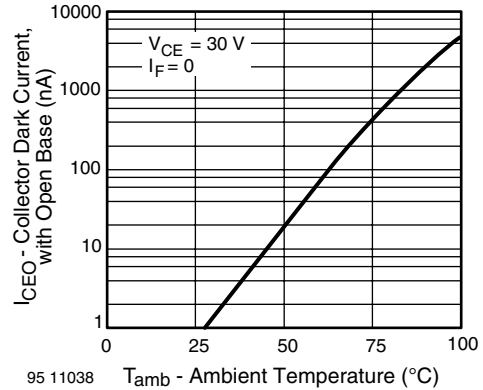


Fig. 6 - Collector Dark Current vs. Ambient Temperature

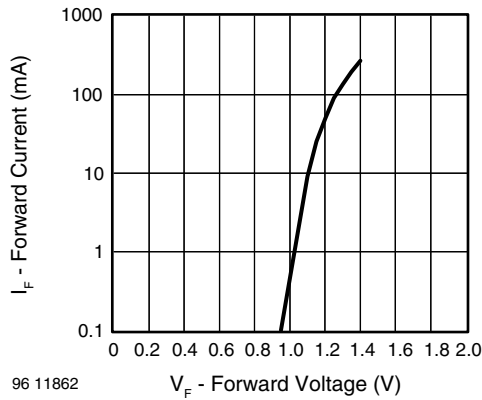


Fig. 4 - Forward Current vs. Forward Voltage

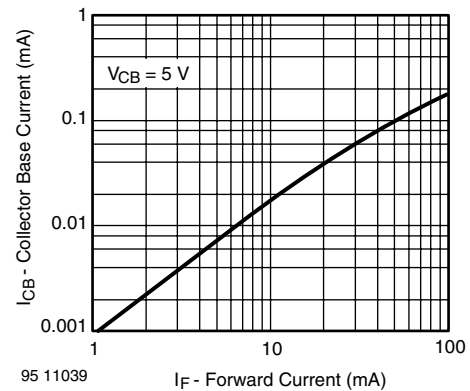


Fig. 7 - Collector Base Current vs. Forward Current

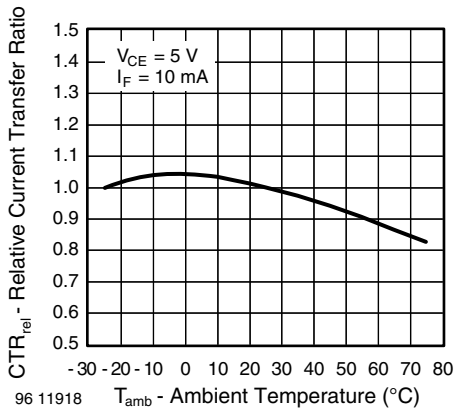


Fig. 5 - Relative Current Transfer Ratio vs. Ambient Temperature

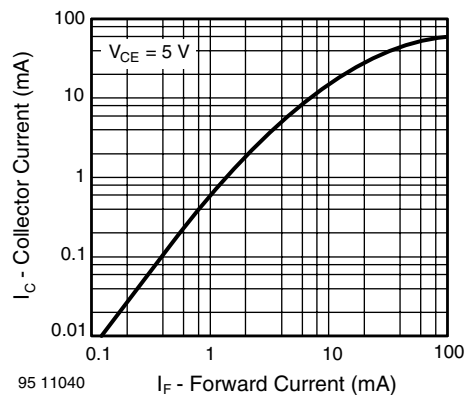


Fig. 8 - Collector Current vs. Forward Current

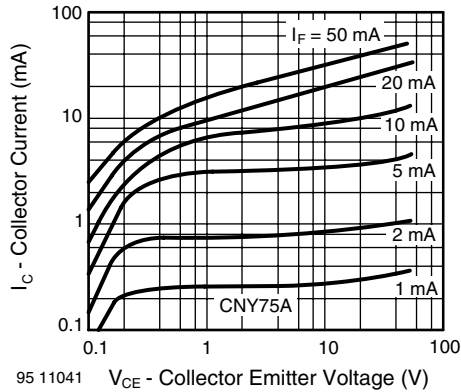


Fig. 9 - Collector Current vs. Collector Emitter Voltage

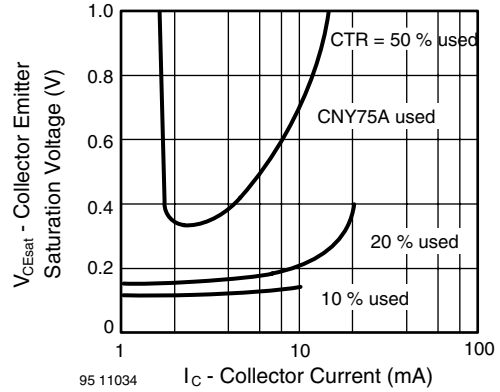


Fig. 12 - Collector Emitter Saturation Voltage vs. Collector Current

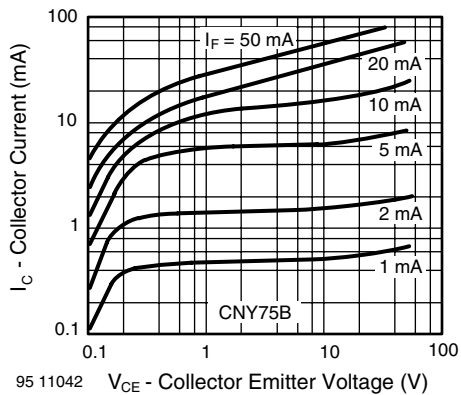


Fig. 10 - Collector Current vs. Collector Emitter Voltage

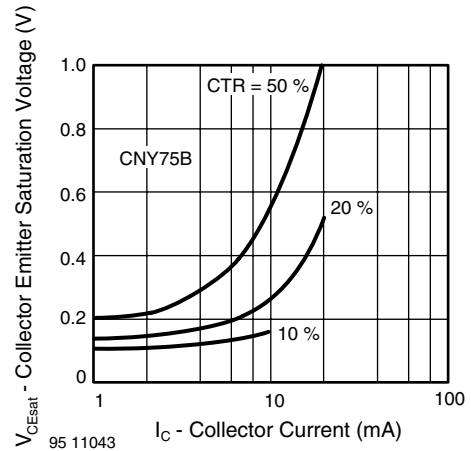


Fig. 13 - Collector Emitter Saturation Voltage vs. Collector Current

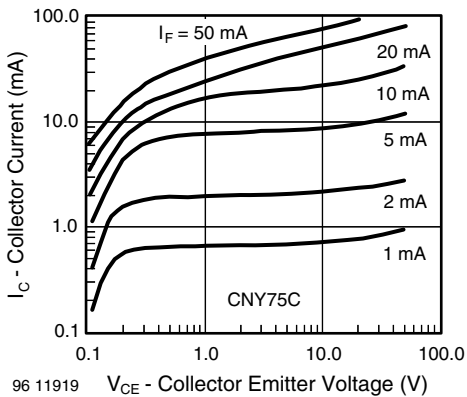


Fig. 11 - Collector Current vs. Collector Emitter Voltage

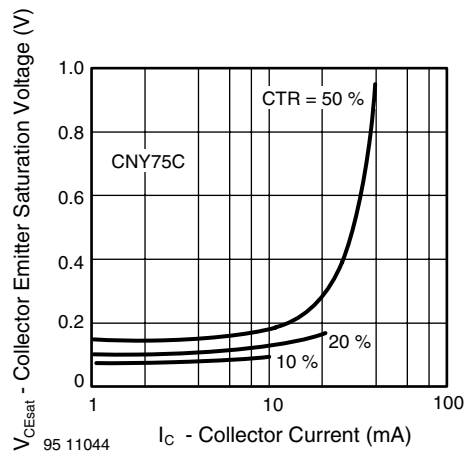


Fig. 14 - Collector Emitter Saturation Voltage vs. Collector Current

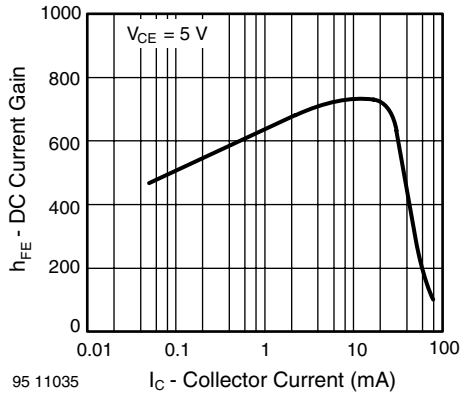


Fig. 15 - DC Current Gain vs. Collector Current

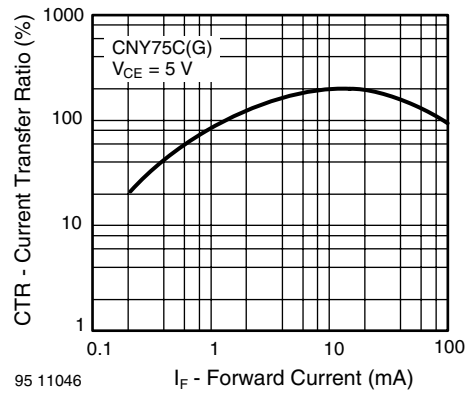


Fig. 18 - Current Transfer Ratio vs. Forward Current

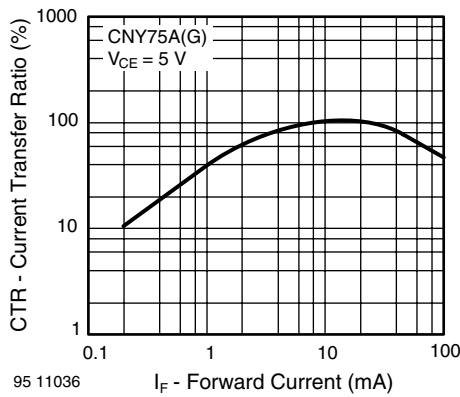


Fig. 16 - Current Transfer Ratio vs. Forward Current

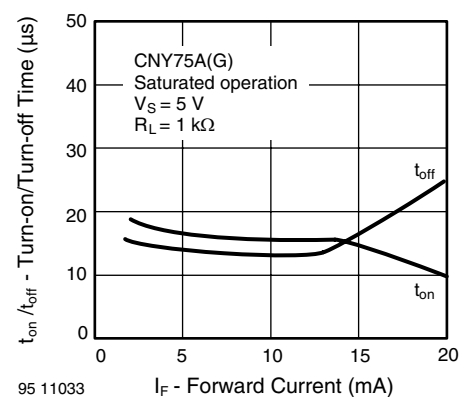


Fig. 19 - Turn-on/off Time vs. Forward Current

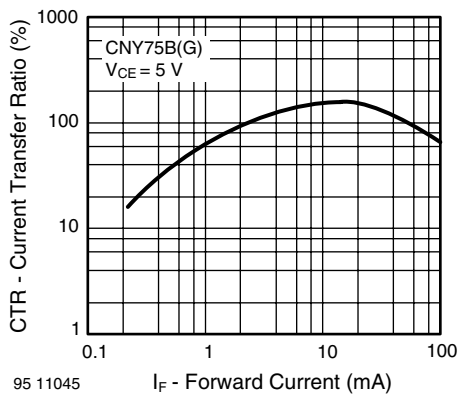


Fig. 17 - Current Transfer Ratio vs. Forward Current

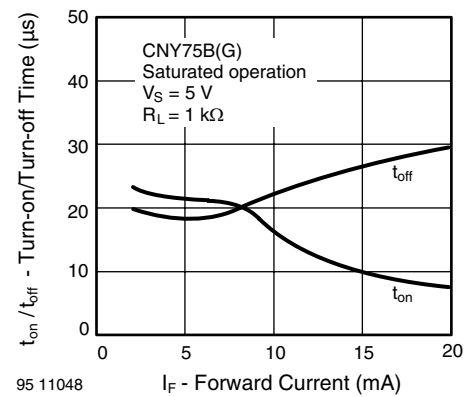


Fig. 20 - Turn-on/off Time vs. Forward Current

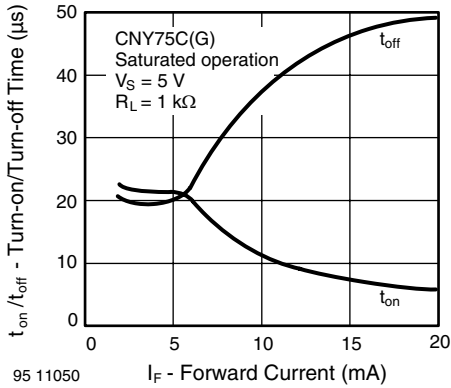


Fig. 21 - Turn-on/off Time vs. Forward Current

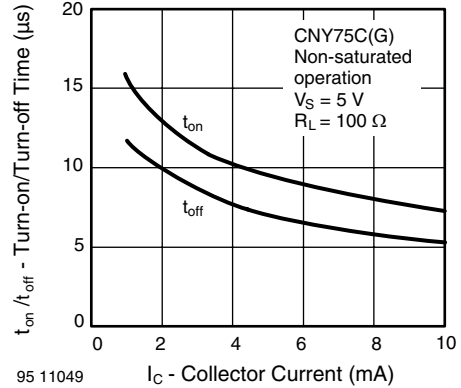


Fig. 24 - Turn-on/off Time vs. Collector Current

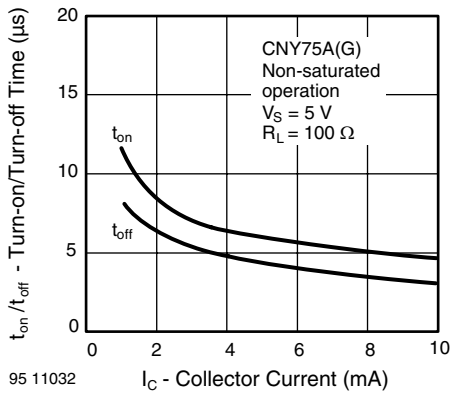


Fig. 22 - Turn-on/off Time vs. Collector Current

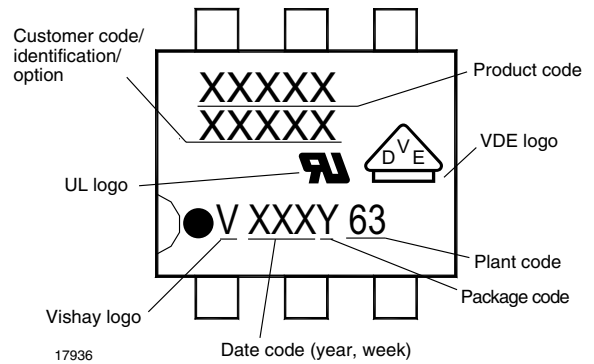


Fig. 25 - Marking Example

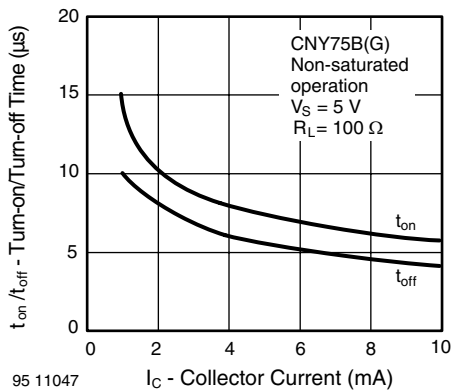


Fig. 23 - Turn-on/off Time vs. Collector Current





# CNY75A/B/C/GA/GB/GC



Vishay Semiconductors Optocoupler, Phototransistor Output,  
with Base Connection

## PACKAGE DIMENSIONS in millimeters

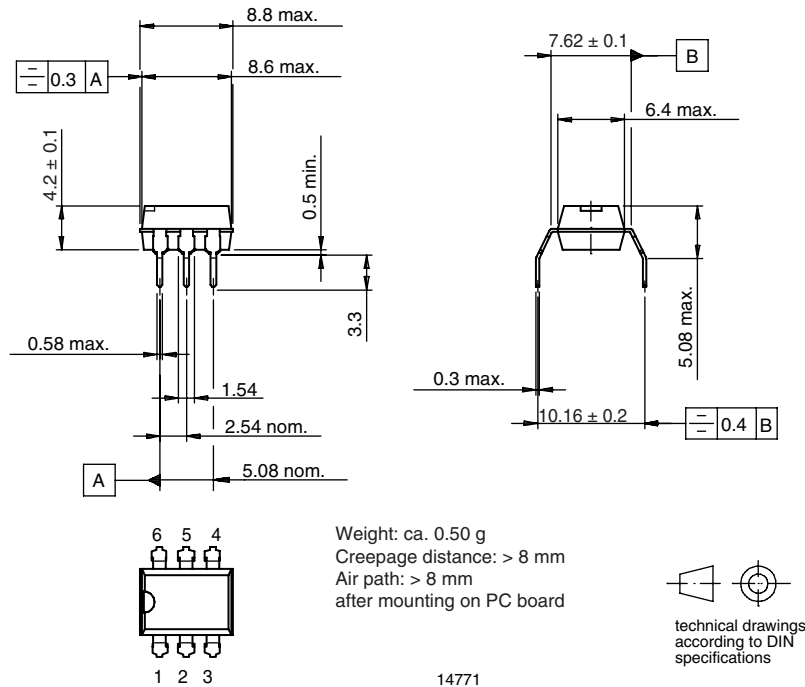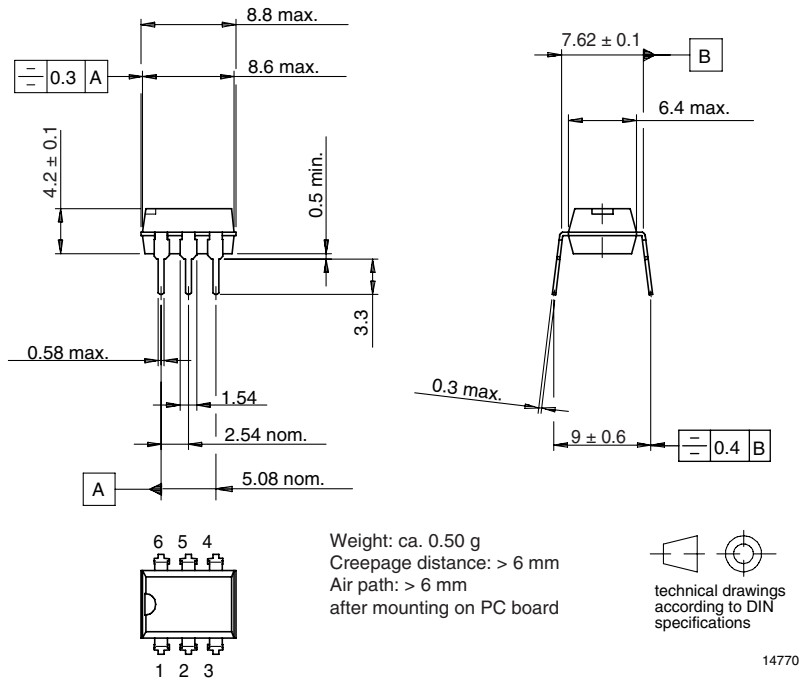

**OZONE DEPLETING SUBSTANCES POLICY STATEMENT**

It is the policy of Vishay Semiconductor GmbH to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Vishay Semiconductor GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively.
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Vishay Semiconductor GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design  
and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay Semiconductors products for any unintended or unauthorized application, the buyer shall indemnify Vishay Semiconductors against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.