

High Current, Surface Mount Inductor



STANDARD ELECTRICAL SPECIFICATIONS

IND. at 1 kHz (μ H)	DCR MAX. (Ohms)	RATED CURRENT (Max. Amps)	INCREMENTAL CURRENT (Amps Approx.)
1.0	0.013	8.6	4.1
1.2	0.018	7.6	3.8
1.5	0.02	6.9	3.5
1.8	0.021	6.5	3.2
2.2	0.029	5.7	2.9
2.7	0.034	5.1	2.6
3.3	0.038	4.6	2.4
3.9	0.042	4.3	2.2
4.7	0.047	4.0	2.0
5.6	0.051	3.8	1.9
6.8	0.058	3.5	1.7
8.2	0.063	3.3	1.5
10.0	0.071	3.1	1.4
12.0	0.079	2.7	1.3
15.0	0.089	2.3	1.2
18.0	0.119	1.9	1.1
22.0	0.152	1.7	1.02
27.0	0.179	1.6	0.95
33.0	0.222	1.3	0.88
39.0	0.315	1.19	0.8
47.0	0.362	1.07	0.74
56.0	0.397	0.95	0.68
68.0	0.446	0.87	0.62
82.0	0.604	0.8	0.56
100.0	0.672	0.73	0.5
120.0	0.735	0.66	0.45
150.0	0.998	0.58	0.4
180.0	1.37	0.5	0.35
220.0	1.58	0.46	0.32
270.0	1.77	0.41	0.3
330.0	2.51	0.37	0.28
390.0	2.73	0.34	0.26
470.0	3.36	0.32	0.24
560.0	3.75	0.3	0.23
680.0	4.31	0.28	0.2
820.0	6.04	0.26	0.17
1000.0	6.9	0.24	0.15

PART MARKING

- Model
- Inductance value
- Date code

FEATURES

- Flame retardant encapsulant (UL 94V-0)
- Completely encapsulated winding provides superior environmental protection and moisture resistance
- High current unit in surface mount package printed with model, inductance value and date code
- Compatible with infrared or conventional reflow soldering methods
- Pick and place compatible
- Tape and reel packaging for automatic handling



APPLICATIONS

Excellent power line noise filters, filters for switching regulated power supplies, DC/DC converters, SCR and Triac controls and RFI suppression.

ELECTRICAL SPECIFICATIONS

Inductance: Measured at 1 volt with no DC current

Inductance Tolerance: $\pm 15\%$

Incremental Current: The typical current at which the inductance will be decreased by 5 % from its initial zero DC value

Operating Temperature: - 55 °C to + 125 °C (no load);
- 55 °C to + 85 °C (at full rated current)


MATERIAL SPECIFICATIONS

Core: High resistivity ferrite core

Encapsulant: Epoxy

Terminals: 100 % Sn over Ni


DIMENSIONS in inches [millimeters]

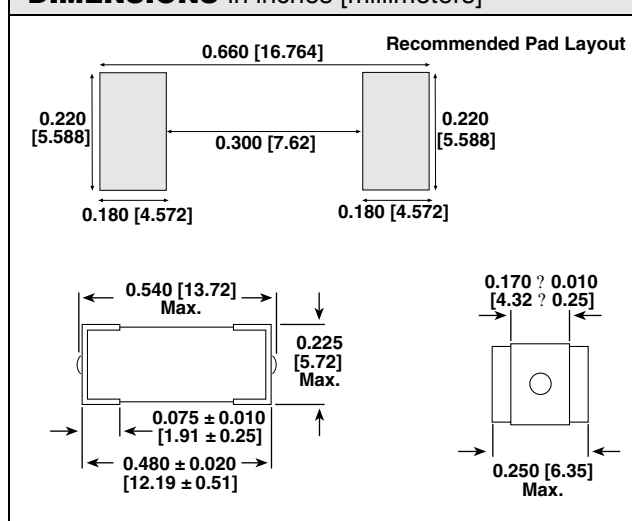

DESCRIPTION

IHSM-4825	3.9 μ H	$\pm 15\%$	ER	e3
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

SAP PART NUMBERING GUIDELINES (INTERNAL)





Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.