

## Type SC10, SC15, SC30, SC55 Series

### Key Features

- Wide Inductance Range
- Insulated Packaging
- Four Sizes
- Flame Retardant
- Wide Temperature Range
- Established Reliability
- Fully Protected from the Environment
- Available from Distribution



TE Connectivity quality and reliability are guaranteed in this range of insulated and shielded RF Inductors. The insulated range has a self-extinguishing polyolefin sleeve. Their small size make them ideal for use when space is at a premium. And they are also fully protected from environmental factors. Electrostatic and electromagnetic screening is provided by the magnetic enclosure. A wide range of values are available and the self-extinguishing polyolefin sleeve enhances environmental protection. The SC series was originally designed for military applications but now has widespread industrial use.

### Characteristics - Electrical

|   | SC10                          | SC15   | SC30            | SC55            |
|---|-------------------------------|--|-----------------|-----------------|
| <b>Inductance Range:</b>                |                               | See Table - E12 Grid<br>(Non-standard values available to special order) |                 |                 |
| <b>Selection Tolerance:</b>             | ±10%                          | ±10%   | ±10%            | ±10%            |
| <b>Power Rating at 70°C:</b>            | 0.33W                         | See Below  | 0.25W           | 0.30W           |
| <b>Isolation Voltage:</b>               | 700V DC or AC peak            |  |                 |                 |
| <b>Limits of Inductance Change:</b>     | 5% after 1000 hours endurance |  |                 |                 |
| <b>Operating Temperature Range:</b>     | -55°C to +100°C               | -55°C to +100°C  | -55°C to +100°C | -55°C to +125°C |
| <b>Recommended Storage Temperature:</b> | 0°C to +35°C                  |  |                 |                 |
| <b>Climatic Category:</b>               | 55/100/21                     | 55/100/21  | 55/100/21       | 55/125/21       |

SC15 Power Rating Values between 0.15uH and 4.7uH - Power Rating 0.33 Watt  
Values between 5.6uH and 330uH - Power Rating 0.20 Watt

### Packaging and Marking

| Type | Ammo Pack  | Reeled      | Weight per Component | Marking |
|------|------------|-------------|----------------------|---------|
| SC10 | 500 Pieces | 1500 Pieces | -                    | LC10    |
| SC15 | 500 Pieces | 1500 Pieces | -                    | LC15    |
| SC30 | 500 Pieces | 2500 Pieces | -                    | LC30    |
| SC55 | 500 Pieces | 1500 Pieces | 0.6g                 | LC55    |

### Dimensions



| Size | L Max. | D Max. | l Min. | d     |
|------|--------|--------|--------|-------|
| SC10 | 10.0mm | 4.2mm  | 25mm   | 0.6mm |
| SC15 | 10.0mm | 4.5mm  | 30mm   | 0.6mm |
| SC30 | 7.0mm  | 2.8mm  | 25mm   | 0.5mm |
| SC55 | 11.4mm | 5.2mm  | 30mm   | 0.6mm |

## Type SC10, SC15, SC30, SC55 Series

### Characteristics - Electrical - Type SC10 - Section 1

| Inductance Value - $\mu$ H | Inductance Code | Test Freq. MHz | Q Factor Min. | S.R.F. MHz Min. | Max. DC Resistance Ohms at 20°C | Direct Current at 70°C Max. mA |
|----------------------------|-----------------|----------------|---------------|-----------------|---------------------------------|--------------------------------|
| 0.10                       | R10             | 25             | 50            | 500             | 0.055                           | 2060                           |
| 0.12                       | R12             | 25             | 50            | 475             | 0.060                           | 1970                           |
| 0.15                       | R15             | 25             | 50            | 450             | 0.065                           | 1900                           |
| 0.18                       | R18             | 25             | 50            | 425             | 0.070                           | 1830                           |
| 0.22                       | R22             | 25             | 50            | 400             | 0.075                           | 1770                           |
| 0.27                       | R27             | 25             | 50            | 380             | 0.085                           | 1660                           |
| 0.33                       | R33             | 25             | 50            | 360             | 0.095                           | 1570                           |
| 0.39                       | R39             | 25             | 50            | 330             | 0.11                            | 1460                           |
| 0.47                       | R47             | 25             | 50            | 300             | 0.12                            | 1390                           |
| 0.56                       | R56             | 25             | 50            | 280             | 0.14                            | 1290                           |
| 0.68                       | R68             | 25             | 45            | 260             | 0.16                            | 1210                           |
| 0.82                       | R82             | 25             | 45            | 235             | 0.26                            | 950                            |
| 1.0                        | 1R0             | 25             | 45            | 210             | 0.30                            | 880                            |
| 1.2                        | 1R2             | 7.9            | 32            | 190             | 0.50                            | 685                            |
| 1.5                        | 1R5             | 7.9            | 32            | 170             | 0.60                            | 625                            |
| 1.8                        | 1R8             | 7.9            | 32            | 156             | 0.75                            | 560                            |
| 2.2                        | 2R2             | 7.9            | 32            | 140             | 1.10                            | 460                            |
| 2.7                        | 2R7             | 7.9            | 32            | 125             | 1.40                            | 410                            |
| 3.3                        | 3R3             | 7.9            | 32            | 115             | 1.90                            | 350                            |

### Type SC10 - Section 2

| Inductance Value - $\mu$ H | Inductance Code | Test Freq. MHz | Q Factor Min. | S.R.F. MHz Min. | Max. DC Resistance Ohms at 20°C | Direct Current at 70°C Max. mA |
|----------------------------|-----------------|----------------|---------------|-----------------|---------------------------------|--------------------------------|
| 3.9                        | 3R9             | 7.9            | 45            | 75              | 0.25                            | 970                            |
| 4.7                        | 4R7             | 7.9            | 45            | 65              | 0.35                            | 820                            |
| 5.6                        | 5R6             | 7.9            | 45            | 60              | 0.40                            | 765                            |
| 6.8                        | 6R8             | 7.9            | 45            | 55              | 0.55                            | 650                            |
| 8.2                        | 8R2             | 7.9            | 45            | 50              | 0.75                            | 560                            |
| 10                         | 100             | 7.9            | 45            | 45              | 0.9                             | 510                            |
| 12                         | 120             | 2.5            | 55            | 40              | 1.1                             | 460                            |
| 15                         | 150             | 2.5            | 55            | 35              | 1.5                             | 395                            |
| 18                         | 180             | 2.5            | 55            | 30              | 2.7                             | 295                            |
| 22                         | 220             | 2.5            | 55            | 27              | 3.0                             | 280                            |
| 27                         | 270             | 2.5            | 55            | 25              | 4.5                             | 230                            |
| 33                         | 330             | 2.5            | 55            | 22              | 5.2                             | 210                            |
| 39                         | 390             | 2.5            | 55            | 20              | 7.5                             | 175                            |
| 47                         | 470             | 2.5            | 55            | 18              | 9.6                             | 156                            |

### Type SC10 - Section 3

| Inductance Value - $\mu$ H | Inductance Code | Test Freq. MHz | Q Factor Min. | S.R.F. MHz Min. | Max. DC Resistance Ohms at 20°C | Direct Current at 70°C Max. mA |
|----------------------------|-----------------|----------------|---------------|-----------------|---------------------------------|--------------------------------|
| 56                         | 560             | 2.5            | 55            | 11              | 8.1                             | 170                            |
| 68                         | 680             | 2.5            | 55            | 10              | 9.0                             | 161                            |
| 82                         | 820             | 2.5            | 50            | 8.5             | 10.0                            | 153                            |
| 100                        | 101             | 2.5            | 50            | 7.0             | 11.0                            | 146                            |
| 120                        | 121             | 0.79           | 40            | 6.5             | 12.0                            | 140                            |
| 150                        | 151             | 0.79           | 40            | 5.5             | 13.0                            | 134                            |
| 180                        | 181             | 0.79           | 45            | 5.0             | 15.0                            | 125                            |
| 220                        | 221             | 0.79           | 45            | 4.2             | 17.0                            | 117                            |
| 270                        | 271             | 0.79           | 45            | 3.8             | 19.5                            | 110                            |
| 330                        | 331             | 0.79           | 45            | 3.3             | 22.0                            | 103                            |
| 390                        | 391             | 0.79           | 45            | 3.1             | 24.5                            | 98                             |
| 470                        | 471             | 0.79           | 45            | 2.9             | 26.5                            | 94                             |
| 560                        | 561             | 0.79           | 45            | 2.7             | 30.0                            | 88                             |
| 680                        | 681             | 0.79           | 45            | 2.5             | 33.0                            | 84                             |
| 820                        | 821             | 0.79           | 45            | 2.3             | 36.5                            | 80                             |
| 1000                       | 102             | 0.79           | 40            | 2.2             | 40.0                            | 76                             |

Section 1 was formerly the TE Connectivity C10 Series, Section 2 was formerly the TE Connectivity C11 Series, Section 3 was formerly the TE Connectivity C12 Series

## Type SC10, SC15, SC30, SC55 Series

### Characteristics - Electrical Type SC15

| Inductance Value - $\mu$ H | Inductance Code | Test Freq. MHz | Q Factor Min. | S.R.F. MHz Min. | Max. DC Resistance Ohms at 20°C | Direct Current at 70°C Max. mA |
|----------------------------|-----------------|----------------|---------------|-----------------|---------------------------------|--------------------------------|
| 0.15                       | R15             | 25             | 50            | 525             | 0.030                           | 2790                           |
| 0.18                       | R18             | 25             | 45            | 480             | 0.040                           | 2420                           |
| 0.22                       | R22             | 25             | 50            | 450             | 0.055                           | 2060                           |
| 0.27                       | R27             | 25             | 45            | 400             | 0.070                           | 1830                           |
| 0.33                       | R33             | 25             | 45            | 360             | 0.090                           | 1610                           |
| 0.39                       | R39             | 25             | 45            | 350             | 0.100                           | 1530                           |
| 0.47                       | R47             | 25             | 45            | 310             | 0.120                           | 1400                           |
| 0.56                       | R56             | 25             | 50            | 280             | 0.135                           | 1320                           |
| 0.68                       | R68             | 25             | 50            | 250             | 0.15                            | 1250                           |
| 0.82                       | R82             | 25             | 50            | 220             | 0.22                            | 1030                           |
| 1.0                        | 1R0             | 25             | 50            | 200             | 0.29                            | 900                            |
| 1.2                        | 1R2             | 7.9            | 33            | 180             | 0.42                            | 750                            |
| 1.5                        | 1R5             | 7.9            | 33            | 160             | 0.50                            | 685                            |
| 1.8                        | 1R8             | 7.9            | 33            | 150             | 0.65                            | 600                            |
| 2.2                        | 2R2             | 7.9            | 33            | 135             | 0.95                            | 495                            |
| 2.7                        | 2R7             | 7.9            | 33            | 120             | 1.20                            | 440                            |
| 3.3                        | 3R3             | 7.9            | 33            | 110             | 2.00                            | 340                            |
| 3.9                        | 3R9             | 7.9            | 33            | 100             | 2.30                            | 320                            |
| 4.7                        | 4R7             | 7.9            | 33            | 90              | 2.60                            | 300                            |
| 5.6                        | 5R6             | 7.9            | 45            | 60              | 0.32                            | 690                            |
| 6.8                        | 6R8             | 7.9            | 50            | 55              | 0.50                            | 550                            |
| 8.2                        | 8R2             | 7.9            | 50            | 50              | 0.60                            | 505                            |
| 10                         | 100             | 7.9            | 55            | 45              | 0.90                            | 415                            |
| 12                         | 120             | 2.5            | 65            | 42              | 1.10                            | 375                            |
| 15                         | 150             | 2.5            | 65            | 40              | 1.40                            | 330                            |
| 18                         | 180             | 2.5            | 75            | 34              | 2.25                            | 260                            |
| 22                         | 220             | 2.5            | 75            | 30              | 2.50                            | 250                            |
| 24*                        | 240*            | 2.5            | 60            | 27              | 2.50                            | 250                            |
| 27                         | 270             | 2.5            | 60            | 25              | 2.60                            | 242                            |
| 30                         | 300             | 2.5            | 65            | 21              | 2.80                            | 230                            |
| 33                         | 330             | 2.5            | 65            | 19              | 3.00                            | 227                            |
| 36*                        | 360*            | 2.5            | 60            | 15.5            | 2.50                            | 250                            |
| 39                         | 390             | 2.5            | 60            | 14.5            | 2.60                            | 244                            |
| 43*                        | 430*            | 2.5            | 60            | 13.7            | 2.70                            | 238                            |
| 47                         | 470             | 2.5            | 55            | 13.0            | 2.75                            | 235                            |
| 51*                        | 510*            | 2.5            | 55            | 12.7            | 2.85                            | 231                            |
| 56                         | 560             | 2.5            | 55            | 12.0            | 3.00                            | 225                            |
| 62*                        | 620*            | 2.5            | 55            | 11.5            | 3.15                            | 220                            |
| 68                         | 680             | 2.5            | 55            | 11.0            | 3.30                            | 215                            |
| 75*                        | 750*            | 2.5            | 55            | 10.5            | 3.70                            | 203                            |
| 82                         | 820             | 2.5            | 50            | 10.3            | 3.90                            | 200                            |
| 91*                        | 910*            | 2.5            | 50            | 10.0            | 4.30                            | 188                            |
| 100                        | 101             | 2.5            | 50            | 9.5             | 4.50                            | 185                            |
| 110*                       | 111*            | 0.79           | 60            | 8.9             | 4.90                            | 176                            |
| 120                        | 121             | 0.79           | 65            | 8.7             | 5.20                            | 170                            |
| 130*                       | 131*            | 0.79           | 65            | 8.5             | 5.45                            | 167                            |
| 150                        | 151             | 0.79           | 65            | 8.0             | 6.05                            | 160                            |
| 160*                       | 161*            | 0.79           | 65            | 7.5             | 6.40                            | 154                            |
| 180                        | 181             | 0.79           | 65            | 7.0             | 6.75                            | 150                            |
| 200*                       | 201*            | 0.79           | 65            | 6.5             | 7.10                            | 147                            |
| 220                        | 221             | 0.79           | 65            | 6.2             | 7.45                            | 144                            |
| 240*                       | 241*            | 0.79           | 65            | 5.9             | 7.80                            | 140                            |
| 270                        | 271             | 0.79           | 65            | 5.7             | 9.00                            | 131                            |
| 300*                       | 301*            | 0.79           | 65            | 5.4             | 11.50                           | 118                            |
| 330                        | 331             | 0.79           | 65            | 5.1             | 12.50                           | 111                            |

## Type SC10, SC15, SC30, SC55 Series

### Characteristics - Electrical Type SC30

| Inductance Value - $\mu$ H | Inductance Code | Test Freq. MHz | Q Factor Min. | S.R.F. MHz Min. | Max. DC Resistance Ohms at 20°C | Direct Current at 70°C Max. mA |
|----------------------------|-----------------|----------------|---------------|-----------------|---------------------------------|--------------------------------|
| 0.022                      | R022            | 50             | 33            | 1245            | 0.006                           | 3000                           |
| 0.027                      | R027            | 50             | 33            | 1200            | 0.010                           | 2800                           |
| 0.033                      | R033            | 50             | 33            | 1175            | 0.026                           | 2620                           |
| 0.039                      | R039            | 50             | 33            | 1130            | 0.033                           | 2320                           |
| 0.047                      | R047            | 50             | 33            | 1060            | 0.038                           | 2170                           |
| 0.056                      | R056            | 50             | 33            | 990             | 0.048                           | 1930                           |
| 0.068                      | R068            | 50             | 33            | 900             | 0.055                           | 1800                           |
| 0.082                      | R082            | 50             | 33            | 750             | 0.065                           | 1650                           |
| 0.10                       | R10             | 25             | 40            | 680             | 0.080                           | 1490                           |
| 0.12                       | R12             | 25             | 40            | 640             | 0.090                           | 1400                           |
| 0.15                       | R15             | 25             | 38            | 600             | 0.10                            | 1330                           |
| 0.18                       | R18             | 25             | 35            | 550             | 0.12                            | 1210                           |
| 0.22                       | R22             | 25             | 33            | 510             | 0.14                            | 1120                           |
| 0.27                       | R27             | 25             | 33            | 430             | 0.16                            | 1050                           |
| 0.33                       | R33             | 25             | 30            | 410             | 0.22                            | 900                            |
| 0.39                       | R39             | 25             | 30            | 365             | 0.30                            | 770                            |
| 0.47                       | R47             | 25             | 30            | 330             | 0.35                            | 710                            |
| 0.56                       | R56             | 25             | 30            | 300             | 0.50                            | 595                            |
| 0.68                       | R68             | 25             | 28            | 275             | 0.60                            | 540                            |
| 0.82                       | R82             | 25             | 28            | 250             | 0.85                            | 455                            |
| 1.0                        | 1R0             | 25             | 25            | 230             | 1.00                            | 420                            |
| 1.2                        | 1R2             | 7.9            | 25            | 150             | 0.18                            | 990                            |
| 1.5                        | 1R5             | 7.9            | 28            | 140             | 0.22                            | 895                            |
| 1.8                        | 1R8             | 7.9            | 30            | 125             | 0.30                            | 765                            |
| 2.2                        | 2R2             | 7.9            | 30            | 115             | 0.40                            | 665                            |
| 2.7                        | 2R7             | 7.9            | 37            | 100             | 0.55                            | 565                            |
| 3.3                        | 3R3             | 7.9            | 45            | 90              | 0.85                            | 455                            |
| 3.9                        | 3R9             | 7.9            | 45            | 80              | 1.0                             | 420                            |
| 4.7                        | 4R7             | 7.9            | 45            | 75              | 1.2                             | 384                            |
| 5.6                        | 5R6             | 7.9            | 50            | 65              | 1.8                             | 314                            |
| 6.8                        | 6R8             | 7.9            | 50            | 60              | 2.0                             | 298                            |
| 8.2                        | 8R2             | 7.9            | 55            | 55              | 2.7                             | 256                            |
| 10                         | 100             | 7.9            | 55            | 50              | 3.7                             | 219                            |
| 12                         | 120             | 2.5            | 45            | 40              | 2.7                             | 256                            |
| 15                         | 150             | 2.5            | 45            | 35              | 2.8                             | 251                            |
| 18                         | 180             | 2.5            | 50            | 30              | 3.1                             | 239                            |
| 22                         | 220             | 2.5            | 50            | 25              | 3.3                             | 232                            |
| 27                         | 270             | 2.5            | 50            | 20              | 3.5                             | 225                            |
| 33                         | 330             | 2.5            | 45            | 24              | 3.4                             | 228                            |
| 39                         | 390             | 2.5            | 45            | 22              | 3.6                             | 222                            |
| 47                         | 470             | 2.5            | 45            | 20              | 4.5                             | 198                            |
| 56                         | 560             | 2.5            | 45            | 18              | 5.7                             | 176                            |
| 68                         | 680             | 2.5            | 50            | 15              | 6.7                             | 162                            |
| 82                         | 820             | 2.5            | 50            | 14              | 7.3                             | 156                            |
| 100                        | 101             | 2.5            | 50            | 13              | 8.0                             | 149                            |
| 120                        | 121             | 0.79           | 30            | 12              | 13.0                            | 116                            |
| 150                        | 151             | 0.79           | 30            | 11              | 15.0                            | 108                            |
| 180                        | 181             | 0.79           | 30            | 10              | 17.0                            | 102                            |
| 220                        | 221             | 0.79           | 30            | 9               | 21.0                            | 92                             |
| 270                        | 271             | 0.79           | 30            | 8               | 25.0                            | 84                             |
| 330                        | 331             | 0.79           | 30            | 7               | 28.0                            | 79                             |
| 390                        | 391             | 0.79           | 30            | 6.5             | 35.0                            | 71                             |
| 470                        | 471             | 0.79           | 30            | 6               | 42.0                            | 65                             |
| 560                        | 561             | 0.79           | 30            | 5               | 46.0                            | 62                             |
| 680                        | 681             | 0.79           | 30            | 4               | 60.0                            | 54                             |
| 820                        | 821             | 0.79           | 30            | 3.8             | 65.0                            | 52                             |
| 1000                       | 102             | 0.79           | 30            | 3.4             | 72.0                            | 49                             |


The SC30 Series was formerly the TE Connectivity C30 Series

## Type SC10, SC15, SC30, SC55 Series

### Characteristics - Electrical Type SC55

| Inductance Value ( $\mu$ H) | Inductance Code | Q Min. | Test Freq MHz | S.R.F. MHz Min. | Max. DC Resistance Ohms | Direct Current at 85°C Max. mA | Body Marking |
|-----------------------------|-----------------|--------|---------------|-----------------|-------------------------|--------------------------------|--------------|
| 1.0                         | 1R0             | 45     | 7.9           | 190.0           | 0.04                    | 2200                           | 1uH0-K       |
| 1.5                         | 1R5             | 65     | 7.9           | 155.0           | 0.05                    | 2000                           | 1uH5-K       |
| 2.2                         | 2R2             | 60     | 7.9           | 130.0           | 0.06                    | 1800                           | 2uH2-K       |
| 3.3                         | 3R3             | 50     | 7.9           | 110.0           | 0.07                    | 1700                           | 3uH3-K       |
| 4.7                         | 4R7             | 50     | 7.9           | 95.0            | 0.12                    | 1300                           | 4uH7-K       |
| 6.8                         | 6R8             | 60     | 7.9           | 85.0            | 0.22                    | 1000                           | 6uH8-K       |
| 10                          | 100             | 50     | 7.9           | 65.0            | 0.35                    | 750                            | 10uH-K       |
| 15                          | 150             | 55     | 2.5           | 55.0            | 0.60                    | 600                            | 15uH-K       |
| 22                          | 220             | 65     | 2.5           | 45.0            | 1.10                    | 430                            | 22uH-K       |
| 33                          | 330             | 85     | 2.5           | 35.0            | 2.00                    | 300                            | 33uH-K       |
| 47                          | 470             | 70     | 2.5           | 20.0            | 2.50                    | 270                            | 47uH-K       |
| 68                          | 680             | 65     | 2.5           | 16.0            | 3.00                    | 250                            | 68uH-K       |
| 100                         | 101             | 65     | 2.5           | 14.0            | 4.00                    | 220                            | mH10-K       |
| 150                         | 151             | 80     | 0.79          | 9.5             | 5.80                    | 230                            | mH15-K       |
| 220                         | 221             | 80     | 0.79          | 8.0             | 7.30                    | 200                            | mH22-K       |
| 330                         | 331             | 80     | 0.79          | 7.5             | 12.00                   | 160                            | mH33-K       |
| 470                         | 471             | 80     | 0.79          | 6.5             | 20.00                   | 120                            | mH47-K       |
| 680                         | 681             | 85     | 0.79          | 5.0             | 24.00                   | 110                            | mH68-K       |
| 1000                        | 102             | 85     | 0.79          | 3.0             | 30.00                   | 100                            | 1mH0-K       |

### How to Order

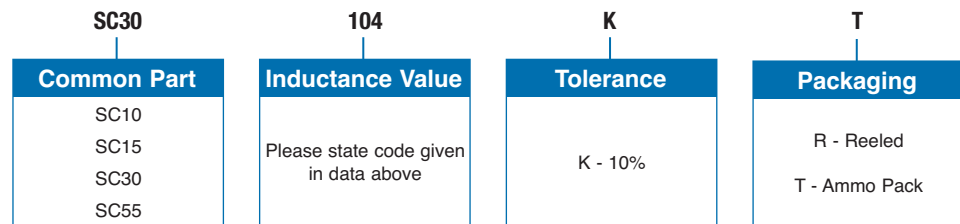

TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.  
 Other logos, product and Company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this datasheet, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this datasheet are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.