

**SERIES:** TB009-508 | **DESCRIPTION:** TERMINAL BLOCK**FEATURES**

- 2~24 poles
- horizontal with board
- interlocking (side)
- 5.08 mm pitch
- UL and CE safety approvals

**SPECIFICATIONS**

| parameter                   | conditions/description                      | min | typ  | max  | units |
|-----------------------------|---------------------------------------------|-----|------|------|-------|
| rated voltage (per contact) | UL                                          |     |      | 300  | V     |
|                             | IEC                                         |     |      | 250  | V     |
| rated current (per contact) | UL                                          |     |      | 20   | A     |
|                             | IEC                                         |     |      | 20   | A     |
| withstanding voltage        |                                             |     | 2500 |      | Vac   |
| surge voltage               |                                             |     |      | 4000 | V     |
| contact resistance          |                                             |     |      | 20   | mΩ    |
| insulation resistance       | at 500 Vdc                                  | 500 |      |      | MΩ    |
| operating temperature       |                                             | -40 |      | 105  | °C    |
| safety approvals            | UL 1059, EN 60998-1:2004, EN 60998-2-1:2004 |     |      |      |       |
| flammability rating         | UL94V-0                                     |     |      |      |       |
| RoHS                        | yes                                         |     |      |      |       |

**SOLDERABILITY**

| parameter      | conditions/description | min | typ | max | units |
|----------------|------------------------|-----|-----|-----|-------|
| hand soldering | for maximum 10 seconds | 345 | 350 | 355 | °C    |
| wave soldering | for maximum 5 seconds  | 255 | 260 | 265 | °C    |

**PART NUMBER KEY**

| TB009-508 - X XX XX |                |               |             |  |  |
|---------------------|----------------|---------------|-------------|--|--|
| Base Number         | Screw Type:    | No. of Poles: | Color:      |  |  |
|                     | "blank" = Slot | 02 10 18      | *BE = blue  |  |  |
|                     | P = Phillips   | 03 11 19      | GR = green  |  |  |
|                     |                | 04 12 20      | OR = orange |  |  |
|                     |                | 05 13 21      | YL = yellow |  |  |
|                     |                | 06 14 22      | GY = gray   |  |  |
|                     |                | 07 15 23      | BK = black  |  |  |
|                     |                | 08 16 24      |             |  |  |
|                     |                | 09 17         |             |  |  |




\*Standard housing color is blue. All other colors are subject to higher MOQ. Please inquire with CUI Devices sales for details.

## MECHANICAL DRAWING

units: mm  
 tolerance (per module):  
 $X \leq 6.00$ :  $\pm 0.25$  mm  
 $6.00 < X \leq 30.00$ :  $\pm 0.40$  mm  
 unless otherwise noted

| DESCRIPTION | MATERIAL       | PLATING/COLOR |
|-------------|----------------|---------------|
| housing     | PA66 (UL94V-0) |               |
| contacts    | copper alloy   | tin           |
| screws      | steel          | zinc          |
| block       | copper alloy   | nickel        |

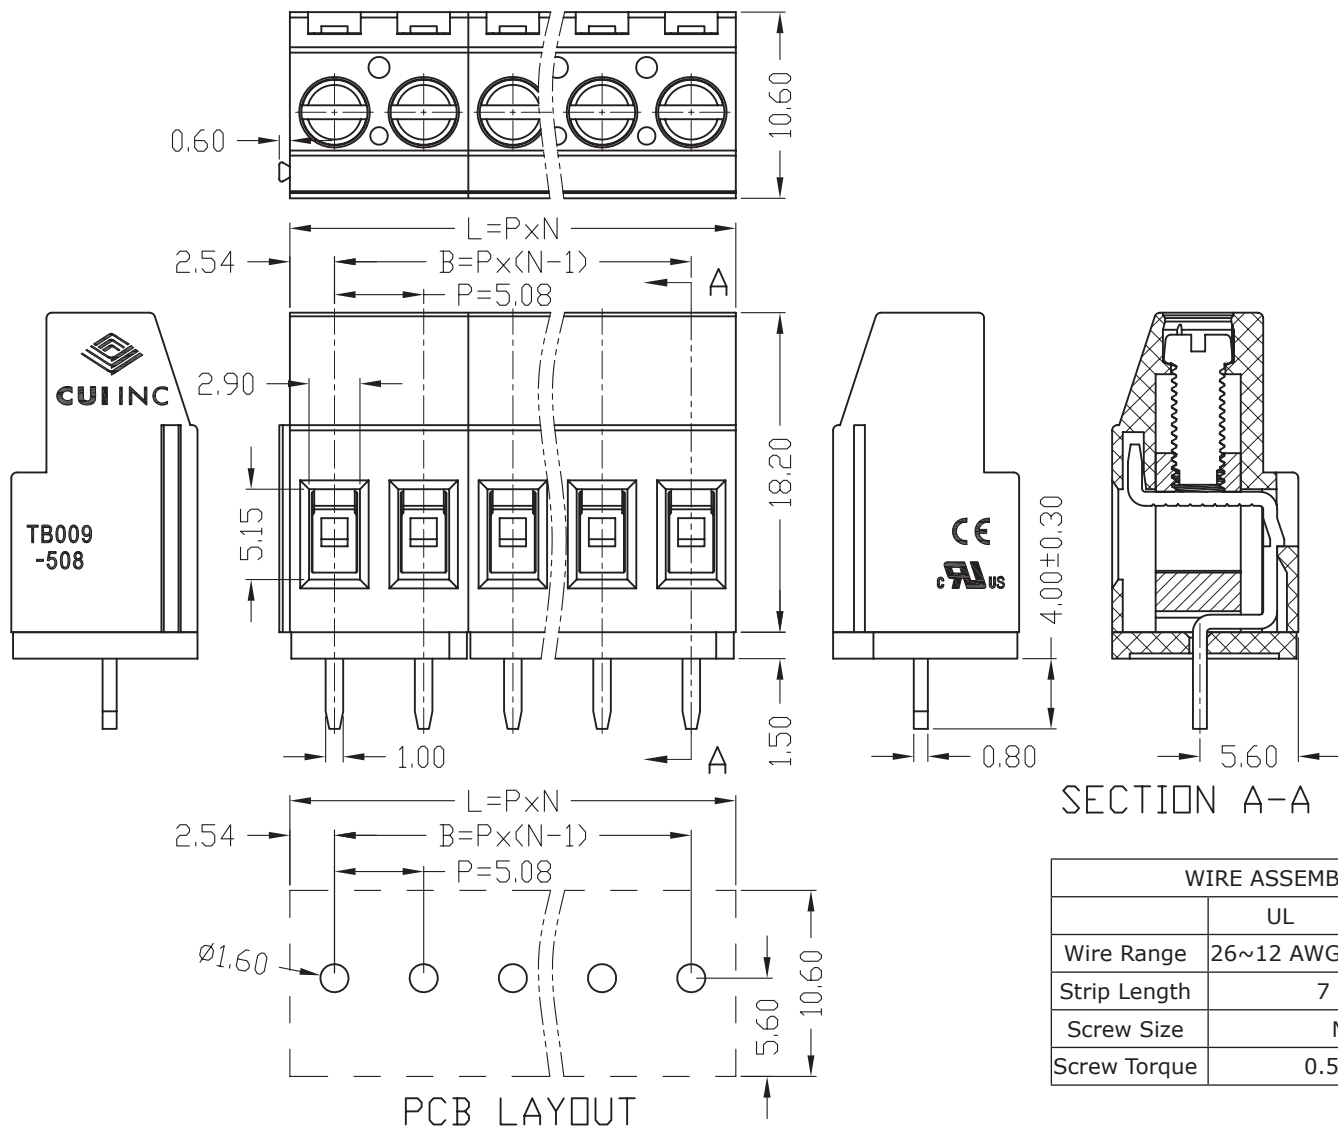

SECTION A-A

| WIRE ASSEMBLY |           |                     |
|---------------|-----------|---------------------|
|               | UL        | IEC                 |
| Wire Range    | 26~12 AWG | 2.5 mm <sup>2</sup> |
| Strip Length  | 7 mm      |                     |
| Screw Size    | M3        |                     |
| Screw Torque  | 0.5 N·m   |                     |

This series can be constructed of 2 and 3 pole modules where L is the total length, P is the pitch, and N is the number of poles.

| N | 02    | 03    | 04    | 05    | 06    | 07    | 08     | 09     | 10     | 11     | 12     | 13    |
|---|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|-------|
| L | 10.16 | 15.24 | 20.32 | 25.40 | 30.48 | 35.56 | 40.64  | 45.72  | 50.80  | 55.88  | 60.96  | 66.04 |
| B | 5.08  | 10.16 | 15.24 | 20.32 | 25.40 | 30.48 | 35.56  | 40.64  | 45.72  | 50.80  | 55.88  | 60.96 |
| N | 14    | 15    | 16    | 17    | 18    | 19    | 20     | 21     | 22     | 23     | 24     | --    |
| L | 71.12 | 76.20 | 81.28 | 86.36 | 91.44 | 96.52 | 101.60 | 106.68 | 111.76 | 116.84 | 121.92 | --    |
| B | 66.04 | 71.12 | 76.20 | 81.28 | 86.36 | 91.44 | 96.52  | 101.60 | 106.68 | 111.76 | 116.84 | --    |

## REVISION HISTORY

| rev. | description       | date       |
|------|-------------------|------------|
| 1.0  | initial release   | 03/19/2019 |
| 1.01 | brand update      | 02/06/2020 |
| 1.02 | updated datasheet | 04/20/2020 |

The revision history provided is for informational purposes only and is believed to be accurate.

---

# CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.