



OptiMOS® Power-Transistor

Features


- N-channel Logic Level - Enhancement mode
- Automotive AEC Q101 qualified
- MSL1 up to 260°C peak reflow
- 175°C operating temperature
- **Green package (lead free)**
- Ultra low Rds(on)
- 100% Avalanche tested

Product Summary

V_{DS}	75	V
$R_{DS(on),max}$ (SMD version)	6.5	mΩ
I_D	100	A

PG-TO263-3-2

PG-TO220-3-1


Type	Package	Ordering Code	Marking
IPB100N08S2L-07	PG-TO263-3-2	SP0002-19053	PN08L07
IPP100N08S2L-07	PG-TO220-3-1	SP0002-19052	PN08L07



Maximum ratings, at $T_j=25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Continuous drain current ¹⁾	I_D	$T_C=25\text{ °C}$, $V_{GS}=10\text{ V}$	100	A
		$T_C=100\text{ °C}$, $V_{GS}=10\text{ V}^{2)}$	98	
Pulsed drain current ²⁾	$I_{D,pulse}$	$T_C=25\text{ °C}$	400	
Avalanche energy, single pulse ²⁾	E_{AS}	$I_D=80\text{ A}$	810	mJ
Gate source voltage ⁴⁾	V_{GS}		±20	V
Power dissipation	P_{tot}	$T_C=25\text{ °C}$	300	W
Operating and storage temperature	T_j, T_{stg}		-55 ... +175	°C

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

Thermal characteristics²⁾

Thermal resistance, junction - case	R_{thJC}		-	-	0.5	K/W
Thermal resistance, junction - ambient, leaded	R_{thJA}		-	-	62	
SMD version, device on PCB	R_{thJA}	minimal footprint	-	-	62	
		6 cm ² cooling area ⁵⁾	-	-	40	

Electrical characteristics, at $T_j=25\text{ °C}$, unless otherwise specified

Static characteristics

Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS}=0\text{ V}$, $I_D=1\text{ mA}$	75	-	-	V
Gate threshold voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$, $I_D=250\text{ }\mu\text{A}$	1.2	1.6	2.0	
Zero gate voltage drain current	I_{DSS}	$V_{DS}=75\text{ V}$, $V_{GS}=0\text{ V}$, $T_j=25\text{ °C}$	-	0.01	1	μA
		$V_{DS}=75\text{ V}$, $V_{GS}=0\text{ V}$, $T_j=125\text{ °C}^{2)}$	-	1	100	
Gate-source leakage current	I_{GSS}	$V_{GS}=20\text{ V}$, $V_{DS}=0\text{ V}$	-	1	100	nA
Drain-source on-state resistance	$R_{DS(on)}$	$V_{GS}=4.5\text{ V}$, $I_D=80\text{ A}$, SMD version	-	6.5	8.7	m Ω
		$V_{GS}=4.5\text{ V}$, $I_D=80\text{ A}$, SMD version	-	6.2	8.4	
Drain-source on-state resistance	$R_{DS(on)}$	$V_{GS}=10\text{ V}$, $I_D=80\text{ A}$,	-	5.0	6.8	m Ω
		$V_{GS}=10\text{ V}$, $I_D=80\text{ A}$, SMD version	-	4.7	6.5	

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

Dynamic characteristics²⁾

Input capacitance	C_{iss}	$V_{GS}=0\text{ V}, V_{DS}=25\text{ V},$ $f=1\text{ MHz}$	-	5400	-	pF
Output capacitance	C_{oss}		-	1300	-	
Reverse transfer capacitance	C_{rss}		-	590	-	
Turn-on delay time	$t_{d(on)}$	$V_{DD}=40\text{ V}, V_{GS}=10\text{ V},$ $I_D=100\text{ A}, R_G=1.1\ \Omega$	-	19	-	ns
Rise time	t_r		-	56	-	
Turn-off delay time	$t_{d(off)}$		-	85	-	
Fall time	t_f		-	22	-	

Gate Charge Characteristics²⁾

Gate to source charge	Q_{gs}	$V_{DD}=60\text{ V}, I_D=100\text{ A},$ $V_{GS}=0\text{ to }10\text{ V}$	-	18	25	nC
Gate to drain charge	Q_{gd}		-	70	124	
Gate charge total	Q_g		-	182	246	
Gate plateau voltage	$V_{plateau}$		-	3.5	-	V

Reverse Diode

Diode continuous forward current ²⁾	I_S	$T_C=25\text{ °C}$	-	-	100	A
Diode pulse current ²⁾	$I_{S,pulse}$		-	-	400	
Diode forward voltage	V_{SD}	$V_{GS}=0\text{ V}, I_F=80\text{ A},$ $T_J=25\text{ °C}$	-	0.9	1.3	V
Reverse recovery time ²⁾	t_{rr}	$V_R=40\text{ V}, I_F=I_S,$ $di_F/dt=100\text{ A}/\mu\text{s}$	-	95	120	ns
Reverse recovery charge ²⁾	Q_{rr}	$V_R=40\text{ V}, I_F=I_S,$ $di_F/dt=100\text{ A}/\mu\text{s}$	-	240	300	nC

¹⁾ Current is limited by bondwire; with an $R_{thJC} = 0.5\text{K/W}$ the chip is able to carry 138A at 25°C. For detailed information see Application Note ANPS071E at www.infineon.com/optimos

²⁾ Defined by design. Not subject to production test.


³⁾ See diagram 13

⁴⁾ Qualified at -20V and +20V.

⁵⁾ Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm² (one layer, 70 µm thick) copper area for drain connection. PCB is vertical in still air.


1 Power dissipation

$$P_{\text{tot}} = f(T_C); V_{\text{GS}} \geq 4 \text{ V}$$

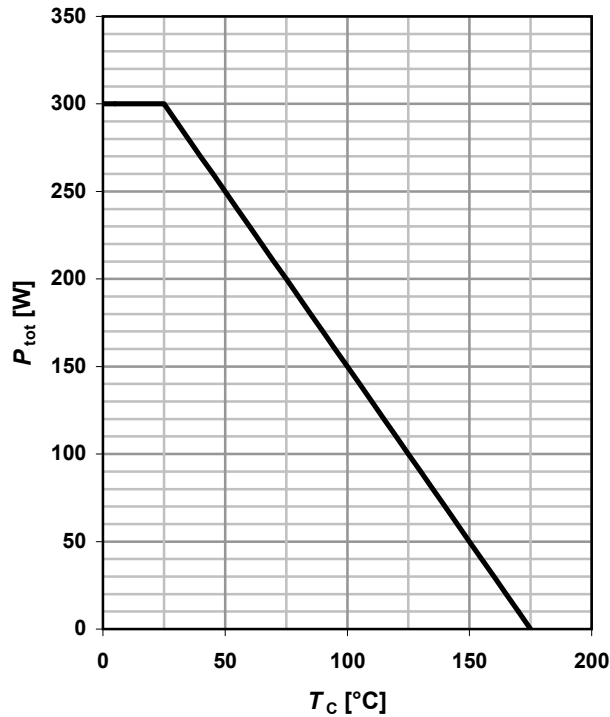

2 Drain current


$$I_D = f(T_C); V_{\text{GS}} \geq 10 \text{ V}$$

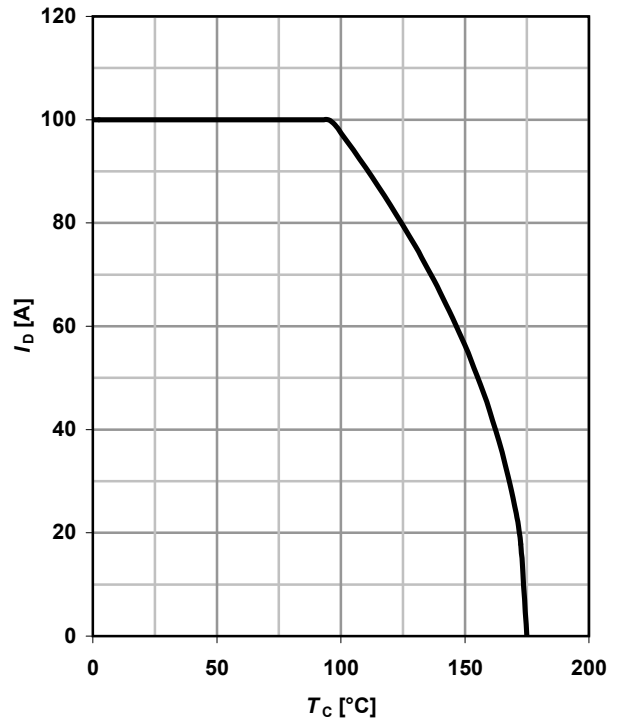

3 Safe operating area

$$I_D = f(V_{\text{DS}}); T_C = 25 \text{ °C}; D = 0$$


parameter: t_p

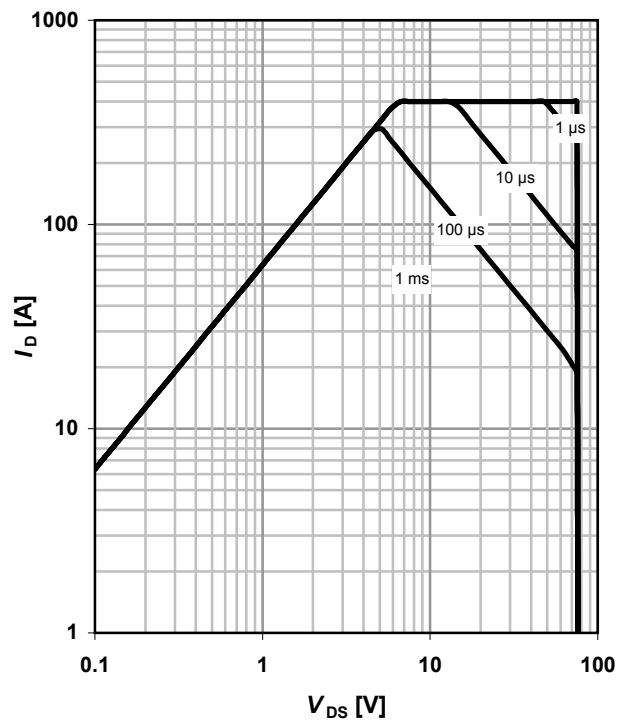

4 Max. transient thermal impedance


$$Z_{\text{thJC}} = f(t_p)$$

parameter: $D = t_p/T$

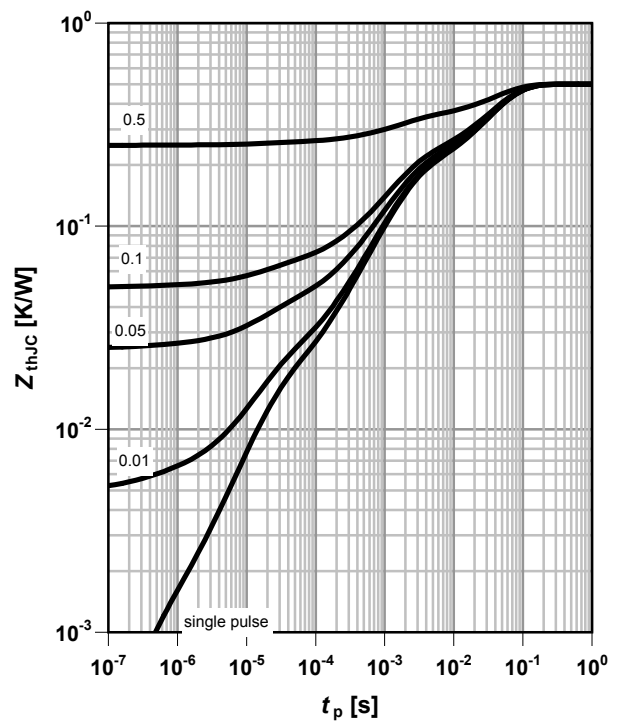


5 Typ. output characteristics

 $I_D = f(V_{DS}); T_j = 25^\circ\text{C}$

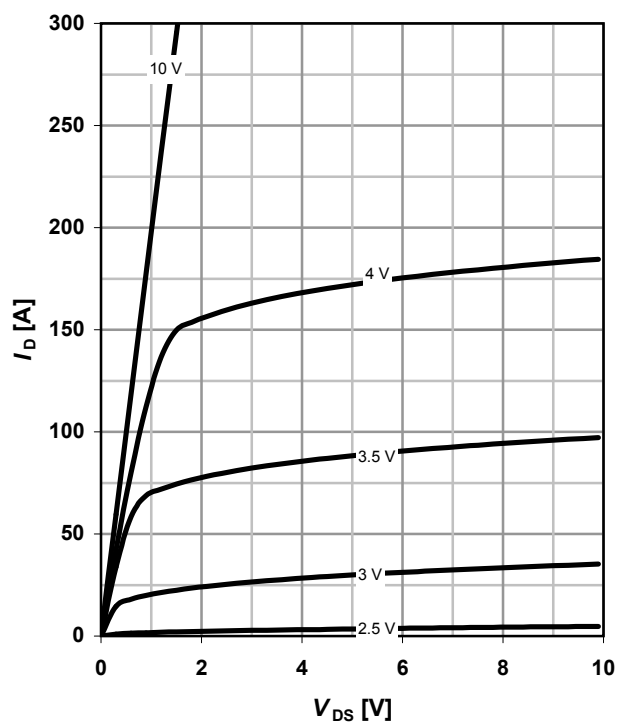parameter: V_{GS}


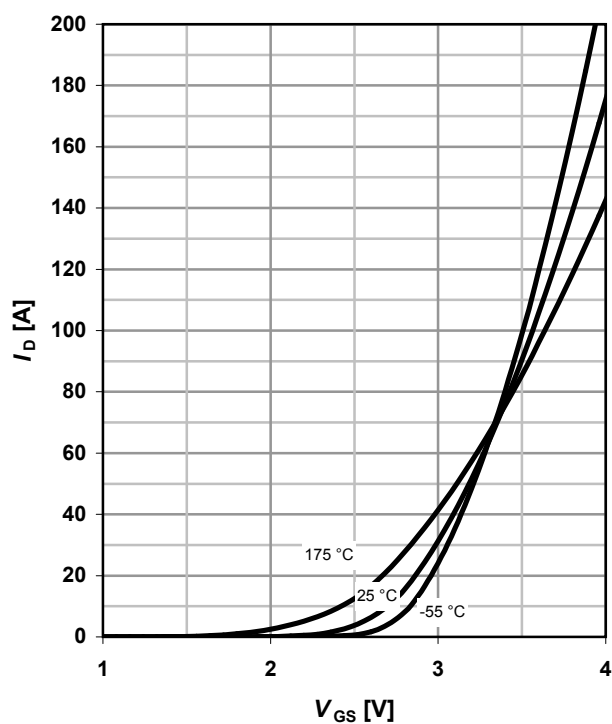
6 Typ. drain-source on-state resistance

 $R_{DS(on)} = f(I_D); T_j = 25^\circ\text{C}$

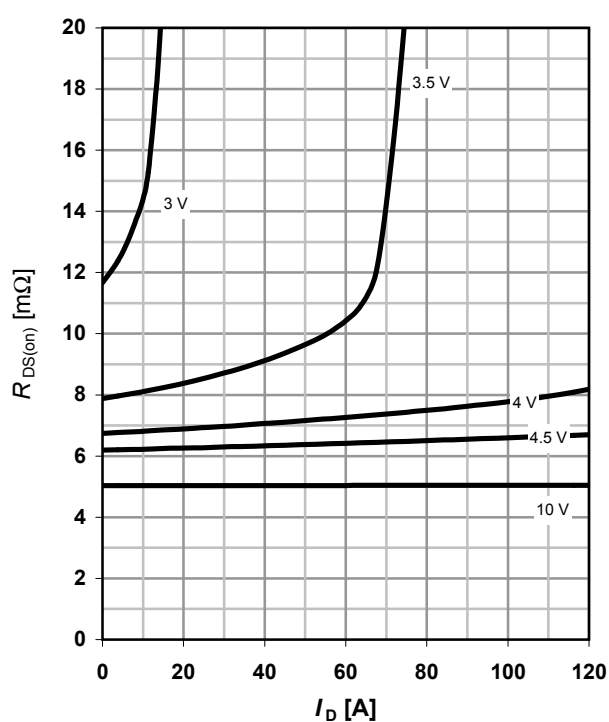parameter: V_{GS}


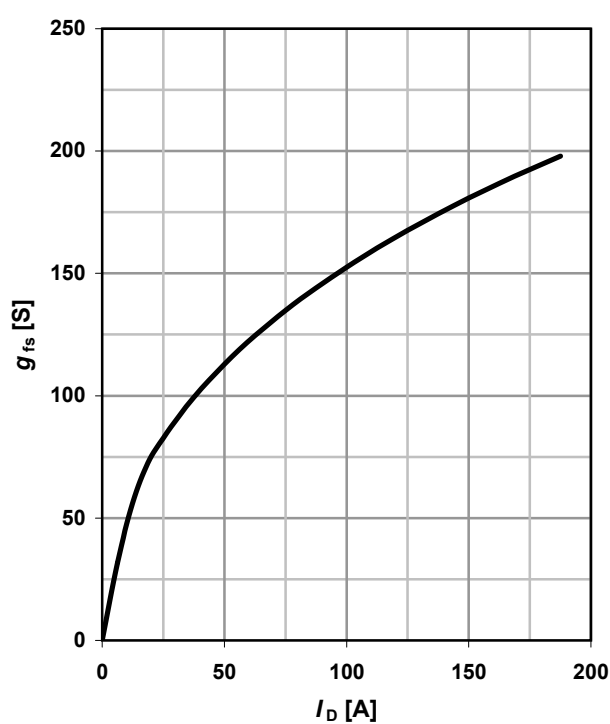
7 Typ. transfer characteristics

 $I_D = f(V_{GS}); V_{DS} = 6\text{V}$

parameter: T_j


8 Typ. Forward transconductance


 $g_{fs} = f(I_D); T_j = 25^\circ\text{C}$

parameter: g_{fs}


9 Typ. Drain-source on-state resistance

$$R_{DS(on)} = f(T_j)$$


parameter: $I_D = 80 \text{ A}$; $V_{GS} = 10 \text{ V}$

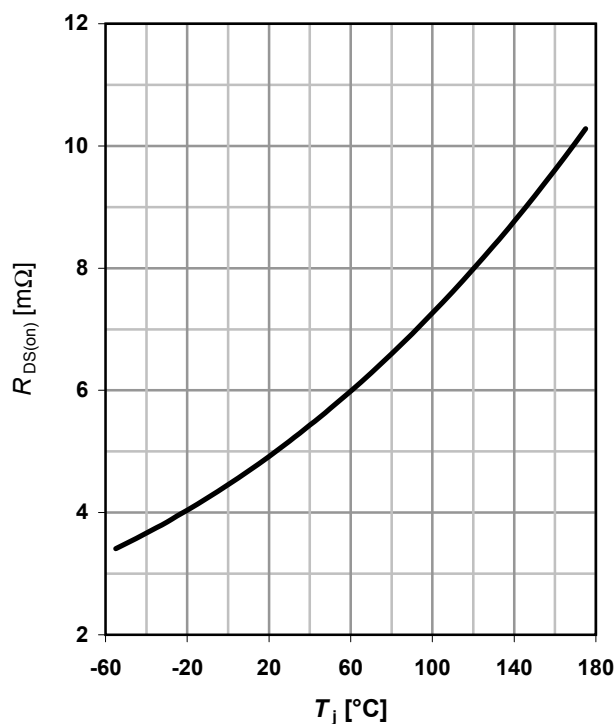

10 Typ. gate threshold voltage


$$V_{GS(th)} = f(T_j); V_{GS} = V_{DS}$$

parameter: I_D

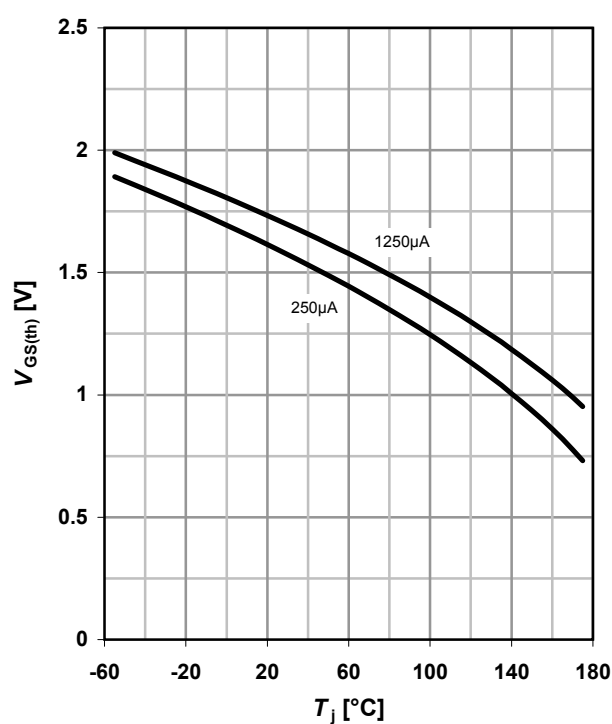

11 Typ. capacitances


$$C = f(V_{DS}); V_{GS} = 0 \text{ V}; f = 1 \text{ MHz}$$

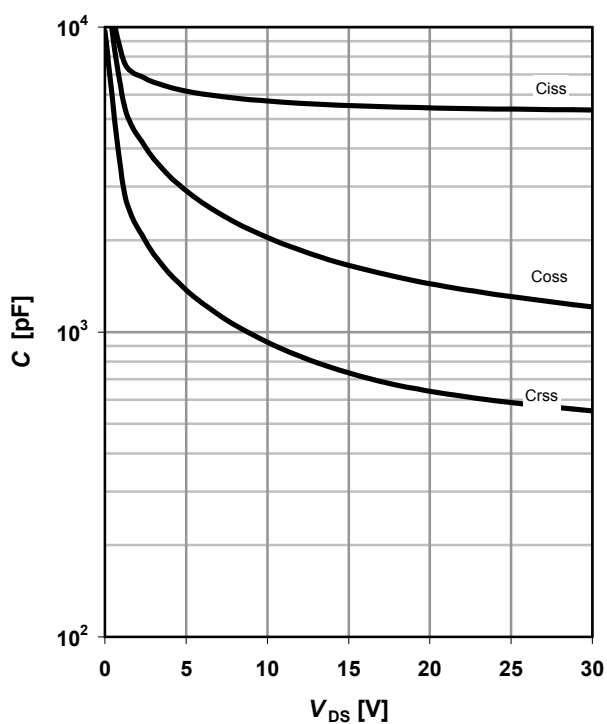

12 Typical forward diode characteristics

$$I_F = f(V_{SD})$$


parameter: T_j

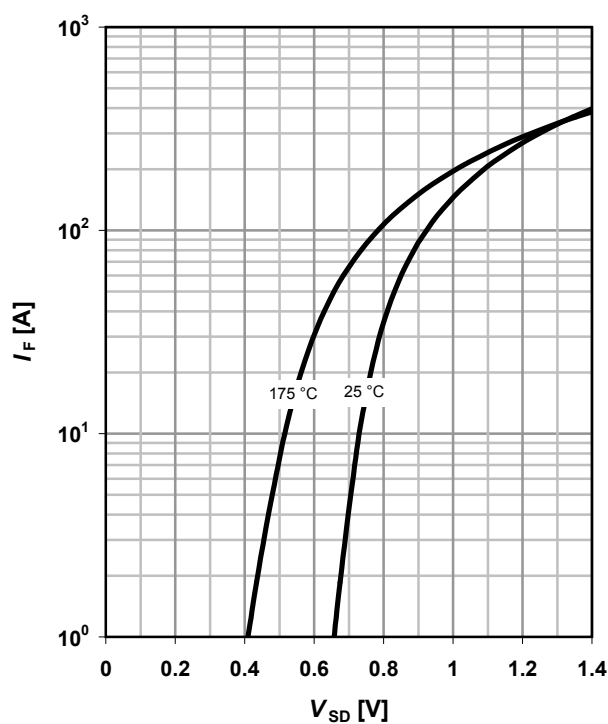

13 Typical avalanche energy

$$E_{AS} = f(T_j)$$


parameter: $I_D = 80A$

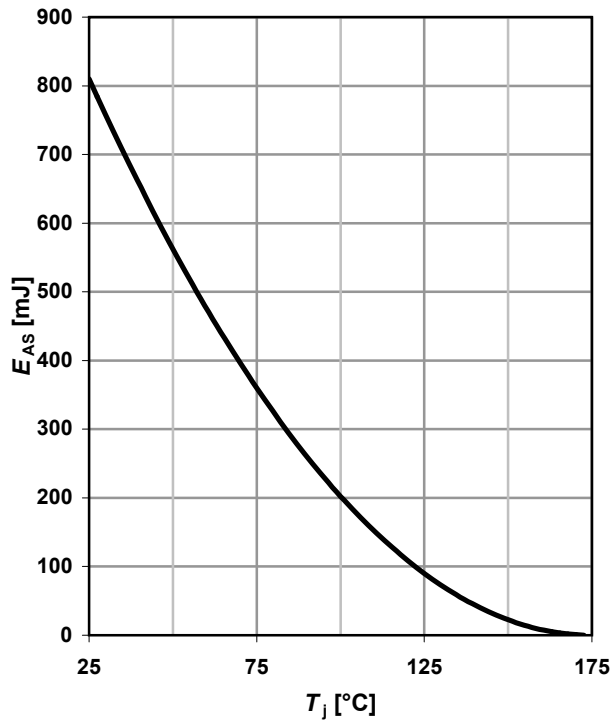

14 Typ. gate charge


$$V_{GS} = f(Q_{gate}); I_D = 100 A \text{ pulsed}$$

parameter: V_{DD}

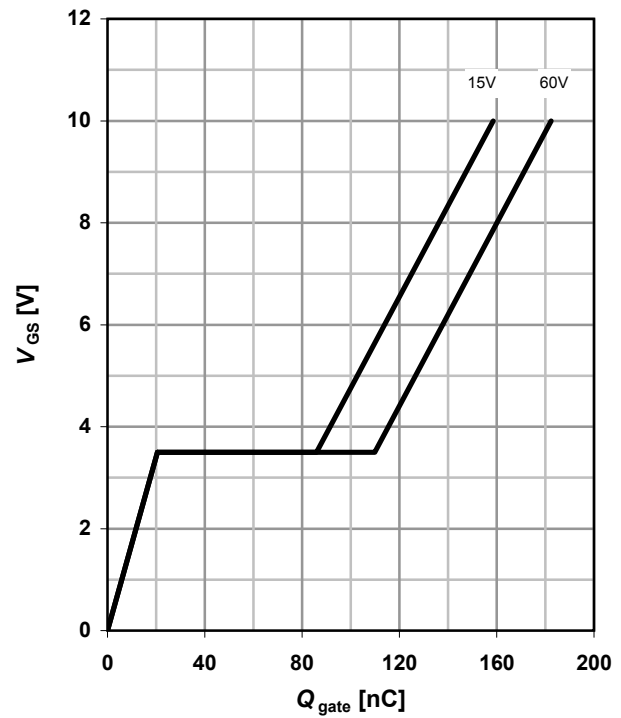


15 Typ. drain-source breakdown voltage

$$V_{BR(DSS)} = f(T_j); I_D = 1 mA$$

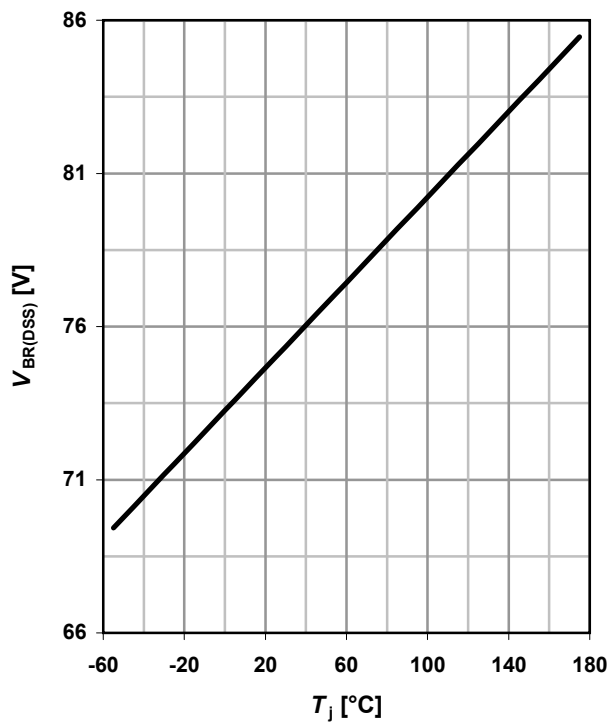

16 Gate charge waveforms

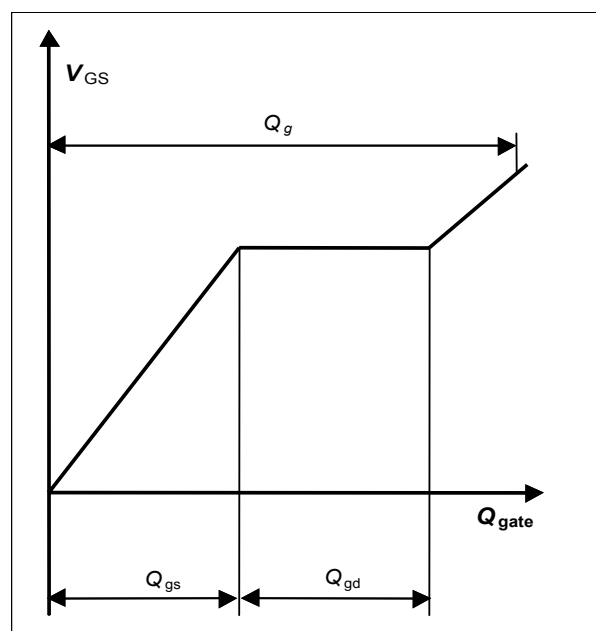

Published by
Infineon Technologies AG
St.-Martin-Straße 53
D-81541 München
© Infineon Technologies AG 2004
All Rights Reserved.

Attention please!

The information herein is given to describe certain components and shall not be considered as a guarantee of characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Information

For further information on technology, delivery terms and conditions and prices, please contact your nearest Infineon Technologies Office (www.infineon.com)

Warnings

Due to technical requirements, components may contain dangerous substances.

For information on the types in question, please contact your nearest Infineon Technologies Office.

effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.