



## 32-bit Power Architecture<sup>®</sup> microcontroller for automotive ASIL-B applications

Data brief

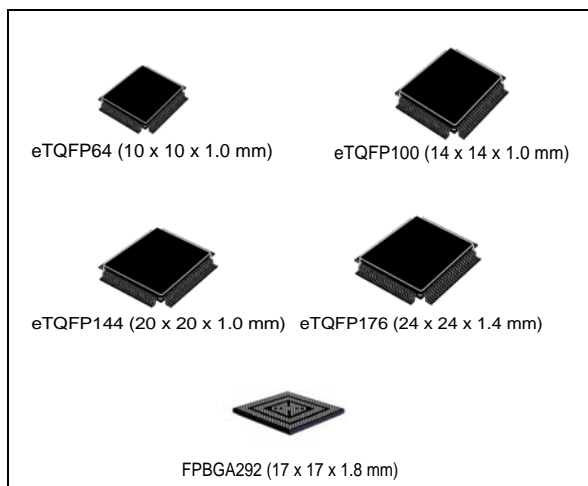

### Features

- AEC-Q100 qualified
  - High performance e200z420n3 dual core:
    - 32-bit Power Architecture technology CPU
    - Core frequency as high as 180 MHz
    - Variable Length Encoding (VLE)
  - 4224 KB (4096 KB code flash + 128 KB data flash) on-chip flash memory: supports read during program and erases operations, and multiple blocks allowing EEPROM emulation
  - 176 KB HSM dedicated flash memory (144 KB code + 32 KB data)
  - 384 KB on-chip general-purpose SRAM (in addition to 128 KB core local data RAM: 64 KB included in each CPU)
  - Multi-channel direct memory access controller (eDMA) with 64 channels
  - 1 interrupt controller (INTC)
- 
- Comprehensive new generation ASIL-B safety concept:
    - ASIL-B of ISO 26262
    - FCCU for collection and reaction to failure notifications
    - Memory Error Management Unit (MEMU) for collection and reporting of error events in memories
    - Cyclic redundancy check (CRC) unit
  - Crossbar switch architecture for concurrent access to peripherals, Flash, or RAM from multiple bus masters with end-to-end ECC
  - Body cross triggering unit (BCTU):
    - Triggers ADC conversions from any eMIOS channel
    - Triggers ADC conversions from up to 2 dedicated PIT\_RTIs
  - Enhanced modular IO subsystem (eMIOS): up to 64 timed I/O channels with 16-bit counter resolution
  - Enhanced analog-to-digital converter system with:
    - 3 independent fast 12-bit SAR analog converters
    - 1 supervisor 12-bit SAR analog converter
    - 1 10-bit SAR analog converter with STDBY mode support:
  - Communication interfaces:
    - 18 LINFlexD modules
    - 8 deserial serial peripheral interface (DSPI) modules
    - 8 MCAN interfaces with advanced shared memory scheme and ISO CAN-FD support
    - Dual channel FlexRay controller
    - 1 Ethernet controller 10/100 Mbps, compliant IEEE 802.3-2008

- Low power capabilities:
  - Versatile low power modes
  - Ultra low power standby with RTC
  - Smart wake-up Unit for contact monitoring
  - Fast wakeup schemes
- Dual phase-locked loops with stable clock domain for peripherals and FM modulation domain for computational shell
- Nexus development interface (NDI) per IEEE-ISTO 5001-2003 standard, with some support for 2010 standard
- Boot assist Flash (BAF) supports factory programming using a serial bootload through the asynchronous CAN or LIN/UART
- Junction temperature range: -40°C to 150°C

**Table 1. Device summary**

| Package  | Part number |             |             |             |             |             |
|----------|-------------|-------------|-------------|-------------|-------------|-------------|
|          | 2 MB        |             | 3MB         |             | 4MB         |             |
|          | Single core | Dual core   | Single core | Dual core   | Single core | Dual core   |
| eTQFP64  | SPC584C70E1 | SPC58EC70E1 | SPC584C74E1 | SPC58EC74E1 | SPC584C80E1 | SPC58EC80E1 |
| eTQFP100 | SPC584C70E3 | SPC58EC70E3 | SPC584C74E3 | SPC58EC74E3 | SPC584C80E3 | SPC58EC80E3 |
| eTQFP144 | SPC584C70E5 | SPC58EC70E5 | SPC584C74E5 | SPC58EC74E5 | SPC584C80E5 | SPC58EC80E5 |
| eLQFP176 | SPC584C70E7 | SPC58EC70E7 | SPC584C74E7 | SPC58EC74E7 | SPC584C80E7 | SPC58EC80E7 |
| FPBGA292 | SPC584C70C3 | SPC58EC70C3 | SPC584C74C3 | SPC58EC74C3 | SPC584C80C3 | SPC58EC80C3 |

# 1 Description

The SPC584Cx and SPC58ECx microcontroller are the first in a new family of devices superseding the SPC564Cx and SPC56ECx family. SPC584Cx and SPC58ECx build on the legacy of the SPC564Cx and SPC56ECx, while introducing new features coupled with higher throughput to provide substantial reduction of cost per feature and significant power and performance improvement (MIPS per mW). On the SPC584Cx and SPC58ECx devices, there are two processor cores e200z420 and one e200z0 core embedded in the Hardware Security Module.

For further info, or full datasheet request, please contact your local ST office.

# 1 Revision history

Table 1. Document revision history

| Date        | Revision | Changes  |
|-------------|----------|--|
| 3-sep-2018  | 1        | Initial release.   |
| 10-sep-2018 | 2        | Change wrong root part number in <a href="#">Table 1: Device summary</a> . |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.