




LOC	DIST	REVISIONS						
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		A		RELEASED PER ECO-14-008758	16JUN2014	CJV	PAR	
		B		REVISED PER ECO-15-010819	10AUG2015	PP	SH	
		B1		REVISED PER ECO-16-004263	17MAR2016	KQ	SH	
		B2		REVISED PER ECO-16-013988	05SEP2016	PP	SH	

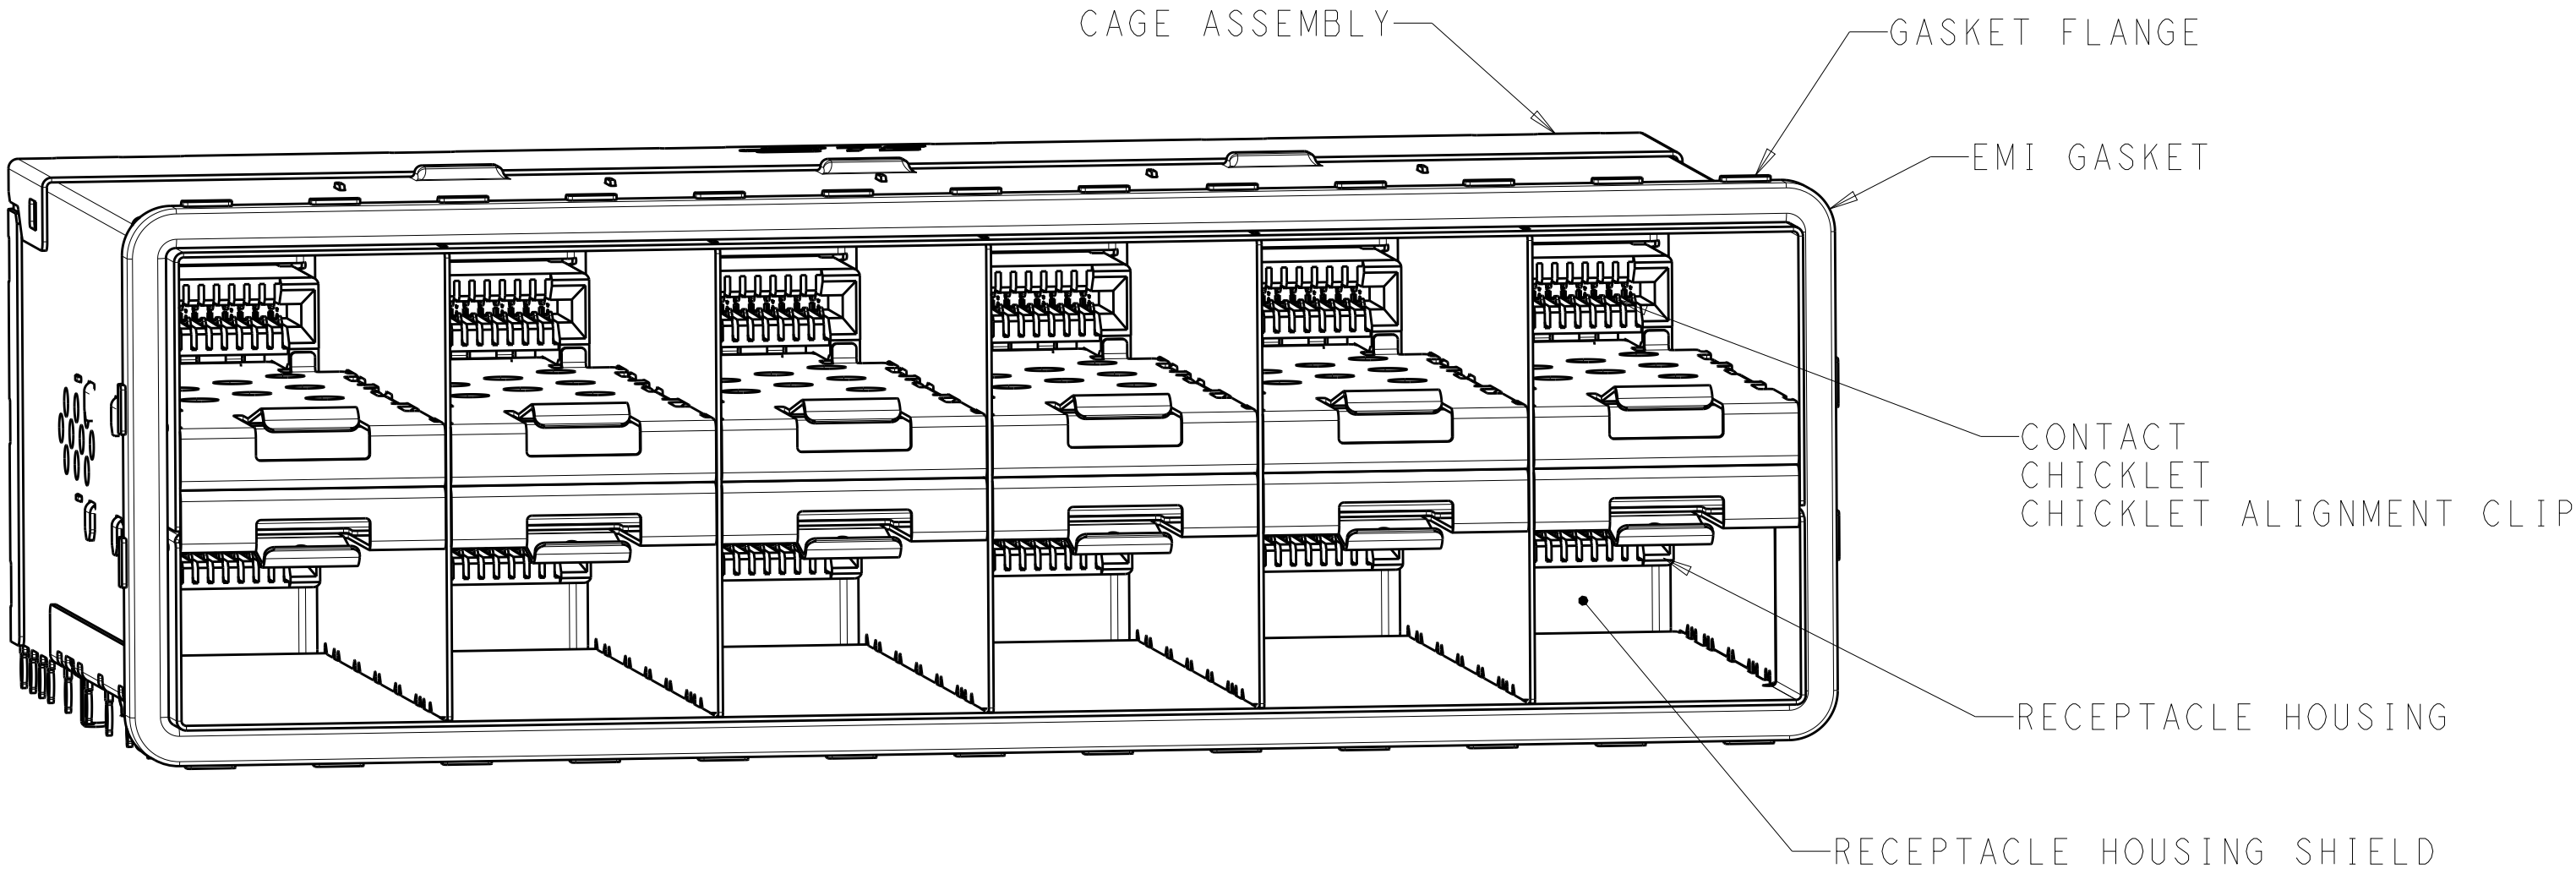


2198339-1
SCALE 3:1

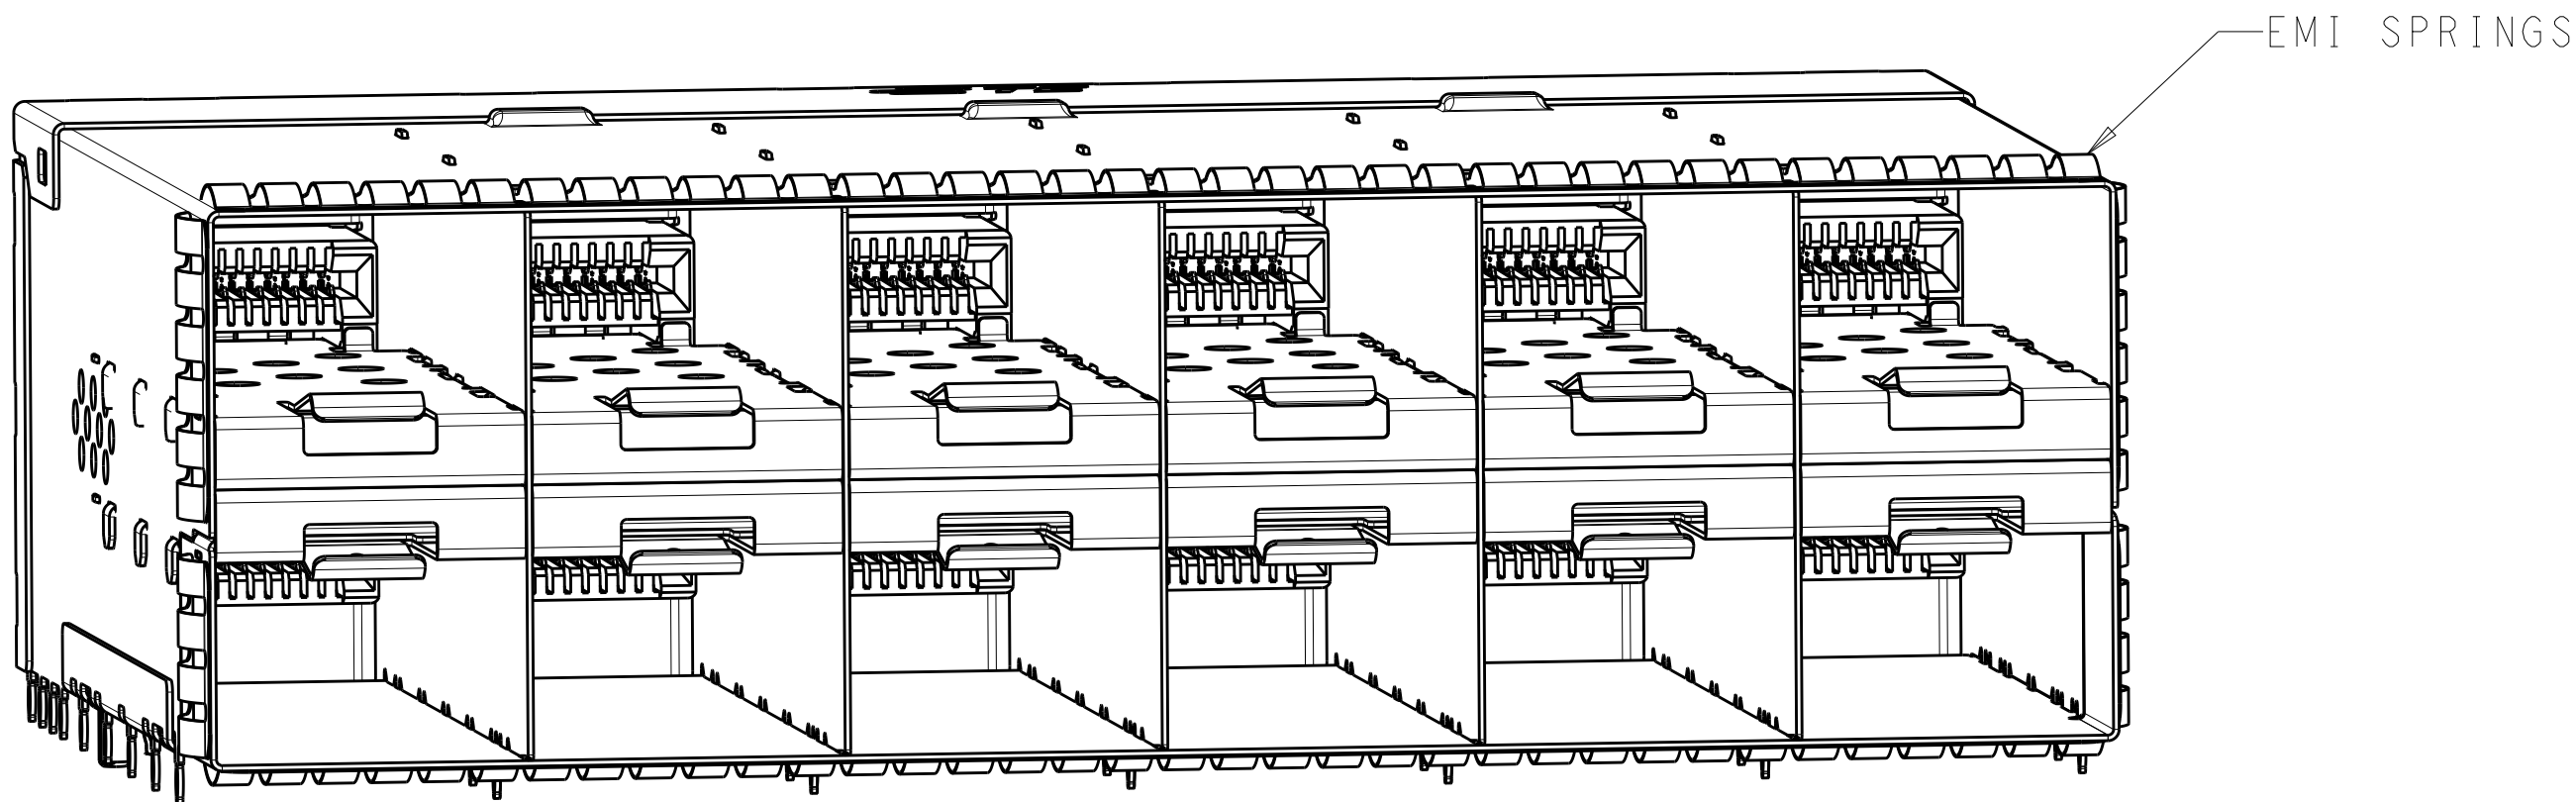


2198339-5
SCALE 3:1

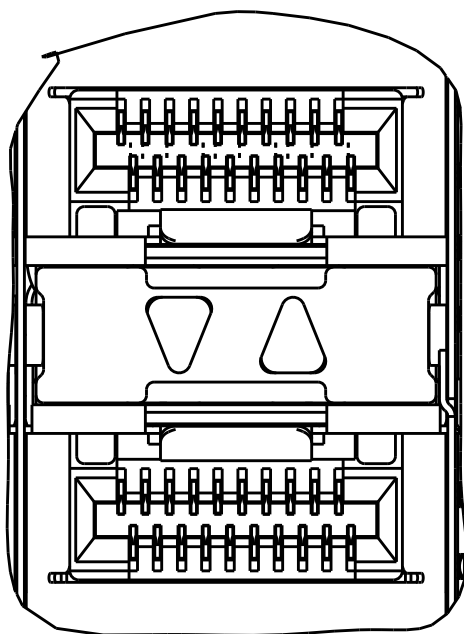


REVERSED INNER LIGHT PIPES
2-2198339-1
SCALE 4:1

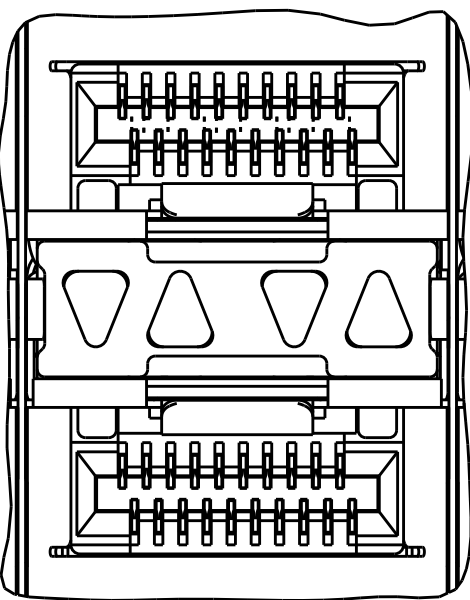


INNER/OUTER LIGHT PIPES
2198339-2, 2198339-6
SCALE 4:1

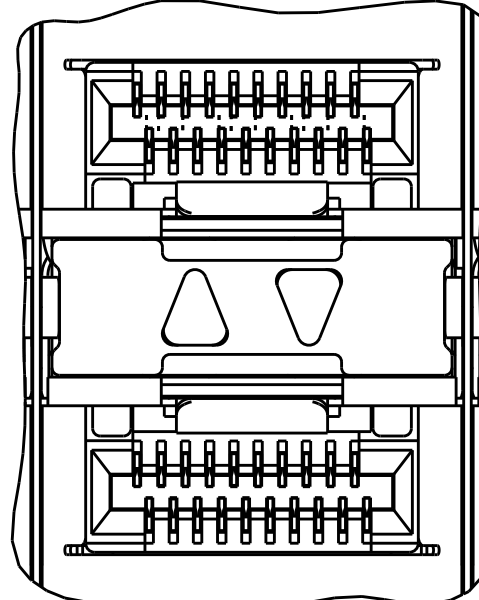


INNER LIGHT PIPES
2198339-3, 2198339-7
SCALE 4:1

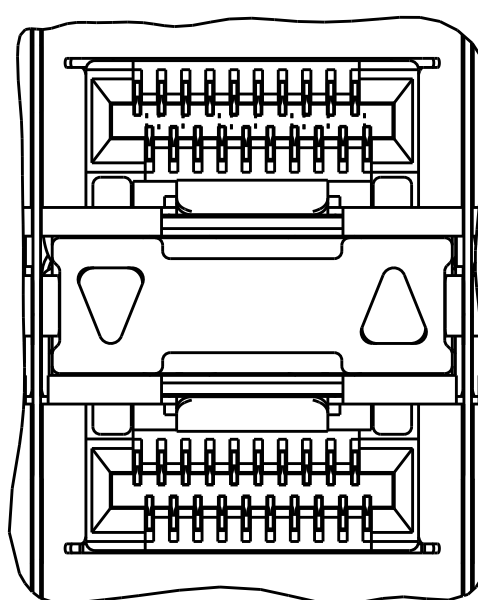

OUTER LIGHT PIPES
2198339-4, 2198339-8
SCALE 4:1

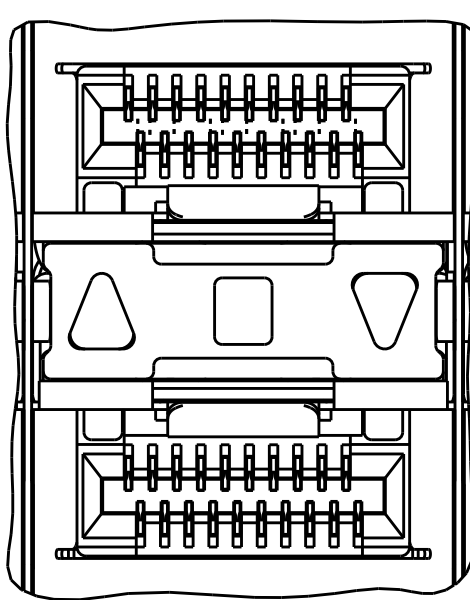

CENTER/REVERSED OUTER
1-2198339-7, 1-2198339-9
SCALE 4:1

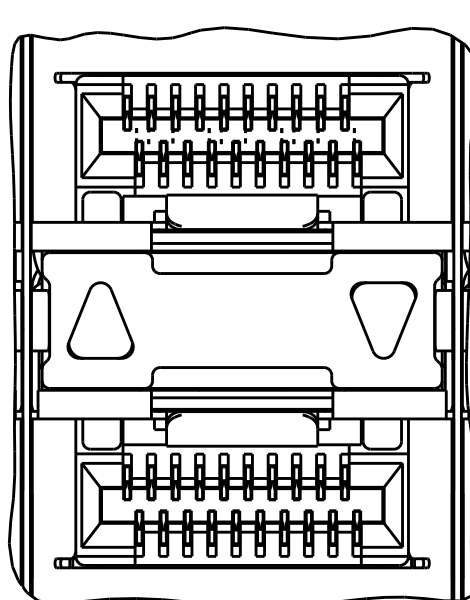

REVERSED OUTER
1-2198339-8, 2-2198339-0
SCALE 4:1

1. MATERIALS:
CAGE ASSEMBLY - NICKEL-SILVER ALLOY PER ASTM B 122
CONNECTOR HOUSING - LCP, BLACK, UL 94V-O RATED
CONNECTOR HOUSING SHIELD - COPPER ALLOY
CHICKLET - LCP, BLACK, UL 94V-O RATED
CHICKLET ALIGNMENT CLIP - PBT
CONTACT - COPPER ALLOY
EMI GASKET - ELASTOMERIC
GASKET FLANGE - STAINLESS STEEL
EMI SPRINGS - PHOSPHOR BRONZE PER ASTM B 103,
0.8µm MIN TIN PER ASTM B 545
LIGHT PIPE - POLYCARBONATE
LIGHT PIPE HOUSING - ZINC ALLOY

2. CONTACT FINISH:
CONFORMS TO THE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2481, BASED ON EIA/ECA-364-1000.01A, (CONTROLLED ENVIRONMENT APPLICATIONS) ON MATING INTERFACE, TIN ON NEEDLE EYE

3. PCB MINIMUM THICKNESS = 1.5mm

4. FOR HOLE SIZE AND PLATINGS,
SEE APPLICATION SPECIFICATION 114-13319

5. LIGHT PIPE PAD LAYOUT IS FOR 0805 LOW PROFILE
LED PACKAGE WITH A HEIGHT OF 0.8mm

6. DIMENSIONS APPLY FOR EMI SPRINGS ONLY


7. THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT, INDICATED BY THE DASHED LINE, TO BE CONSIDERED THE KEEPOUT AREA FOR COMPONENTS AND SIGNAL TRACES, TOP SIDE ONLY, TOP SIDE TRACES ALLOWED WITHIN CONNECTOR HOLE PATTERN

88	EMI SPRING AIRFLOW ENHANCE TYPE	NONE	3-2198339-1
90.75	EMI GASKET AIRFLOW ENHANCE TYPE	NONE	3-2198339-0
88	EMI SPRINGS	REVERSED INNER	2-2198339-1
		REVERSED OUTER	2-2198339-0
		CENTER/REVERSED OUTER	1-2198339-9
90.75	EMI GASKET	REVERSED OUTER	1-2198339-8
		CENTER/REVERSED OUTER	1-2198339-7
88	EMI SPRINGS	OUTER	2198339-8
		INNER	2198339-7
		INNER/OUTER	2198339-6
		NONE	2198339-5
90.75	EMI GASKET	OUTER	2198339-4
		INNER	2198339-3
		INNER/OUTER	2198339-2
		NONE	2198339-1
(E)	CAGE TYPE	LIGHT PIPE CONFIGURATION	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.E. CONWHER 07DEC2011	TE Connectivity	
DIMENSIONS:		CHK M.D. MORRISON 13DEC2011		
mm		APVD M.D. MORRISON 13DEC2011	NAME RECEPTACLE ASSEMBLY ,2X6 STACKED, zSFP+	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	SIZE	
0 PLC ±		108-2481	CAGE CODE	
1 PLC ±0.20		APPLICATION SPEC	DRAWING NO	
2 PLC ±0.15		114-13319	RESTRICTED TO	
3 PLC ±0.10		WEIGHT	A100779C=2198339	
4 PLC ±		CUSTOMER DRAWING	SCALE 1:1	
ANGLES ±°			SHEET 1 OF 6	
FINISH			REV B2	

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
-	-	SEE SHEET 1		-	-	-	


AIRFOLW ENHANCE TYPE

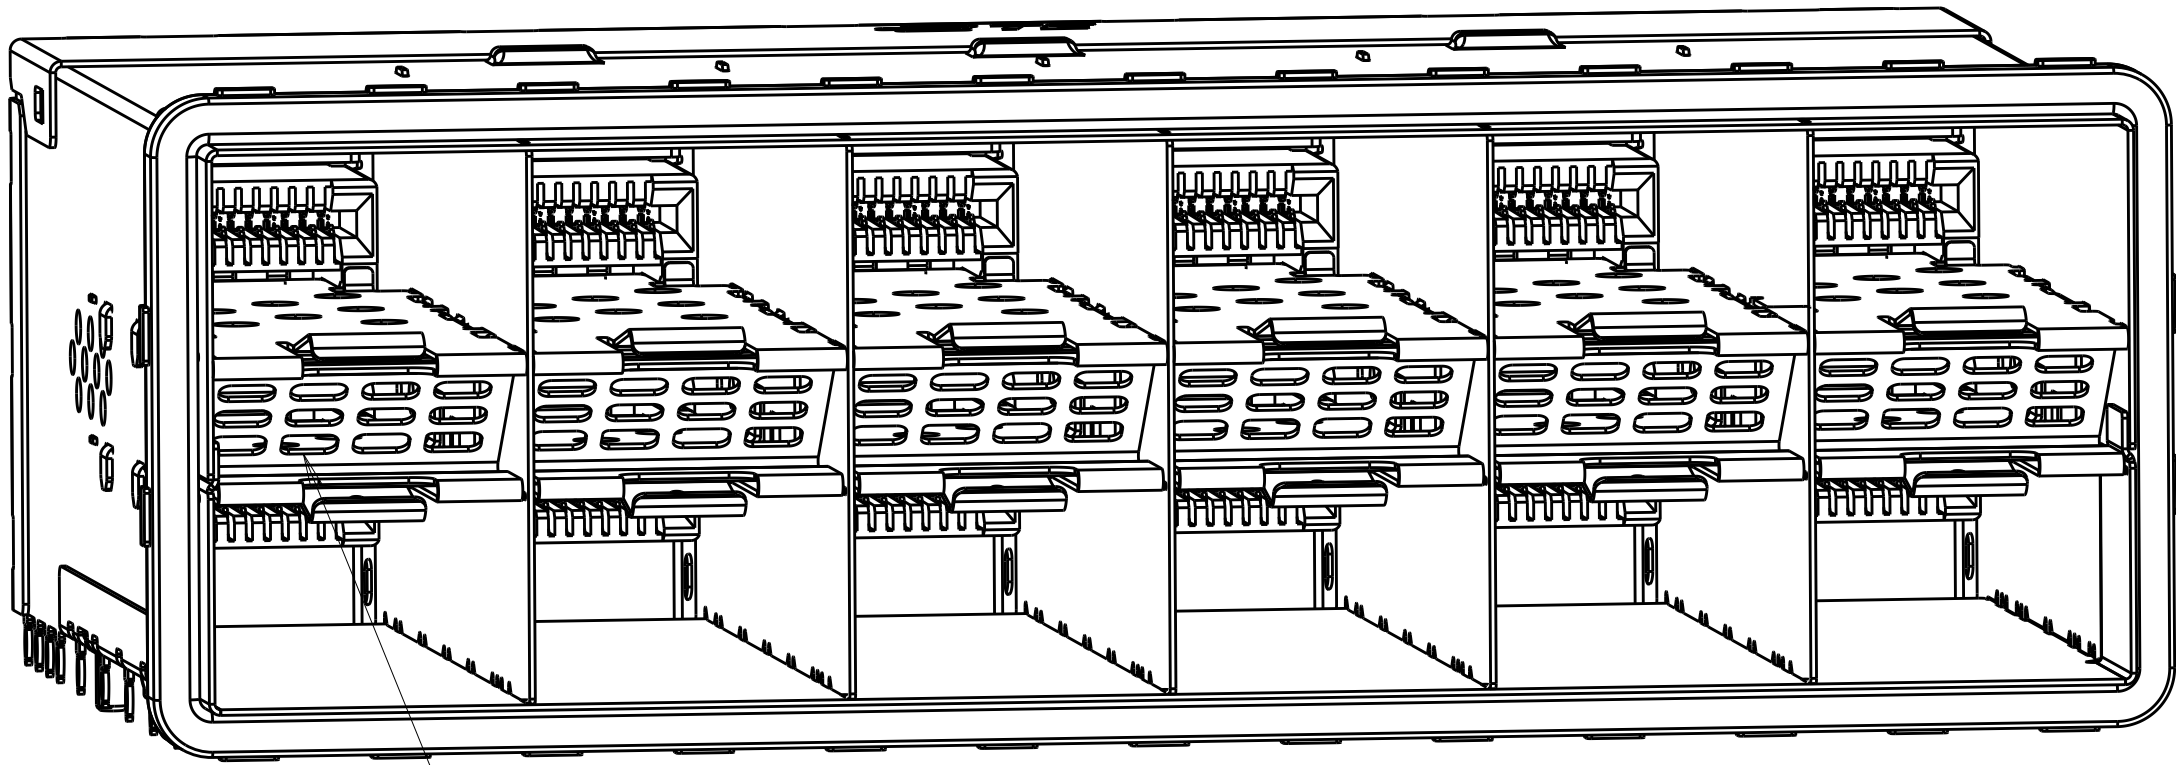

AIR VENTS

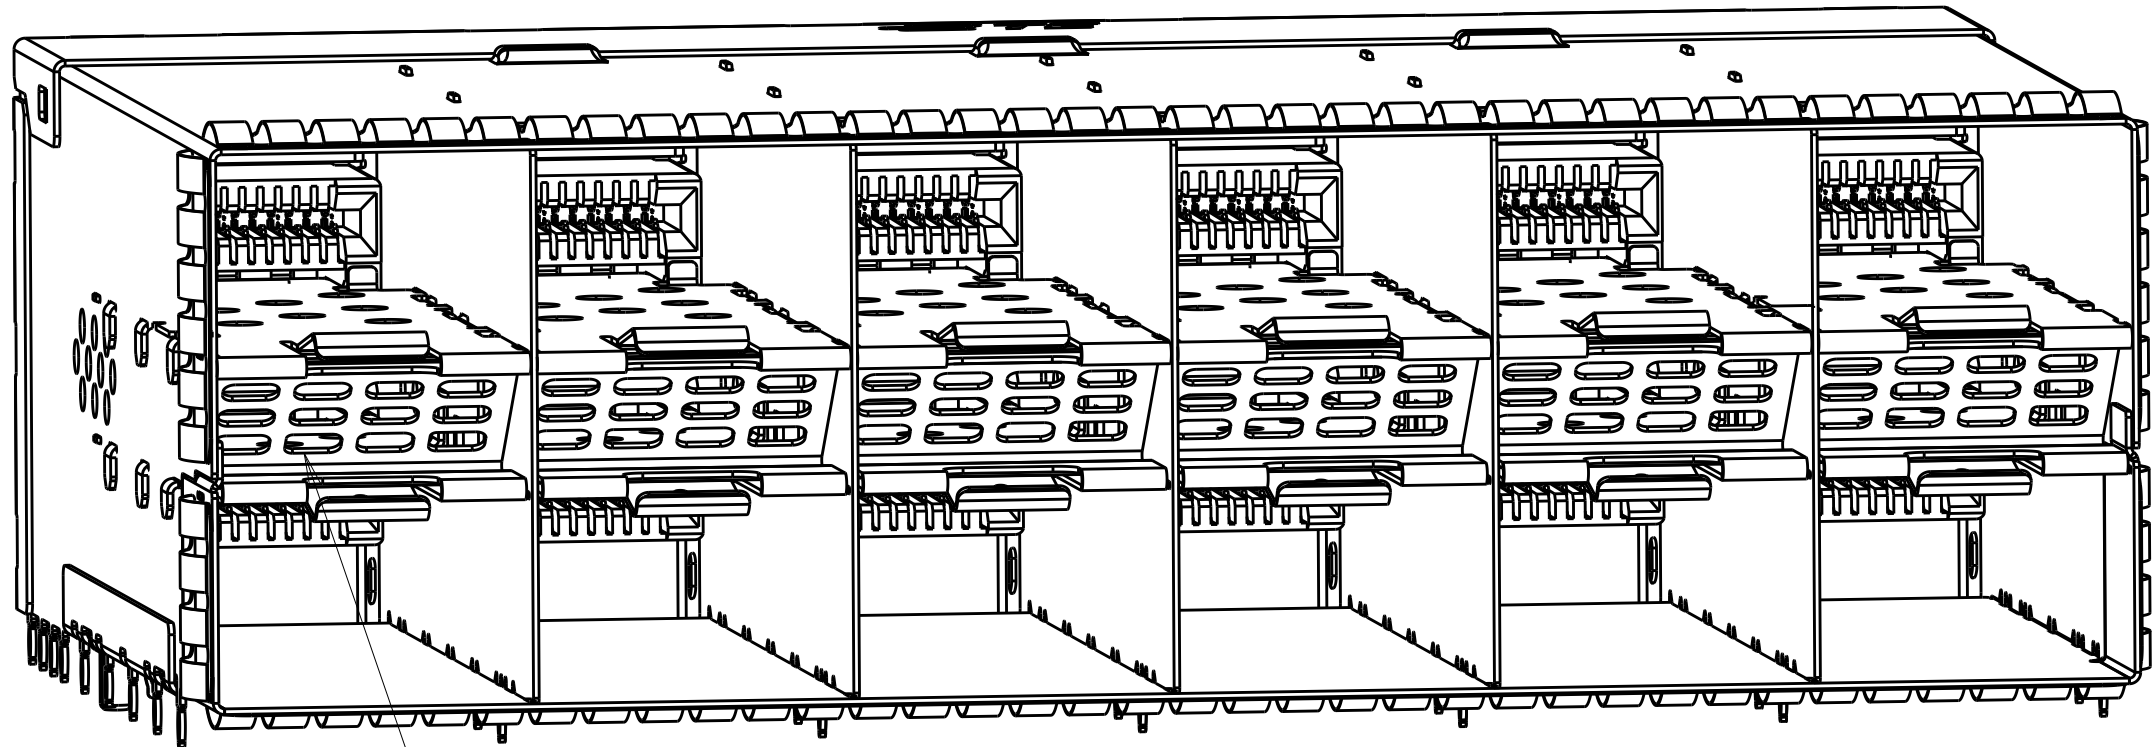


AIR VENTS

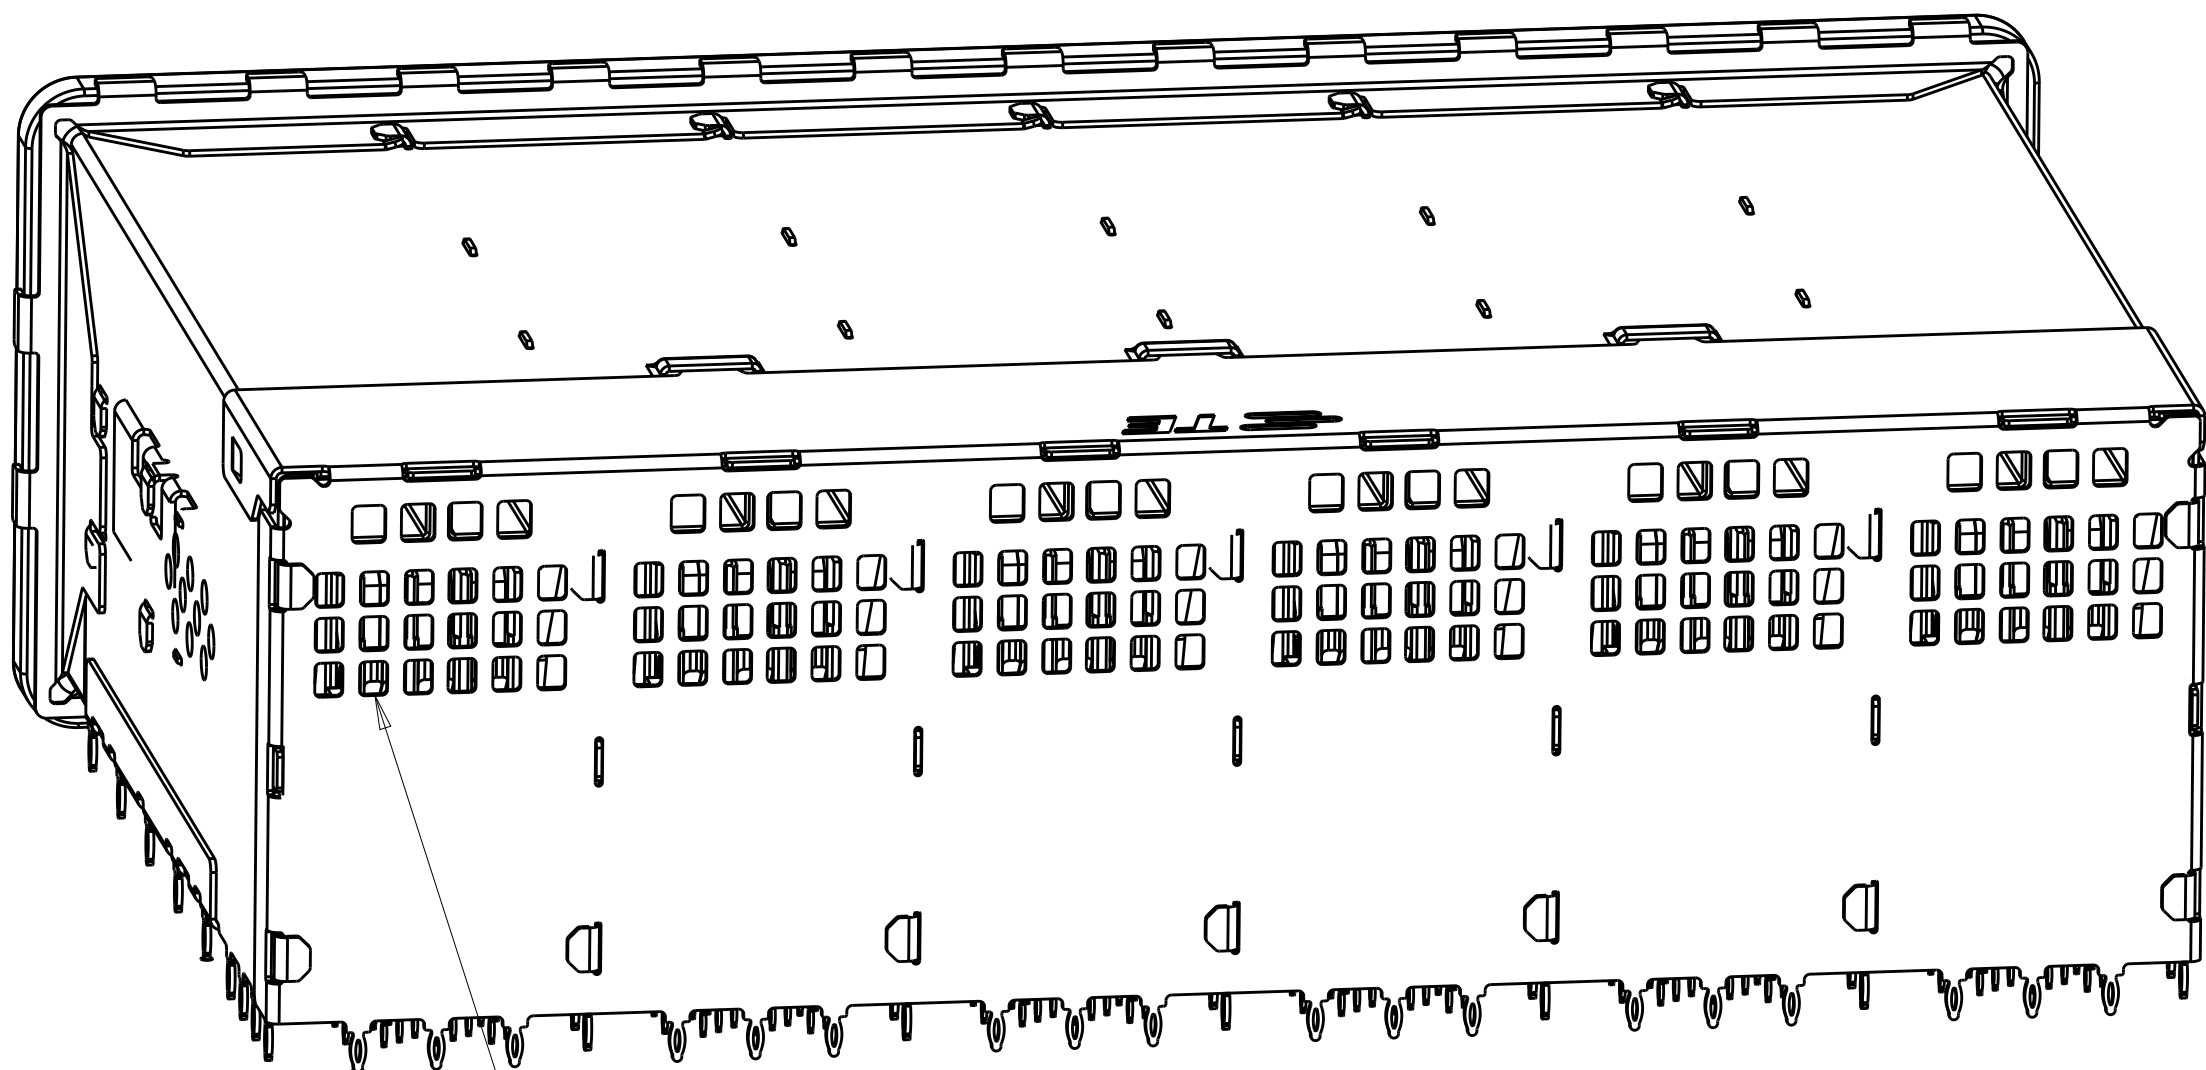


AIR VENTS

3-2198339-0
EMI GASKET TYPE


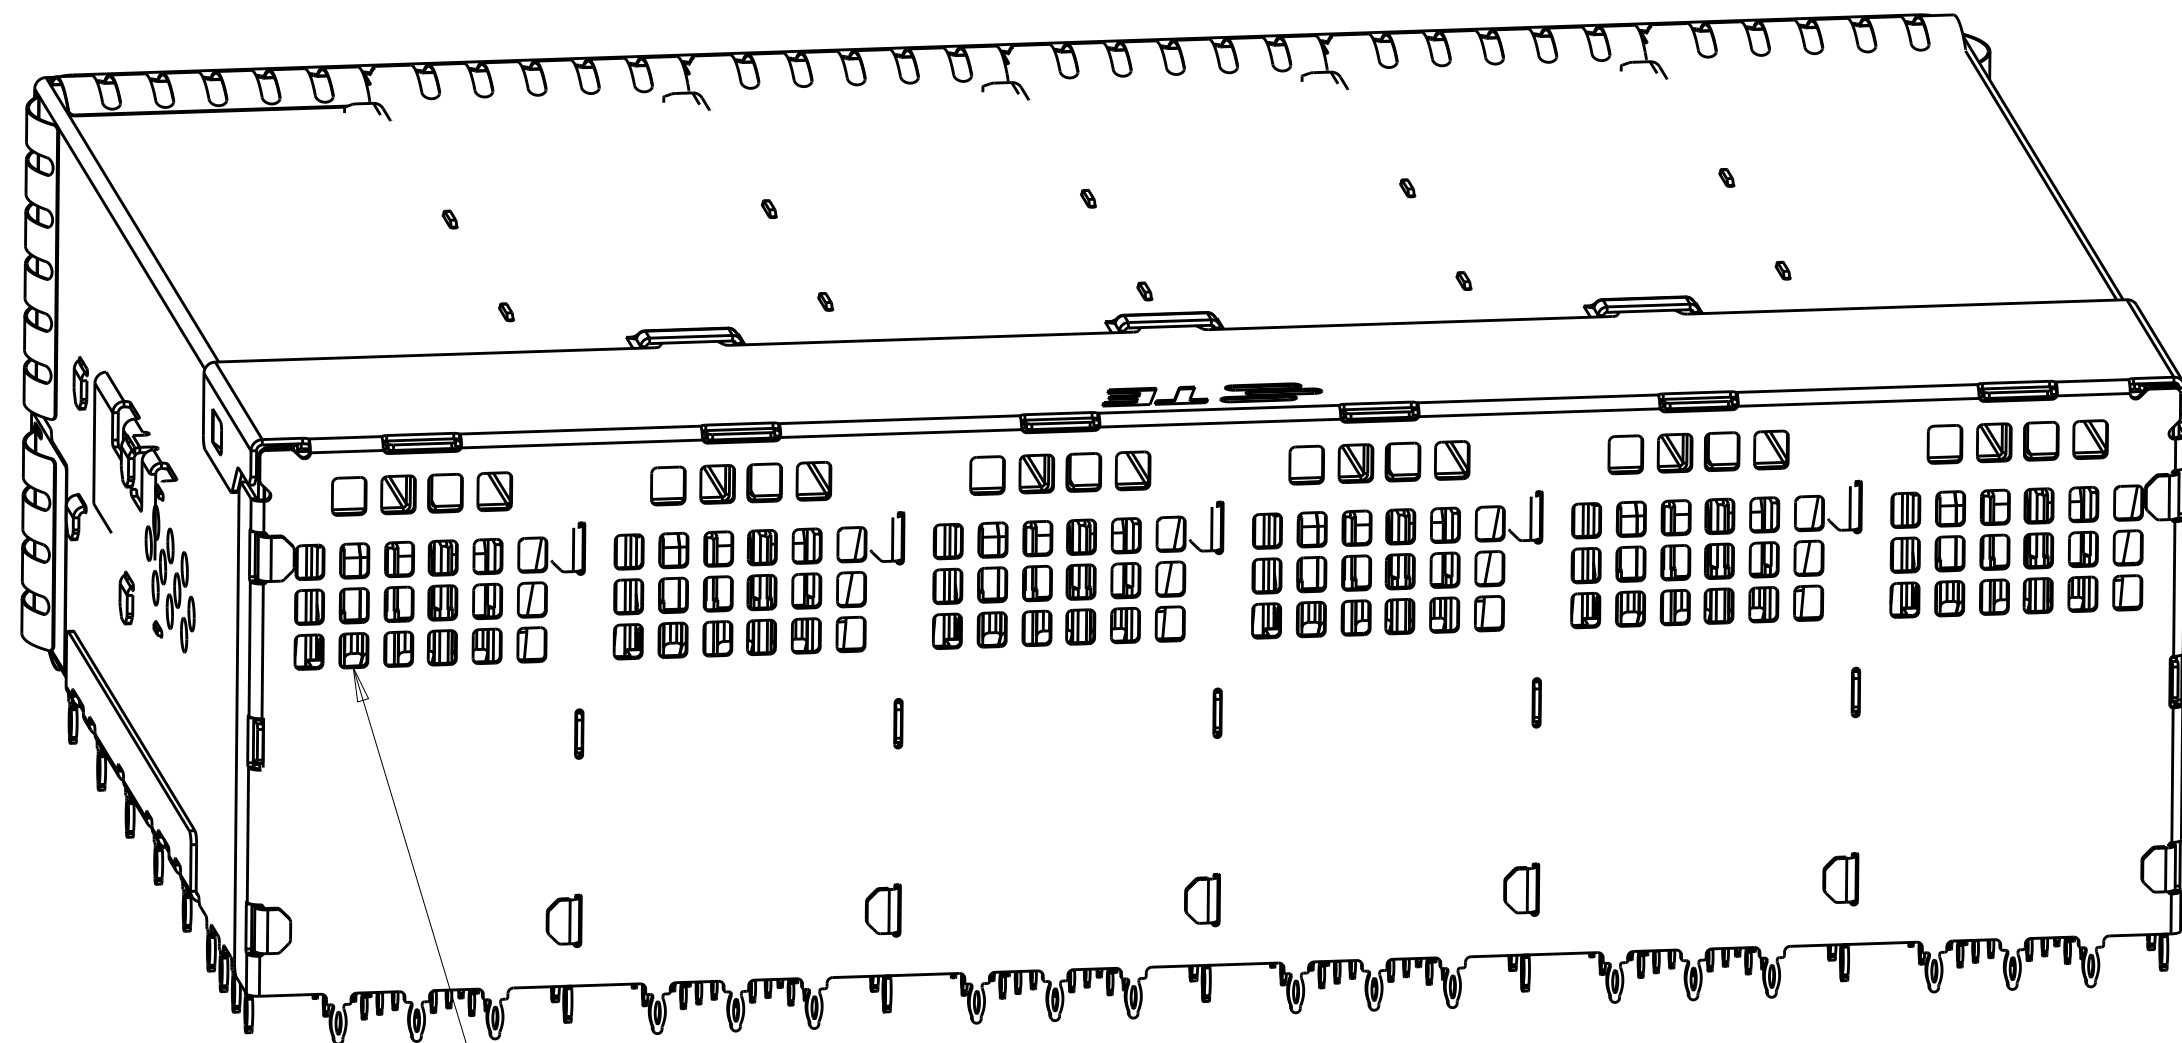


AIR VENTS



3-2198339-1
EMI SPRING TYPE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.E. CONNER 07DEC2011	 TE Connectivity	
DIMENSIONS:		CHK M.D. MORRISON 13DEC2011		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M.D. MORRISON 13DEC2011	NAME RECEPTACLE ASSEMBLY ,2X6 STACKED,zSFP+	
	0 PLC	±	PRODUCT SPEC	SIZE
	1 PLC	±0.20	108-2481	CAGE CODE
	2 PLC	±0.15	APPLICATION SPEC	DRAWING NO
	3 PLC	±0.10	114-13319	RESTRICTED TO
MATERIAL	FINISH	WEIGHT	A100779	REV
SEE NOTES	SEE NOTES	Customer Drawing	©=2198339	B2
		SCALE	1:1	SHEET
				2 OF 6

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

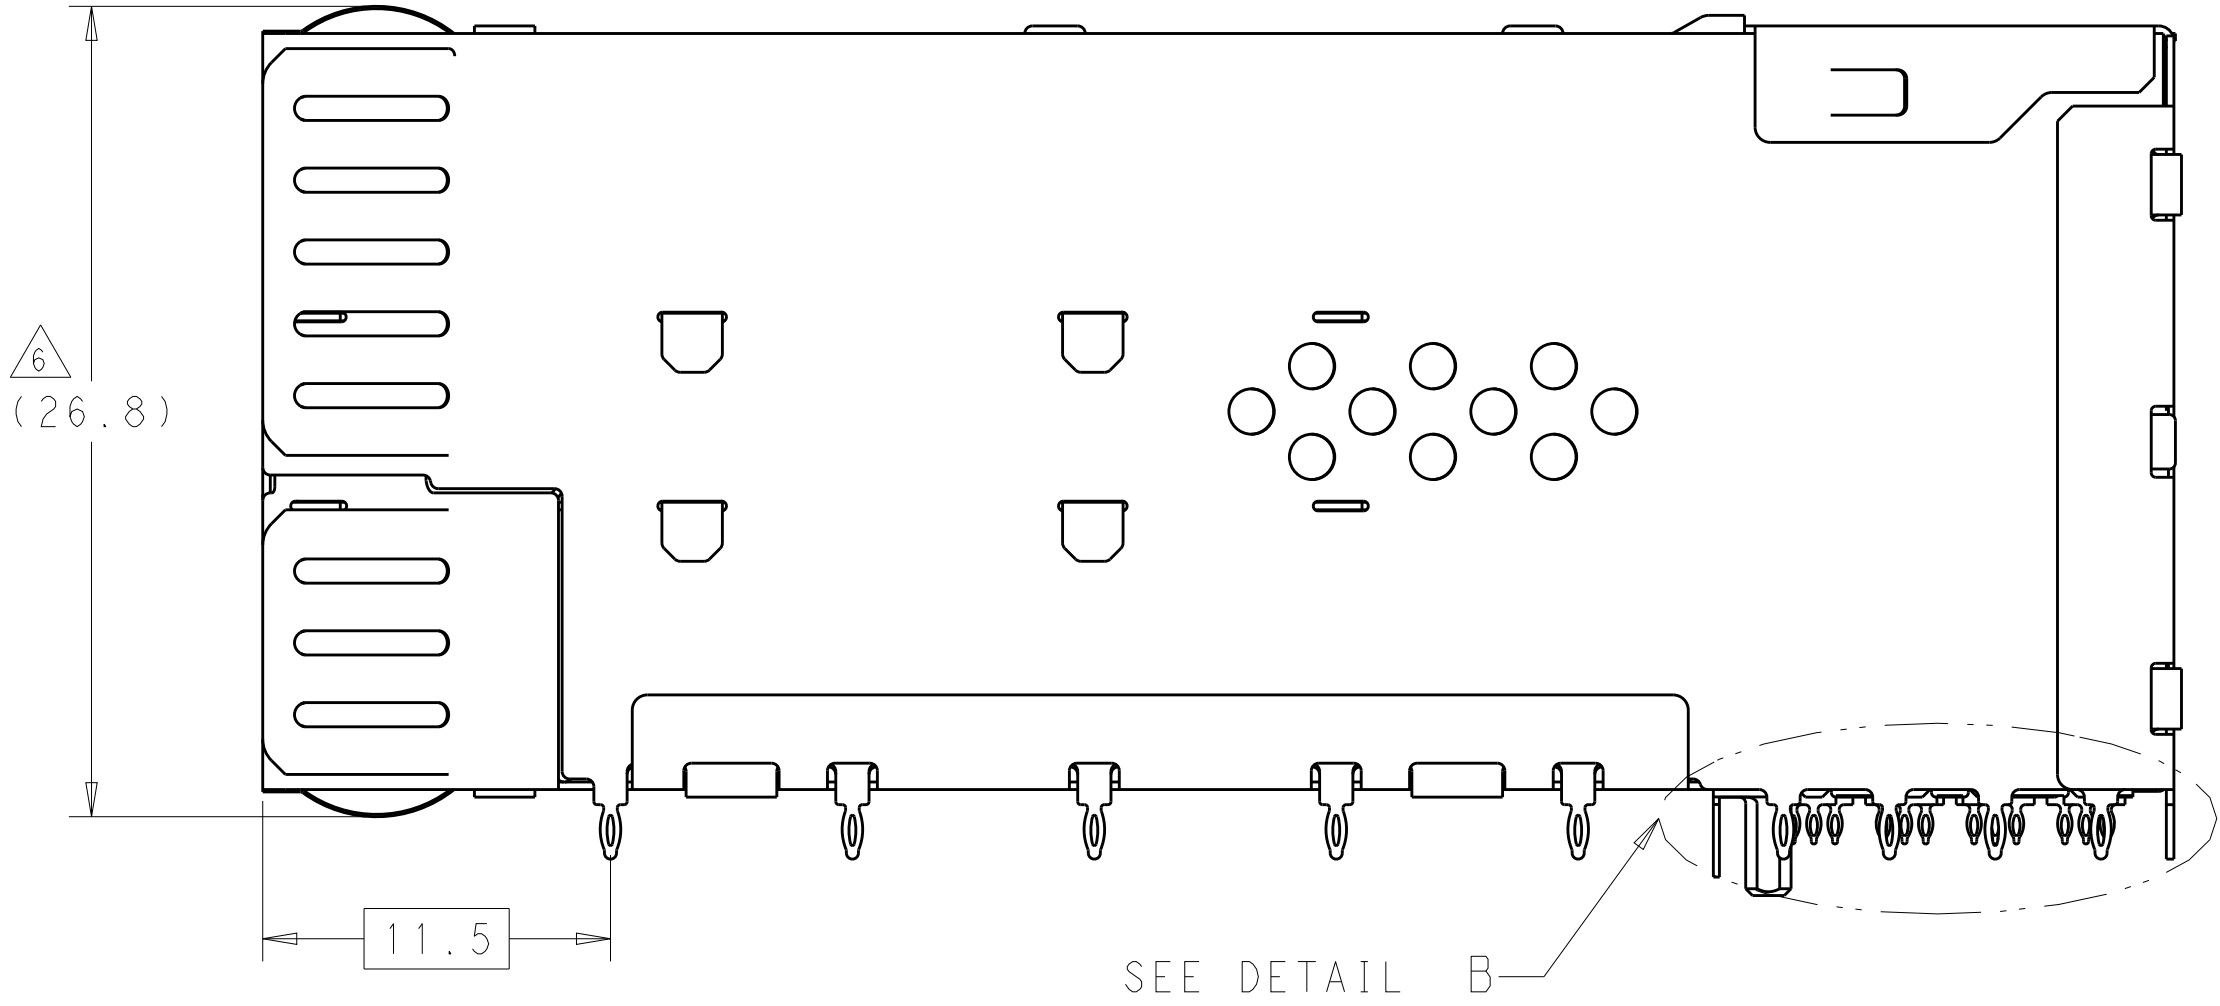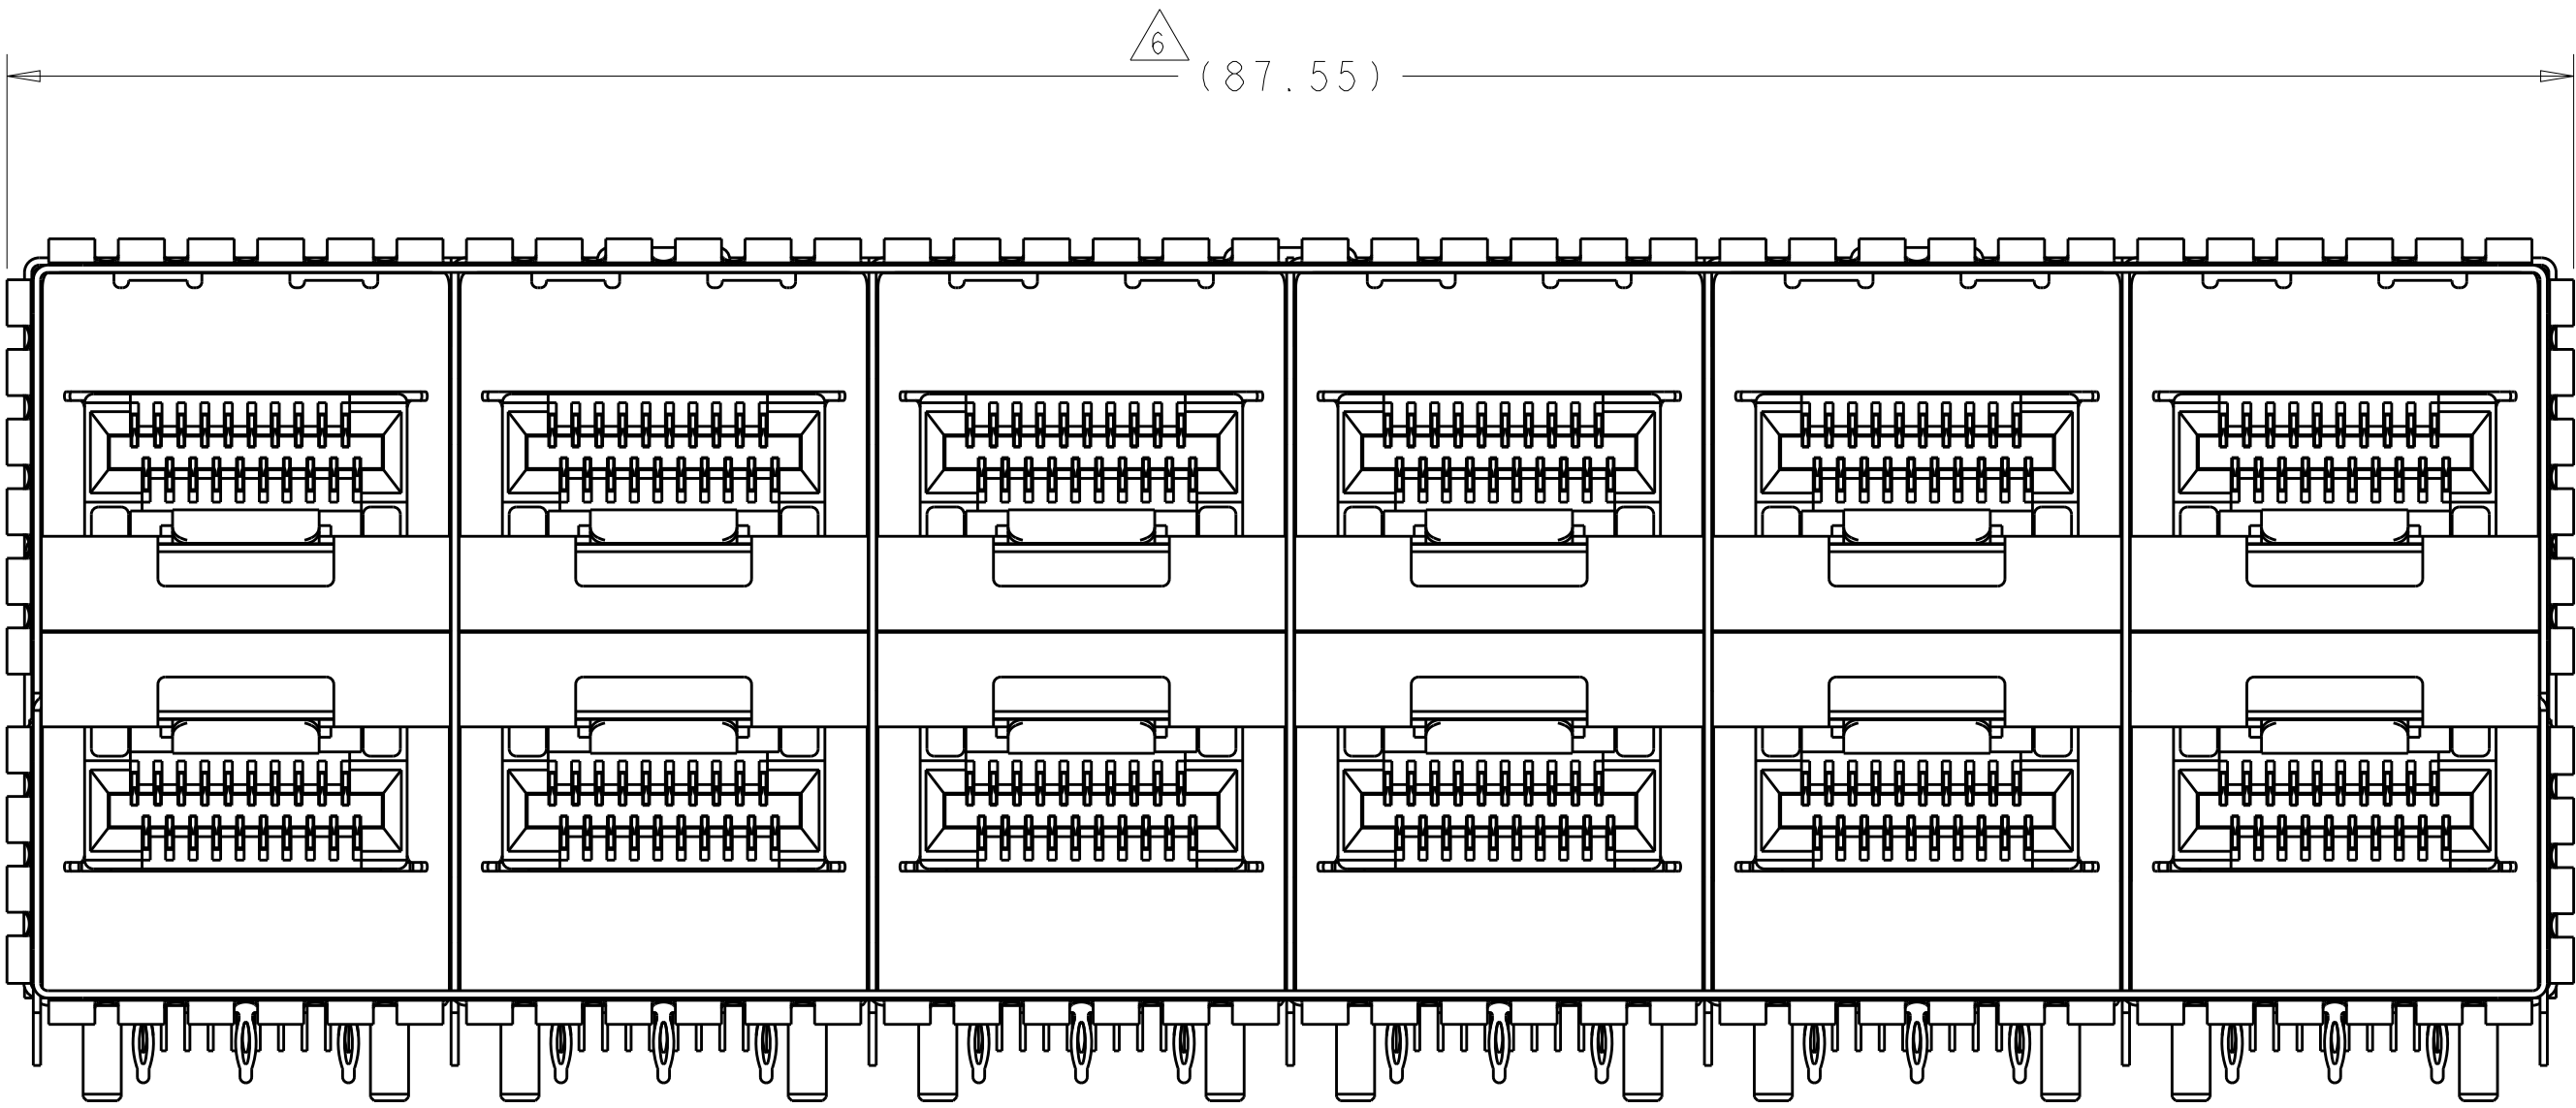





2198339-5 THRU 2198339-8, 1-2198339-9, 2-2198339-0, 2-2198339-1
EMI SPRINGS ONLY
SCALE 4:1

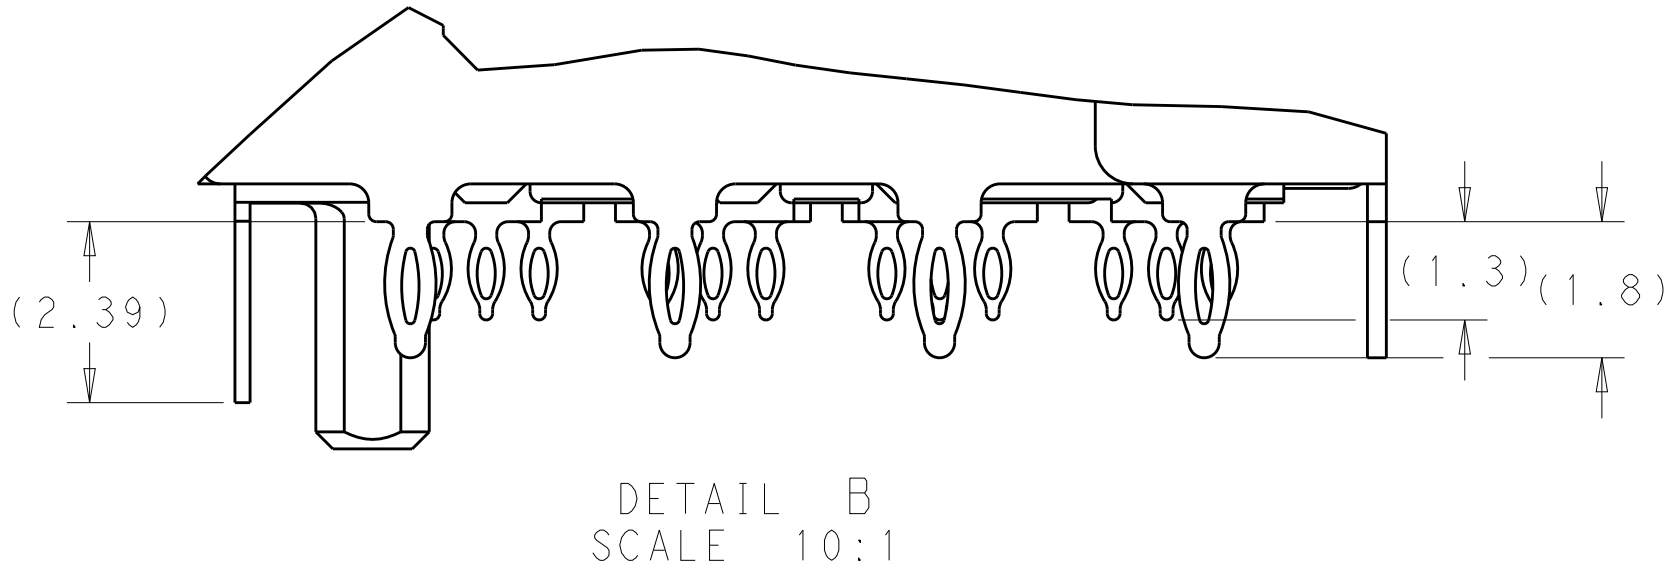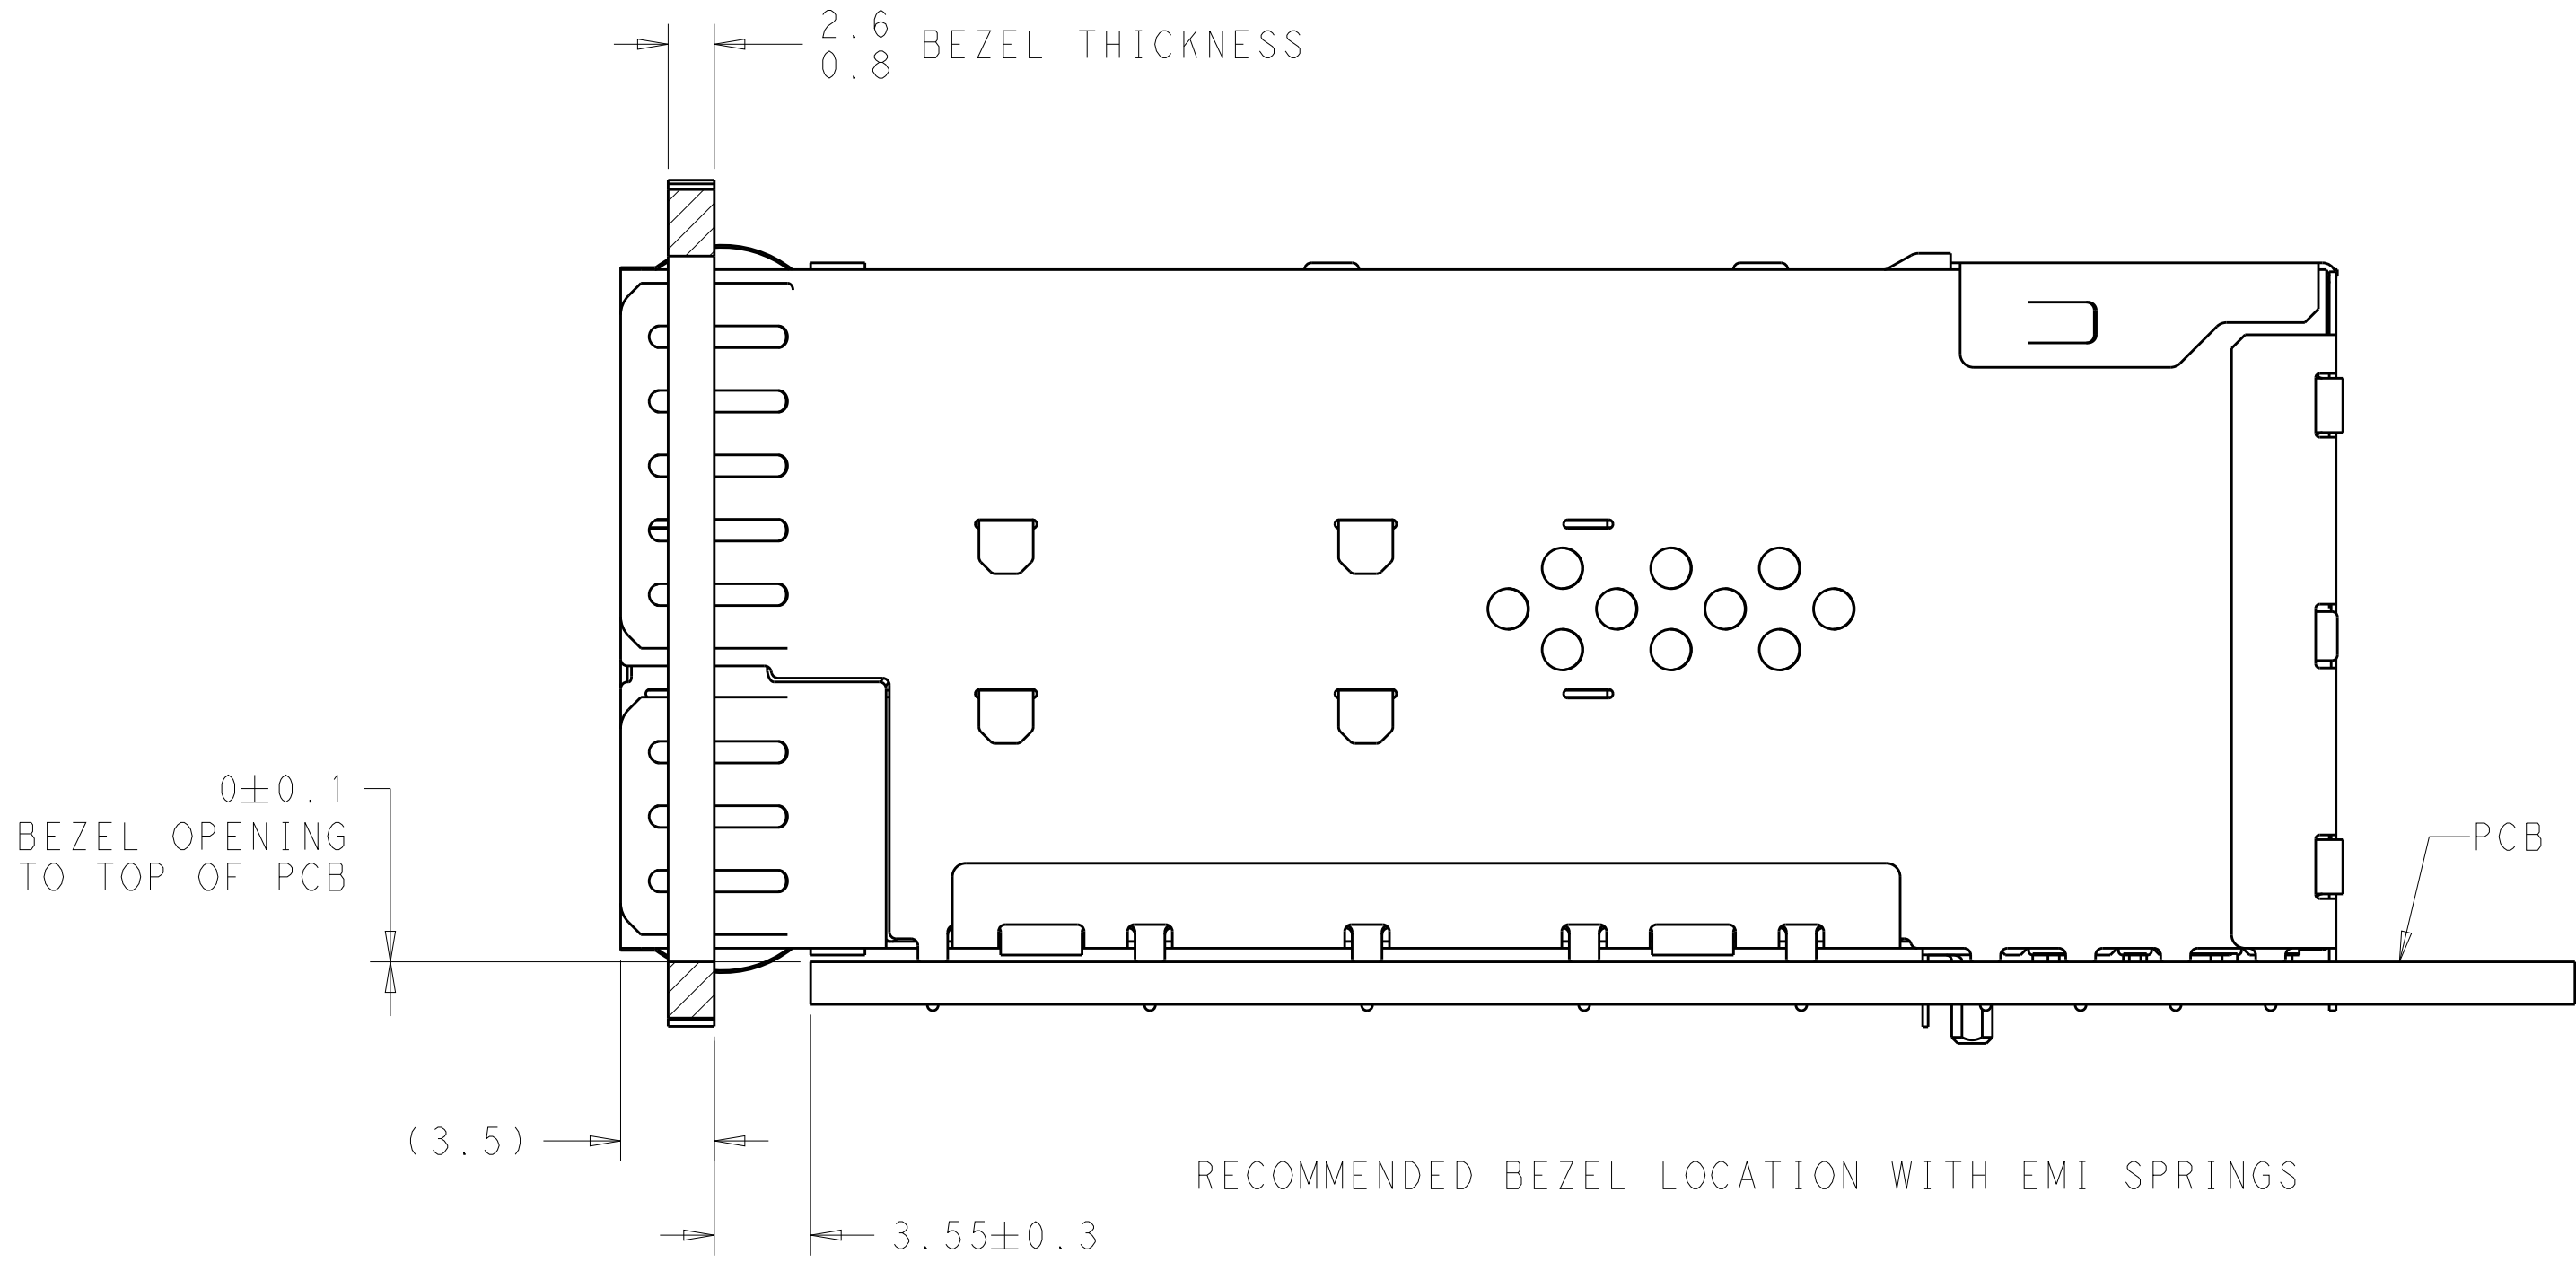

DETAIL B
SCALE 10:1


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.E. CONNER CHK M.D. MORRISON APVD M.D. MORRISON	07DEC2011 13DEC2011 13DEC2011	TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC ±.20 1 PLC ±0.20 2 PLC ±0.15 3 PLC ±0.10 4 PLC ±.10 ANGLES ±4° FINISH		RECEPTACLE ASSEMBLY ,2X6 STACKED,zSFP+	
MATERIAL		SEE NOTES		SIZE CAGE CODE DRAWING NO	
SEE NOTES		SEE NOTES		A100779C=2198339	
Customer Drawing		WEIGHT		RESTRICTED TO	
				SCALE 1:1 SHEET 3 OF 6 REV B2	

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
-	-	SEE SHEET 1		-	-	-	

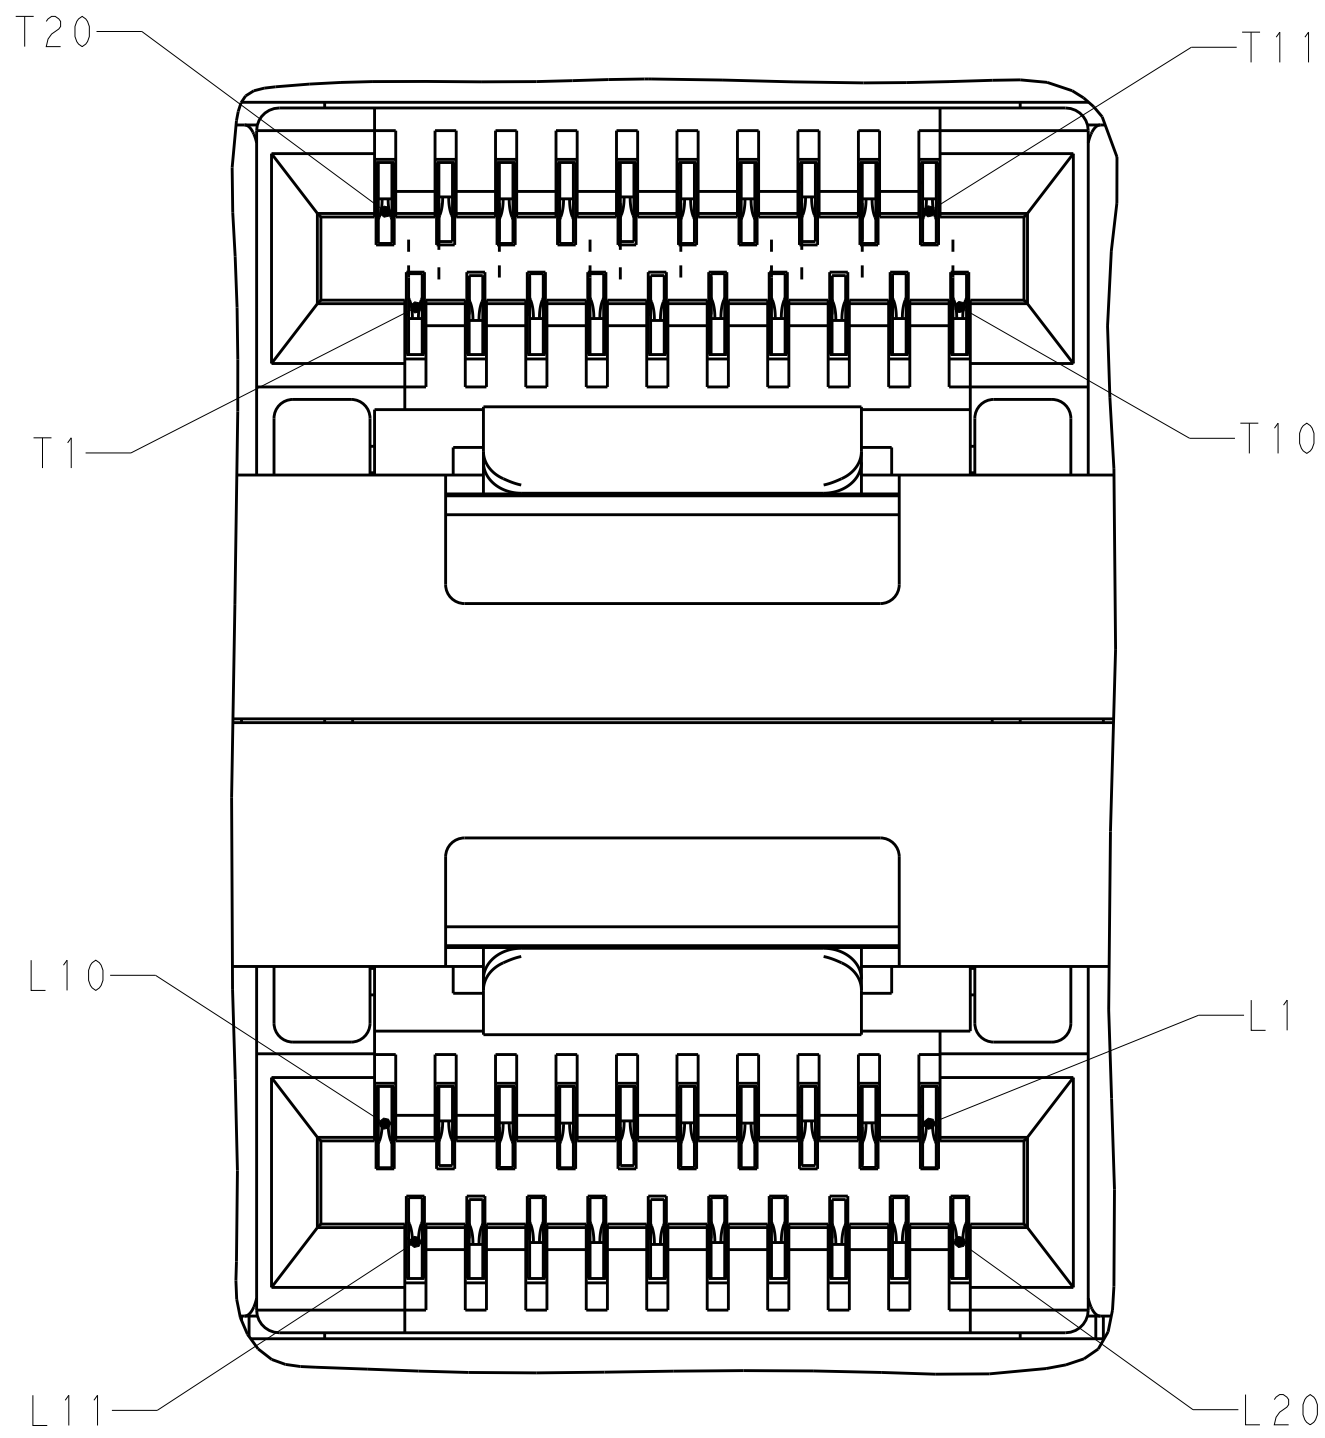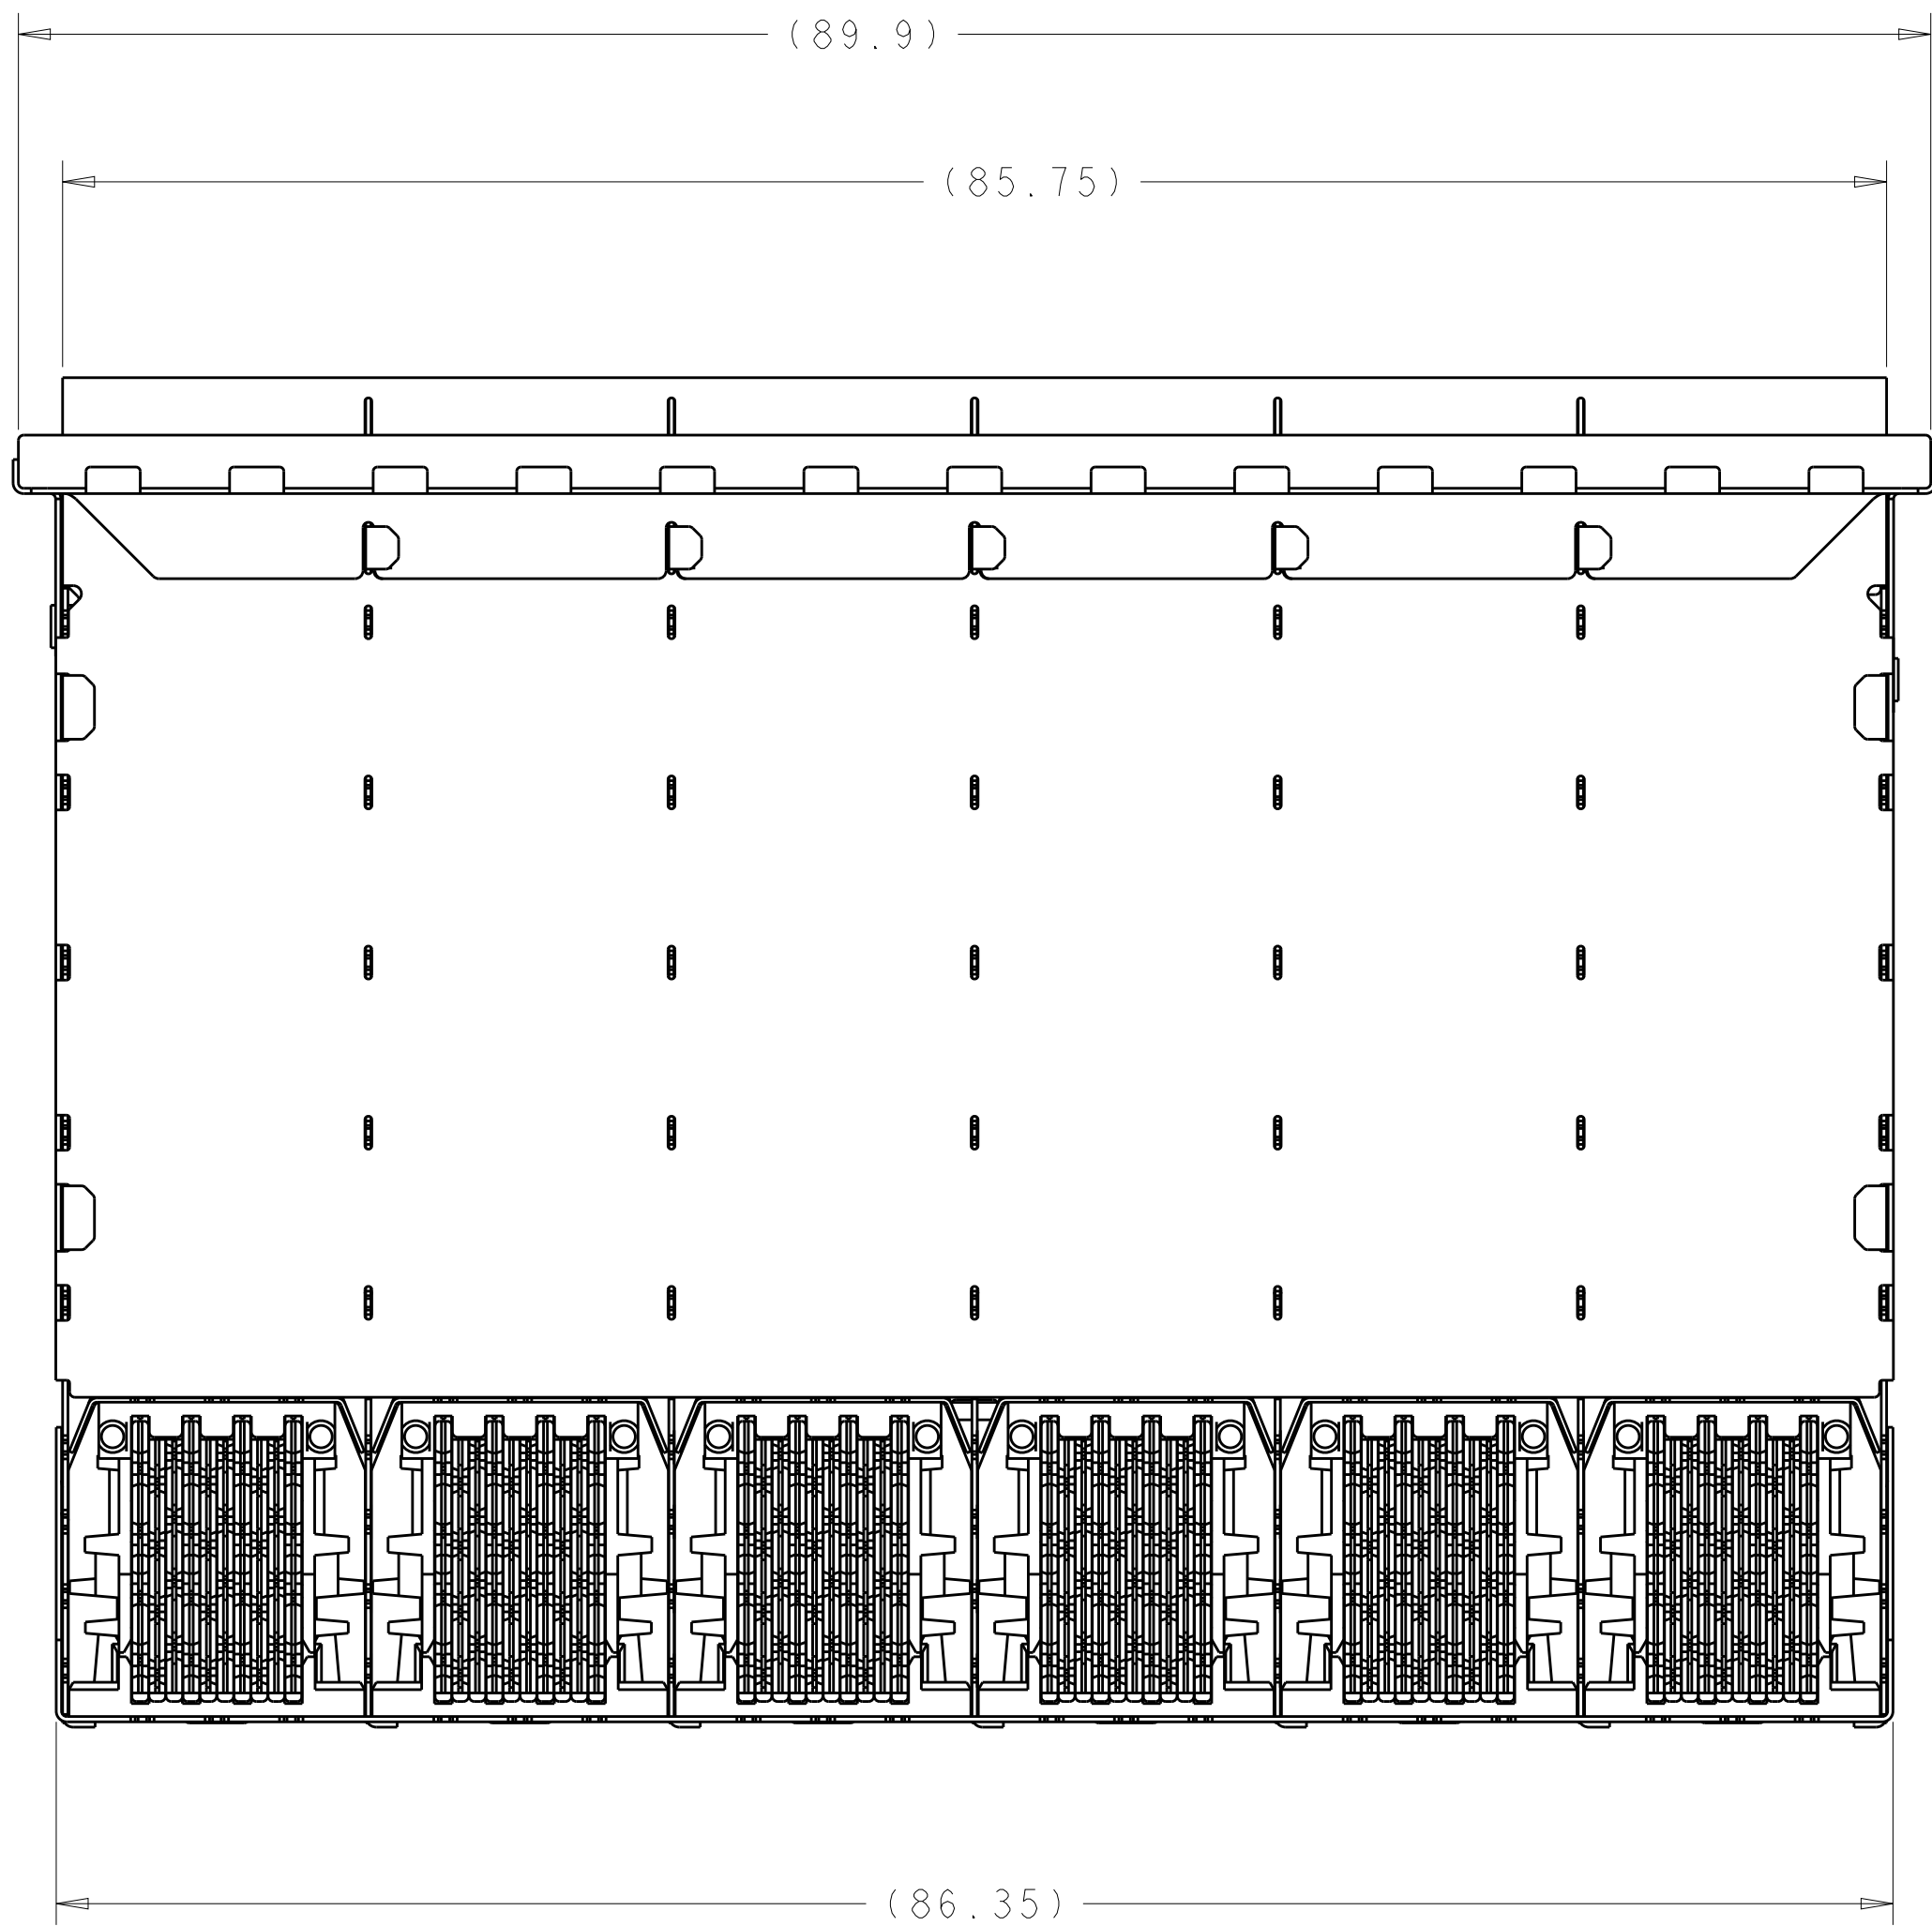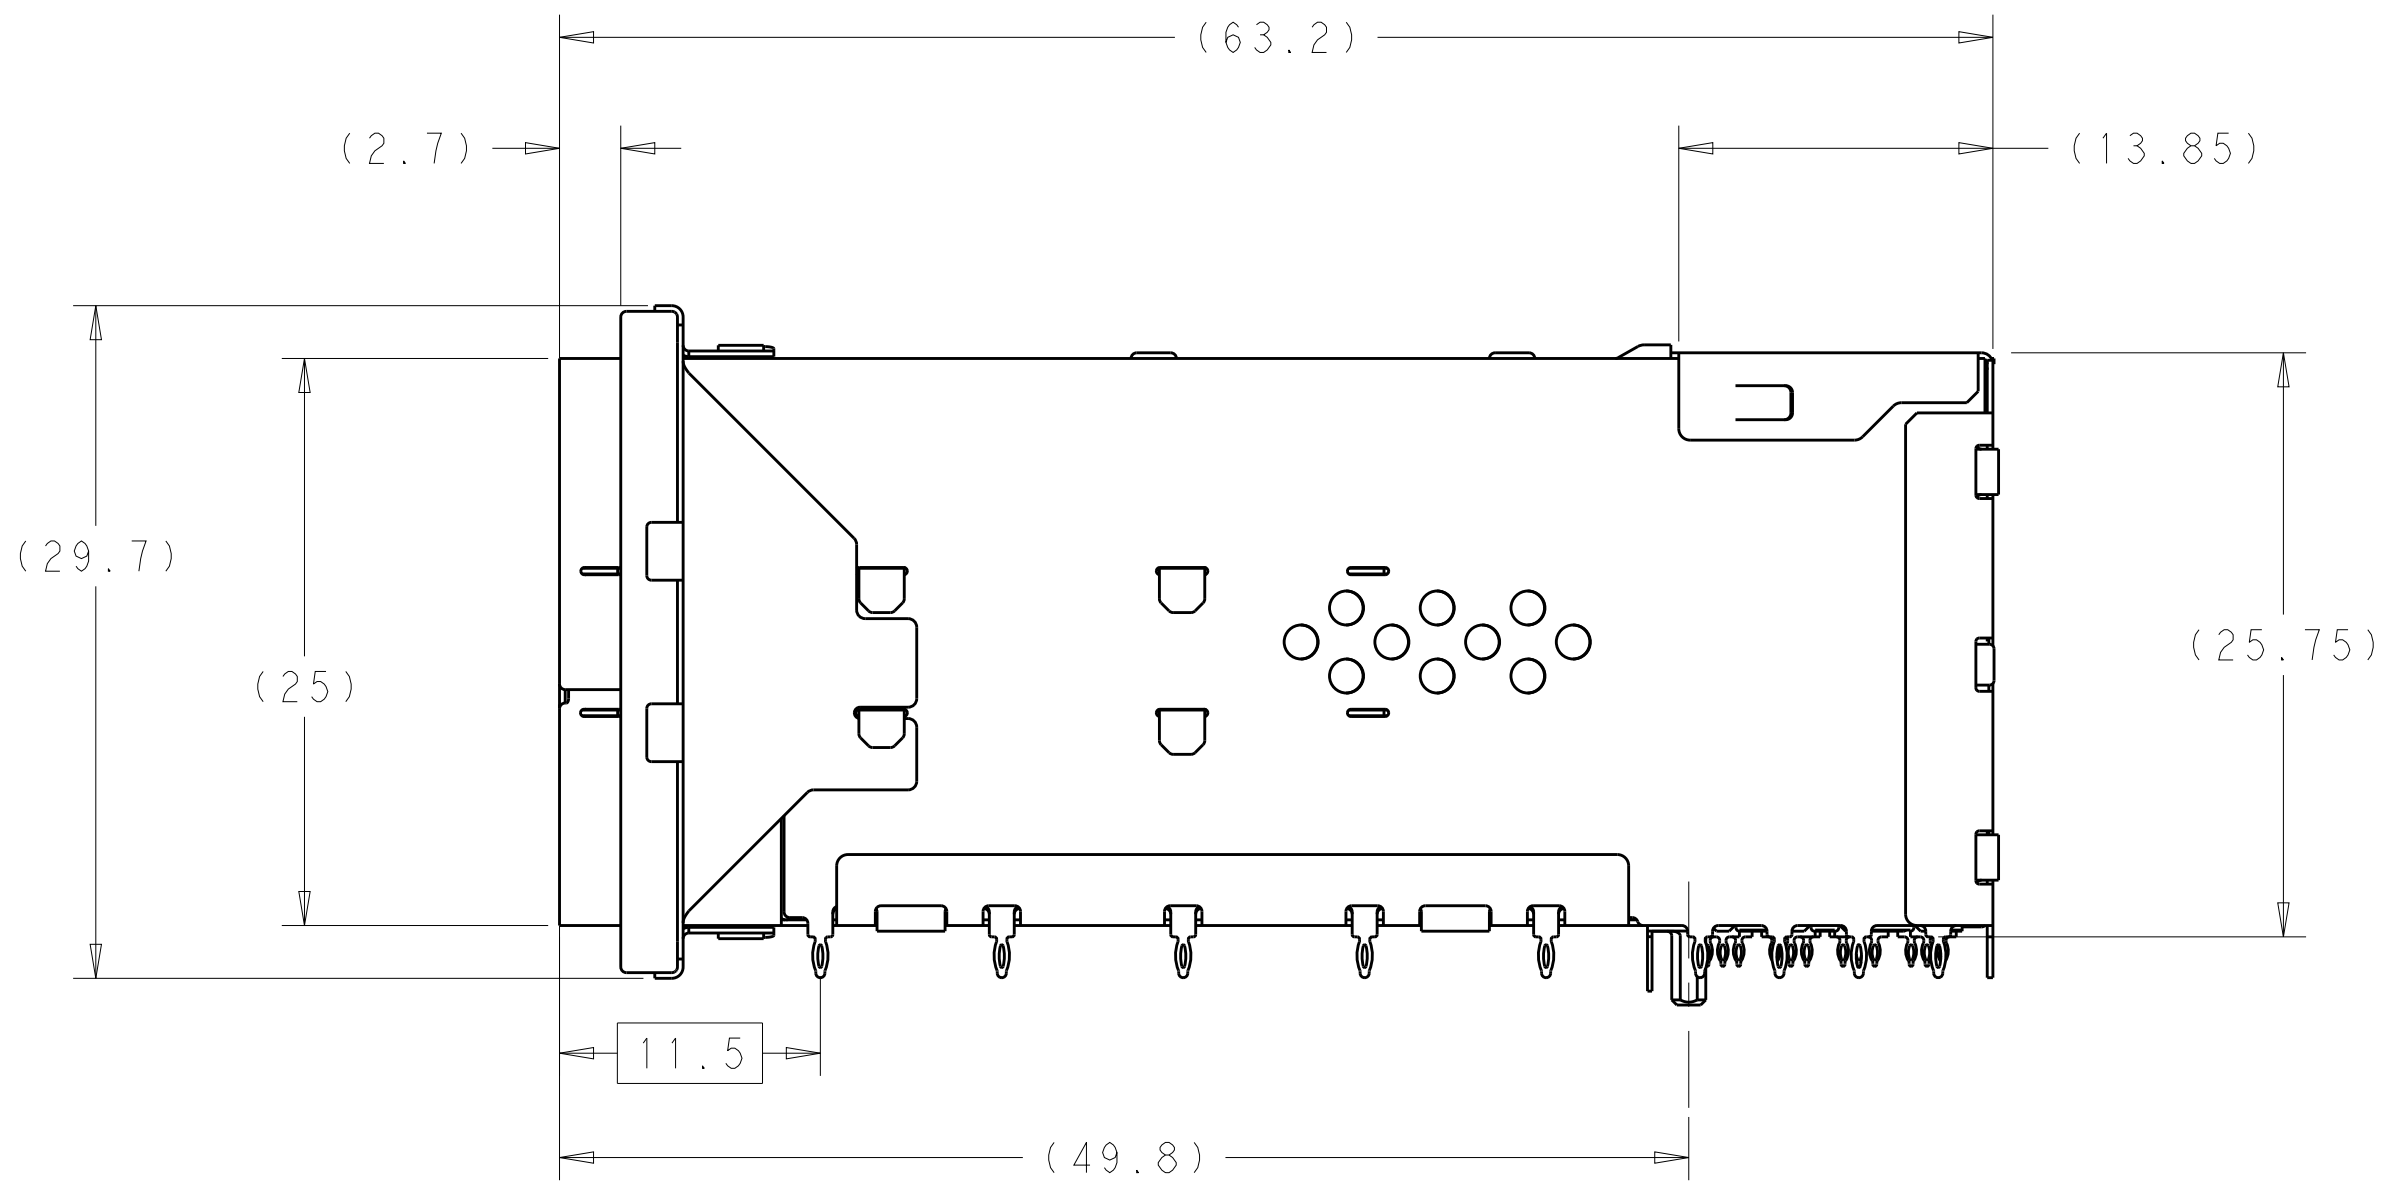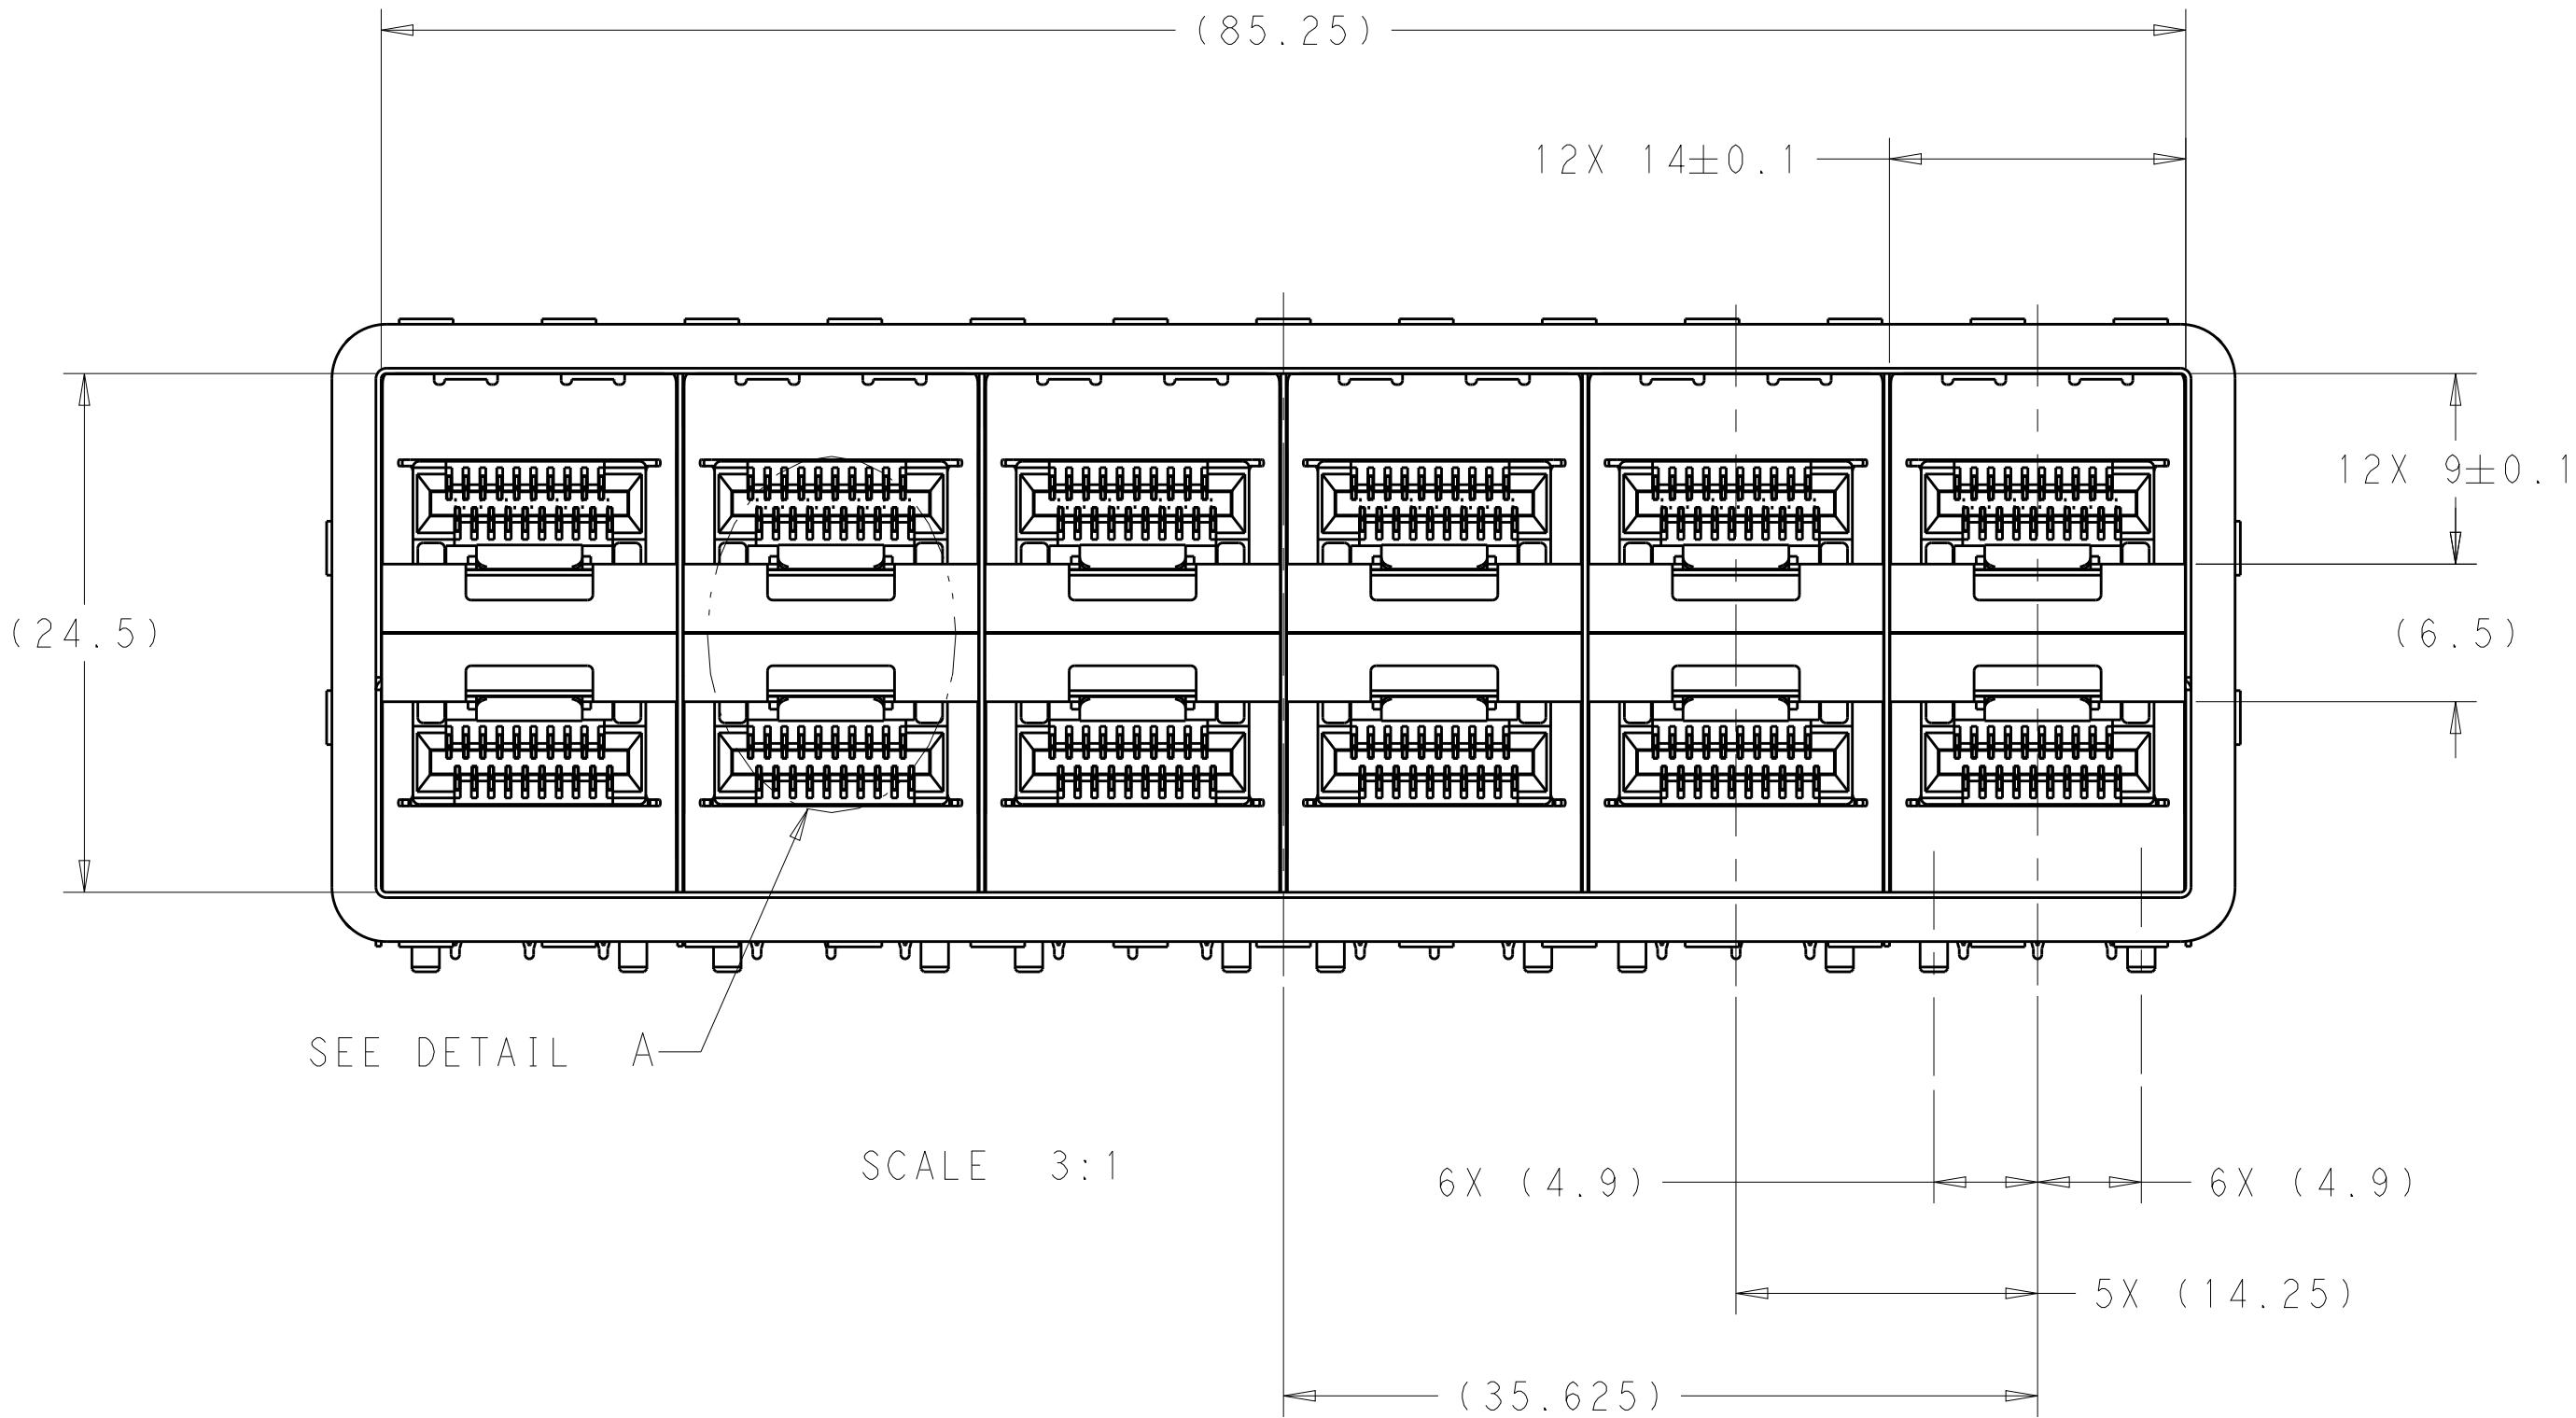


DETAIL A
6X INDIVIDUALLY
SCALE 10:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.E. CONNER CHK M.D. MORRISON APVD M.D. MORRISON	07DEC2011 13DEC2011 13DEC2011	 TE Connectivity	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	NAME		
mm	0 PLC ±.20 1 PLC ±0.20 2 PLC ±0.15 3 PLC ±0.10 4 PLC ±.10 ANGLES ±.5° FINISH	108-2481	RECEPTACLE ASSEMBLY ,2X6 STACKED,zSFP+	SIZE	CAGE CODE
MATERIAL	SEE NOTES	114-13319	Customer Drawing	100779	2198339
SCALE	1:1	SHEET	4	OF	6
REV	B2				

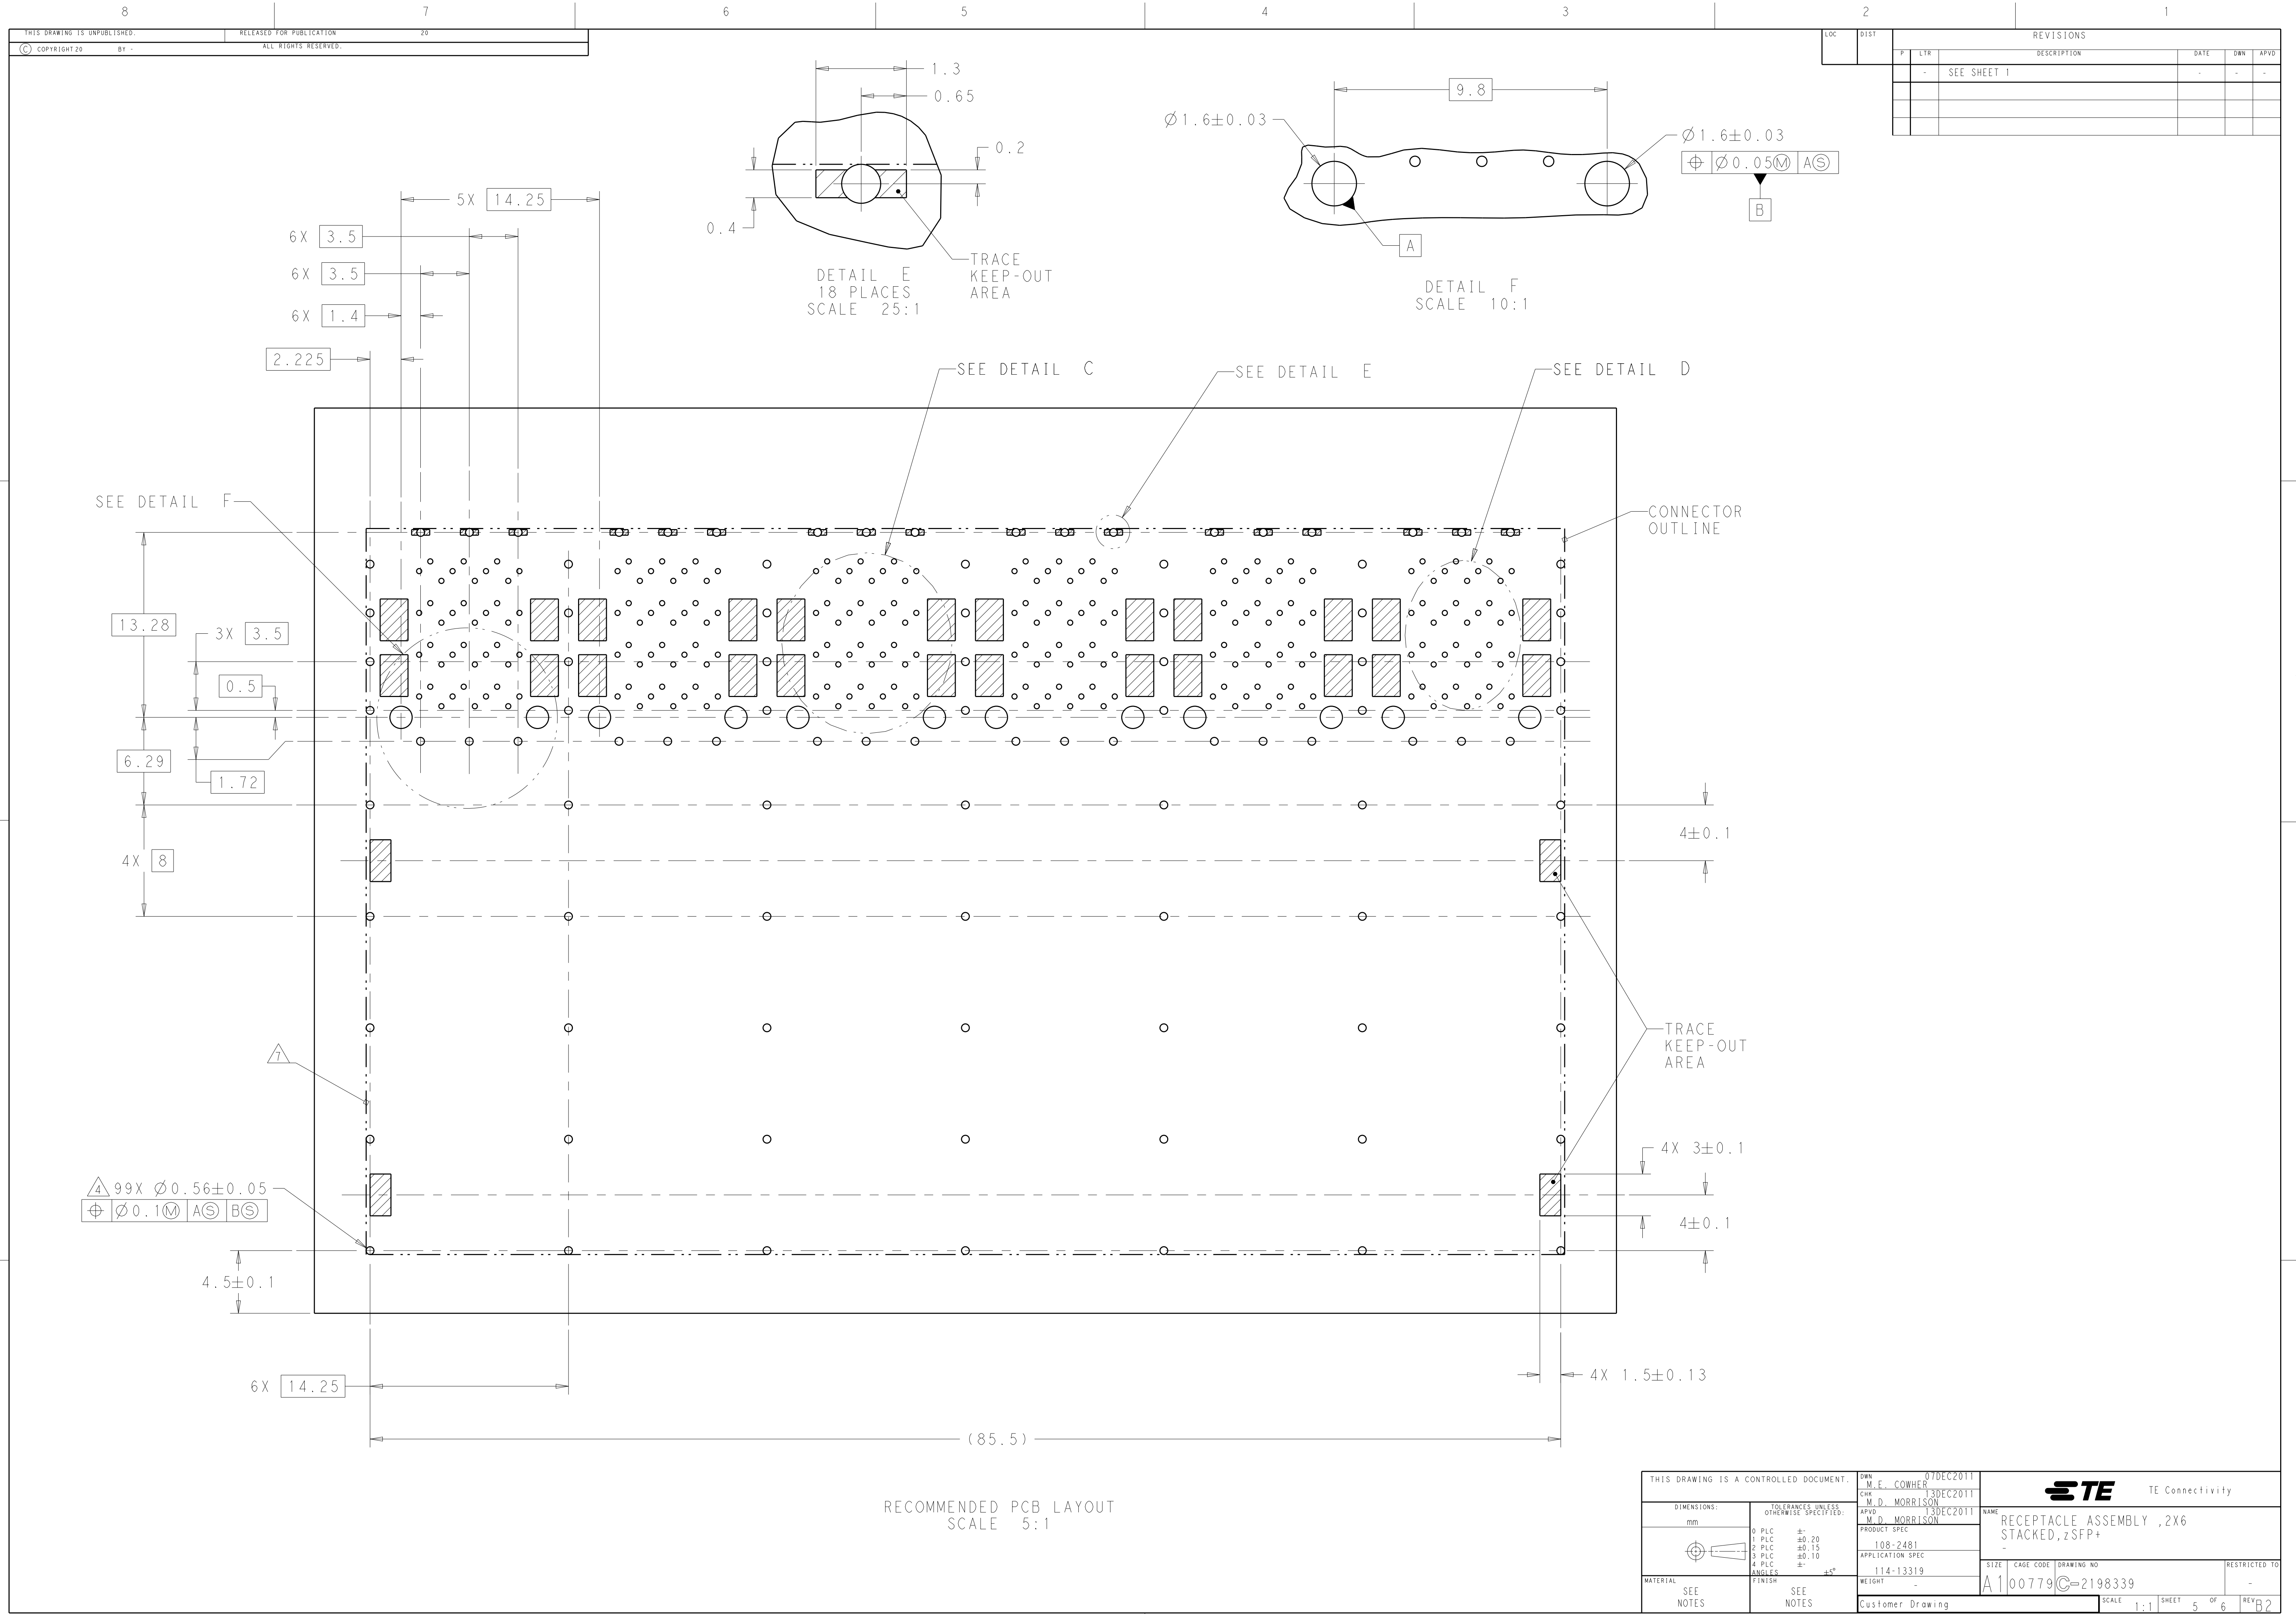

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.E. CONNER 13DEC2011		
DIMENSIONS:		CHK M.D. MORRISON 13DEC2011		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M.D. MORRISON 13DEC2011	NAME RECEPTACLE ASSEMBLY ,2X6 STACKED,zSFP+	
	0 PLC ±0.20	PRODUCT SPEC	SIZE CAGE CODE DRAWING NO A100779C=2198339	
	1 PLC ±0.15	108-2481		
	2 PLC ±0.10	APPLICATION SPEC	RESTRICTED TO	
	3 PLC ±0.10	114-13319		
MATERIAL	ANGLES ±4°	WEIGHT	SCALE 1:1 SHEET 5 OF 6 REV B2	
SEE NOTES	SEE NOTES	Customer Drawing		

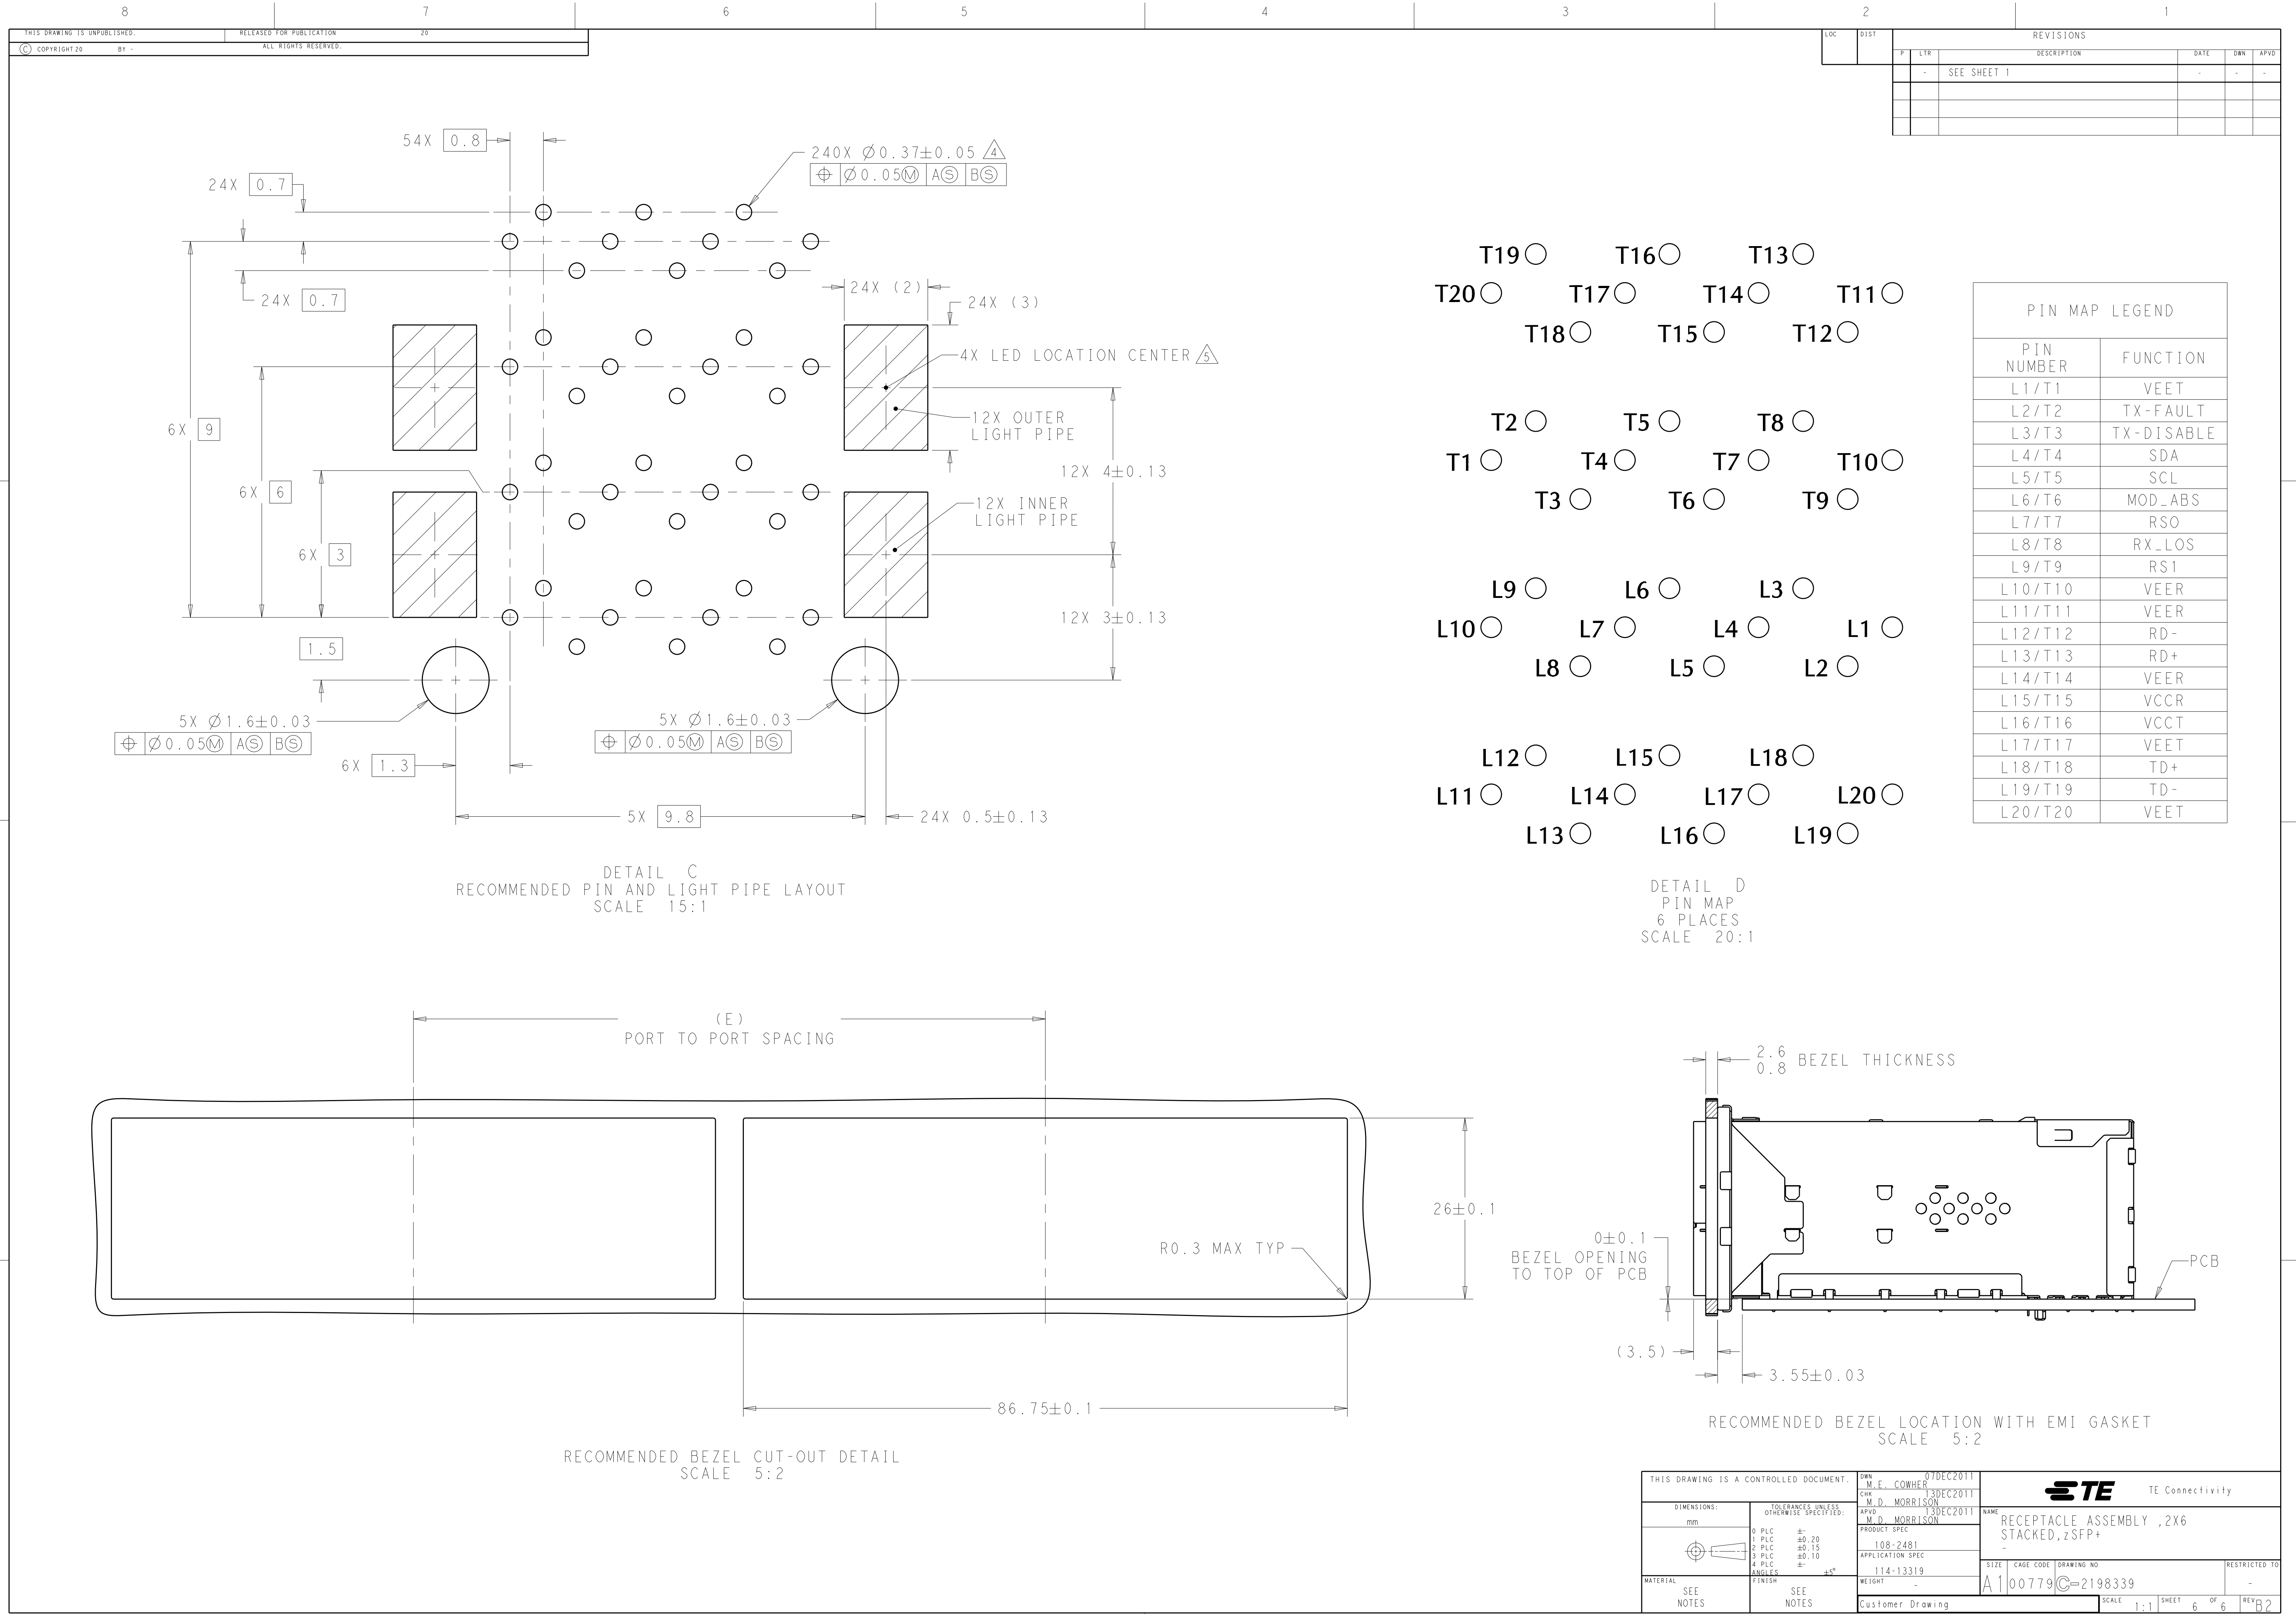



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.