


Polarity B, Optimized for Parallel Optics, Base-8 Connectivity. Guaranteed compatibility when used with recommended Tripp Lite cabling. Designed specifically for use with Tripp Lite cables, such as the N844- and N846-Series cables.

100Gb/120Gb to 40Gb Breakout Cassette, (x2) 24-Fiber MTP/MPO (Male w/Pins) to (x6) 12-Fiber MTP/MPO Male w/Pins)

MODEL NUMBER: **N484-2M24-6M12**

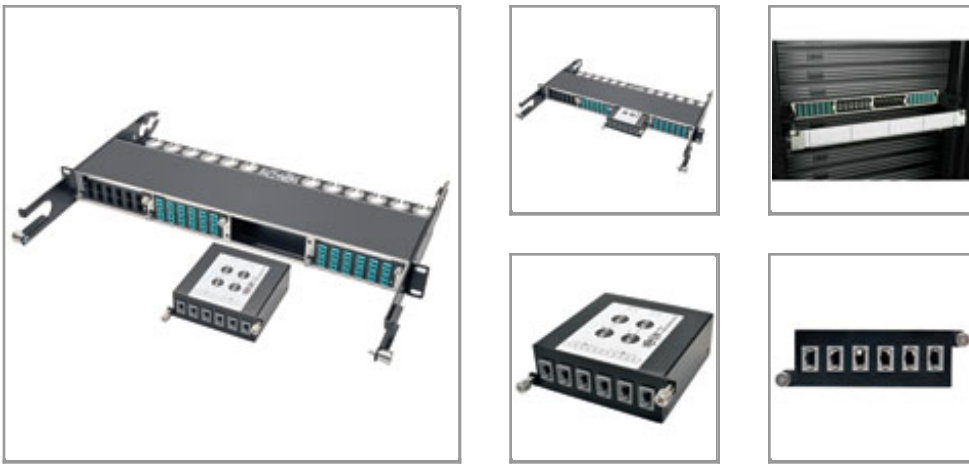

Description

Tripp Lite's N484-2M24-6M12 is a High Density 100/120Gb to 40Gb Breakout Cassette, with (x2) 24-Fiber MTP/MPO connections to (x6) 12-Fiber MTP/MPO connections. Designed specifically for use with Tripp Lite's [N484-00U](#) and [N484-01U](#) chassis'; up to 4 cassettes per [N484-01U](#), or 1 per [N484-00U](#). Supports 100/120 GbE, internally using OM4 fiber optic cable, with an extremely low insertion loss of 0.35db that is well under the IEEE-802.3ae maximum channel loss spec of <25db. Effectively trunks 48-fibers between IDF's and MDF's with (x2) 24-Fiber MTP/MPO cables, breaking out to (x6) 12-fiber MTP/MPO connections. Polarity B, Optimized for Parallel Optics, Base-8 Connectivity. Guaranteed compatibility when used with recommended Tripp Lite cabling. Designed specifically for use with Tripp Lite cables, such as the N844- and N846-Series cables. Installation is simple, with the cassette being easily installed or removed using screw tabs to lock or unlock it from the panel; no tools required. Furthermore, each cassette features factory terminated connectors that reduce the time and labor required of field connector terminations. Cassette housing made with heavy duty, 1.0mm Cold Rolled Steel.

NOTE: Each 24 Fiber cable breaks out to three, 12-fiber MTP ports, with only 8 of the 12 pins populated (4 inner pins unused). QSFP+ and QSFP28 support.

Features

- High Density Fiber Cassette for use with Tripp Lite's [N484-00U](#) and [N484-01U](#) chassis'
- 100/120Gb to 40Gb Breakout Cassette, with (x2) 24-Fiber MTP/MPO connections to (x6) 12-Fiber MTP/MPO connections
- Max insertion loss of 0.35dB falls well under the IEEE 802.3ae maximum channel loss spec of <25dB
- Complies with IEEE 802.3ae (10GbE) and ANSI T11.2 (Fibre Channel) requirements

Highlights

- High Density Fiber Cassette for use with Tripp Lite's [N484-00U](#) and [N484-01U](#) chassis'
- 100/120Gb to 40Gb Breakout Cassette, with (x2) 24-Fiber MTP/MPO (Male w/Pins) connections to (x6) 12-Fiber MTP/MPO connections (Male w/Pins)
- Polarity B, Optimized for Parallel Optics, Base-8 Connectivity
- Guaranteed compatibility when used with recommended Tripp Lite cabling
- Designed specifically for use with Tripp Lite cables, such as the N844- and N846-Series cables
- Supports 100/120 GbE, internally using OM4 fiber optic cable
- Max insertion loss of 0.35dB falls well under the IEEE 802.3ae maximum channel loss spec of <25dB

System Requirements

- Polarity B, Optimized for Parallel Optics, Base-8 Connectivity
- Guaranteed compatibility when used with recommended Tripp Lite cabling
- Designed specifically for use with Tripp Lite cables, such as the N844- and N846-Series cables

Package Includes

- N484-2M24-6M12 100/120Gb to 40Gb Breakout Cassette, (x2) 24-Fiber MTP/MPO to (x6) 12-Fiber MTP/MPO
- Quick Start Guide



- Polarity B, Optimized for Parallel Optics, Base-8 Connectivity
- Guaranteed compatibility when used with recommended Tripp Lite cabling
- Designed specifically for use with Tripp Lite cables, such as the N844- and N846-Series cables
- Installation is simple, with the cassette being easily installed or removed using screw tabs to lock or unlock it from the panel; no tools required
- Each cassette features factory terminated connectors that reduce the time and labor required of field connector terminations
- Housing made of heavy duty, 1.0mm Cold Rolled Steel
- Includes dust caps for unused ports

Specifications

| PHYSICAL | |
|-------------------------------------|----------------------------|
| Unit Dimensions (hwd / in.) | 1.4 x 4.4 x 3.8 |
| Unit Weight (lbs.) | 0.7 |
| Unit Weight (kg) | 0.32 |
| Color | Black |
| ENVIRONMENTAL | |
| Operating Temperature Range | -4 to 122 F (-20 to 50 C) |
| CONNECTIONS | |
| Ports | 6 |
| Side A - Connector 1 | (2) 24-STRAND MTP (FEMALE) |
| Side B - Connector 1 | (6) 12-STRAND MTP (FEMALE) |
| CERTIFICATIONS | |
| Approvals | RoHS, REACH |
| WARRANTY | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |

© 2017 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:

<https://www.triplite.com/products/product-certification-agencies>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.