



MODEL NO: 11-22 SURSYGC/S530-A2/TR8

Device Number : DSE-112-019 REV. 1.0

Chip LEDs with Bi-Color(Multi-Color)

ECN : Page: 1/9

Features :


- Package in 8mm tape on 7" diameter reel .
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Multi-color type.

Description :

- The 11-22 SMD Taping is much smaller than le-aded components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, light Weight makes them ideal for minia-
ture application, etc.

Applications :

- Automotive: backlighting in dashboard and switch
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

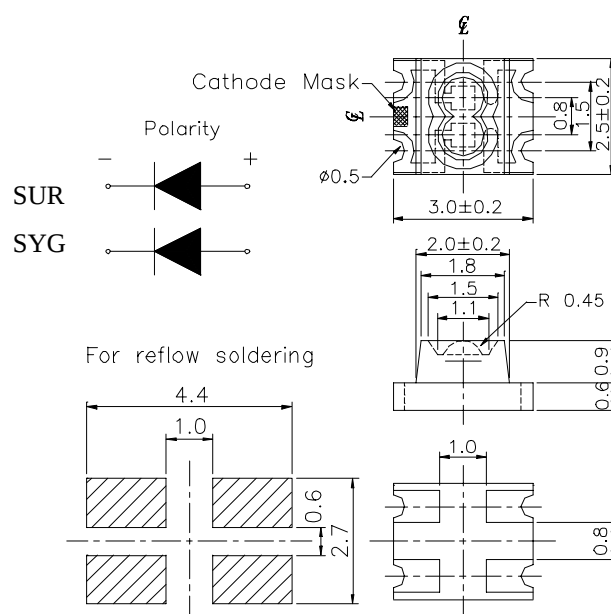Package Dimension :**Notes :**Tolerances Unless Dimension $\pm$
0.1mm

PART NO	CHIP		Lens Color
	Material	Emitted Color	
11-22SURSYGC/S530-A2/TR8	SUR: AlGaInP	Hyper Red	Water Clear
	SYG: AlGaInP	Super Green	

Office : NO 25,Lane.76,Chung Yang Rd.,Sec.3,

Tucheng, Taipei 236,Taiwan, R.O.C.

TEL : 886-2-2267-2000,2266-9936(22 Lines)

FAX : 886-2-2267-6189

Http://www.everlight.com



EVERLIGHT ELECTRONICS CO., LTD.



MODEL NO: 11-22 SURSYGC/S530-A2/TR8

Device Number : DSE-112-019 REV. 1.0


Chip LEDs with Bi-Color(Multi-Color)

ECN : _____ Page: 2/9

■ **Package Dimension :**

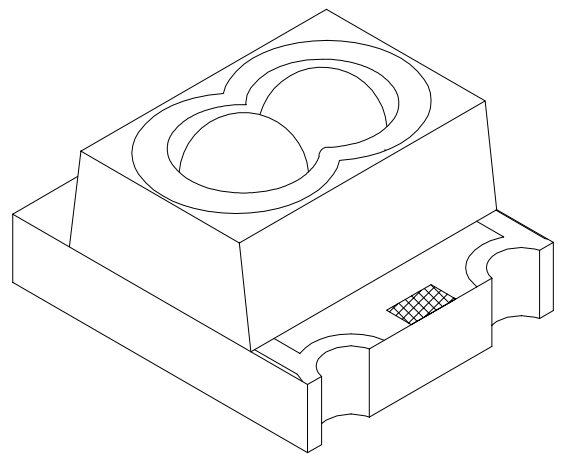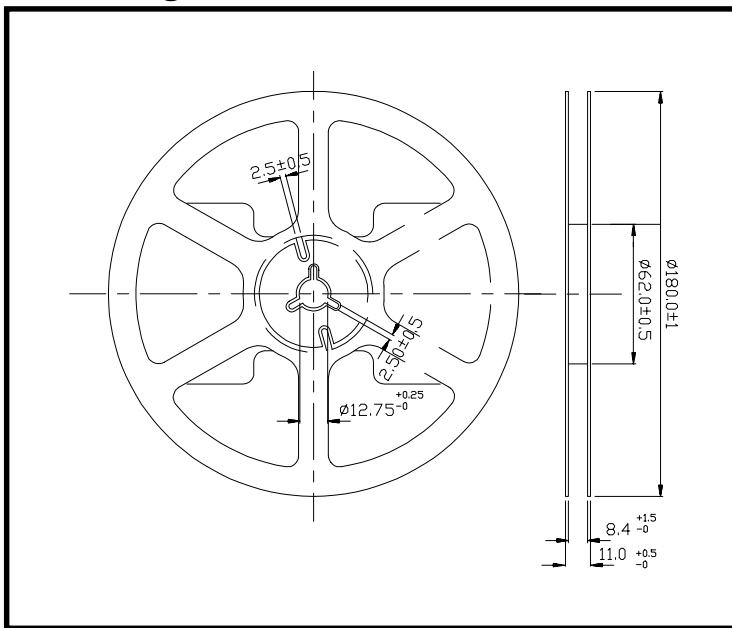

■ **Loaded quantity per reel 2000 pcs/reel :**

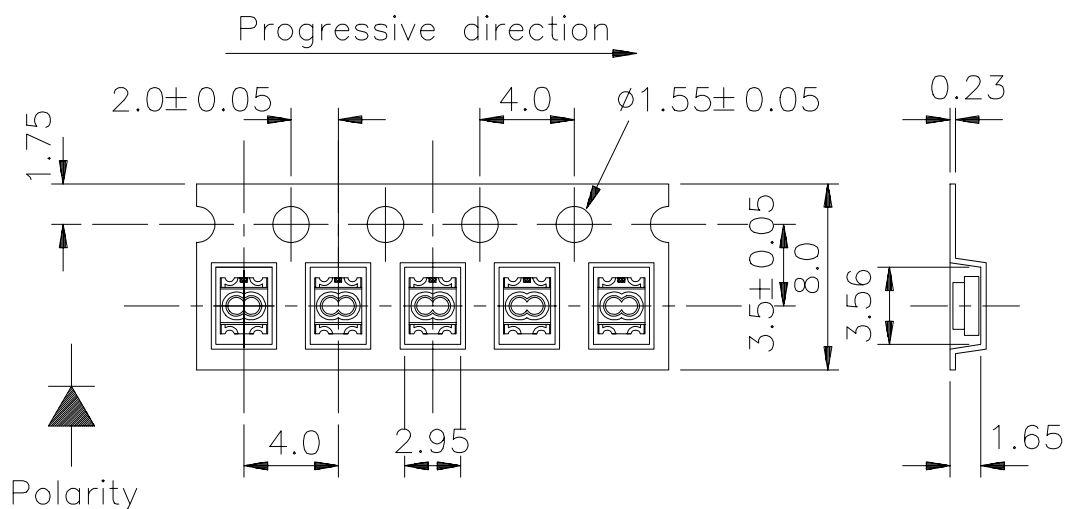

TOLERANCES UNLESS DIMENSION±0.1
ANGLE±0.5
UNIT:mm



EVERLIGHT ELECTRONICS CO., LTD.

MODEL NO: 11-22 SURSYGC/S530-A2/TR8

Device Number : DSE-112-019 REV. 1.0

Chip LEDs with Bi-Color(Multi-Color)

ECN : Page: 3/9

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Rating	Unit
Reverse Voltage	Vr	5	V
Forward Current	If	SUR: 25 SYG: 25	mA
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +90	°C
Soldering Temperature	Tsol	260 (for 5 second)	°C
Power Dissipation	Pd	SUR: 60 SYG: 60	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	SUR: 160 SYG: 160	mA

Reliability Test Item And Condition

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 Pcs	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 Pcs	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 Pcs	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 Pcs	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 Pcs	0/1
6	DC Operating Life	If = 20 m A	1000 HRS	76 Pcs	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 Pcs	0/1



EVERLIGHT ELECTRONICS CO., LTD.

MODEL NO: 11-22 SURSYGC/S530-A2/TR8

Device Number : DSE-112-019 REV. 1.0

Chip LEDs with Bi-Color(Multi-Color)

ECN : _____ Page: 4/9

■ **Electronic Optical Characteristics :**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous intensity	I _v SUR: SYG:	21 14	51 21	-----	mcd	If=20mA
Viewing Angle	2 θ 1/2	-----	60	-----	deg	If=20mA
Peak Wavelength	λ p SUR: SYG:	-----	632 575	-----	nm	If=20mA
Dominant Wavelength	λ d SUR: SYG:	-----	624 573	-----	nm	If=20mA
Spectrum Radiation Bandwidth	$\Delta \lambda$ SUR: SYG:	-----	20 20	-----	nm	If=20mA
Forward Voltage	V _f SUR: SYG:	-----	2.0 2.0	2.4 2.4	V	If=20mA
Reverse Current	I _r	-----	-----	10	μ A	V _r =5V



EVERLIGHT ELECTRONICS CO., LTD.

MODEL NO: 11-22 SURSYGC/S530-A2/TR8





Device Number : DSE-112-019 REV. 1.0

Chip LEDs with Bi-Color(Multi-Color)



ECN : _____ Page: 5/9

Typical Electro-Optical Characteristic Curves

SUR

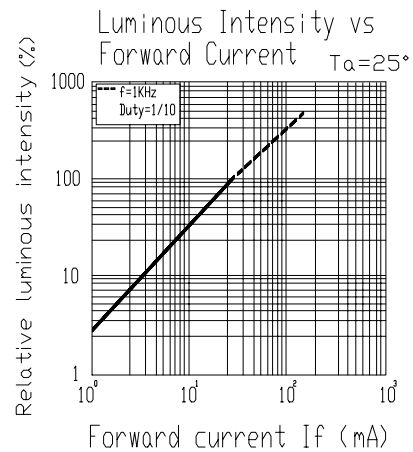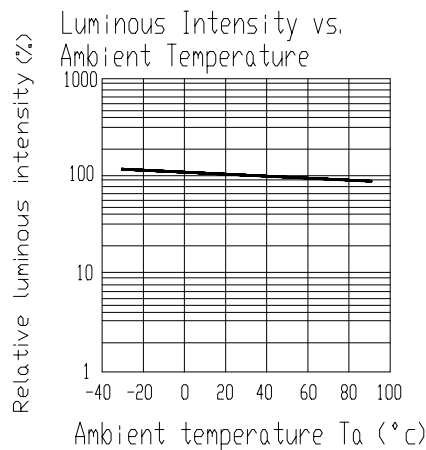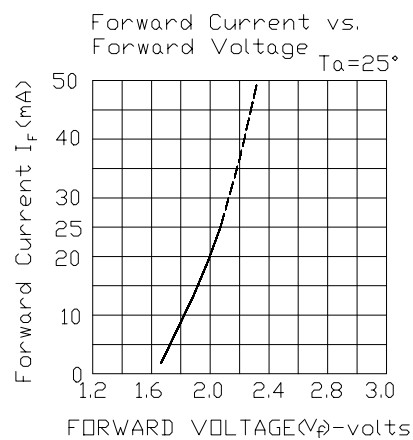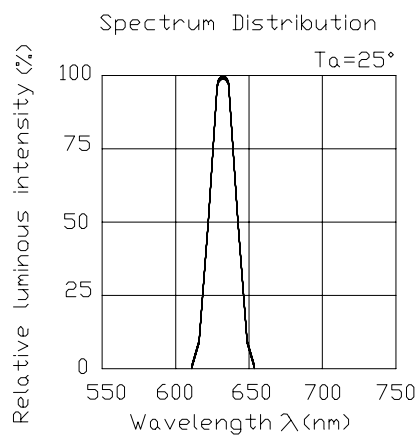

Forward Current Derating Curve

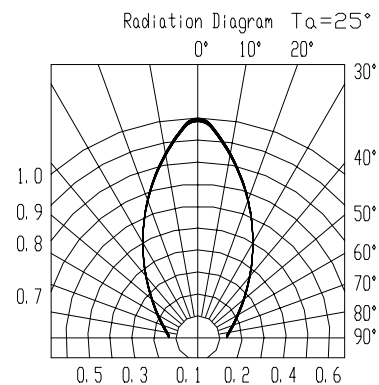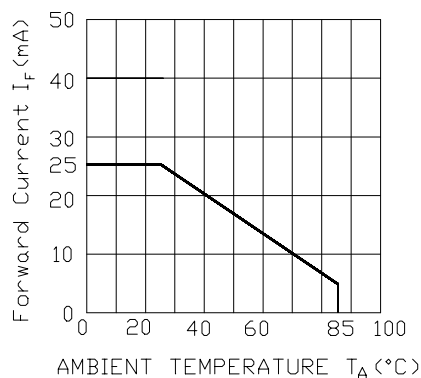



EVERLIGHT ELECTRONICS CO., LTD.

MODEL NO: 11-22 SURSYGC/S530-A2/TR8





Device Number : DSE-112-019 REV. 1.0

Chip LEDs with Bi-Color(Multi-Color)



ECN : Page: 6/9

Typical Electro-Optical Characteristic Curves

SYG

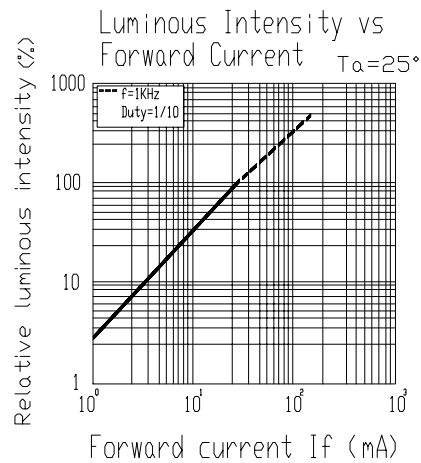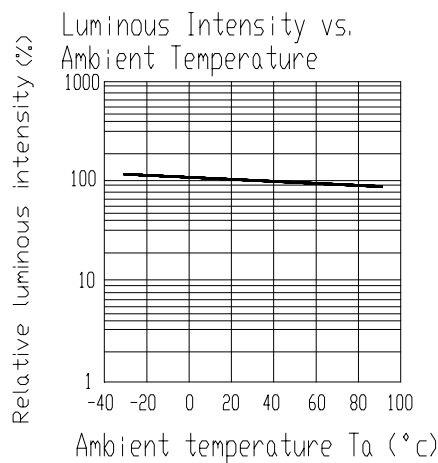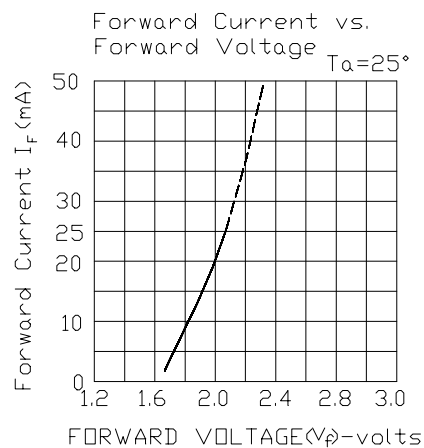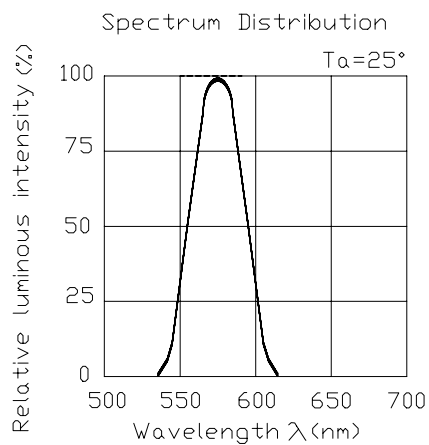

Forward Current Derating Curve

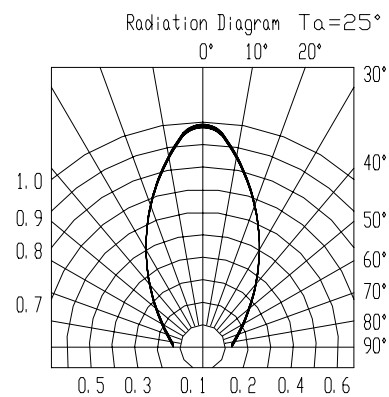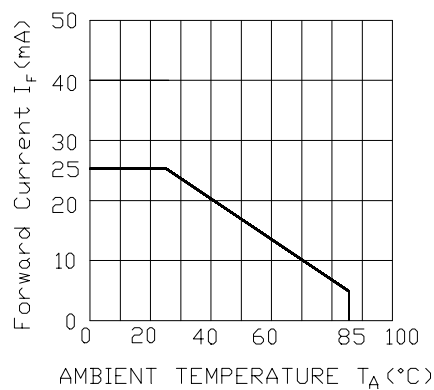



EVERLIGHT ELECTRONICS CO., LTD.


MODEL NO: 11-22 SURSYGC/S530-A2/TR8

Device Number : DSE-112-019 REV. 1.0

Chip LEDs with Bi-Color(Multi-Color)

ECN : _____ Page: 7/9

■ Test Circuit

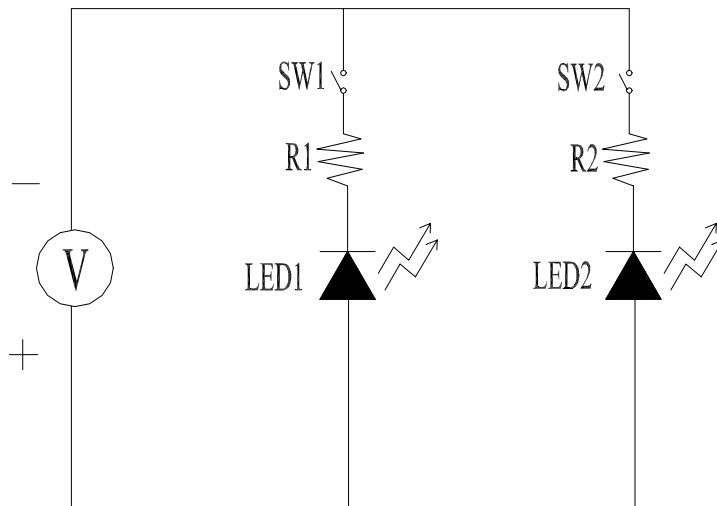

■ Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection , otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage time

2.1 The operation of temperature and R.H. are : $5^{\circ}\text{C} \sim 35^{\circ}\text{C}$, R.H.60%.

2.2 Once the package is opened , the products should be used within a week.

Otherwise , they should be keep in a dampproof box with desiccants.

Considering the tape life , we suggest our customers to use our products within a year(from production date).

2.3 If opened more than one week in an atmosphere $5^{\circ}\text{C} \sim 35^{\circ}\text{C}$, R.H.60%, they should be treated at $60^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for 15hrs.

2.4 When you discover that the desiccant in the package has a pink color (normal=blue) , you should treat them in the same conditions as 2.3.



EVERLIGHT ELECTRONICS CO., LTD.

MODEL NO: 11-22 SURSYGC/S530-A2/TR8


Device Number : DSE-112-019 REV. 1.0

Chip LEDs with Bi-Color(Multi-Color)

ECN : _____ Page: 8/9

■ Soldering heat reliability (DIP)

Please refer to the following figure :

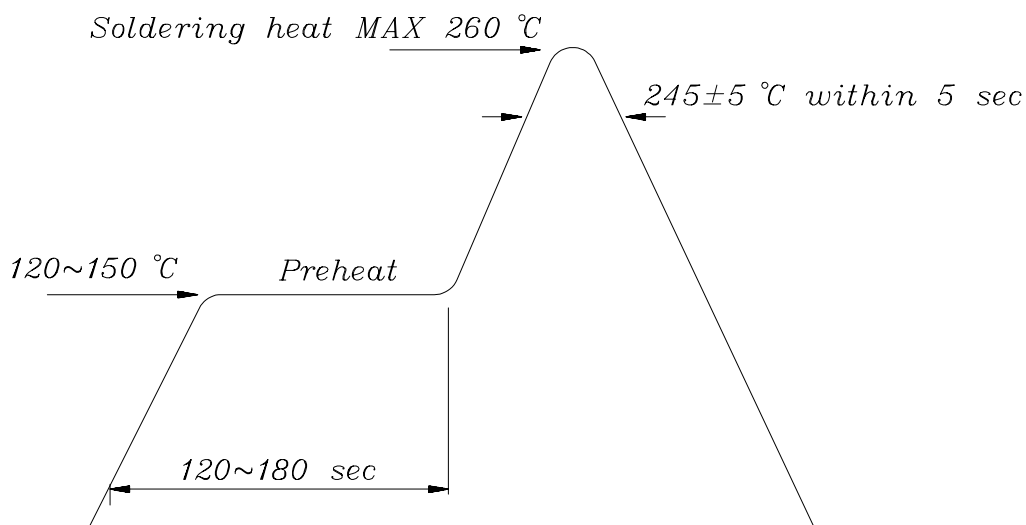


■ Soldering Iron

Basic spec is ≤ 5 sec when 260°C. If temperature is higher, time should be shorter (+10°C → -1sec). Power dissipation of iron should be smaller than 15 W , and temperature should be controllable. Surface temperature of the device should be under 230 °C .

■ Rework

1. Customer must finish rework within 5 sec under 260°C .
2. Copper foil can not be touched by the head of iron.
3. Twin-head type is preferred.

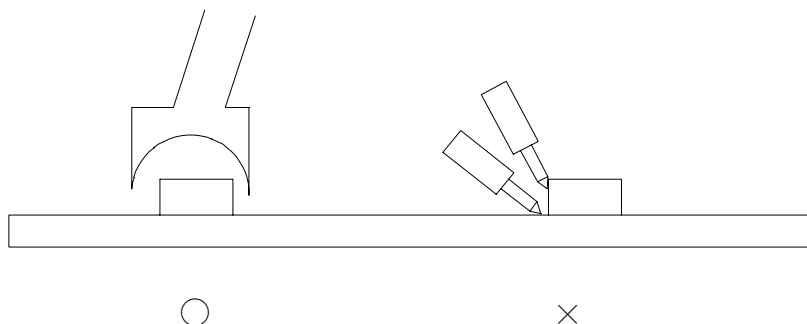



EVERLIGHT ELECTRONICS CO., LTD.


MODEL NO: 11-22 SURSYGC/S530-A2/TR8

Device Number : DSE-112-019 REV. 1.0

Chip LEDs with Bi-Color(Multi-Color)

ECN : _____ Page: 9/9

■ Reflow Temp / Time :

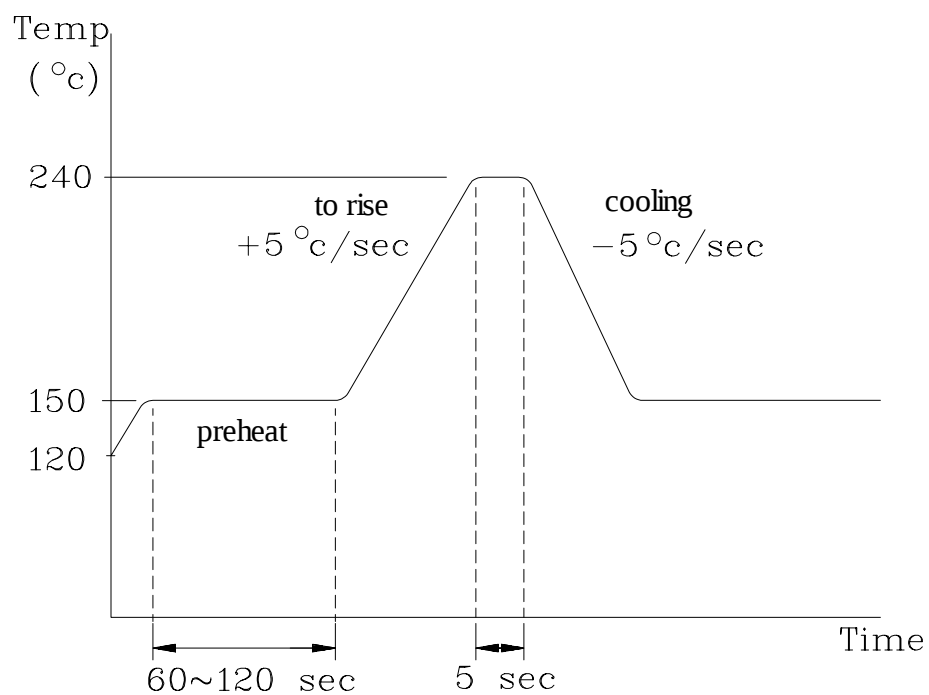

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Everlight:

[11-22SURSYGC/S530-A2/TR8](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.