

Repeater power supply - MACX PL-EX-RPSSI-2I - 2904959

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Ex i measuring transducer power supply and input signal conditioner, HART-transparent. Transfers supplied or active 0/4 - 20 mA electrically isolated signals from the Ex area to two loads in the safe area. 4-way electrical isolation, PLd, screw connection

Product Features



Key commercial data

| | |
|----------------------|----------|
| Packing unit | 1 pc |
| Custom tariff number | 85437090 |
| Country of origin | Germany |

Technical data

Note

| | |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

Dimensions

| | |
|--------|----------|
| Width | 12.5 mm |
| Height | 99 mm |
| Depth | 114.5 mm |

Ambient conditions

| | |
|---|--|
| Ambient temperature (operation) | -20 °C ... 60 °C (Any mounting position) |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C |
| Maximum altitude | ≤ 2000 m |
| Permissible humidity (operation) | 10 % ... 95 % (non-condensing) |

Repeater power supply - MACX PL-EX-RPSSI-2I - 2904959

Technical data

Ambient conditions

| | |
|----------------------|---|
| Noise immunity | EN 61000-6-2 When being exposed to interference, there may be minimal deviations. |
| Degree of protection | IP20 |

Input data

| | |
|----------------------------|---------------------------------|
| Signal input | Repeater power supply operation |
| Current input signal | 4 mA ... 20 mA |
| Transmitter supply voltage | > 16 V (20 mA) |
| | > 15.1 V (23 mA) |
| Voltage drop | approx. 3.9 V |
| Signal input | Signal conditioner operation |
| Current input signal | 4 mA ... 20 mA |
| Voltage drop | approx. 3.9 V |

Output data

| | |
|--|--|
| Signal output | Repeater power supply operation |
| Current output signal | 4 mA ... 20 mA (active) |
| Load/output load current output | < 450 Ω (20 mA) |
| | < 380 Ω (23 mA) |
| Output ripple | < 20 mV _{rms} |
| Output behavior in the event of an error | 0 mA (Cable break in the input) |
| | ≥ 23 mA (Cable short-circuit in the input) |
| Signal output | Signal conditioner operation |
| Current output signal | 4 mA ... 20 mA (active) |
| Load/output load current output | < 450 Ω (20 mA) |
| | < 380 Ω (23 mA) |
| Output ripple | < 20 mV _{rms} |
| Output behavior in the event of an error | 0 mA (Cable break in the input) |
| | 0 mA (Cable short-circuit in the input) |

Power supply

| | |
|--------------------------|---|
| Designation | Repeater power supply operation |
| Supply voltage range | 19.2 V DC ... 30 V DC (24 V DC (-20% ... +25%)) |
| Max. current consumption | < 75 mA (24 V DC / 20 mA) |
| Power consumption | < 1.45 W (24 V DC / 20 mA) |

Connection data

| | |
|---------------------------------------|---------------------|
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |

Repeater power supply - MACX PL-EX-RPSSI-2I - 2904959

Technical data

Connection data

| | |
|---------------------------------------|---------------------|
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 14 |
| Stripping length | 7 mm |
| Screw thread | M3 |
| Connection method | Screw connection |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

General

| | |
|---|---|
| Maximum transmission error | < 0.1 % (of final value) |
| Transmission error, typical | < 0.05 % (of final value) |
| Maximum temperature coefficient | < 0.01 %/K |
| Step response (10-90%) | < 1.3 ms (for 4 mA ... 20 mA step) |
| Status display | Green LED (PWR supply voltage) |
| Inflammability class according to UL 94 | V0 |
| Electromagnetic compatibility | Conformance with EMC Directive 2004/108/EC |
| Housing material | PA 66-FR |
| Color | yellow |
| Designation | Input/output/power supply |
| Electrical isolation | 300 V _{rms} (Rated insulation voltage (surge voltage category II; pollution degree 2, safe isolation as per EN 61010-1)) |
| | 2.5 kV (50 Hz, 1 min., test voltage) |
| Designation | Input/output |
| Electrical isolation | 375 V (Peak value in accordance with EN 60079-11) |
| Designation | Input/power supply |
| Electrical isolation | 375 V (Peak value in accordance with EN 60079-11) |
| Designation | Output 1/output 2 |
| Electrical isolation | 1.5 kV AC (50 Hz, 1 min., test voltage) |
| Conformance | CE-compliant, additionally EN 61326 |
| ATEX | # II (1) G [Ex ia Ga] IIC/IIB |
| | # II (1) D [Ex ia Da] IIIC |
| | # II 3 (1)G Ex nA [ia Ga] IIC/IIB T4 Gc |
| IECEX | [Ex ia Ga] IIC/IIB |
| | [Ex ia Da] |
| | Ex nA [ia Ga] IIC/IIB T4 Gc |
| UL, USA / Canada | UL 61010 |
| | Class I Div 2; IS for Class I, II, III Div 1 |

Repeater power supply - MACX PL-EX-RPSSI-2I - 2904959

Technical data

Data communication (bypass)

| | |
|---------------------|------|
| HART function | Yes |
| Protocols supported | HART |

Safety data

| | |
|--------------------------------------|---------------------------------|
| Operation | Repeater power supply operation |
| Max. output voltage U_o | 25.2 V |
| Max. output current I_o | 93 mA |
| Max. output power P_o | 587 mW |
| Group | IIC |
| Max. external inductivity L_o | 2 mH |
| Max. external capacity C_o | 107 nF |
| Group | IIB |
| Max. external inductivity L_o | 4 mH |
| Max. external capacity C_o | 820 nF |
| Safety-related maximum voltage U_m | 253 V AC (125 V DC) |
| Operation | Signal conditioner operation |
| Input voltage U_i | ≤ 30 V |
| Input current I_i | ≤ 150 mA |
| Max. internal inductance L_i | negligible |
| Max. internal capacitance C_i | negligible |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 5.1 | 27210121 |
| eCl@ss 6.0 | 27200206 |
| eCl@ss 8.0 | 27210121 |

ETIM

| | |
|----------|----------|
| ETIM 4.0 | EC002653 |
| ETIM 5.0 | EC002653 |

Approvals

Approvals

Approvals

UL Listed / cUL Listed / GL / cULus Listed

Repeater power supply - MACX PL-EX-RPSSI-2I - 2904959

Approvals

Ex Approvals

IECEx / ATEX / UL Listed / cUL Listed / cULus Listed

Approvals submitted

Approval details

UL Listed


cUL Listed

GL

cULus Listed

Drawings

Block diagram

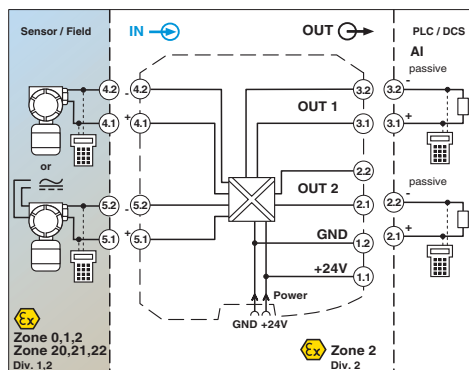



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.