SIGN	DATE	DESCRIPTION	APPROVER
1	3/22'06	Hole size changed from 0.5mm to 1.3mm	Tony
2	01/12'07	Soldering temperature changed from 245° to 250°	Tason
3	01/12'07	Part NO is Changed	Tason
4	08/28'08	Construction is change	Seamus
5	9/01'08	Operating temperature changed from -30°C/+105°C to -40°C/+115°C	Seamus
6	10/26'09	Wire guard solder pin is Changed from Brass to Copper	Aaron
7	11/09'10	Add is " VDE "	Aaron
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

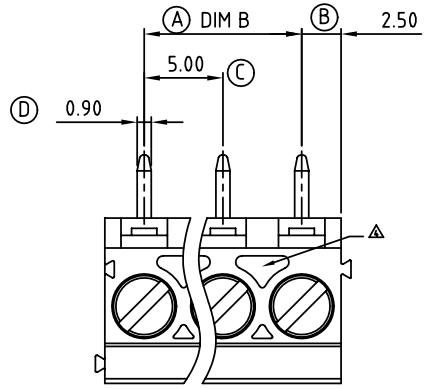

Dimension A&B

DIM A	N×5.0
DIM B	(N-1)×5.0

N=Number of contacts

Poles	A&B Tolerance
2P-8P	±0.15
9P-14P	±0.25
15P-20P	±0.35
21P-24P	±0.40

Material:

- Item 1 Terminal housing:Thermoplastic (UL 94V-0)
- Item 2 Clamp: Brass Ni plated
- 6 Item 3 Wire guard solder pin: Copper, Tin plated
- Item 4 Terminal screw: Steel Zinc plating"-"slot type

1 Electrical cULus / VDE

- Voltage rating : 300VAC / 450V
- Current rating : 20A / 24A
- Wire range : 0.2-2.5mm²
- Solid wire(AWG) : 12-30
- Stranded wire(AWG) : 12-30
- Torque : 3.5 Lb-In / 0.5 N.m
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV / 2.5KV
- 5 Operating temperature: -40°C to +115°C
- 1 Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: cULus VDE

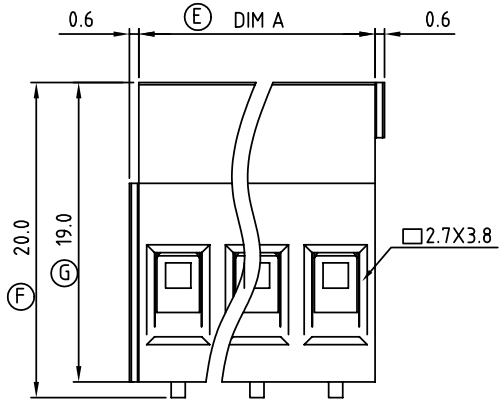

N=Number of contacts

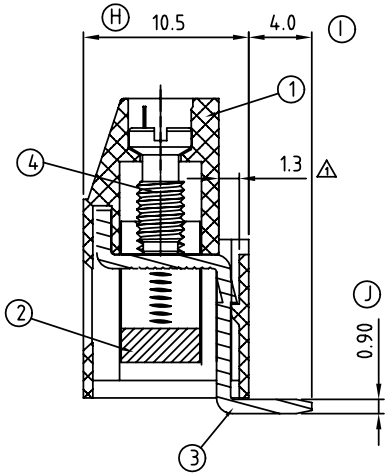

5 VJ xx 01 x 0 xxxx G

No. of poles end stackable sesign		0	Black (RAL9005)	RoHS Pb<40,000ppm
02	2 CONTACTS	2	Red (RAL3001/D)	0000:"@"Logo (Standard)
03	3 CONTACTS	3	Orange(RAL2011/P)	000A:"ANYTEK"Logo
...	...	4	Yellow(RAL1018/A)	Any special item by customer request, please contact sales department.
24	24 CONTACTS	5	Green(RAL6018/T)	
		6	Blue (RAL5015/A)	
		8	Grey(RAL7035/D)	

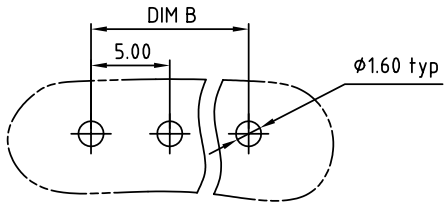

P.C.B LAYOUT

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	VJ-5.0 Series 2P-24P Vertical (90D wire inlet)					
PART NO.	VJxx01x0xxxxG			DWG NO.	8VJ0002	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
		Aaron 2010.11.09	Aaron 2009.10.26	UNIT: mm		X. ±0.50
				SCALE: NONE		X.X ±0.30
				SHEET: 01/01	REV.: H	X.XX ±0.10 X° ±1°

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.