

# conga-TFS




- Power efficient high-performance x86 processing
- Unprecedented integrated graphics performance
- High performance parallel processing support

**COM**  **Express**<sup>®</sup>

Formfactor	COM Express™ Basic   (95 x 125 mm)   Type 6 Connector Layout					
CPU	AMD Embedded R-Series processors					
	AMD Embedded R-464L	AMD Radeon™ HD 7660G Graphics	Quad-Core 2.3	3.2 GHz	TDP 35 W	PGA
	AMD Embedded R-460H	AMD Radeon™ HD 7640G Graphics	Quad-Core 1.9	2.8 GHz	TDP 35 W	PGA
	AMD Embedded R-272F	AMD Radeon™ HD 7520G Graphics	Dual-Core 2.7	3.2 GHz	TDP 35 W	PGA
DRAM	Two 1.5V/1.35V DDR3 SO-DIMMs up to 1600MT/s and 8 GByte					
Chipset	AMD A70M Controller Hub					
Ethernet	Realtek RTL8111E GbE LAN Controller					
I/O Interfaces	7x PCI Express™ 2.0 lane   PCI Express™ 2.0 x8 link   4x SATA 6Gb/s with RAID 0/1   4x USB 3.0   8x USB 2.0   2x Express™Card   LPC bus   SDHC   I²C bus					
Sound	High Definition Audio Interface					
Graphics	High performance DirectX®11 GPU supports OpenCL™ 1.1 and OpenGL 4.2   Three Independent Display Controllers   Dedicated Hardware (UVD) for H.264 MPEG4 Part 2 VC-1 and MPEG2 decode   Dedicated Hardware (VCE) assisted encoding of HD video streams to H.264					
LVDS	18/24-bit Single/Dual Channel Interface   resolutions up to 1920x1200@60Hz   VESA standard or JEIDA data mapping   Automatic Panel Detection via EDID/EPI					
DisplayPort	Three DisplayPort 1.2					
HDMI or DVI	Two Ports support one HDMI1.4a and two Single-Link DVI					
VGA	One Port supports resolutions up to 1920x1200@60Hz					
congatec Board Controller	Multi Stage Watchdog   non-volatile User Data Storage   Manufacturing and Board Information   Board Statistics   BIOS Setup Data Backup   I2C bus   Power Loss Control					
Embedded BIOS Features	AMI Aptio® UEFI firmware					
Security	The conga-TFS can be optionally equipped with a discrete "Trusted Platform Module" (TPM). It is capable of calculating efficient hash and RSA algorithms with key lengths up to 2,048 bits and includes a real random number generator. Security sensitive applications such as gaming and e-commerce will benefit also with improved authentication   integrity and confidence levels.					
Power Management	ACPI 3.0 with battery support					
Operating Systems	Microsoft® Windows 8   Microsoft® Windows 7   Linux   Microsoft® Windows® embedded Standard					
Power Consumption	Typ. application: tbd.   see manual for full details   CMOS Battery Backup					
Temperature	Operating: 0 .. +60°C   Storage: -20 .. +80°C					
Humidity	Operating: 10 - 90% r. H. non cond.   Storage: 5 - 95% r. H. non cond.					
Size	95 x 125 mm (3.74" x 4.92")					

# conga-TFS | Block diagram

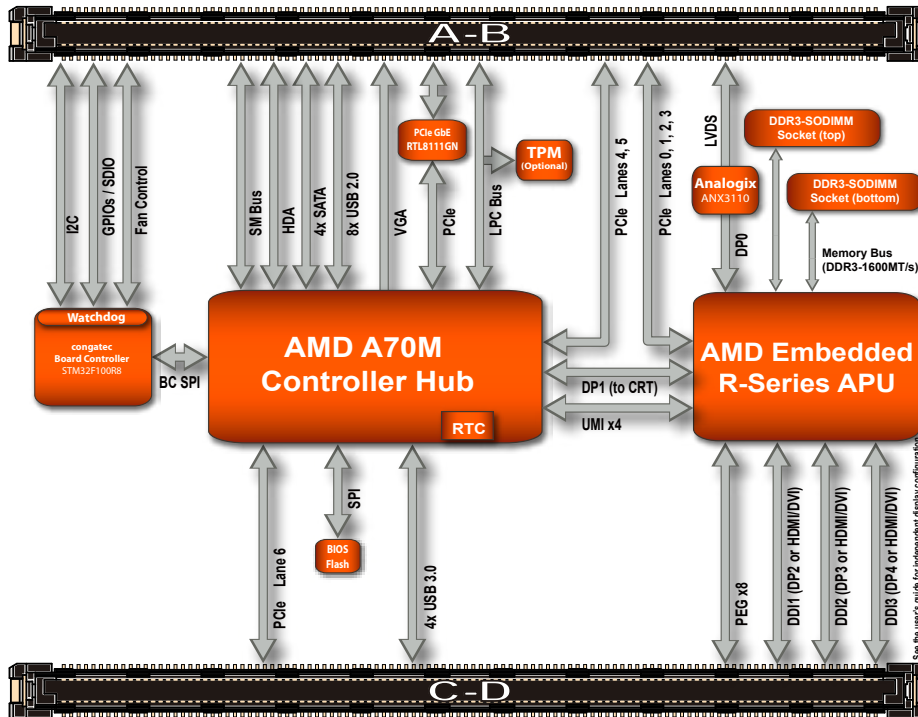

# conga-TFS | Order Information

Article	PN	Description
conga-TFS/R-464L	041101	AMD embedded R-Series R-464L quad core processor with 2.3GHz   2x2MB L2 cache and 1600MT/s DDR3 SODIMM memory interface for up to 16GB
conga-TFS/R-460H	041102	AMD embedded R-Series R-460H quad core processor with 1.9GHz   2x2MB L2 cache and 1600MT/s DDR3 SODIMM memory interface for up to 16GB
conga-TFS/R-272F	041103	AMD embedded R-Series R-272F dual core processor with 2.7GHz   1MB L2 cache and 1600MT/s DDR3 SODIMM memory interface for up to 16GB
conga-TFS/HSP-B	041150	Standard heatspreader for high performance COM Express module conga-TFS with integrated flat heat pipe. All standoffs are with 2.7mm bore hole
conga-TFS/HSP-T	041151	Standard heatspreader for high performance COM Express module conga-TFS with integrated flat heat pipe. All standoffs are M2.5mm thread
conga-TFS/CSA-B	041154	Standard active cooling solution for high performance COM Express module conga-TFS with integrated flat heat pipe   15mm fins 20mm overall heat sink height and integrated 12V fan. All standoffs are with 2.7mm bore hole
conga-TFS/CSA-T	041155	Standard active cooling solution for high performance COM Express module conga-TFS with integrated flat heat pipe   15mm fins 20mm overall heat sink height and integrated 12V fan. All standoffs are M2.5mm thread
DDR3L-SODIMM-1600 (2GB)	068755	DDR3L SODIMM memory module with 1600 MT/s (PC3L-12800S) and 2GB RAM
DDR3L-SODIMM-1600 (4GB)	068756	DDR3L SODIMM memory module with 1600 MT/s (PC3L-12800S) and 4GB RAM
DDR3L-SODIMM-1600 (8GB)	068757	DDR3L SODIMM memory module with 1600 MT/s (PC3L-12800S) and 8GB RAM

## Accessories

conga-TEVAL	065800	Evaluation carrier board for Type 6 COM-Express-modules
conga-Cdebug	047854	COM-Express debugging platform   Including cable for COM   PS/2 and VGA.
conga-LDVI/EPI	011115	LVDS to DVI converter board for digital flat panels with onboard EEPROM
conga-HDMI/Display Port adapter	500014	The conga-HDMI/DisplayPort adapter is used fo convert the chipset graphic ports Port-B   Port-C and Port-D to the HDMI or DisplayPort Interface
COM-Express-carrier-board-Socket-5	400007	Connector for COM-Express carrier boards   height 5mm   packing unit 4 pieces
COM-Express-carrier-board-Socket-8	400004	Connector for COM-Express carrier boards   height 8mm   packing unit 4 pieces

© 2014 congatec AG. All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG. Rev. October 22, 2014 MR



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.