

Power Line Inductor

AIRD-06



RoHS
Compliant



21.3 x ϕ 21.1 mm

FEATURES:

- Ferrite core with UL tube
- Wire wound construction
- High current, low DCR

APPLICATIONS:

- Electronic Appliance
- Power Supplies
- TRIAC/SCR Control Circuits

STANDARD SPECIFICATIONS

Operating Temperature: -25°C ~ +85°C

Storage Temperature: -25°C ~ +125°C

Part Number	Inductance	Tolerance	DCR (Max)	Saturation Current (Max)	Temperature Rise Current (Max)	Hipot (winding to core)	Dimension "E"
Units	μ H	%	Ω	A	A	Vdc for 1min	in/mm
Symbol	L	K, M	DCR	Isat	Irms	Hipot	E
AIRD-06-1R0	1.0	M	0.003	108	11.4	500	0.620/15.7
AIRD-06-1R2	1.2	M	0.003	108	11.4	500	0.620/15.7
AIRD-06-1R5	1.5	M	0.003	83	11.4	500	0.620/15.7
AIRD-06-1R8	1.8	M	0.003	68	11.4	500	0.620/15.7
AIRD-06-2R2	2.2	M	0.004	68	11.4	500	0.620/15.7
AIRD-06-2R7	2.7	M	0.005	58	11.4	500	0.620/15.7
AIRD-06-3R3	3.3	M	0.005	58	11.4	500	0.620/15.7
AIRD-06-3R9	3.9	M	0.005	50	11.4	500	0.620/15.7
AIRD-06-4R7	4.7	M	0.005	50	11.4	500	0.620/15.7
AIRD-06-5R6	5.6	M	0.006	44	11.4	500	0.620/15.7
AIRD-06-6R8	6.8	M	0.007	39	11.4	500	0.620/15.7
AIRD-06-8R2	8.2	M	0.007	36	11.4	500	0.620/15.7
AIRD-06-100	10	K	0.009	30	11.4	500	0.620/15.7
AIRD-06-120	12	K	0.009	27	11.4	500	0.620/15.7
AIRD-06-150	15	K	0.013	25	9.0	500	0.625/15.9
AIRD-06-180	18	K	0.018	22	7.2	500	0.630/16.0
AIRD-06-220	22	K	0.019	21	7.2	500	0.630/16.0
AIRD-06-270	27	K	0.026	20.5	5.5	500	0.546/13.9
AIRD-06-330	33	K	0.029	18.6	5.5	500	0.546/13.9
AIRD-06-390	39	K	0.030	17.0	5.5	500	0.594/15.1
AIRD-06-470	47	K	0.035	15.1	5.5	500	0.625/15.9
AIRD-06-560	56	K	0.039	13.6	5.5	500	0.625/15.9
AIRD-06-680	68	K	0.053	12.7	4.8	500	0.656/16.7
AIRD-06-820	82	K	0.060	11.3	4.8	500	0.656/16.7
AIRD-06-101	100	K	0.080	10.4	4.0	500	0.593/15.1
AIRD-06-121	120	K	0.090	9.4	4.0	500	0.593/15.1
AIRD-06-151	150	K	0.098	8.6	4.0	500	0.593/15.1
AIRD-06-181	180	K	0.110	7.8	4.0	500	0.671/17.0
AIRD-06-221	220	K	0.150	7.0	2.8	500	0.593/15.1
AIRD-06-271	270	K	0.213	6.3	2.0	500	0.562/14.3
AIRD-06-331	330	K	0.305	5.2	1.6	500	0.590/15.0
AIRD-06-391	390	K	0.320	4.9	1.6	500	0.590/15.0
AIRD-06-471	470	K	0.355	4.5	1.6	500	0.590/15.0
AIRD-06-561	560	K	0.388	4.1	1.6	500	0.590/15.0
AIRD-06-681	680	K	0.430	3.7	1.6	500	0.590/15.0
AIRD-06-821	820	K	0.590	3.4	1.3	500	0.590/15.0
AIRD-06-102	1000	K	0.818	3.1	1.0	500	0.590/15.0
AIRD-06-122	1200	K	1.140	2.7	0.8	500	0.590/15.0
AIRD-06-152	1500	K	1.260	2.4	0.8	500	0.590/15.0
AIRD-06-182	1800	K	1.390	2.2	0.8	500	0.590/15.0
AIRD-06-222	2200	K	1.540	2.0	0.8	500	0.590/15.0

Test Conditions and equipments

Test frequency: 1Hz, 0.1Vrms
 DCR: QuadTech Milliohmmeter
 Isat: 10% inductance drops from initial value
 Irms Δ T of 40°C temperature rise max

ABRACON IS
ISO 9001:2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale
 30332 Esperanza, Rancho Santa Margarita, California 92688
 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 10.25.11-A

Power Line Inductor

AIRD-06



RoHS
Compliant



21.3 x ϕ 21.1 mm

PART NUMBER IDENTIFICATION

AIRD-06-

Inductance Code

Please refer to the
Electrical Spec Table


Tolerance

M: $\pm 20\%^*$

K: $\pm 10\%^*$

*1.0 ~ 8.2 μ H: M only
10 ~ 2,200 μ H: K only

OUTLINE DIMENSION:

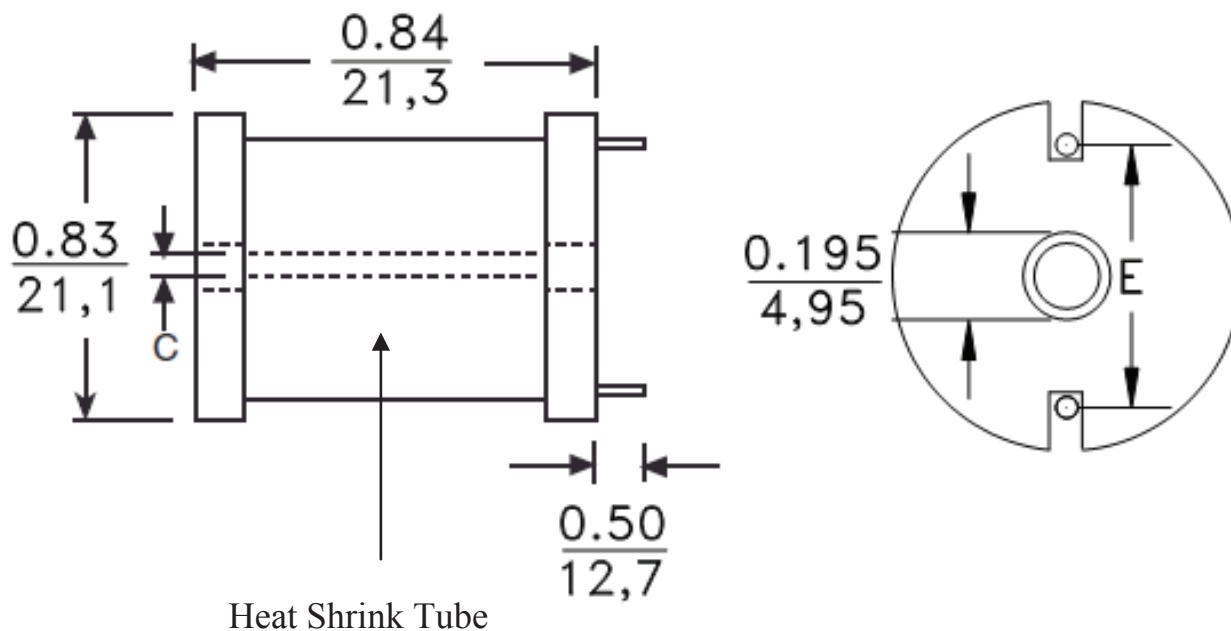

C: The mounting hole will have clearance for 4/40 screw

Dimension: inch (mm)

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO 9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 10.25.11-A**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.