

ALUMINUM ELECTROLYTIC CAPACITORS



UPM

Low Impedance, High Reliability


Low Impedance

Long Life

Anti-Solvent
Feature
(Through 100V only)

Smaller

UPW

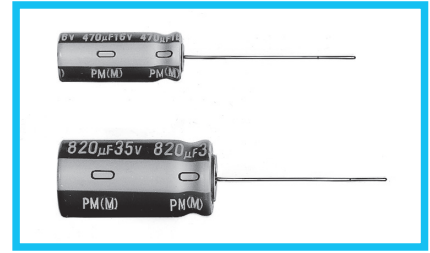


- High reliability withstanding 5000 hour load life at +105°C (3000/2000 hours for smaller case sizes as specified below).
- Capacitance ranges available based on the numerical values in E12 series under JIS.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.

Specifications

| Item | Performance Characteristics | | | | | | | | | | |
|-------------------------------|--|---|----------|------|---------|--------------------|--|-----------|------------|-----------|-----|
| Category Temperature Range | -55 to +105°C (6.3 to 100V), -40 to +105°C (160 to 400V), -25 to +105°C (450V) | | | | | | | | | | |
| Rated Voltage Range | 6.3 to 450V | | | | | | | | | | |
| Rated Capacitance Range | 1 to 15000µF | | | | | | | | | | |
| Capacitance Tolerance | ±20% at 120Hz, 20°C | | | | | | | | | | |
| Leakage Current | Rated Voltage (V) | 6.3 to 100 | | | | | 160 to 450 | | | | |
| | Leakage current | After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV or 4 (µA), whichever is greater. | | | | | CV ≤ 1000 : I = 0.1CV+40 (µA) or less. CV > 1000 : I = 0.04CV+100 (µA) or less. | | | | |
| Tangent of loss angle (tan δ) | For capacitance of more than 1000µF, add 0.02 for every increase of 1000µF. Measurement frequency : 120Hz at 20°C | | | | | | | | | | |
| | Rated Voltage (V) | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 to 100 | 160 to 350 | 400 · 450 | |
| | tan δ (MAX.) | 0.22 | 0.19 | 0.16 | 0.14 | 0.12 | 0.10 | 0.08 | 0.20 | 0.25 | |
| Stability at Low Temperature | Rated voltage (V) | | 6.3 · 10 | 16 | 25 · 35 | 50 to 100 | 160 · 200 | 250 | 315 · 350 | 400 | 450 |
| | Impedance ratio (MAX.) | Z-25°C / Z+20°C | — | — | — | — | — | — | — | — | 15 |
| | | Z-40°C / Z+20°C | — | — | — | — | — | 4 | 6 | 8 | 10 |
| | Z-55°C / Z+20°C | 4 | 3 | 3 | 2 | — | — | — | — | — | |
| Endurance | The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 5000 hours (2000 hours for φD=5 and 6.3, 3000 hours for φD=8) at 105°C, the peak voltage shall not exceed the rated voltage. | | | | | Capacitance change | Within ±20% of the initial capacitance value | | | | |
| | | | | | | tan δ | 200% or less than the initial specified value | | | | |
| | | | | | | Leakage current | Less than or equal to the initial specified value | | | | |
| Shelf Life | After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the characteristic requirements listed at right. | | | | | Capacitance change | Within ±20% of the initial capacitance value | | | | |
| | | | | | | tan δ | 150% or less than the initial specified value | | | | |
| | | | | | | Leakage current | Less than or equal to the initial specified value | | | | |
| Marking | Printed with white color letter on dark brown sleeve. | | | | | | | | | | |

Radial Lead Type

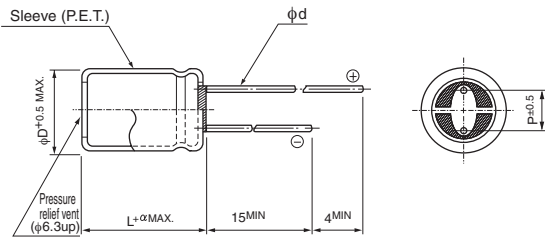

| | | |
|---|-----------|-----|
| α | (φD < 10) | 1.5 |
| | (φD ≥ 10) | 2.0 |

| | (mm) | | | | | | |
|----|------|-----|-----|-----|------|-----|-----|
| φD | 5 | 6.3 | 8 | 10 | 12.5 | 16 | 18 |
| P | 2.0 | 2.5 | 3.5 | 5.0 | 5.0 | 7.5 | 7.5 |
| φd | 0.5 | 0.5 | 0.6 | 0.6 | 0.6* | 0.8 | 0.8 |

※In case L > 25 for the φ12.5 dia. unit, lead dia. φ d = 0.8mm.

- Please refer to page 20 about the end seal configuration.

Type numbering system (Example : 25V 470µF)

1 2 3 4 5 6 7 8 9 10 11 12

U P M | 1 | E | 4 7 1 | M | P | D | □

Configuration ※

Capacitance tolerance (±20%)

Rated capacitance (470µF)

Rated voltage (25V)

Series name


Type

| Size code | |
|-------------|------|
| Type | Code |
| Small Dia | — |
| Low Profile | 6 |

※ Configuration

| φ D | Pb-free leadwire Pb-free PET sleeve |
|------------|--|
| 5 | DD |
| 6.3 | ED |
| 8 · 10 | PD |
| 12.5 to 18 | HD |

Frequency coefficient of rated ripple current

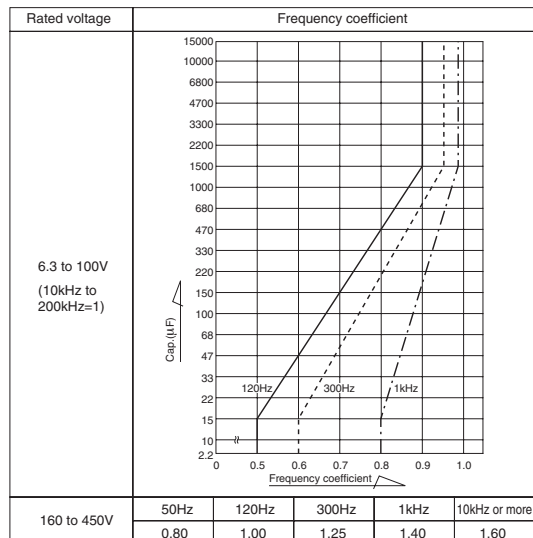

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

- Dimension table in next page.



■ Dimensions

φD×L (mm)

| Cap.(μF) | V(Code) Size code | 6.3 (0J) | | 10 (1A) | | 16 (1C) | | 25 (1E) | | 35 (1V) | |
|----------|----------------------|-------------|-----------|---------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|
| | | — | 6 | — | 6 | — | 6 | — | 6 | — | 6 |
| 22 | 220 | | | | | | | | | | 5 × 11 |
| 27 | 270 | | | | | | | | | | 5 × 11 |
| 33 | 330 | | | | | | | | 5 × 11 | | 6.3 × 11 |
| 39 | 390 | | | | | | | | 5 × 11 | | 6.3 × 11 |
| 47 | 470 | | | | | | 5 × 11 | | 6.3 × 11 | | 6.3 × 11 |
| 56 | 560 | | | | | | 5 × 11 | | 6.3 × 11 | | 6.3 × 11 |
| 68 | 680 | | | | 5 × 11 | | 6.3 × 11 | | 6.3 × 11 | | 6.3 × 15 |
| 82 | 820 | | | | 5 × 11 | | 6.3 × 11 | | 6.3 × 11 | | 6.3 × 15 |
| 100 | 101 | 5 × 11 | | | 6.3 × 11 | | 6.3 × 11 | | 6.3 × 15 | | 8 × 11.5 |
| 120 | 121 | 5 × 11 | | | 6.3 × 11 | | 6.3 × 11 | | 6.3 × 15 | | 8 × 15 |
| 150 | 151 | 6.3 × 11 | | | 6.3 × 11 | | 6.3 × 15 | | 8 × 11.5 | | 8 × 15 |
| 180 | 181 | 6.3 × 11 | | | 6.3 × 11 | | 6.3 × 15 | | 8 × 15 | 10 × 12.5 | 8 × 20 |
| 220 | 221 | 6.3 × 11 | | | 6.3 × 15 | | 8 × 11.5 | | 8 × 15 | 10 × 12.5 | 8 × 20 |
| 270 | 271 | 6.3 × 15 | | | 6.3 × 15 | | 8 × 15 | 10 × 12.5 | 8 × 20 | 10 × 16 | 10 × 20 |
| 330 | 331 | 6.3 × 15 | | | 8 × 11.5 | | 8 × 15 | 10 × 12.5 | 8 × 20 | 10 × 16 | 10 × 20 |
| 390 | 391 | 8 × 11.5 | | | 8 × 15 | 10 × 12.5 | 8 × 20 | 10 × 16 | 10 × 20 | 12.5 × 15 | 10 × 25 |
| 470 | 471 | 8 × 15 | 10 × 12.5 | | 8 × 15 | 10 × 12.5 | 8 × 20 | 10 × 16 | 10 × 20 | 12.5 × 15 | 10 × 31.5 |
| 560 | 561 | 8 × 15 | 10 × 12.5 | | 8 × 20 | 10 × 16 | 10 × 20 | 12.5 × 15 | 10 × 25 | 12.5 × 15 | 12.5 × 20 |
| 680 | 681 | 8 × 20 | 10 × 16 | | 8 × 20 | 10 × 16 | 10 × 20 | 12.5 × 15 | 10 × 31.5 | 16 × 15 | 12.5 × 25 |
| 820 | 821 | 8 × 20 | 10 × 16 | | 10 × 20 | 12.5 × 15 | 10 × 25 | 12.5 × 15 | 12.5 × 20 | 16 × 15 | 12.5 × 25 |
| 1000 | 102 | 10 × 20 | 12.5 × 15 | | 10 × 20 | 12.5 × 15 | 10 × 31.5 | 16 × 15 | 12.5 × 25 | 18 × 15 | 12.5 × 31.5 |
| 1200 | 122 | 10 × 20 | 12.5 × 15 | | 10 × 25 | 12.5 × 15 | 12.5 × 20 | 16 × 15 | 12.5 × 25 | 18 × 15 | 12.5 × 35.5 |
| 1500 | 152 | 10 × 25 | 12.5 × 15 | | 10 × 31.5 | 16 × 15 | 12.5 × 25 | 18 × 15 | 12.5 × 31.5 | 16 × 20 | 12.5 × 40 |
| 1800 | 182 | 10 × 31.5 | 16 × 15 | | 12.5 × 20 | 16 × 15 | 12.5 × 31.5 | 16 × 20 | 12.5 × 35.5 | 16 × 25 | 16 × 31.5 |
| 2200 | 222 | 10 × 31.5 | 16 × 15 | | 12.5 × 25 | 18 × 15 | 12.5 × 31.5 | 16 × 20 | 12.5 × 40 | 18 × 20 | 16 × 35.5 |
| 2700 | 272 | 12.5 × 25 | 18 × 15 | | 12.5 × 31.5 | 16 × 20 | 12.5 × 35.5 | 16 × 25 | 16 × 31.5 | 18 × 25 | 16 × 40 |
| 3300 | 332 | 12.5 × 25 | 18 × 15 | | 12.5 × 35.5 | 16 × 20 | 12.5 × 40 | 18 × 20 | 16 × 35.5 | 18 × 31.5 | 18 × 40 |
| 3900 | 392 | 12.5 × 31.5 | 16 × 20 | | 12.5 × 40 | 18 × 20 | 16 × 31.5 | 18 × 25 | 16 × 40 | 18 × 35.5 | |
| 4700 | 472 | 12.5 × 35.5 | 18 × 20 | | 16 × 31.5 | 18 × 25 | 16 × 35.5 | 18 × 31.5 | 18 × 40 | | |
| 5600 | 562 | 12.5 × 40 | 18 × 20 | | 16 × 35.5 | 18 × 25 | 16 × 40 | 18 × 35.5 | | | |
| 6800 | 682 | 16 × 31.5 | 18 × 25 | | 16 × 35.5 | 18 × 31.5 | 18 × 35.5 | | | | |
| 8200 | 822 | 16 × 35.5 | 18 × 31.5 | | 16 × 40 | 18 × 35.5 | 18 × 40 | | | | |
| 10000 | 103 | 16 × 40 | 18 × 31.5 | | 18 × 40 | | | | | | |
| 12000 | 123 | 18 × 35.5 | | | | | | | | | |
| 15000 | 153 | 18 × 40 | | | | | | | | | |

| Cap.(μF) | V(Code) Size code | 50 (1H) | | 63 (1J) | | 80 (1K) | | 100 (2A) | |
|----------|----------------------|-------------|-----------|---------|-------------|-----------|-------------|-----------|-------------|
| | | — | 6 | — | 6 | — | 6 | — | 6 |
| 2.2 | 2R2 | 5 × 11 | | | | | | 5 × 11 | |
| 3.3 | 3R3 | 5 × 11 | | | | | | 5 × 11 | |
| 4.7 | 4R7 | 5 × 11 | | | | | 5 × 11 | 6.3 × 11 | |
| 6.8 | 6R8 | 5 × 11 | | | | | 5 × 11 | 6.3 × 11 | |
| 10 | 100 | 5 × 11 | | | 5 × 11 | | 6.3 × 11 | 6.3 × 11 | |
| 12 | 120 | 5 × 11 | | | 5 × 11 | | 6.3 × 11 | 6.3 × 11 | |
| 15 | 150 | 5 × 11 | | | 6.3 × 11 | | 6.3 × 11 | 6.3 × 15 | |
| 18 | 180 | 5 × 11 | | | 6.3 × 11 | | 6.3 × 11 | 6.3 × 15 | |
| 22 | 220 | 6.3 × 11 | | | 6.3 × 11 | | 6.3 × 15 | 8 × 11.5 | |
| 27 | 270 | 6.3 × 11 | | | 6.3 × 11 | | 6.3 × 15 | 8 × 15 | 10 × 12.5 |
| 33 | 330 | 6.3 × 11 | | | 6.3 × 15 | | 8 × 11.5 | 8 × 15 | 10 × 12.5 |
| 39 | 390 | 6.3 × 11 | | | 6.3 × 15 | | 8 × 15 | 10 × 12.5 | 8 × 20 |
| 47 | 470 | 6.3 × 15 | | | 8 × 11.5 | | 8 × 15 | 10 × 12.5 | 10 × 20 |
| 56 | 560 | 6.3 × 15 | | | 8 × 15 | 10 × 12.5 | 8 × 20 | 10 × 16 | 12.5 × 15 |
| 68 | 680 | 8 × 11.5 | | | 8 × 15 | 10 × 12.5 | 10 × 20 | 12.5 × 15 | 10 × 25 |
| 82 | 820 | 8 × 15 | 10 × 12.5 | | 8 × 20 | 10 × 16 | 10 × 20 | 12.5 × 15 | 10 × 31.5 |
| 100 | 101 | 8 × 20 | 10 × 16 | | 10 × 20 | 12.5 × 15 | 10 × 25 | 12.5 × 15 | 10 × 31.5 |
| 120 | 121 | 8 × 20 | 10 × 16 | | 10 × 20 | 12.5 × 15 | 10 × 31.5 | 16 × 15 | 12.5 × 25 |
| 150 | 151 | 10 × 20 | 12.5 × 15 | | 10 × 25 | 12.5 × 15 | 10 × 31.5 | 16 × 15 | 12.5 × 25 |
| 180 | 181 | 10 × 20 | 12.5 × 15 | | 10 × 31.5 | 16 × 15 | 12.5 × 25 | 16 × 15 | 12.5 × 31.5 |
| 220 | 221 | 10 × 25 | 12.5 × 15 | | 12.5 × 20 | 16 × 15 | 12.5 × 31.5 | 18 × 15 | 12.5 × 35.5 |
| 270 | 271 | 10 × 31.5 | 16 × 15 | | 12.5 × 25 | 18 × 15 | 12.5 × 31.5 | 16 × 20 | 12.5 × 40 |
| 330 | 331 | 10 × 31.5 | 16 × 15 | | 12.5 × 25 | 18 × 15 | 12.5 × 35.5 | 16 × 25 | 16 × 31.5 |
| 390 | 391 | 12.5 × 25 | 16 × 15 | | 12.5 × 31.5 | 16 × 20 | 12.5 × 40 | 18 × 20 | 16 × 35.5 |
| 470 | 471 | 12.5 × 25 | 18 × 15 | | 12.5 × 35.5 | 16 × 25 | 16 × 31.5 | 18 × 25 | 16 × 40 |
| 560 | 561 | 12.5 × 31.5 | 16 × 20 | | 12.5 × 40 | 18 × 20 | 16 × 35.5 | 18 × 31.5 | 18 × 35.5 |
| 680 | 681 | 12.5 × 35.5 | 16 × 20 | | 16 × 31.5 | 18 × 25 | 16 × 40 | 18 × 31.5 | 18 × 40 |
| 820 | 821 | 12.5 × 40 | 18 × 20 | | 16 × 35.5 | 18 × 31.5 | 18 × 35.5 | | |
| 1000 | 102 | 16 × 31.5 | 18 × 25 | | 16 × 40 | 18 × 35.5 | 18 × 40 | | |
| 1200 | 122 | 16 × 35.5 | 18 × 31.5 | | 18 × 40 | | | | |
| 1500 | 152 | 16 × 40 | 18 × 31.5 | | | | | | |
| 1800 | 182 | 18 × 35.5 | | | | | | | |
| 2200 | 222 | 18 × 40 | | | | | | | |

In case of low profile type, ⑥ will be put at 12th digit of type numbering system.

Dimension table for 160 to 450V products are shown in 218 page.



■ Dimensions

| V(Code) | | 6.3 (0J) | | | | | | | | | | |
|-----------|-----------|-----------------------|--------------------|----------------|---|---------------|-----------------------|--------------------|----------------|---|---------------|--|
| Size code | | — | | | | | 6 | | | | | |
| Cap.(μF) | Item Code | Case size φD × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) | | Case size φD × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) | | |
| | | | 20°C / 100kHz | -10°C / 100kHz | 105°C / ¹⁰ 10kHz / ²⁰⁰ 200kHz | 105°C / 120Hz | | 20°C / 100kHz | -10°C / 100kHz | 105°C / ¹⁰ 10kHz / ²⁰⁰ 200kHz | 105°C / 120Hz | |
| 100 | 101 | 5 × 11 | 0.85 | 1.70 | 150 | 99 | | | | | | |
| 120 | 121 | 5 × 11 | 0.65 | 1.30 | 175 | 115 | | | | | | |
| 150 | 151 | 6.3 × 11 | 0.49 | 0.98 | 225 | 155 | | | | | | |
| 180 | 181 | 6.3 × 11 | 0.39 | 0.78 | 250 | 175 | | | | | | |
| 220 | 221 | 6.3 × 11 | 0.30 | 0.60 | 285 | 205 | | | | | | |
| 270 | 271 | 6.3 × 15 | 0.24 | 0.48 | 370 | 275 | | | | | | |
| 330 | 331 | 6.3 × 15 | 0.20 | 0.40 | 405 | 310 | | | | | | |
| 390 | 391 | 8 × 11.5 | 0.17 | 0.34 | 445 | 345 | | | | | | |
| 470 | 471 | 8 × 15 | 0.14 | 0.28 | 550 | 440 | 10 × 12.5 | 0.14 | 0.28 | 635 | 505 | |
| 560 | 561 | 8 × 15 | 0.12 | 0.24 | 595 | 485 | 10 × 12.5 | 0.13 | 0.26 | 670 | 545 | |
| 680 | 681 | 8 × 20 | 0.10 | 0.20 | 730 | 605 | 10 × 16 | 0.11 | 0.22 | 825 | 685 | |
| 820 | 821 | 8 × 20 | 0.085 | 0.17 | 795 | 675 | 10 × 16 | 0.095 | 0.19 | 840 | 715 | |
| 1000 | 102 | 10 × 20 | 0.075 | 0.15 | 950 | 820 | 12.5 × 15 | 0.085 | 0.17 | 890 | 770 | |
| 1200 | 122 | 10 × 20 | 0.065 | 0.13 | 1060 | 930 | 12.5 × 15 | 0.075 | 0.15 | 950 | 835 | |
| 1500 | 152 | 10 × 25 | 0.055 | 0.11 | 1260 | 1130 | 12.5 × 15 | 0.065 | 0.13 | 1020 | 915 | |
| 1800 | 182 | 10 × 31.5 | 0.050 | 0.10 | 1370 | 1230 | 16 × 15 | 0.055 | 0.11 | 1270 | 1140 | |
| 2200 | 222 | 10 × 31.5 | 0.043 | 0.086 | 1470 | 1320 | 16 × 15 | 0.049 | 0.098 | 1340 | 1200 | |
| 2700 | 272 | 12.5 × 25 | 0.038 | 0.076 | 1700 | 1530 | 18 × 15 | 0.044 | 0.088 | 1500 | 1350 | |
| 3300 | 332 | 12.5 × 25 | 0.034 | 0.068 | 1710 | 1530 | 18 × 15 | 0.039 | 0.078 | 1600 | 1440 | |
| 3900 | 392 | 12.5 × 31.5 | 0.031 | 0.062 | 1980 | 1780 | 16 × 20 | 0.036 | 0.072 | 1770 | 1590 | |
| 4700 | 472 | 12.5 × 35.5 | 0.028 | 0.056 | 2230 | 2000 | 18 × 20 | 0.032 | 0.064 | 1920 | 1720 | |
| 5600 | 562 | 12.5 × 40 | 0.026 | 0.052 | 2460 | 2210 | 18 × 20 | 0.030 | 0.060 | 1980 | 1780 | |
| 6800 | 682 | 16 × 31.5 | 0.024 | 0.048 | 2510 | 2250 | 18 × 25 | 0.027 | 0.054 | 2350 | 2110 | |
| 8200 | 822 | 16 × 35.5 | 0.022 | 0.044 | 2770 | 2490 | 18 × 31.5 | 0.025 | 0.050 | 2600 | 2340 | |
| 10000 | 103 | 16 × 40 | 0.020 | 0.040 | 3110 | 2790 | 18 × 31.5 | 0.023 | 0.046 | 2720 | 2440 | |
| 12000 | 123 | 18 × 35.5 | 0.019 | 0.038 | 3050 | 2740 | | | | | | |
| 15000 | 153 | 18 × 40 | 0.018 | 0.036 | 3300 | 2970 | | | | | | |

| V(Code) | | 10 (1A) | | | | | | | | | | |
|-----------|-----------|-----------------------|-------------------|----------------|---|---------------|-----------------------|--------------------|----------------|---|---------------|--|
| Size code | | — | | | | | 6 | | | | | |
| Cap.(μF) | Item Code | Case size φD × L (mm) | Impedance (Ω)MAX. | | Rated ripple (mArms) | | Case size φD × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) | | |
| | | | 20°C / 100kHz | -10°C / 100kHz | 105°C / ¹⁰ 10kHz / ²⁰⁰ 200kHz | 105°C / 120Hz | | 20°C / 100kHz | -10°C / 100kHz | 105°C / ¹⁰ 10kHz / ²⁰⁰ 200kHz | 105°C / 120Hz | |
| 68 | 680 | 5 × 11 | 0.80 | 1.60 | 155 | 97 | | | | | | |
| 82 | 820 | 5 × 11 | 0.65 | 1.30 | 175 | 110 | | | | | | |
| 100 | 101 | 6.3 × 11 | 0.55 | 1.10 | 210 | 135 | | | | | | |
| 120 | 121 | 6.3 × 11 | 0.44 | 0.88 | 235 | 160 | | | | | | |
| 150 | 151 | 6.3 × 11 | 0.35 | 0.70 | 265 | 185 | | | | | | |
| 180 | 181 | 6.3 × 11 | 0.29 | 0.58 | 290 | 205 | | | | | | |
| 220 | 221 | 6.3 × 15 | 0.24 | 0.48 | 370 | 270 | | | | | | |
| 270 | 271 | 6.3 × 15 | 0.20 | 0.40 | 405 | 300 | | | | | | |
| 330 | 331 | 8 × 11.5 | 0.16 | 0.32 | 460 | 350 | | | | | | |
| 390 | 391 | 8 × 15 | 0.14 | 0.28 | 550 | 430 | 10 × 12.5 | 0.15 | 0.30 | 635 | 490 | |
| 470 | 471 | 8 × 15 | 0.12 | 0.24 | 595 | 475 | 10 × 12.5 | 0.13 | 0.26 | 670 | 535 | |
| 560 | 561 | 8 × 20 | 0.10 | 0.20 | 730 | 595 | 10 × 16 | 0.11 | 0.22 | 700 | 570 | |
| 680 | 681 | 8 × 20 | 0.085 | 0.17 | 795 | 660 | 10 × 16 | 0.090 | 0.18 | 825 | 685 | |
| 820 | 821 | 10 × 20 | 0.070 | 0.14 | 985 | 835 | 12.5 × 15 | 0.080 | 0.16 | 920 | 780 | |
| 1000 | 102 | 10 × 20 | 0.060 | 0.12 | 1060 | 915 | 12.5 × 15 | 0.065 | 0.13 | 1040 | 900 | |
| 1200 | 122 | 10 × 25 | 0.050 | 0.10 | 1260 | 1120 | 12.5 × 15 | 0.060 | 0.12 | 1060 | 930 | |
| 1500 | 152 | 10 × 31.5 | 0.045 | 0.090 | 1450 | 1300 | 16 × 15 | 0.050 | 0.10 | 1330 | 1190 | |
| 1800 | 182 | 12.5 × 20 | 0.039 | 0.078 | 1470 | 1320 | 16 × 15 | 0.044 | 0.088 | 1420 | 1270 | |
| 2200 | 222 | 12.5 × 25 | 0.034 | 0.068 | 1710 | 1530 | 18 × 15 | 0.039 | 0.078 | 1600 | 1440 | |
| 2700 | 272 | 12.5 × 31.5 | 0.030 | 0.060 | 1980 | 1780 | 16 × 20 | 0.035 | 0.070 | 1740 | 1560 | |
| 3300 | 332 | 12.5 × 35.5 | 0.026 | 0.052 | 2230 | 2000 | 16 × 20 | 0.031 | 0.062 | 1850 | 1660 | |
| 3900 | 392 | 12.5 × 40 | 0.024 | 0.048 | 2460 | 2210 | 18 × 20 | 0.028 | 0.056 | 2050 | 1840 | |
| 4700 | 472 | 16 × 31.5 | 0.023 | 0.046 | 2420 | 2170 | 18 × 25 | 0.026 | 0.052 | 2350 | 2110 | |
| 5600 | 562 | 16 × 35.5 | 0.021 | 0.042 | 2610 | 2340 | 18 × 25 | 0.024 | 0.048 | 2440 | 2190 | |
| 6800 | 682 | 16 × 35.5 | 0.020 | 0.040 | 2770 | 2490 | 18 × 31.5 | 0.022 | 0.044 | 2720 | 2440 | |
| 8200 | 822 | 16 × 40 | 0.019 | 0.038 | 3110 | 2790 | 18 × 35.5 | 0.021 | 0.042 | 3050 | 2740 | |
| 10000 | 103 | 18 × 40 | 0.017 | 0.034 | 3300 | 2970 | | | | | | |

In case of low profile type, [6] will be put at 12th digit of type numbering system.



■ Dimensions

| V(Code) Size Code | | 16 (1C) | | | | | | | | | | |
|----------------------|------|--------------------------------------|----------------|--------------------------------|---------------|----------------------|----------------|------------------------------|--------------------------------|---------------|----------------------|--|
| | | Item Case size φ D × L (mm) | | — | | | | 6 | | | | |
| | | | | Impedance (Ω) MAX. | | Rated ripple (mArms) | | Case size φ D × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) | |
| Cap.(μF) | Code | 20°C / 100kHz | -10°C / 100kHz | 105°C / $\frac{10kHz}{200kHz}$ | 105°C / 120Hz | 20°C / 100kHz | -10°C / 100kHz | | 105°C / $\frac{10kHz}{200kHz}$ | 105°C / 120Hz | | |
| 47 | 470 | 5 × 11 | 0.80 | 1.60 | 155 | 92 | | | | | | |
| 56 | 560 | 5 × 11 | 0.65 | 1.30 | 175 | 105 | | | | | | |
| 68 | 680 | 6.3 × 11 | 0.50 | 1.00 | 220 | 135 | | | | | | |
| 82 | 820 | 6.3 × 11 | 0.42 | 0.84 | 240 | 155 | | | | | | |
| 100 | 101 | 6.3 × 11 | 0.35 | 0.70 | 265 | 175 | | | | | | |
| 120 | 121 | 6.3 × 11 | 0.29 | 0.58 | 290 | 195 | | | | | | |
| 150 | 151 | 6.3 × 15 | 0.23 | 0.46 | 375 | 260 | | | | | | |
| 180 | 181 | 6.3 × 15 | 0.20 | 0.40 | 405 | 285 | | | | | | |
| 220 | 221 | 8 × 11.5 | 0.16 | 0.32 | 460 | 335 | | | | | | |
| 270 | 271 | 8 × 15 | 0.14 | 0.28 | 550 | 410 | 10 × 12.5 | 0.14 | 0.28 | 635 | 470 | |
| 330 | 331 | 8 × 15 | 0.12 | 0.24 | 595 | 455 | 10 × 12.5 | 0.12 | 0.24 | 670 | 510 | |
| 390 | 391 | 8 × 20 | 0.10 | 0.20 | 730 | 570 | 10 × 16 | 0.10 | 0.20 | 730 | 570 | |
| 470 | 471 | 8 × 20 | 0.090 | 0.18 | 770 | 615 | 10 × 16 | 0.090 | 0.18 | 825 | 660 | |
| 560 | 561 | 10 × 20 | 0.075 | 0.15 | 950 | 775 | 12.5 × 15 | 0.080 | 0.16 | 920 | 750 | |
| 680 | 681 | 10 × 20 | 0.065 | 0.13 | 1060 | 880 | 12.5 × 15 | 0.070 | 0.14 | 985 | 820 | |
| 820 | 821 | 10 × 25 | 0.055 | 0.11 | 1260 | 1070 | 12.5 × 15 | 0.060 | 0.12 | 1060 | 900 | |
| 1000 | 102 | 10 × 31.5 | 0.047 | 0.094 | 1410 | 1220 | 16 × 15 | 0.055 | 0.11 | 1270 | 1100 | |
| 1200 | 122 | 12.5 × 20 | 0.041 | 0.082 | 1430 | 1250 | 16 × 15 | 0.046 | 0.092 | 1390 | 1220 | |
| 1500 | 152 | 12.5 × 25 | 0.036 | 0.072 | 1700 | 1530 | 18 × 15 | 0.041 | 0.082 | 1560 | 1400 | |
| 1800 | 182 | 12.5 × 31.5 | 0.032 | 0.064 | 1880 | 1690 | 16 × 20 | 0.037 | 0.074 | 1700 | 1530 | |
| 2200 | 222 | 12.5 × 31.5 | 0.028 | 0.056 | 2010 | 1800 | 16 × 20 | 0.033 | 0.066 | 1800 | 1620 | |
| 2700 | 272 | 12.5 × 35.5 | 0.025 | 0.050 | 2230 | 2000 | 16 × 25 | 0.030 | 0.060 | 2190 | 1970 | |
| 3300 | 332 | 12.5 × 40 | 0.023 | 0.046 | 2460 | 2210 | 18 × 20 | 0.027 | 0.054 | 2090 | 1880 | |
| 3900 | 392 | 16 × 31.5 | 0.022 | 0.044 | 2510 | 2250 | 18 × 25 | 0.025 | 0.050 | 2350 | 2110 | |
| 4700 | 472 | 16 × 35.5 | 0.020 | 0.040 | 2770 | 2490 | 18 × 31.5 | 0.023 | 0.046 | 2720 | 2440 | |
| 5600 | 562 | 16 × 40 | 0.019 | 0.038 | 3110 | 2790 | 18 × 35.5 | 0.022 | 0.044 | 2620 | 2350 | |
| 6800 | 682 | 18 × 35.5 | 0.018 | 0.036 | 3050 | 2740 | | | | | | |
| 8200 | 822 | 18 × 40 | 0.017 | 0.034 | 3300 | 2970 | | | | | | |

| V(Code) Size Code | | 25 (1E) | | | | | | | | | | |
|----------------------|------|--------------------------------------|----------------|--------------------------------|---------------|----------------------|----------------|------------------------------|--------------------------------|---------------|----------------------|--|
| | | Item Case size φ D × L (mm) | | — | | | | 6 | | | | |
| | | | | Impedance (Ω) MAX. | | Rated ripple (mArms) | | Case size φ D × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) | |
| Cap.(μF) | Code | 20°C / 100kHz | -10°C / 100kHz | 105°C / $\frac{10kHz}{200kHz}$ | 105°C / 120Hz | 20°C / 100kHz | -10°C / 100kHz | | 105°C / $\frac{10kHz}{200kHz}$ | 105°C / 120Hz | | |
| 33 | 330 | 5 × 11 | 0.80 | 1.60 | 155 | 88 | | | | | | |
| 39 | 390 | 5 × 11 | 0.65 | 1.30 | 175 | 100 | | | | | | |
| 47 | 470 | 6.3 × 11 | 0.55 | 1.10 | 210 | 125 | | | | | | |
| 56 | 560 | 6.3 × 11 | 0.44 | 0.88 | 235 | 140 | | | | | | |
| 68 | 680 | 6.3 × 11 | 0.36 | 0.72 | 260 | 160 | | | | | | |
| 82 | 820 | 6.3 × 11 | 0.30 | 0.60 | 285 | 180 | | | | | | |
| 100 | 101 | 6.3 × 15 | 0.24 | 0.48 | 370 | 245 | | | | | | |
| 120 | 121 | 6.3 × 15 | 0.20 | 0.40 | 405 | 275 | | | | | | |
| 150 | 151 | 8 × 11.5 | 0.16 | 0.32 | 460 | 320 | | | | | | |
| 180 | 181 | 8 × 15 | 0.14 | 0.28 | 550 | 390 | 10 × 12.5 | 0.15 | 0.30 | 635 | 450 | |
| 220 | 221 | 8 × 15 | 0.11 | 0.22 | 625 | 455 | 10 × 12.5 | 0.13 | 0.26 | 670 | 485 | |
| 270 | 271 | 8 × 20 | 0.095 | 0.19 | 750 | 560 | 10 × 16 | 0.11 | 0.22 | 700 | 525 | |
| 330 | 331 | 8 × 20 | 0.085 | 0.17 | 795 | 610 | 10 × 16 | 0.095 | 0.19 | 825 | 630 | |
| 390 | 391 | 10 × 20 | 0.070 | 0.14 | 985 | 770 | 12.5 × 15 | 0.080 | 0.16 | 920 | 720 | |
| 470 | 471 | 10 × 20 | 0.065 | 0.13 | 1060 | 845 | 12.5 × 15 | 0.070 | 0.14 | 985 | 785 | |
| 560 | 561 | 10 × 25 | 0.055 | 0.11 | 1260 | 1030 | 12.5 × 15 | 0.060 | 0.12 | 1060 | 860 | |
| 680 | 681 | 10 × 31.5 | 0.046 | 0.092 | 1420 | 1180 | 16 × 15 | 0.055 | 0.11 | 1270 | 1050 | |
| 820 | 821 | 12.5 × 20 | 0.041 | 0.082 | 1440 | 1220 | 16 × 15 | 0.049 | 0.098 | 1340 | 1140 | |
| 1000 | 102 | 12.5 × 25 | 0.036 | 0.072 | 1700 | 1470 | 18 × 15 | 0.043 | 0.086 | 1520 | 1310 | |
| 1200 | 122 | 12.5 × 25 | 0.032 | 0.064 | 1760 | 1550 | 18 × 15 | 0.039 | 0.078 | 1600 | 1400 | |
| 1500 | 152 | 12.5 × 31.5 | 0.029 | 0.058 | 1980 | 1780 | 16 × 20 | 0.034 | 0.068 | 1770 | 1590 | |
| 1800 | 182 | 12.5 × 35.5 | 0.026 | 0.052 | 2230 | 2000 | 16 × 25 | 0.031 | 0.062 | 2190 | 1970 | |
| 2200 | 222 | 12.5 × 40 | 0.024 | 0.048 | 2460 | 2210 | 18 × 20 | 0.028 | 0.056 | 2050 | 1840 | |
| 2700 | 272 | 16 × 31.5 | 0.022 | 0.044 | 2510 | 2250 | 18 × 25 | 0.025 | 0.050 | 2350 | 2110 | |
| 3300 | 332 | 16 × 35.5 | 0.020 | 0.040 | 2770 | 2490 | 18 × 31.5 | 0.023 | 0.046 | 2720 | 2440 | |
| 3900 | 392 | 16 × 40 | 0.019 | 0.038 | 3110 | 2790 | 18 × 35.5 | 0.021 | 0.042 | 3050 | 2740 | |
| 4700 | 472 | 18 × 40 | 0.018 | 0.036 | 3300 | 2970 | | | | | | |

In case of low profile type, [6] will be put at 12th digit of type numbering system.

UPM

■ Dimensions

| Cap. (μF) | Code | Item | 35 (1V) | | | | | | | | | | | |
|-----------|------|------|-------------|-------|-----------------------------|--------------------|----------------|----------------------------|---------------|-----------------------------|--------------------|----------------|----------------------------|---------------|
| | | | V(Code) | | — | | | | 6 | | | | | |
| | | | Size code | | Case size φD × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) | | Case size φD × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) | |
| | | | Code | | | 20°C / 100kHz | -10°C / 100kHz | 105°C / 10kHz to 200kHz | 105°C / 120Hz | | 20°C / 100kHz | -10°C / 100kHz | 105°C / 10kHz to 200kHz | 105°C / 120Hz |
| 22 | 220 | 220 | 5 × 11 | 0.75 | 1.50 | 160 | 85 | | | | | | | |
| 27 | 270 | 270 | 5 × 11 | 0.60 | 1.20 | 180 | 99 | | | | | | | |
| 33 | 330 | 330 | 6.3 × 11 | 0.49 | 0.98 | 225 | 125 | | | | | | | |
| 39 | 390 | 390 | 6.3 × 11 | 0.41 | 0.82 | 245 | 140 | | | | | | | |
| 47 | 470 | 470 | 6.3 × 11 | 0.34 | 0.68 | 270 | 160 | | | | | | | |
| 56 | 560 | 560 | 6.3 × 11 | 0.28 | 0.56 | 295 | 180 | | | | | | | |
| 68 | 680 | 680 | 6.3 × 15 | 0.24 | 0.48 | 370 | 230 | | | | | | | |
| 82 | 820 | 820 | 6.3 × 15 | 0.19 | 0.38 | 415 | 265 | | | | | | | |
| 100 | 101 | 101 | 8 × 11.5 | 0.16 | 0.32 | 460 | 305 | | | | | | | |
| 120 | 121 | 121 | 8 × 15 | 0.14 | 0.28 | 550 | 370 | 10 × 12.5 | 0.15 | 0.30 | 635 | 425 | | |
| 150 | 151 | 151 | 8 × 15 | 0.12 | 0.24 | 595 | 415 | 10 × 12.5 | 0.12 | 0.24 | 680 | 475 | | |
| 180 | 181 | 181 | 8 × 20 | 0.10 | 0.20 | 730 | 520 | 10 × 16 | 0.11 | 0.22 | 700 | 500 | | |
| 220 | 221 | 221 | 8 × 20 | 0.085 | 0.17 | 795 | 580 | 10 × 16 | 0.090 | 0.18 | 825 | 600 | | |
| 270 | 271 | 271 | 10 × 20 | 0.070 | 0.14 | 985 | 735 | 12.5 × 15 | 0.080 | 0.16 | 920 | 690 | | |
| 330 | 331 | 331 | 10 × 20 | 0.060 | 0.12 | 1060 | 810 | 12.5 × 15 | 0.065 | 0.13 | 1020 | 780 | | |
| 390 | 391 | 391 | 10 × 25 | 0.055 | 0.11 | 1260 | 980 | 12.5 × 15 | 0.060 | 0.12 | 1060 | 825 | | |
| 470 | 471 | 471 | 10 × 31.5 | 0.046 | 0.092 | 1450 | 1160 | 16 × 15 | 0.055 | 0.11 | 1270 | 1010 | | |
| 560 | 561 | 561 | 12.5 × 20 | 0.041 | 0.082 | 1430 | 1170 | 16 × 15 | 0.048 | 0.096 | 1360 | 1110 | | |
| 680 | 681 | 681 | 12.5 × 25 | 0.036 | 0.072 | 1700 | 1410 | 18 × 15 | 0.042 | 0.084 | 1540 | 1280 | | |
| 820 | 821 | 821 | 12.5 × 25 | 0.032 | 0.064 | 1760 | 1490 | 18 × 15 | 0.038 | 0.076 | 1620 | 1380 | | |
| 1000 | 102 | 102 | 12.5 × 31.5 | 0.029 | 0.058 | 1980 | 1710 | 16 × 20 | 0.034 | 0.068 | 1770 | 1530 | | |
| 1200 | 122 | 122 | 12.5 × 35.5 | 0.026 | 0.052 | 2230 | 1960 | 16 × 25 | 0.031 | 0.062 | 2190 | 1920 | | |
| 1500 | 152 | 152 | 12.5 × 40 | 0.024 | 0.048 | 2460 | 2210 | 18 × 20 | 0.028 | 0.056 | 2050 | 1840 | | |
| 1800 | 182 | 182 | 16 × 31.5 | 0.022 | 0.044 | 2510 | 2250 | 18 × 25 | 0.025 | 0.050 | 2350 | 2110 | | |
| 2200 | 222 | 222 | 16 × 35.5 | 0.020 | 0.040 | 2770 | 2490 | 18 × 31.5 | 0.023 | 0.046 | 2720 | 2440 | | |
| 2700 | 272 | 272 | 16 × 40 | 0.018 | 0.036 | 3110 | 2790 | 18 × 35.5 | 0.021 | 0.042 | 3050 | 2740 | | |
| 3300 | 332 | 332 | 18 × 40 | 0.017 | 0.034 | 3300 | 2970 | | | | | | | |

| Cap. (μF) | Code | Item | 50 (1H) | | | | | | | | | | | |
|-----------|------|------|-------------|-------|-----------------------------|--------------------|----------------|----------------------------|---------------|-----------------------------|--------------------|----------------|----------------------------|---------------|
| | | | V(Code) | | — | | | | 6 | | | | | |
| | | | Size code | | Case size φD × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) | | Case size φD × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) | |
| | | | Code | | | 20°C / 100kHz | -10°C / 100kHz | 105°C / 10kHz to 200kHz | 105°C / 120Hz | | 20°C / 100kHz | -10°C / 100kHz | 105°C / 10kHz to 200kHz | 105°C / 120Hz |
| 2.2 | 2R2 | 2R2 | 5 × 11 | 5.00 | 10.0 | 54 | 27 | | | | | | | |
| 3.3 | 3R3 | 3R3 | 5 × 11 | 3.30 | 6.60 | 66 | 33 | | | | | | | |
| 4.7 | 4R7 | 4R7 | 5 × 11 | 2.20 | 4.40 | 81 | 40 | | | | | | | |
| 6.8 | 6R8 | 6R8 | 5 × 11 | 1.80 | 3.60 | 91 | 45 | | | | | | | |
| 10 | 100 | 100 | 5 × 11 | 1.40 | 2.80 | 115 | 57 | | | | | | | |
| 12 | 120 | 120 | 5 × 11 | 1.20 | 2.40 | 125 | 62 | | | | | | | |
| 15 | 150 | 150 | 5 × 11 | 0.93 | 1.86 | 145 | 72 | | | | | | | |
| 18 | 180 | 180 | 5 × 11 | 0.80 | 1.60 | 165 | 79 | | | | | | | |
| 22 | 220 | 220 | 6.3 × 11 | 0.65 | 1.30 | 195 | 100 | | | | | | | |
| 27 | 270 | 270 | 6.3 × 11 | 0.53 | 1.06 | 215 | 115 | | | | | | | |
| 33 | 330 | 330 | 6.3 × 11 | 0.43 | 0.86 | 240 | 135 | | | | | | | |
| 39 | 390 | 390 | 6.3 × 11 | 0.36 | 0.72 | 260 | 150 | | | | | | | |
| 47 | 470 | 470 | 6.3 × 15 | 0.30 | 0.60 | 330 | 195 | | | | | | | |
| 56 | 560 | 560 | 6.3 × 15 | 0.25 | 0.50 | 360 | 220 | | | | | | | |
| 68 | 680 | 680 | 8 × 11.5 | 0.20 | 0.40 | 415 | 260 | | | | | | | |
| 82 | 820 | 820 | 8 × 15 | 0.17 | 0.34 | 505 | 320 | 10 × 12.5 | 0.18 | 0.36 | 530 | 340 | | |
| 100 | 101 | 101 | 8 × 20 | 0.14 | 0.28 | 620 | 410 | 10 × 16 | 0.16 | 0.32 | 580 | 385 | | |
| 120 | 121 | 121 | 8 × 20 | 0.12 | 0.24 | 755 | 510 | 10 × 16 | 0.13 | 0.26 | 755 | 510 | | |
| 150 | 151 | 151 | 10 × 20 | 0.10 | 0.20 | 820 | 570 | 12.5 × 15 | 0.11 | 0.22 | 785 | 545 | | |
| 180 | 181 | 181 | 10 × 20 | 0.085 | 0.17 | 945 | 670 | 12.5 × 15 | 0.095 | 0.19 | 845 | 605 | | |
| 220 | 221 | 221 | 10 × 25 | 0.075 | 0.15 | 1150 | 840 | 12.5 × 15 | 0.080 | 0.16 | 920 | 670 | | |
| 270 | 271 | 271 | 10 × 31.5 | 0.065 | 0.13 | 1200 | 900 | 16 × 15 | 0.070 | 0.14 | 1120 | 840 | | |
| 330 | 331 | 331 | 10 × 31.5 | 0.055 | 0.11 | 1300 | 995 | 16 × 15 | 0.060 | 0.12 | 1210 | 925 | | |
| 390 | 391 | 391 | 12.5 × 25 | 0.048 | 0.096 | 1440 | 1120 | 16 × 15 | 0.055 | 0.11 | 1270 | 990 | | |
| 470 | 471 | 471 | 12.5 × 25 | 0.044 | 0.088 | 1500 | 1200 | 18 × 15 | 0.046 | 0.092 | 1470 | 1170 | | |
| 560 | 561 | 561 | 12.5 × 31.5 | 0.040 | 0.080 | 1720 | 1410 | 16 × 20 | 0.044 | 0.088 | 1550 | 1270 | | |
| 680 | 681 | 681 | 12.5 × 35.5 | 0.036 | 0.072 | 1900 | 1580 | 16 × 20 | 0.040 | 0.080 | 1630 | 1350 | | |
| 820 | 821 | 821 | 12.5 × 40 | 0.033 | 0.066 | 2120 | 1800 | 18 × 20 | 0.036 | 0.072 | 1810 | 1540 | | |
| 1000 | 102 | 102 | 16 × 31.5 | 0.030 | 0.060 | 2150 | 1860 | 18 × 25 | 0.033 | 0.066 | 2020 | 1750 | | |
| 1200 | 122 | 122 | 16 × 35.5 | 0.028 | 0.056 | 2320 | 2040 | 18 × 31.5 | 0.031 | 0.062 | 2140 | 1880 | | |
| 1500 | 152 | 152 | 16 × 40 | 0.026 | 0.052 | 2650 | 2380 | 18 × 31.5 | 0.029 | 0.058 | 2340 | 2100 | | |
| 1800 | 182 | 182 | 18 × 35.5 | 0.025 | 0.050 | 2620 | 2350 | | | | | | | |
| 2200 | 222 | 222 | 18 × 40 | 0.024 | 0.048 | 2790 | 2510 | | | | | | | |

In case of low profile type, [6] will be put at 12th digit of type numbering system.



■ Dimensions

| Cap. (μF) | V(Code) Size code | Item Code | 63 (1J) | | | | | | | | | |
|-----------|----------------------|--------------|------------------------------|--------------------|----------------|-------------------------|---------------|------------------------------|--------------------|----------------|-------------------------|---------------|
| | | | — | | | | 6 | | | | | |
| | | | Case size φ D × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) | | Case size φ D × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) | |
| | | | | 20°C / 100kHz | -10°C / 100kHz | 105°C / 10kHz to 200kHz | 105°C / 120Hz | | 20°C / 100kHz | -10°C / 100kHz | 105°C / 10kHz to 200kHz | 105°C / 120Hz |
| 10 | 100 | 5 × 11 | 1.06 | 2.12 | 135 | 67 | | | | | | |
| 12 | 120 | 5 × 11 | 0.93 | 1.86 | 145 | 72 | | | | | | |
| 15 | 150 | 6.3 × 11 | 0.73 | 1.46 | 185 | 92 | | | | | | |
| 18 | 180 | 6.3 × 11 | 0.63 | 1.26 | 195 | 100 | | | | | | |
| 22 | 220 | 6.3 × 11 | 0.52 | 1.04 | 215 | 110 | | | | | | |
| 27 | 270 | 6.3 × 11 | 0.43 | 0.86 | 240 | 130 | | | | | | |
| 33 | 330 | 6.3 × 15 | 0.35 | 0.70 | 305 | 170 | | | | | | |
| 39 | 390 | 6.3 × 15 | 0.30 | 0.60 | 330 | 190 | | | | | | |
| 47 | 470 | 8 × 11.5 | 0.25 | 0.50 | 365 | 215 | | | | | | |
| 56 | 560 | 8 × 15 | 0.21 | 0.42 | 450 | 275 | 10 × 12.5 | 0.23 | 0.46 | 450 | 275 | |
| 68 | 680 | 8 × 15 | 0.17 | 0.34 | 500 | 315 | 10 × 12.5 | 0.19 | 0.38 | 495 | 310 | |
| 82 | 820 | 8 × 20 | 0.15 | 0.30 | 600 | 385 | 10 × 16 | 0.16 | 0.32 | 580 | 375 | |
| 100 | 101 | 10 × 20 | 0.12 | 0.24 | 750 | 495 | 12.5 × 15 | 0.14 | 0.28 | 695 | 460 | |
| 120 | 121 | 10 × 20 | 0.10 | 0.20 | 820 | 555 | 12.5 × 15 | 0.12 | 0.24 | 750 | 510 | |
| 150 | 151 | 10 × 25 | 0.090 | 0.18 | 950 | 665 | 12.5 × 15 | 0.095 | 0.19 | 845 | 590 | |
| 180 | 181 | 10 × 31.5 | 0.075 | 0.15 | 1110 | 790 | 16 × 15 | 0.080 | 0.16 | 1050 | 750 | |
| 220 | 221 | 12.5 × 20 | 0.065 | 0.13 | 1140 | 835 | 16 × 15 | 0.070 | 0.14 | 1120 | 820 | |
| 270 | 271 | 12.5 × 25 | 0.055 | 0.11 | 1340 | 1000 | 18 × 15 | 0.060 | 0.12 | 1290 | 965 | |
| 330 | 331 | 12.5 × 25 | 0.049 | 0.098 | 1420 | 1090 | 18 × 15 | 0.050 | 0.10 | 1410 | 1080 | |
| 390 | 391 | 12.5 × 31.5 | 0.043 | 0.086 | 1620 | 1260 | 16 × 20 | 0.047 | 0.094 | 1500 | 1170 | |
| 470 | 471 | 12.5 × 35.5 | 0.039 | 0.078 | 1780 | 1420 | 16 × 25 | 0.042 | 0.084 | 1700 | 1360 | |
| 560 | 561 | 12.5 × 40 | 0.035 | 0.070 | 1950 | 1590 | 18 × 20 | 0.039 | 0.78 | 1730 | 1410 | |
| 680 | 681 | 16 × 31.5 | 0.032 | 0.064 | 2050 | 1700 | 18 × 25 | 0.035 | 0.070 | 1940 | 1610 | |
| 820 | 821 | 16 × 35.5 | 0.029 | 0.058 | 2220 | 1890 | 18 × 31.5 | 0.032 | 0.064 | 2110 | 1790 | |
| 1000 | 102 | 16 × 40 | 0.027 | 0.054 | 2370 | 2050 | 18 × 35.5 | 0.029 | 0.058 | 2280 | 1970 | |
| 1200 | 122 | 18 × 40 | 0.025 | 0.050 | 2510 | 2210 | | | | | | |

| Cap. (μF) | V(Code) Size code | Item Code | 80 (1K) | | | | | | | | | |
|-----------|----------------------|--------------|------------------------------|--------------------|----------------|-------------------------|---------------|------------------------------|--------------------|----------------|-------------------------|---------------|
| | | | — | | | | 6 | | | | | |
| | | | Case size φ D × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) | | Case size φ D × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mArms) | |
| | | | | 20°C / 100kHz | -10°C / 100kHz | 105°C / 10kHz to 200kHz | 105°C / 120Hz | | 20°C / 100kHz | -10°C / 100kHz | 105°C / 10kHz to 200kHz | 105°C / 120Hz |
| 4.7 | 4R7 | 5 × 11 | 4.20 | 11.00 | 53 | 26 | | | | | | |
| 6.8 | 6R8 | 5 × 11 | 2.60 | 7.00 | 68 | 34 | | | | | | |
| 10 | 100 | 6.3 × 11 | 1.70 | 4.60 | 87 | 43 | | | | | | |
| 12 | 120 | 6.3 × 11 | 1.40 | 3.80 | 96 | 48 | | | | | | |
| 15 | 150 | 6.3 × 11 | 1.20 | 3.20 | 104 | 52 | | | | | | |
| 18 | 180 | 6.3 × 11 | 1.00 | 2.70 | 150 | 78 | | | | | | |
| 22 | 220 | 6.3 × 15 | 0.77 | 2.10 | 180 | 95 | | | | | | |
| 27 | 270 | 6.3 × 15 | 0.63 | 1.70 | 220 | 115 | | | | | | |
| 33 | 330 | 8 × 11.5 | 0.53 | 1.40 | 275 | 150 | | | | | | |
| 39 | 390 | 8 × 15 | 0.46 | 1.20 | 300 | 170 | 10 × 12.5 | 0.49 | 1.30 | 380 | 215 | |
| 47 | 470 | 8 × 15 | 0.39 | 1.10 | 360 | 215 | 10 × 12.5 | 0.42 | 1.10 | 410 | 245 | |
| 56 | 560 | 8 × 20 | 0.34 | 0.92 | 490 | 295 | 10 × 16 | 0.36 | 0.97 | 500 | 305 | |
| 68 | 680 | 10 × 20 | 0.28 | 0.76 | 570 | 355 | 12.5 × 15 | 0.31 | 0.84 | 520 | 325 | |
| 82 | 820 | 10 × 20 | 0.25 | 0.68 | 620 | 395 | 12.5 × 15 | 0.27 | 0.73 | 560 | 355 | |
| 100 | 101 | 10 × 25 | 0.21 | 0.57 | 795 | 525 | 12.5 × 15 | 0.23 | 0.62 | 605 | 400 | |
| 120 | 121 | 10 × 31.5 | 0.18 | 0.49 | 870 | 585 | 16 × 15 | 0.20 | 0.54 | 663 | 445 | |
| 150 | 151 | 10 × 31.5 | 0.15 | 0.41 | 955 | 665 | 16 × 15 | 0.18 | 0.47 | 699 | 470 | |
| 180 | 181 | 12.5 × 25 | 0.13 | 0.35 | 1040 | 735 | 16 × 15 | 0.15 | 0.41 | 766 | 545 | |
| 220 | 221 | 12.5 × 31.5 | 0.12 | 0.32 | 1160 | 845 | 18 × 15 | 0.13 | 0.35 | 881 | 645 | |
| 270 | 271 | 12.5 × 31.5 | 0.10 | 0.27 | 1270 | 945 | 16 × 20 | 0.11 | 0.30 | 1240 | 920 | |
| 330 | 331 | 12.5 × 35.5 | 0.088 | 0.24 | 1450 | 1100 | 16 × 25 | 0.099 | 0.27 | 1440 | 1100 | |
| 390 | 391 | 12.5 × 40 | 0.078 | 0.21 | 1610 | 1250 | 18 × 20 | 0.089 | 0.24 | 1450 | 1120 | |
| 470 | 471 | 16 × 31.5 | 0.069 | 0.19 | 1790 | 1430 | 18 × 25 | 0.080 | 0.22 | 1650 | 1320 | |
| 560 | 561 | 16 × 35.5 | 0.062 | 0.17 | 2000 | 1640 | 18 × 31.5 | 0.072 | 0.19 | 1750 | 1430 | |
| 680 | 681 | 16 × 40 | 0.055 | 0.15 | 2200 | 1830 | 18 × 31.5 | 0.065 | 0.18 | 1850 | 1540 | |
| 820 | 821 | 18 × 35.5 | 0.049 | 0.13 | 2250 | 1910 | | | | | | |
| 1000 | 102 | 18 × 40 | 0.044 | 0.12 | 2370 | 2050 | | | | | | |

In case of low profile type, [6] will be put at 12th digit of type numbering system.



■ Dimensions

| Cap.(μF) | V(Code) | Size code | Item | 100 (2A) | | | | | | | | | |
|----------|---------|-------------|-------|-----------------------------|--------------------|----------------|-------------------------|---------------|-----------------------------|--------------------|----------------|-------------------------|---------------|
| | | | | — | | | | | | 6 | | | |
| | | | | Case size φD × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mA rms) | | Case size φD × L (mm) | Impedance (Ω) MAX. | | Rated ripple (mA rms) | |
| | | | | | 20°C / 100kHz | -10°C / 100kHz | 105°C / 10kHz to 200kHz | 105°C / 120Hz | | 20°C / 100kHz | -10°C / 100kHz | 105°C / 10kHz to 200kHz | 105°C / 120Hz |
| 2.2 | 2R2 | 5 × 11 | 6.60 | 18.0 | 43 | 21 | | | | | | | |
| 3.3 | 3R3 | 5 × 11 | 4.10 | 11.0 | 54 | 27 | | | | | | | |
| 4.7 | 4R7 | 6.3 × 11 | 2.80 | 7.60 | 68 | 34 | | | | | | | |
| 6.8 | 6R8 | 6.3 × 11 | 1.90 | 5.10 | 83 | 41 | | | | | | | |
| 10 | 100 | 6.3 × 11 | 1.20 | 3.20 | 104 | 52 | | | | | | | |
| 12 | 120 | 6.3 × 11 | 1.00 | 2.70 | 150 | 75 | | | | | | | |
| 15 | 150 | 6.3 × 15 | 0.81 | 2.20 | 180 | 90 | | | | | | | |
| 18 | 180 | 6.3 × 15 | 0.67 | 1.80 | 220 | 110 | | | | | | | |
| 22 | 220 | 8 × 11.5 | 0.55 | 1.50 | 275 | 145 | | | | | | | |
| 27 | 270 | 8 × 15 | 0.47 | 1.30 | 300 | 160 | 10 × 12.5 | 0.50 | 1.40 | 380 | 205 | | |
| 33 | 330 | 8 × 15 | 0.38 | 1.00 | 360 | 200 | 10 × 12.5 | 0.42 | 1.10 | 410 | 230 | | |
| 39 | 390 | 8 × 20 | 0.33 | 0.89 | 490 | 280 | 10 × 16 | 0.36 | 0.97 | 500 | 285 | | |
| 47 | 470 | 10 × 20 | 0.28 | 0.76 | 570 | 340 | 12.5 × 15 | 0.31 | 0.84 | 520 | 310 | | |
| 56 | 560 | 10 × 20 | 0.24 | 0.65 | 620 | 375 | 12.5 × 15 | 0.27 | 0.73 | 560 | 340 | | |
| 68 | 680 | 10 × 25 | 0.21 | 0.57 | 795 | 500 | 12.5 × 15 | 0.23 | 0.62 | 605 | 380 | | |
| 82 | 820 | 10 × 31.5 | 0.18 | 0.49 | 870 | 555 | 16 × 15 | 0.19 | 0.51 | 681 | 435 | | |
| 100 | 101 | 10 × 31.5 | 0.15 | 0.41 | 955 | 635 | 16 × 15 | 0.17 | 0.46 | 719 | 475 | | |
| 120 | 121 | 12.5 × 25 | 0.13 | 0.35 | 1040 | 700 | 16 × 15 | 0.14 | 0.38 | 793 | 535 | | |
| 150 | 151 | 12.5 × 25 | 0.11 | 0.30 | 1120 | 780 | 18 × 15 | 0.12 | 0.32 | 917 | 640 | | |
| 180 | 181 | 12.5 × 31.5 | 0.098 | 0.26 | 1270 | 900 | 16 × 20 | 0.11 | 0.30 | 1240 | 880 | | |
| 220 | 221 | 12.5 × 35.5 | 0.087 | 0.23 | 1450 | 1050 | 16 × 25 | 0.093 | 0.25 | 1440 | 1050 | | |
| 270 | 271 | 12.5 × 40 | 0.072 | 0.19 | 1610 | 1200 | 18 × 20 | 0.080 | 0.22 | 1450 | 1080 | | |
| 330 | 331 | 16 × 31.5 | 0.062 | 0.17 | 1790 | 1370 | 18 × 25 | 0.070 | 0.19 | 1650 | 1260 | | |
| 390 | 391 | 16 × 35.5 | 0.053 | 0.14 | 2000 | 1550 | 18 × 31.5 | 0.062 | 0.17 | 1850 | 1430 | | |
| 470 | 471 | 16 × 40 | 0.047 | 0.13 | 2200 | 1760 | 18 × 35.5 | 0.056 | 0.15 | 1970 | 1570 | | |
| 560 | 561 | 18 × 35.5 | 0.041 | 0.11 | 2250 | 1840 | | | | | | | |
| 680 | 681 | 18 × 40 | 0.036 | 0.097 | 2300 | 1910 | | | | | | | |

In case of low profile type, [6] will be put at 12th digit of type numbering system.

| Cap.(μF) | V(Code) | 160 | | 200 | | 250 | | 315 | | 350 | | 400 | | 450 | |
|----------|---------|-----------|-----|-----------|-----|-----------|-----|-----------|-----|-----------|-----|-----------|-----|--------------------------|-----|
| | | 2C | 19 | 2D | 19 | 2E | 19 | 2F | 19 | 2V | 21 | 2G | 17 | 2W | 17 |
| 1 | 010 | 8 × 11.5 | 19 | 8 × 11.5 | 19 | 8 × 11.5 | 19 | 8 × 11.5 | 19 | 10 × 12.5 | 21 | 10 × 12.5 | 17 | 10 × 16 | 17 |
| 2.2 | 2R2 | 8 × 11.5 | 30 | 8 × 11.5 | 30 | 10 × 12.5 | 32 | 10 × 12.5 | 32 | 10 × 16 | 34 | 10 × 16 | 28 | 10 × 20 | 28 |
| 3.3 | 3R3 | 10 × 12.5 | 50 | 10 × 12.5 | 50 | 10 × 16 | 52 | 10 × 16 | 52 | 10 × 20 | 54 | 10 × 20 | 47 | 12.5 × 20 | 48 |
| 4.7 | 4R7 | 10 × 12.5 | 57 | 10 × 16 | 60 | 10 × 16 | 60 | 10 × 20 | 65 | 10 × 20 | 65 | 12.5 × 20 | 55 | 12.5 × 25 | 55 |
| 10 | 100 | 10 × 16 | 90 | 10 × 20 | 95 | 12.5 × 20 | 98 | 12.5 × 20 | 98 | 12.5 × 25 | 100 | 12.5 × 25 | 85 | 16 × 25 | 90 |
| 22 | 220 | 12.5 × 20 | 140 | 12.5 × 25 | 145 | 16 × 25 | 150 | 16 × 25 | 150 | 16 × 25 | 150 | 16 × 31.5 | 130 | 16 × 35.5 | 135 |
| 33 | 330 | 12.5 × 25 | 175 | 16 × 25 | 180 | 16 × 25 | 180 | 16 × 31.5 | 185 | 16 × 35.5 | 190 | 18 × 35.5 | 170 | 18 × 40 | 170 |
| 47 | 470 | 16 × 25 | 220 | 16 × 25 | 220 | 16 × 31.5 | 225 | 18 × 35.5 | 235 | 18 × 40 | 240 | | | | |
| 100 | 101 | 16 × 35.5 | 330 | 18 × 40 | 345 | 18 × 40 | 345 | | | | | | | Case size φD × L (mm) | ※1 |

※1 Rated ripple current (mA rms) at 105°C 120Hz



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.