

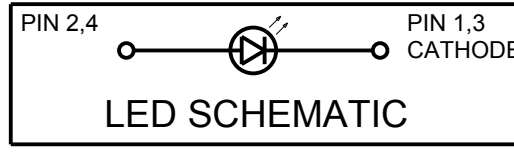
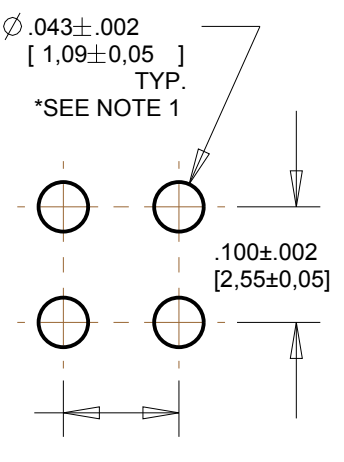
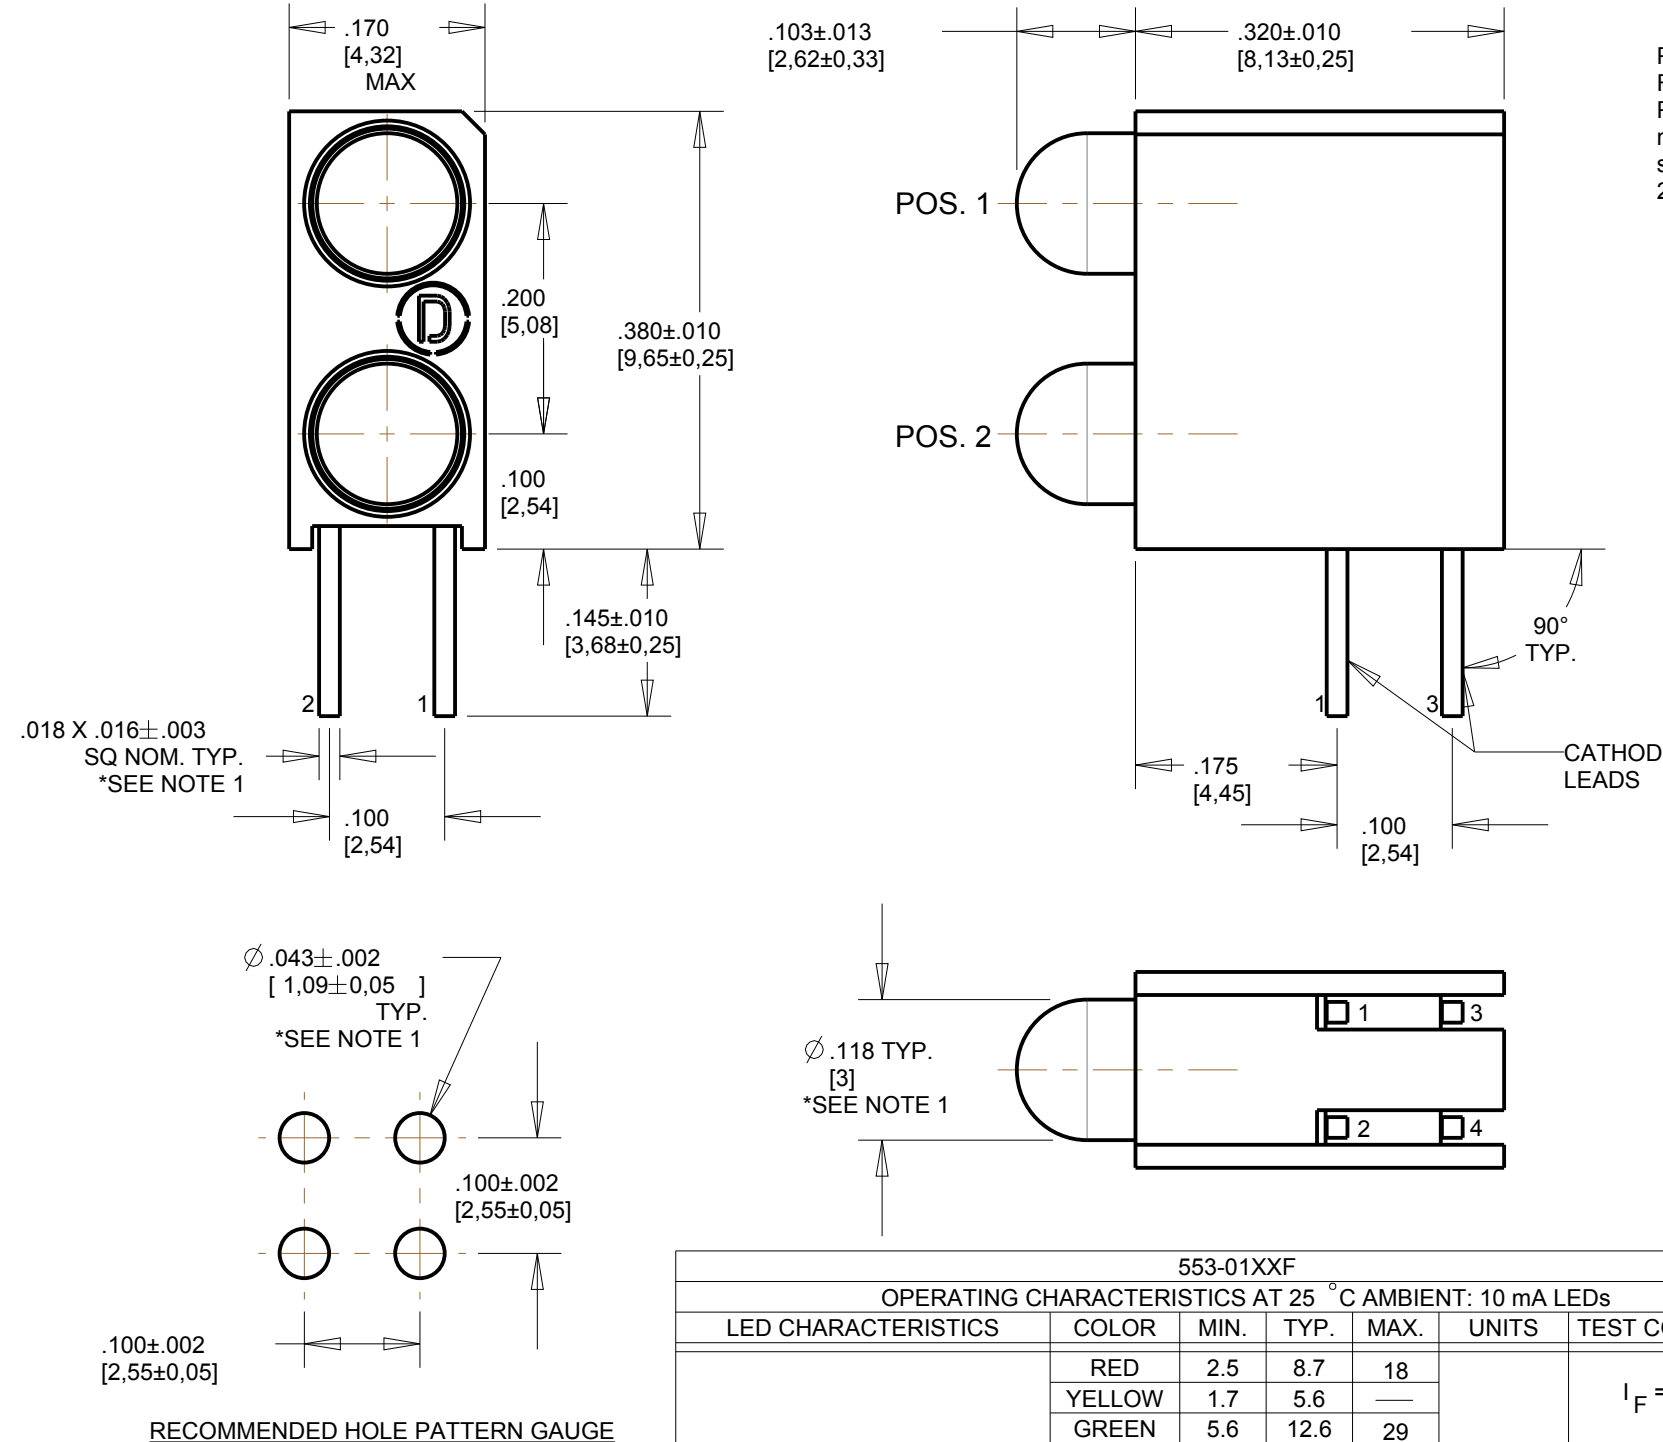


ASSY. NO. (CAT. NO.)	LED COLOR	
	POSITION 1	POSITION 2
553-0101F	BLANK	RED
553-0102F	BLANK	GREEN
553-0103F	BLANK	YELLOW
553-0107F	BLANK	ORANGE
553-0108F	BLANK	BLUE
553-0110F	RED	BLANK
553-0111F	RED	RED
553-0112F	RED	GREEN
553-0113F	RED	YELLOW
553-0118F	RED	BLUE
553-0120F	GREEN	BLANK
553-0121F	GREEN	RED
553-0122F	GREEN	GREEN
553-0123F	GREEN	YELLOW
553-0127F	GREEN	ORANGE
553-0128F	GREEN	BLUE
553-0130F	YELLOW	BLANK
553-0131F	YELLOW	RED
553-0132F	YELLOW	GREEN
553-0133F	YELLOW	YELLOW
553-0171F	ORANGE	RED
553-0172F	ORANGE	GREEN
553-0173F	ORANGE	YELLOW
553-0177F	ORANGE	ORANGE
553-0181F	BLUE	RED
553-0182F	BLUE	GREEN
553-0188F	BLUE	BLUE
553-0199F	WHITE	WHITE
553-0201F	BLANK	RED
553-0202F	BLANK	GREEN
553-0203F	BLANK	YELLOW
553-0210F	RED	BLANK
553-0211F	RED	RED
553-0212F	RED	GREEN
553-0213F	RED	YELLOW
553-0220F	GREEN	BLANK
553-0221F	GREEN	RED
553-0222F	GREEN	GREEN
553-0223F	GREEN	YELLOW
553-0230F	YELLOW	BLANK
553-0231F	YELLOW	RED
553-0232F	YELLOW	GREEN
553-0233F	YELLOW	YELLOW
553-0301F	BLANK	RED
553-0302F	BLANK	GREEN
553-0303F	BLANK	YELLOW
553-0310F	RED	BLANK
553-0311F	RED	RED
553-0312F	RED	GREEN
553-0313F	RED	YELLOW
553-0320F	GREEN	BLANK
553-0321F	GREEN	RED
553-0322F	GREEN	GREEN
553-0323F	GREEN	YELLOW
553-0331F	YELLOW	RED
553-0332F	YELLOW	GREEN
553-0333F	YELLOW	YELLOW

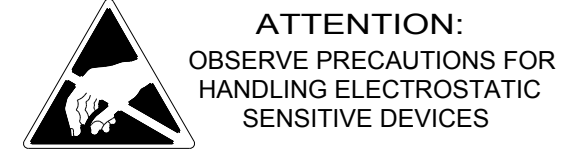

RoHS COMPLIANT 553-0XXXF
 Part Numbers with the "F" suffix ending are RoHS Compliant.
 For example: 553-0101F
 Packaging is marked with "RoHS Compliant" label or equivalent markings. Parts can be wave soldered, dip soldered or hand soldered using typical lead-free soldering process with max 260°C temp. for 5 sec.

BIN	LIMITS (WHITE LED) (CHROMATICITY COORDINATES)			
	X	Y	Z	U
A3	0.270	0.270	0.250	0.250
	0.275	0.325	0.300	0.250
A4	0.270	0.250	0.250	0.270
	0.275	0.250	0.200	0.225
B3	0.290	0.290	0.270	0.270
	0.300	0.350	0.325	0.275
B4	0.290	0.270	0.270	0.290
	0.300	0.275	0.225	0.250
C3	0.310	0.310	0.290	0.290
	0.325	0.375	0.350	0.300
C4	0.310	0.290	0.290	0.310
	0.325	0.300	0.250	0.275
D3	0.330	0.330	0.310	0.310
	0.350	0.400	0.375	0.325
D4	0.330	0.310	0.310	0.330
	0.350	0.325	0.275	0.300



NOTES:

- (FOR ORANGE: LEADS .018 SQ. NOM.), LED BODY ϕ .115±.010 AND THE PC BOARD TOLERANCE ON LEAD THICKNESS TO BE ±.003.
- LED LEAD DIMENSIONS SHOWN ARE MEASURED AT HOUSING EXIT.
- LEADS TO FIT INTO HOLES SPACED AS PER PATTERN.
- PIN NUMBERS FOR REFERENCE ONLY, DESIGNATION NON-EXISTENT ON PART.
- DIALIGHT PART NUMBERS: 553-0XXXF.
- THIS ASSEMBLY CONTAINS ELECTROSTATIC DISCHARGE SENSITIVE DEVICES (ESDS). MAINTAIN ALL PRECAUTIONARY MEASURES DURING ASSEMBLY, HANDLING, AND STORAGE IN ACCORDANCE WITH IPC-A-610.

553-02XXF					
OPERATING CHARACTERISTICS AT 25° C AMBIENT: 2 mA LOW CURRENT LEDs					
LED CHARACTERISTICS	COLOR	MIN.	TYP.	MAX.	TEST CONDITIONS
LUMINOUS INTENSITY	RED	0.75	2.5		mcd $I_F = 2$ mA
	YELLOW	0.4	4.5		
	GREEN	0.4	1.1		
PEAK WAVELENGTH	RED		635		nm
	YELLOW		585		
	GREEN		565		
FORWARD VOLTAGE	RED	1.7	2.2		V $I_F = 2$ mA
	YELLOW	1.8	2.2		
	GREEN	1.9	2.2		
REVERSE CURRENT	ALL			10	μ A $V_R = 5$ V
VIEWING ANGLE	ALL		60		DEGREE

553-01XXF					
OPERATING CHARACTERISTICS AT 25° C AMBIENT: 10 mA LEDs					
LED CHARACTERISTICS	COLOR	MIN.	TYP.	MAX.	TEST CONDITIONS
LUMINOUS INTENSITY	RED	2.5	8.7	18	mcd $I_F = 10$ mA
	YELLOW	1.7	5.6	—	
	GREEN	5.6	12.6	29	
	BLUE	11	16	23	
	ORANGE	3.4	7.0	10.8	
	WHITE	400	1100	1900	
PEAK WAVELENGTH	RED		635		nm
	YELLOW		588		
	GREEN		565		
	BLUE		468		
	ORANGE		600		
	WHITE				
DOMINANT WAVELENGTH	RED	615	625	632	nm $I_F = 10$ mA
	YELLOW	585	590	595	
	GREEN	564	568	573	
	BLUE	460	467	475	
	ORANGE	597	602	616	
	WHITE				
FORWARD VOLTAGE	RED		2.0	2.6	V $I_F = 10$ mA
	YELLOW		2.1	2.6	
	GREEN		2.1	2.6	
	BLUE	2.0	2.7	4.1	
	ORANGE	1.5	1.9	3.5	
	WHITE		3.5	4.0	
REVERSE CURRENT	RED			100	μ A $V_R = 5$ V
	YELLOW			100	
	GREEN			100	
	BLUE			10	
	ORANGE			100	
	WHITE			100	
VIEWING ANGLE	RED		60		DEGREE
	YELLOW		60		
	GREEN		60		
	BLUE		100		
	ORANGE		60		
	WHITE		45		

553-02XXF		
ABSOLUTE MAXIMUM RATINGS AT 25° C AMBIENT: 2 mA LOW CURRENT LEDs		
	COLOR	UNITS
POWER DISSIPATION	RED GREEN YELLOW	20 mW
PEAK FORWARD CURRENT (1/10 DUTY CYCLE, 0.1ms PULSE WIDTH)		500 mA
CONTINUOUS FORWARD CURRENT		7 mA
LINEAR DERATING FROM 95° C		0.7 mA/°C
REVERSE VOLTAGE		5 V
LEAD SOLDERING TEMPERATURE (.063" [1.6mm] FROM BODY) FOR 5 SEC.		260 °C
OPERATING TEMPERATURE		-55 TO +100 °C
STORAGE TEMPERATURE		-55 TO +100 °C

553-01XXF						
ABSOLUTE MAXIMUM RATINGS AT 25° C AMBIENT						
	RED	YELLOW	GREEN	BLUE	ORANGE	WHITE
POWER DISSIPATION	100	60	120	120	135	120
PEAK FORWARD CURRENT (1/10, .1ms PULSE WIDTH) (1/10, .1ms PULSE WIDTH) (1/10, .1ms PULSE WIDTH) (1/10, .1ms PULSE WIDTH) (1/10, .1ms PULSE WIDTH) (1/10, .1ms PULSE WIDTH)	90	60	90	100	500	100
CONTINUOUS FORWARD CURRENT (1/10, .1ms PULSE WIDTH)	30	20	30	30	30	30
LINEAR DERATING FROM 50° C (30° C FOR BLUE, 30° C FOR WHITE)	0.40	0.25	0.40	.5	0.50	.45
REVERSE VOLTAGE	5 V					
LEAD SOLDERING TEMPERATURE (.063" [1.6mm] FROM BODY) FOR 5 SEC.	260 °C					
OPERATING TEMPERATURE	-55 TO +100		-40 TO +85		-55 TO +100	
STORAGE TEMPERATURE	-55 TO +100		-55 TO +100		-40 TO +100	

553-03XXF						
OPERATING CHARACTERISTICS AT 25° C AMBIENT: 5 V INTEGRAL RESISTOR LEDs						
LED CHARACTERISTICS	COLOR	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
LUMINOUS INTENSITY	RED	8.7	29.0		mcd	$V_F = 5$ V
	YELLOW	3.7	12.6			
	GREEN	5.6	19.0			
PEAK WAVELENGTH	RED		635		nm	
	YELLOW		585			
	GREEN		565			
FORWARD CURRENT	RED	10	20		mA	$V_F = 5$ V
	YELLOW	10	20			
	GREEN	10	20			
REVERSE CURRENT	RED			100	μ A	$V_R = 5$ V
	YELLOW			100		
	GREEN			100		
VIEWING ANGLE	ALL		60		DEGREE	

553-03XXF			
ABSOLUTE MAXIMUM RATINGS AT 25° C AMBIENT 5 V INTEGRAL RESISTOR LEDs			
	COLOR	UNITS	
CONTINUOUS FORWARD VOLTAGE	RED GREEN YELLOW	7.5	V
REVERSE VOLTAGE		5	V
LINEAR DERATING FROM 50° C		0.071	V/°C
LEAD SOLDERING TEMPERATURE (.063" [1.6mm] FROM BODY) FOR 5 SEC.		260	°C
OPERATING TEMPERATURE		-40 TO +85	°C
STORAGE TEMPERATURE		-55 TO +100	°C

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.

SCALE: 6.000

DRAWING NUMBER: C-17277

REV: K

TOLERANCES: UNLESS OTHERWISE SPECIFIED
 FRACTIONS: \pm 1/64
 DECIMALS (.XX): \pm .02
 DECIMALS (.XXX): \pm .015

TITLE: 3mm LED BI-LEVEL CBI
 RoHS COMPLIANT

MATERIAL:

ANGLES: \pm 3°

FINISH:

FSCM 83330

SHEET 1 OF 1

FAMILY TABLES:

1501 ROUTE 34 SOUTH
 FARMINGDALE, NJ 07727
 (732) 919-3119
 www.dialight.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.