LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	PRODUCTION RELEASE	05JUN2019	JW	SH

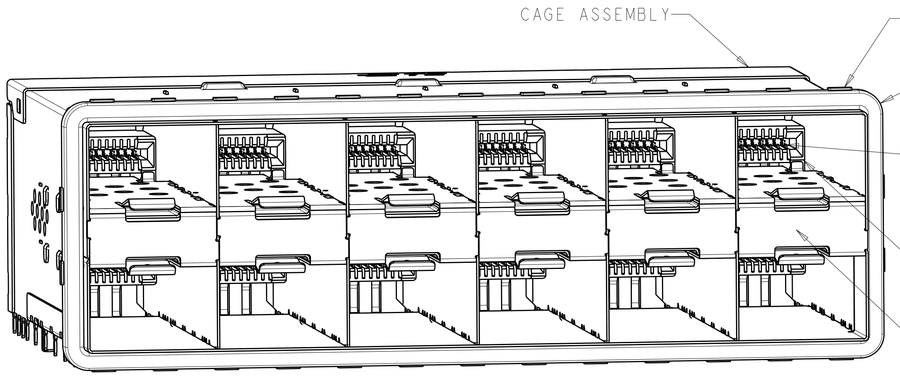

2347721-1
SCALE 3:1

1. MATERIALS:
   CAGE ASSEMBLY - NICKEL-SILVER ALLOY PER ASTM B 122
   CONNECTOR HOUSING - LCP, BLACK, UL 94V-O RATED
   CHICKLET - LCP, BLACK, UL 94V-O RATED
   CHICKLET ALIGNMENT CLIP - LCP, BLACK, UL 94V-O RATED
   CONTACT - COPPER ALLOY
   EMI GASKET - ELASTOMERIC
   GASKET FLANGE - STAINLESS STEEL
   EMI SPRINGS - PHOSPHOR BRONZE PER ASTM B 103,
   0.8µm MIN TIN PER ASTM B 545
   LIGHT PIPE - POLYCARBONATE
   LIGHT PIPE PLATE- STAINLESS STEEL
2. CONTACT FINISH:
   CONFORMS TO THE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2481, BASED ON EIA/ECA-364-1000.01A, (CONTROLLED ENVIRONMENT APPLICATIONS) ON MATING INTERFACE, TIN ON NEEDLE EYE
3. PCB MINIMUM THICKNESS = 1.5mm

4. FOR HOLE SIZE AND PLATINGS, SEE APPLICATION SPECIFICATION 114-13319
5. LIGHT PIPE PAD LAYOUT IS FOR 0805 LOW PROFILE LED PACKAGE WITH A HEIGHT OF 0.8mm
6. DIMENSIONS APPLY FOR EMI SPRINGS ONLY
7. THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT, INDICATED BY THE DASHED LINE, TO BE CONSIDERED THE KEEPOUT AREA FOR COMPONENTS AND SIGNAL TRACES, TOP SIDE ONLY, TOP SIDE TRACES ALLOWED WITHIN CONNECTOR HOLE PATTERN

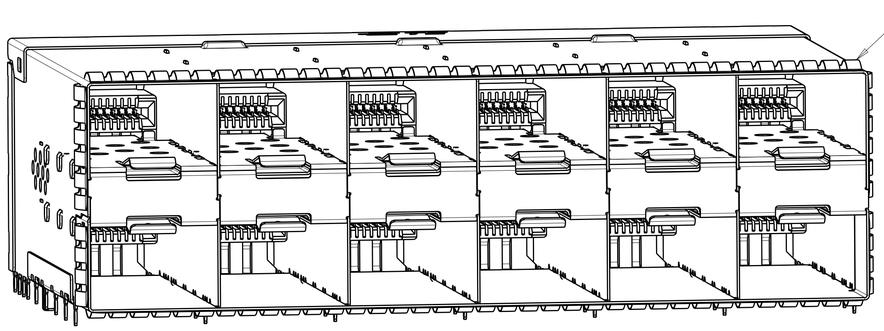

2347721-5
SCALE 3:1



REVERSED INNER LIGHT PIPES
2-2347721-1, 1-2347721-3
SCALE 4:1



INNER/OUTER LIGHT PIPES
2347721-2, 2347721-6
SCALE 4:1



INNER LIGHT PIPES
2347721-3, 2347721-7
SCALE 4:1



OUTER LIGHT PIPES
2347721-4, 2347721-8
SCALE 4:1



CENTER/REVERSED OUTER
1-2347721-7, 1-2347721-9
SCALE 4:1



REVERSED OUTER
1-2347721-8, 2-2347721-0
SCALE 4:1

88	EMI SPRING AIRFLOW ENHANCE TYPE	NONE	3-2347721-1
90.75	EMI GASKET AIRFLOW ENHANCE TYPE	NONE	3-2347721-0
88	EMI SPRINGS	REVERSED INNER	2-2347721-1
		REVERSED OUTER	2-2347721-0
		CENTER/REVERSED OUTER	1-2347721-9
90.75	EMI GASKET	REVERSED OUTER	1-2347721-8
		CENTER/REVERSED OUTER	1-2347721-7
88	EMI SPRINGS WITH NICKEL PLATING ONLY	REVERSED INNER	1-2347721-3
		OUTER	1-2347721-2
		INNER	1-2347721-1
		INNER/OUTER	1-2347721-0
		NONE	2347721-9
88	EMI SPRINGS	OUTER	2347721-8
		INNER	2347721-7
		INNER/OUTER	2347721-6
		NONE	2347721-5
90.75	EMI GASKET	OUTER	2347721-4
		INNER	2347721-3
		INNER/OUTER	2347721-2
		NONE	2347721-1
(E)	CAGE TYPE	LIGHT PIPE CONFIGURATION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±0.25
1 PLC ±0.25
2 PLC ±0.25
3 PLC ±0.25
4 PLC ±-
ANGLES ±5°

MATERIAL SEE NOTES
FINISH SEE NOTES

DWN J.WANG 26FEB2019
CHK S.HAN 26FEB2019
APVD S.HAN 26FEB2019
PRODUCT SPEC 108-2481
APPLICATION SPEC 114-13319
WEIGHT -

TE Connectivity

NAME RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2347721	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 6 | REV A

LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

AIRFOLW ENHANCE TYPE

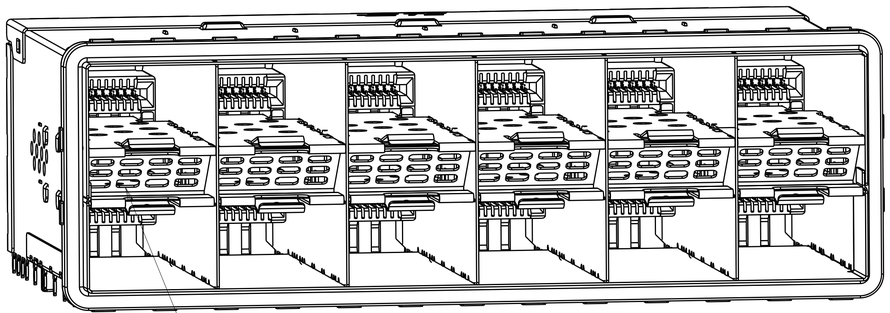

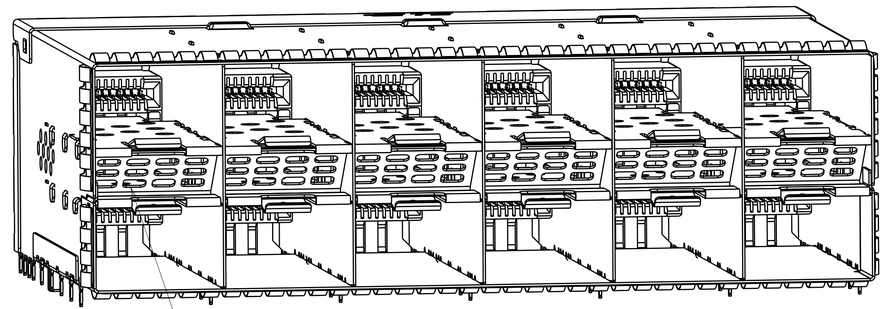

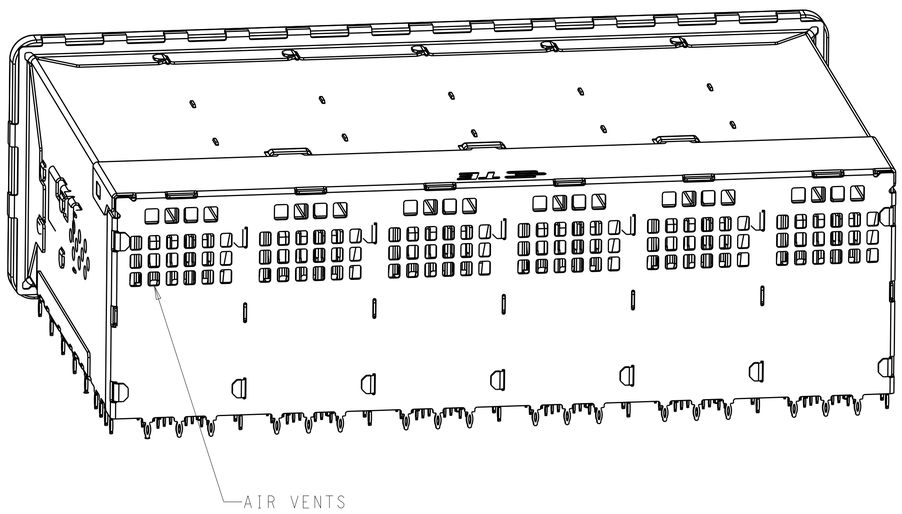

3-2347721-0
EMI GASKET TYPE

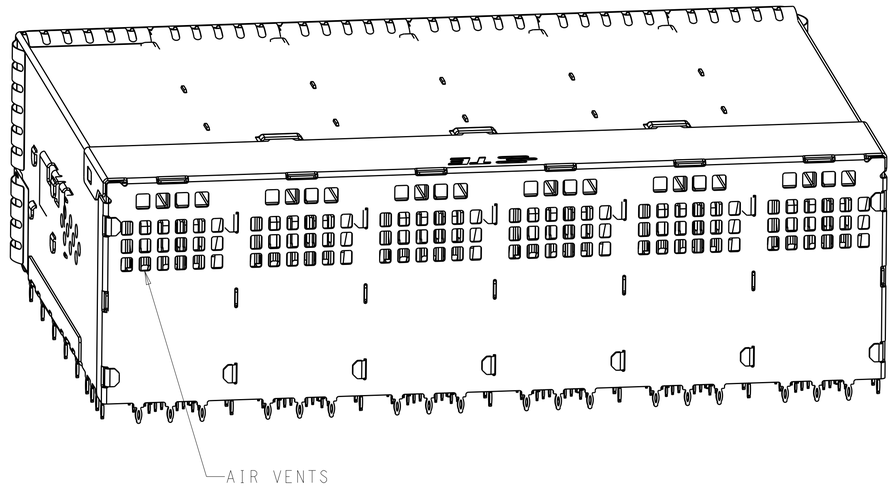

3-2347721-1
EMI SPRING TYPE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.WANG 26FEB2019	TE Connectivity
		CHK S.HAN 26FEB2019	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.25; 1 PLC ±0.25; 2 PLC ±0.25; 3 PLC ±0.25; 4 PLC ±0.25; ANGLES ±5°	APVD S.HAN 26FEB2019	NAME RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56 -
		PRODUCT SPEC 108-2481	
		APPLICATION SPEC 114-13319	SIZE A1 · CAGE CODE 00779 · DRAWING NO C-2347721 · RESTRICTED TO -
MATERIAL SEE NOTES	FINISH SEE NOTES	WEIGHT -	CUSTOMER DRAWING · SCALE 1:1 · SHEET 2 OF 6 · REV A

LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

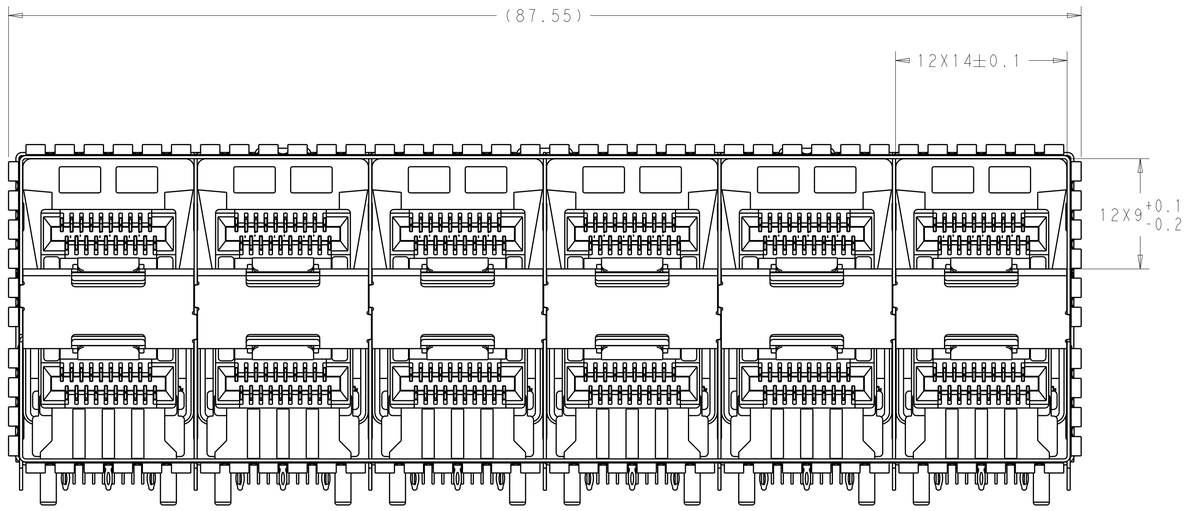

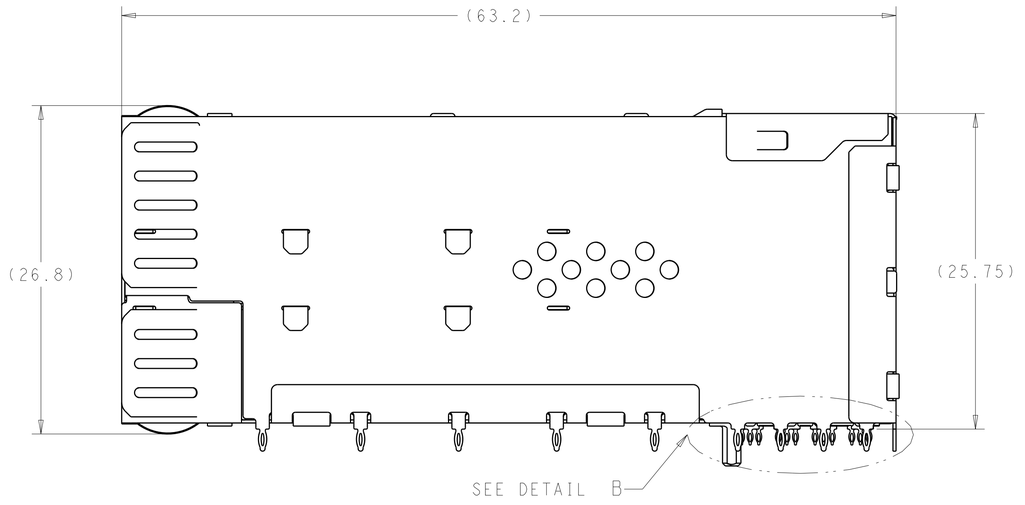

2347721-5 THRU 1-2347721-2, 1-2347721-9, 2-2347721-0,2-2347721-1
EMI SPRINGS ONLY
SCALE 4:1

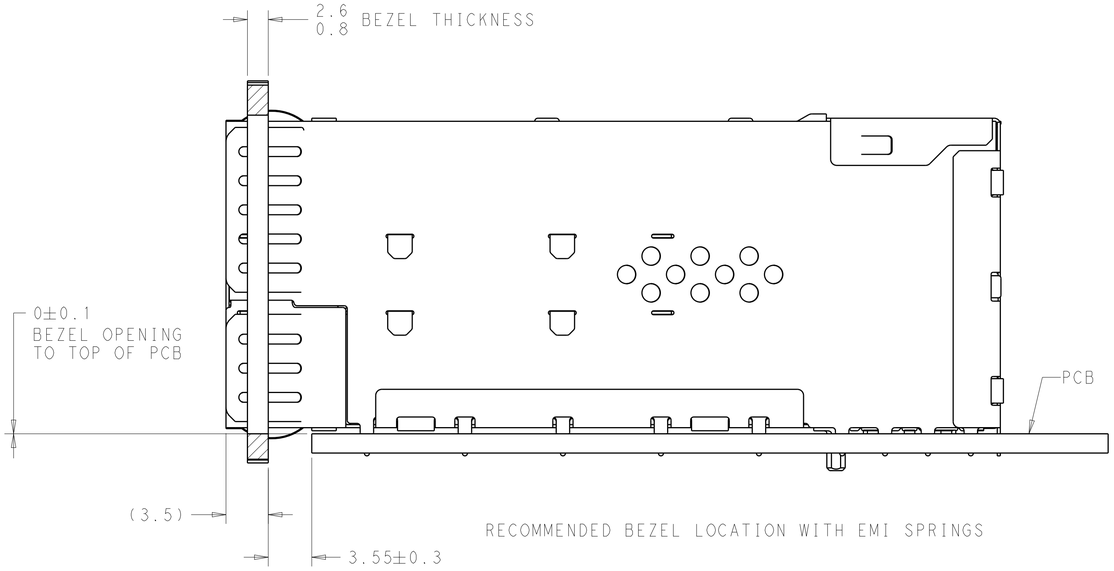

RECOMMENDED BEZEL LOCATION WITH EMI SPRINGS

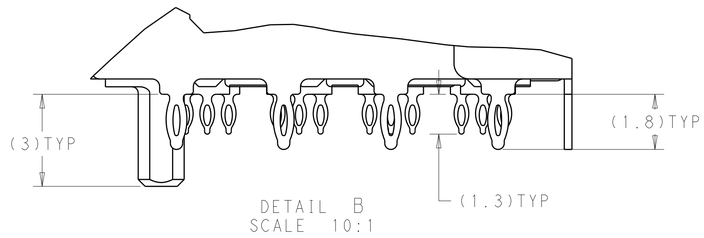

DETAIL B
SCALE 10:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.WANG 26FEB2019	TE Connectivity
		CHK S.HAN 26FEB2019	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.25, 1 PLC ±0.25, 2 PLC ±0.25, 3 PLC ±0.25, 4 PLC ANGLES ±- ±5°	APVD S.HAN 26FEB2019	NAME RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56 -
		PRODUCT SPEC 108-2481	
		APPLICATION SPEC 114-13319	SIZE A1 / CAGE CODE 00779 / DRAWING NO C-2347721 / RESTRICTED TO -
MATERIAL SEE NOTES	FINISH SEE NOTES	WEIGHT -	CUSTOMER DRAWING / SCALE 1:1 / SHEET 3 OF 6 / REV A

LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

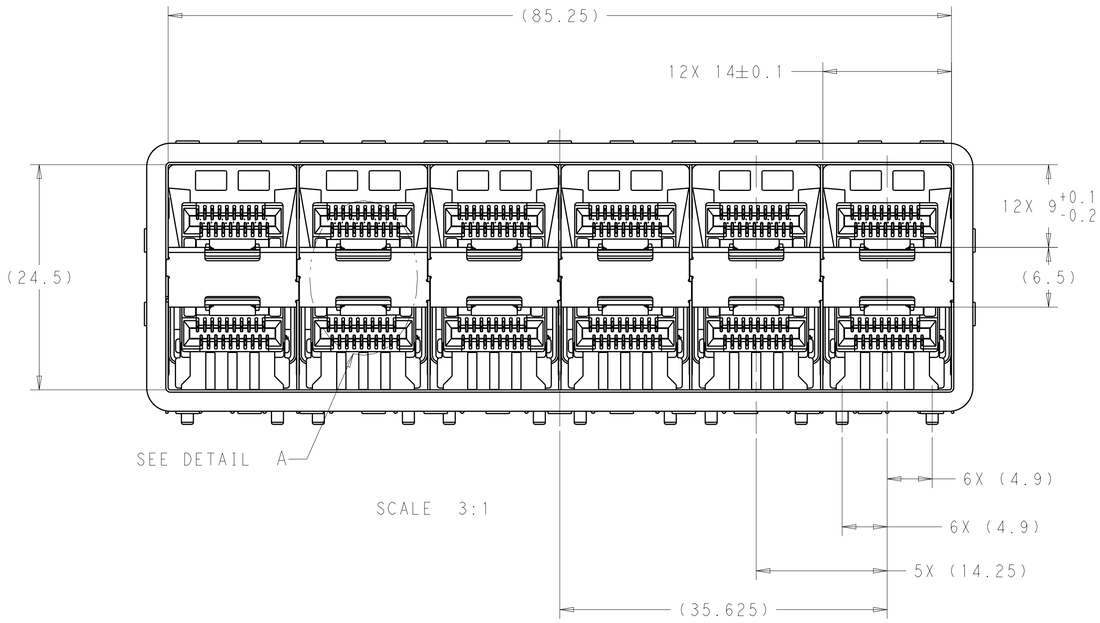

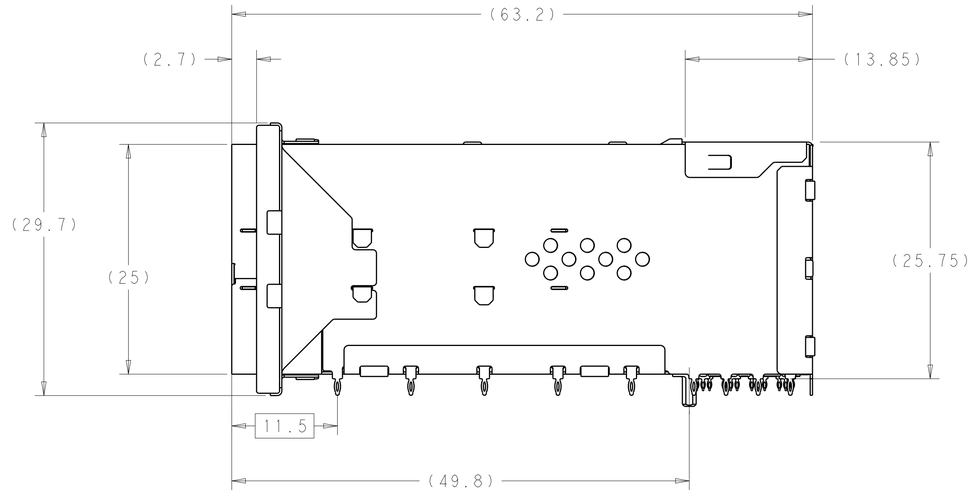

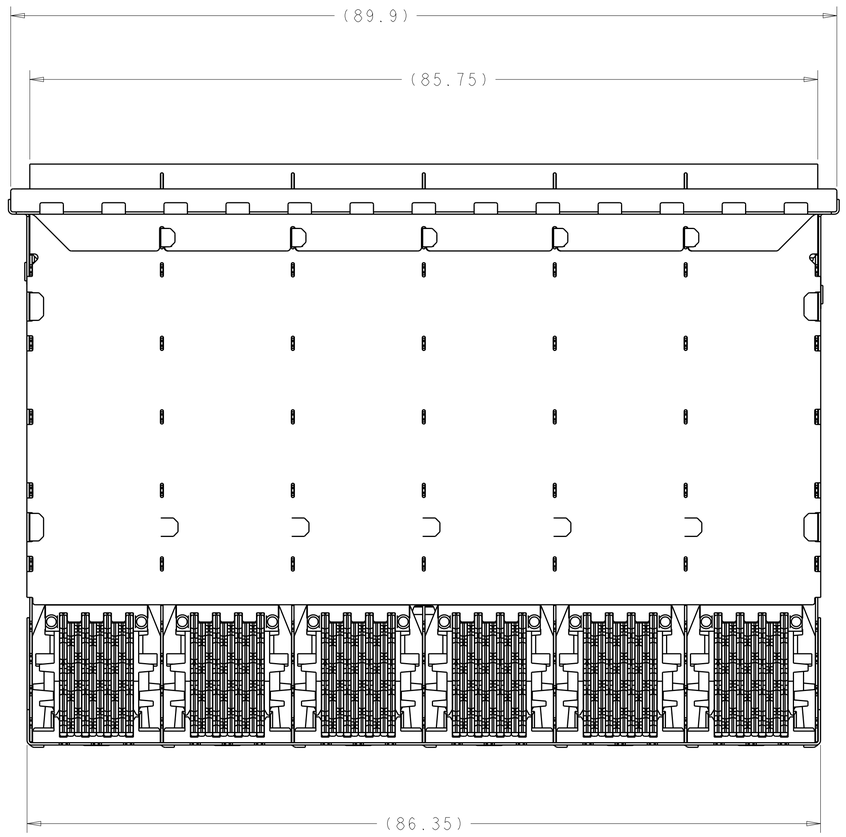

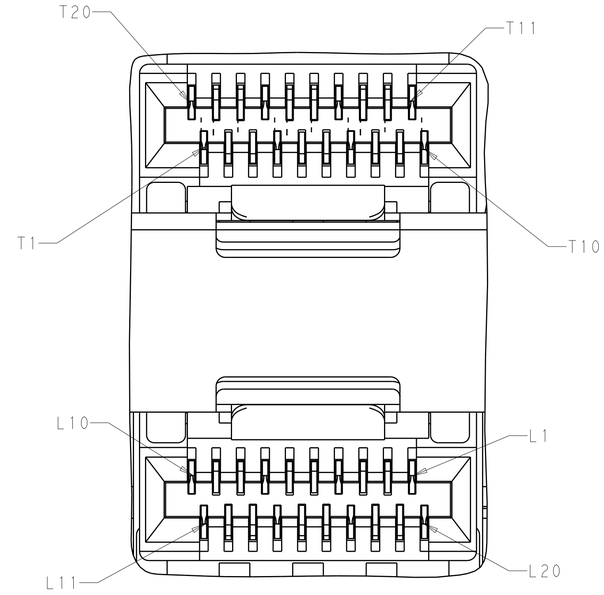

DETAIL A
6X INDIVIDUALLY
SCALE 10:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±0.25
1 PLC ±0.25
2 PLC ±0.25
3 PLC ±0.25
4 PLC ±
ANGLES ±5°

MATERIAL SEE NOTES
FINISH SEE NOTES

DWN	J.WANG	26FEB2019
CHK	S.HAN	26FEB2019
APVD	S.HAN	26FEB2019

PRODUCT SPEC 108-2481
APPLICATION SPEC 114-13319
WEIGHT -

TE Connectivity

NAME RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2347721	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 4 OF 6 | REV A

LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

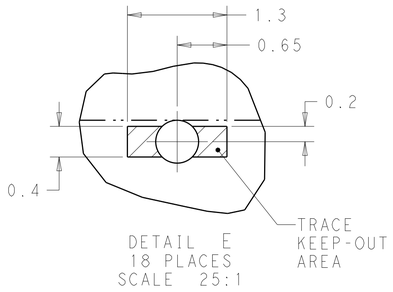

DETAIL E
18 PLACES
SCALE 25:1

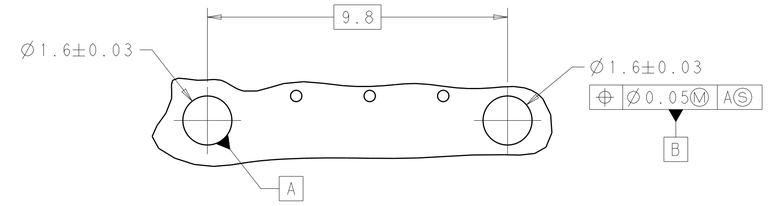

DETAIL F
SCALE 10:1

RECOMMENDED PCB LAYOUT
SCALE 5:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±0.25
1 PLC ±0.25
2 PLC ±0.25
3 PLC ±0.25
4 PLC ±-
ANGLES ±5°

MATERIAL SEE NOTES
FINISH SEE NOTES

DWN	J.WANG	26FEB2019
CHK	S.HAN	26FEB2019
APVD	S.HAN	26FEB2019

PRODUCT SPEC 108-2481
APPLICATION SPEC 114-13319
WEIGHT -

TE Connectivity

NAME RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2347721	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 5 OF 6 | REV A

LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

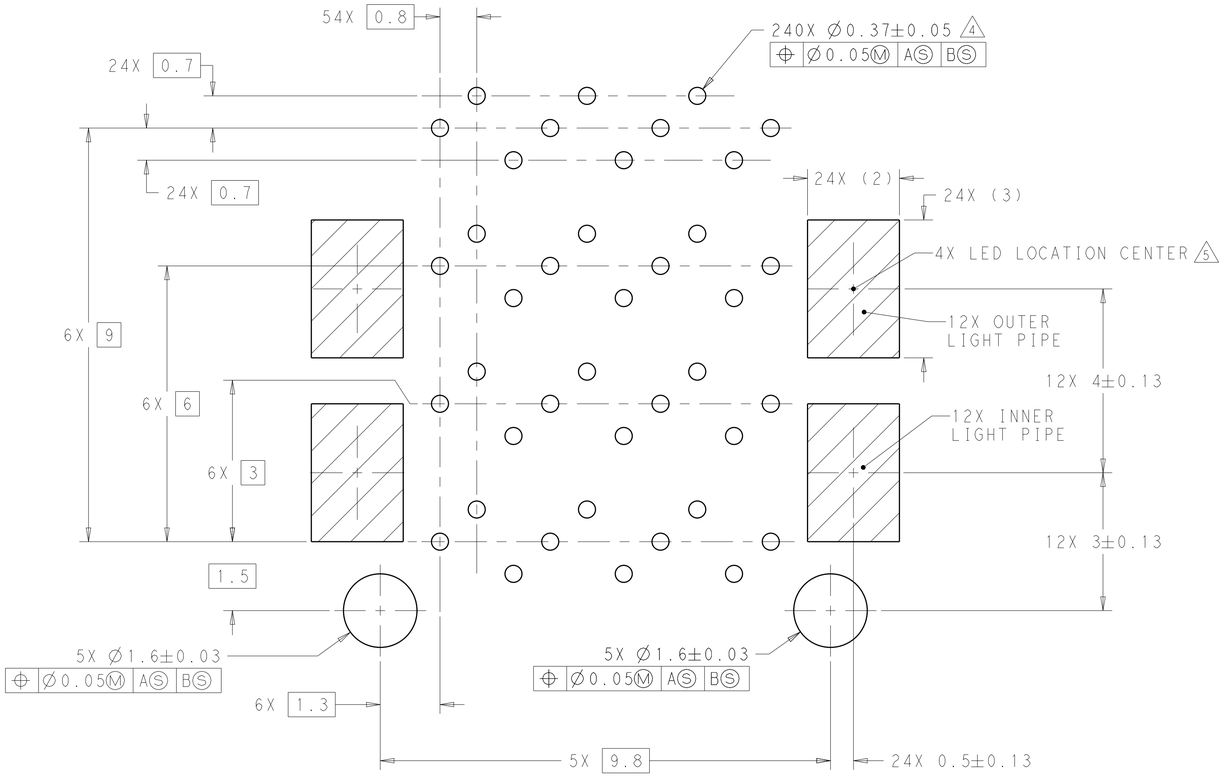

DETAIL C
RECOMMENDED PIN AND LIGHT PIPE LAYOUT
SCALE 15:1



DETAIL D
PIN MAP
6 PLACES
SCALE 20:1

PIN MAP LEGEND	
PIN NUMBER	FUNCTION
L1/T1	VEET
L2/T2	TX-FAULT
L3/T3	TX-DISABLE
L4/T4	SDA
L5/T5	SCL
L6/T6	MOD_ABS
L7/T7	RSO
L8/T8	RX_LOS
L9/T9	RS1
L10/T10	VEER
L11/T11	VEER
L12/T12	RD-
L13/T13	RD+
L14/T14	VEER
L15/T15	VCCR
L16/T16	VCCT
L17/T17	VEET
L18/T18	TD+
L19/T19	TD-
L20/T20	VEET

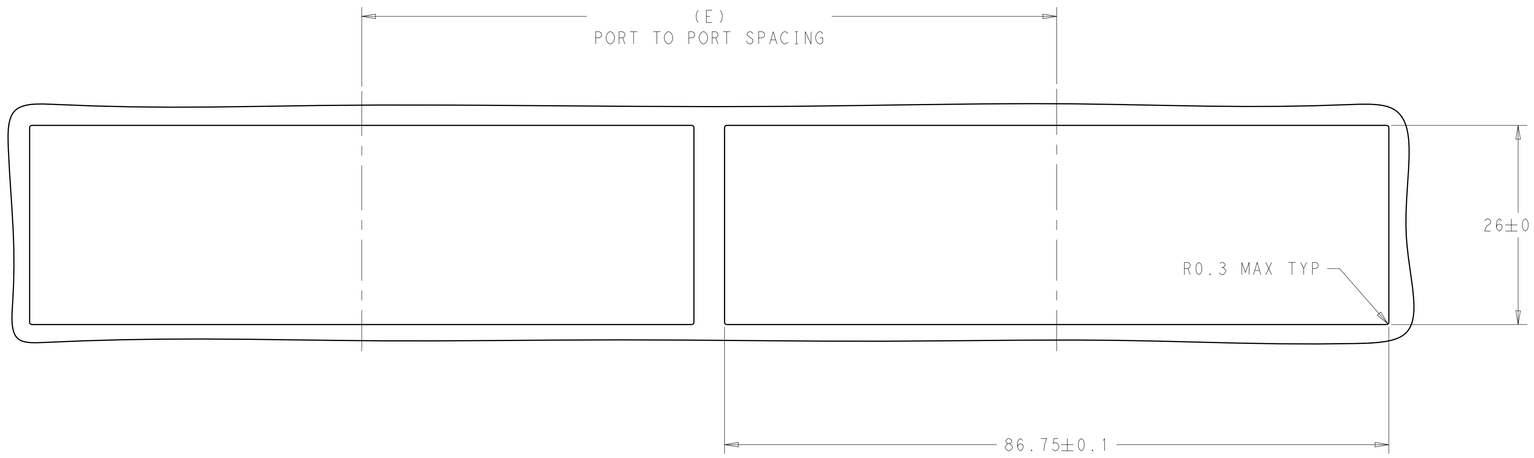

RECOMMENDED BEZEL CUT-OUT DETAIL
SCALE 5:2

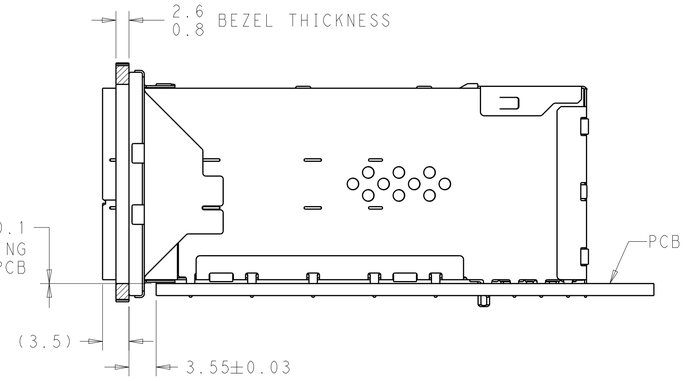

RECOMMENDED BEZEL LOCATION WITH EMI GASKET
SCALE 5:2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±0.25
1 PLC ±0.25
2 PLC ±0.25
3 PLC ±0.25
4 PLC ±
ANGLES ±5°

MATERIAL SEE NOTES
FINISH SEE NOTES

DWN J.WANG 26FEB2019
CHK S.HAN 26FEB2019
APVD S.HAN 26FEB2019
PRODUCT SPEC 108-2481
APPLICATION SPEC 114-13319
WEIGHT -

TE Connectivity

NAME RECEPTACLE ASSEMBLY, 2X6, STACKED, SFP56
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2347721	-

CUSTOMER DRAWING
SCALE 4:1 SHEET 6 OF 6 REV A

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.