

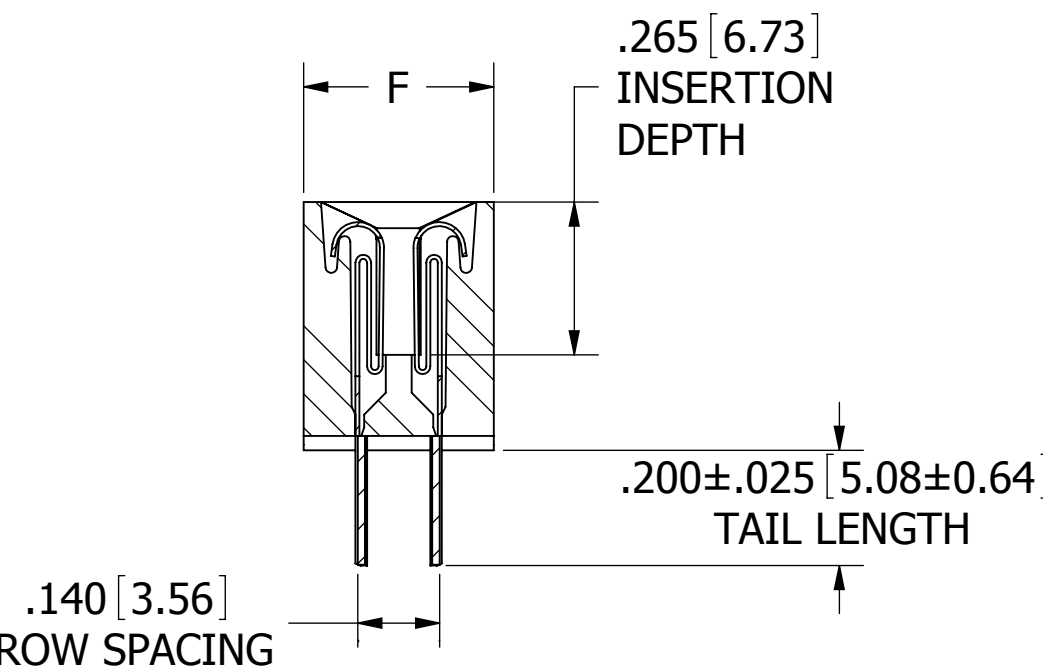
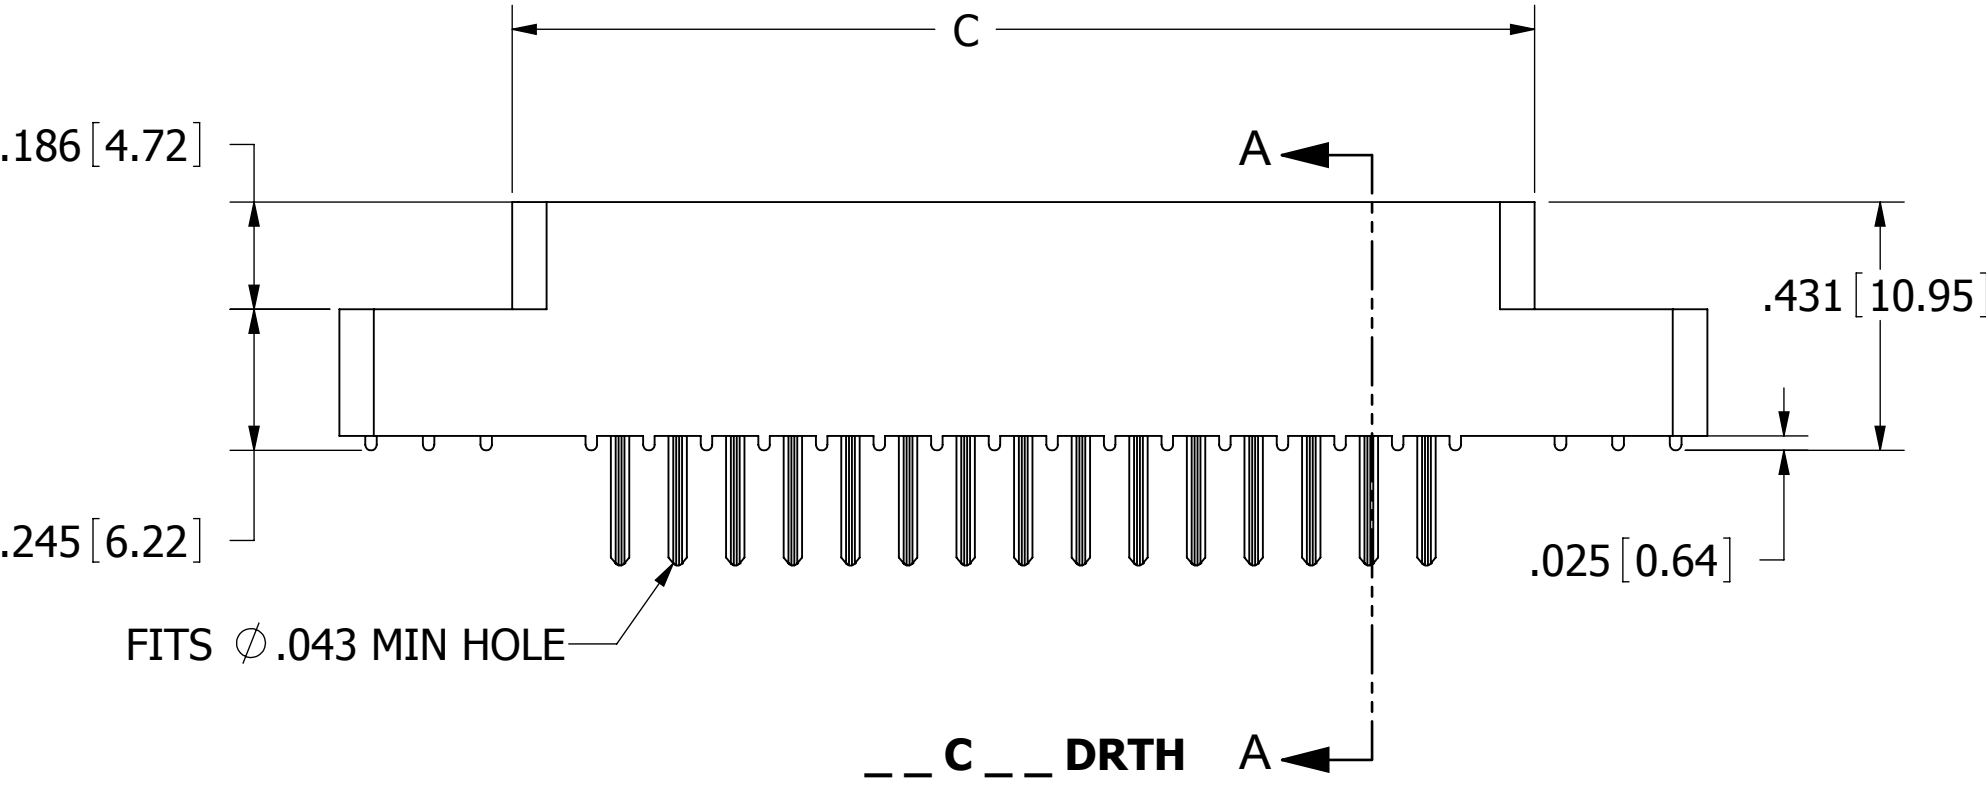


REVISIONS				
REV.	ECO. NO	DESCRIPTION	DATE	BY
A	1254	INITIAL RELEASE	1-25-07	MNH
B	2072	ADD B MOUNTING STYLE	11/05/09	JH

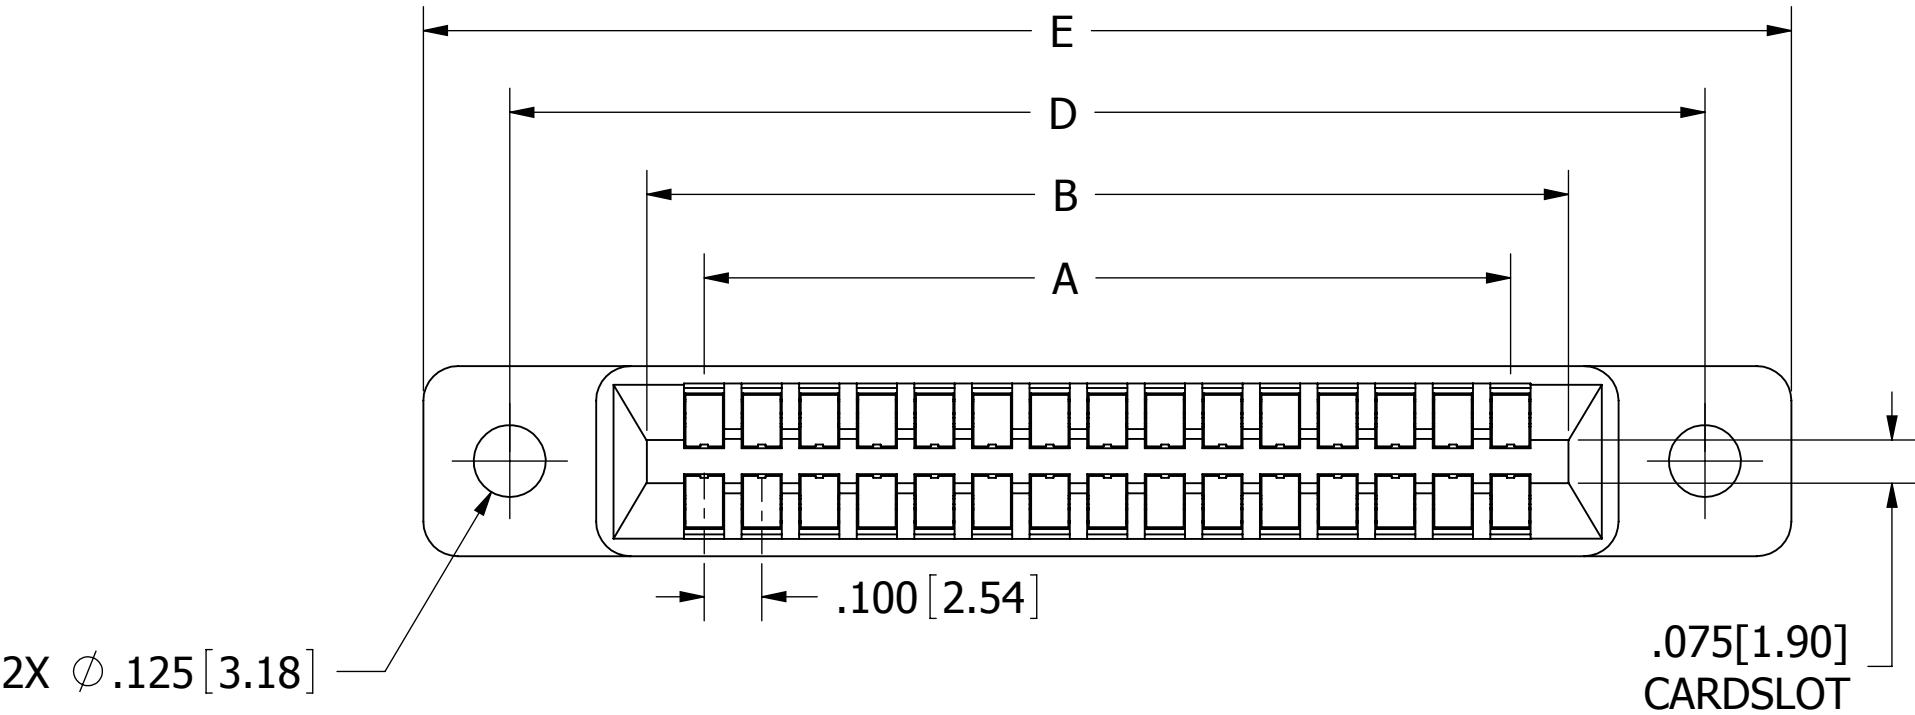

SECTION A - A

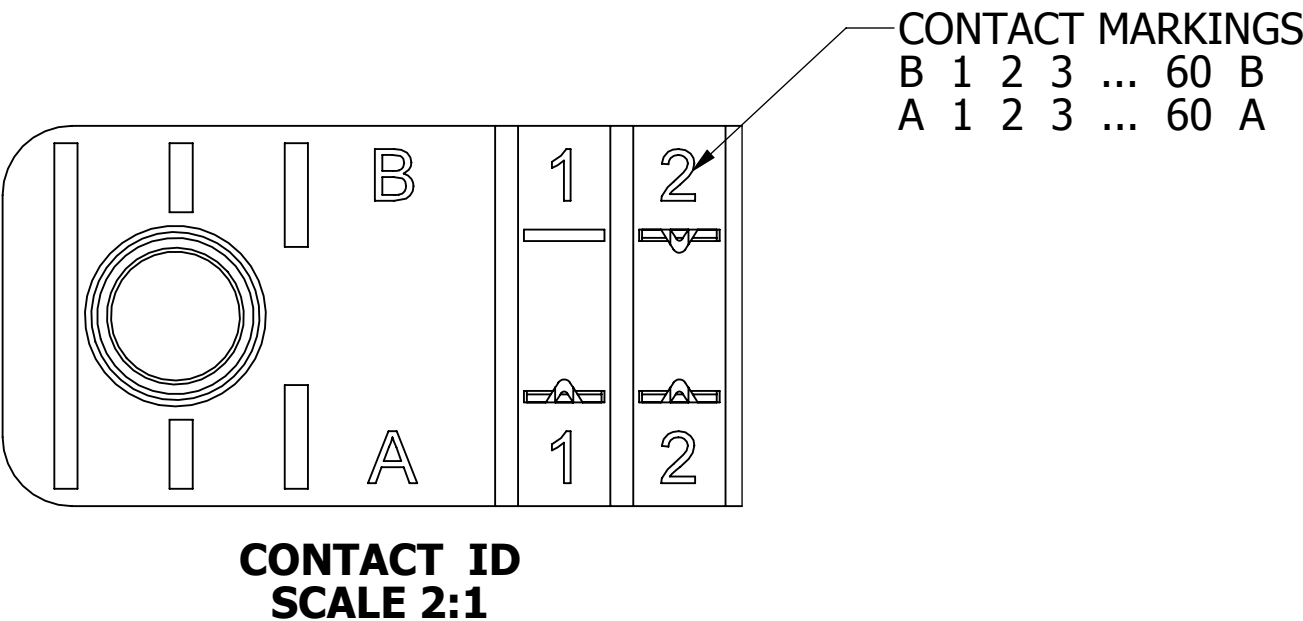

- NOTES:
1. INSULATOR MATERIAL: SEE PART NUMBER CODING
 2. CONTACT MATERIAL: SEE PART NUMBER CODING
 3. PLATING: SEE PART NUMBER CODING
 4. OPERATING TEMPERATURE: SEE PART NUMBER CODING
 5. PROCESSING TEMP: SEE PART NUMBER CODING
 6. UL FLAMMABILITY RATING: 94V-0
 7. VOLTAGE RATING: 600 VDC MINIMUM AT SEA LEVEL.
 8. CURRENT RATING: 3 AMP PER CONTACT PAIR
 9. VOLTAGE DROP: 30 MILLI VOLT AT RATED CURRENT
 10. INSULATION RESISTANCE: 5000 MEGA OHM
 11. CONNECTOR IDENTIFICATION: THE PART SHALL BE MARKED WITH A PART NUMBER AND BARCODE
 12. BOARD THICKNESS ACCOMMODATED: .062 ±.008"
 13. BOARD INSERTION FORCE: 16 OZ MAX PER CONTACT PAIR WHEN USING A .062" TEST BLADE. INTERNAL INSPECTION TO BE PER SULLIN'S WORK INSTRUCTION W17.3-01.
 14. BOARD WITHDRAWAL FORCE: 1 OUNCE MINIMUM PER CONTACT PAIR USING .062" PCB





UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES[MM]
TOLERANCES:
ANGULAR: ± 30'
.XX=± .02 [.508]
.XXX=± .005 [.1270]
.XXXX=± .0005 [.0127]
SURFACE FINISH: 63 Rq
REMOVE ALL BURRS AND SHARP EDGES .010 MAX


INTERPRET DIMENSIONS AND GEOMETRIC TOLERANCING PER: ANSI Y14.5M-1994

DRAWN	1/25/07	NAME	MNH
THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.			
DESCRIPTION EDGE CARD, .100 CC LP			
PART NUMBER -- C -- DRT --			
SIZE C	DWG. NO. C10878	REV B	
SCALE: 2:1		SHEET 1 OF 3	


CUSTOMER COPY

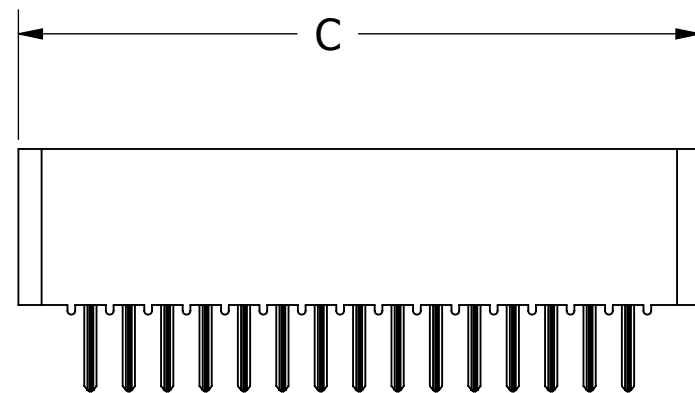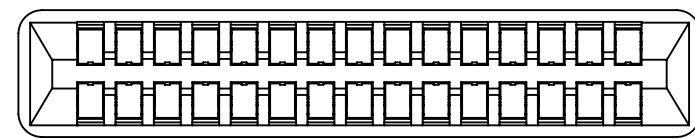



__ C __ DRTN

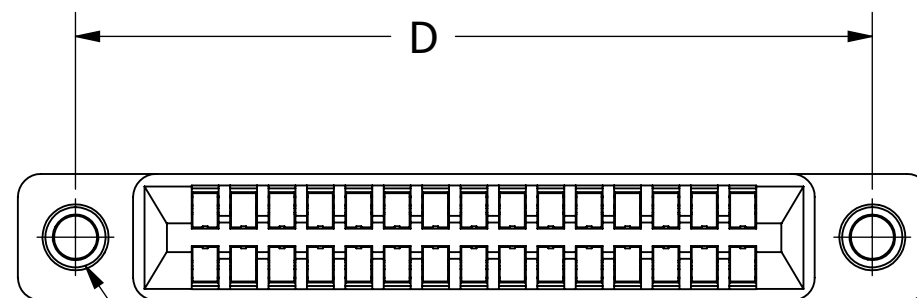



—2X #4-40 THREADED
INSERTS

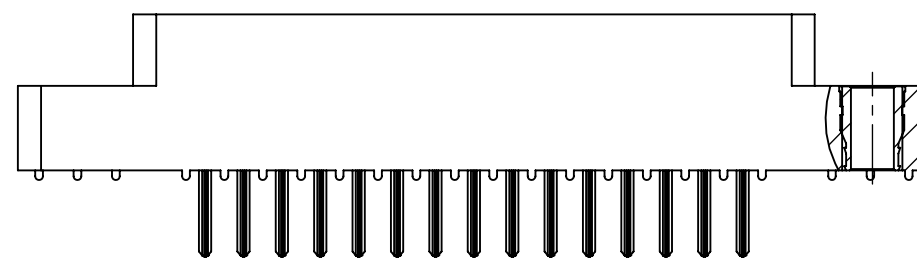


__ C __ DRTI

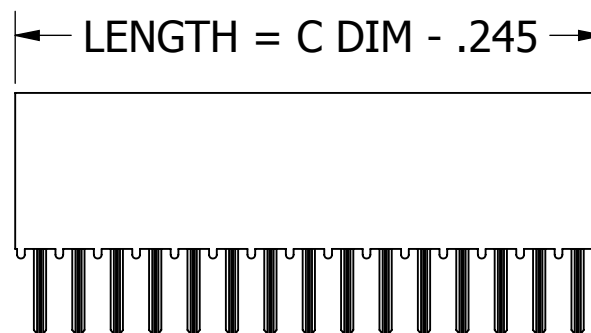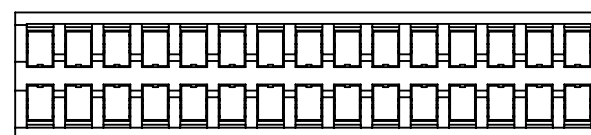

__ C __ DRTB

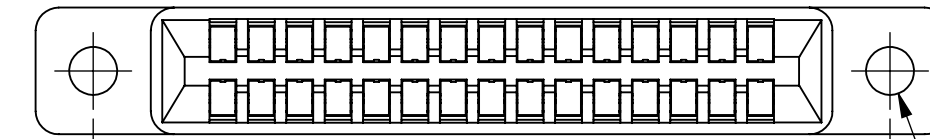



— 2X $\varnothing .125 [3.18]$

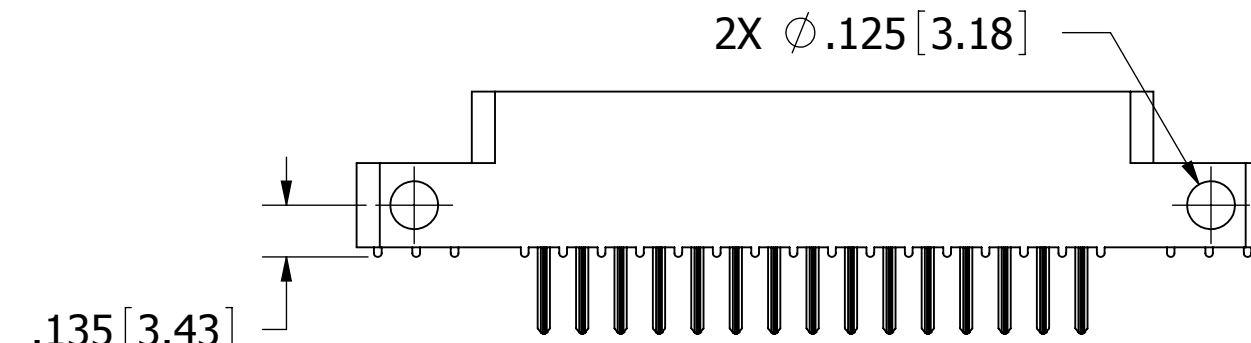


__ C __ DRTS

2X FLOATING BOBBIN
 $\phi .116 [2.95]$
 CLEARANCE FOR
 # 4 SCREW

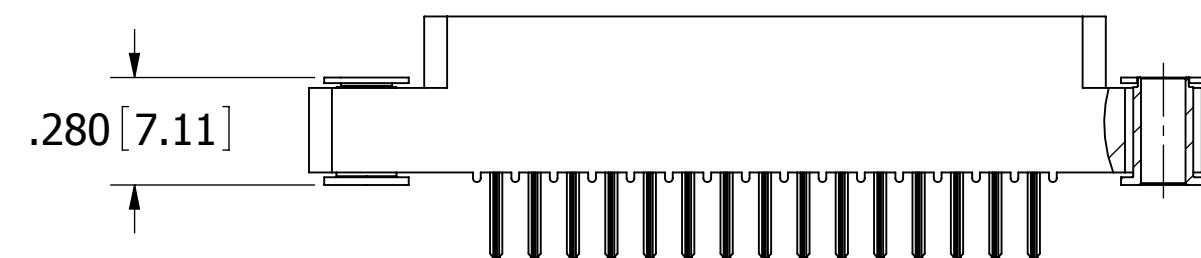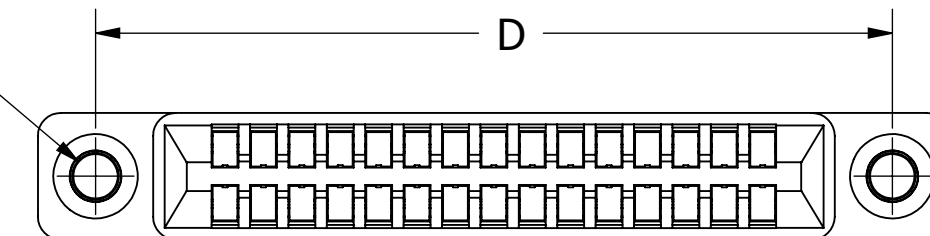

__ C __ DRTF

CUSTOMER COPY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES[MM] TOLERANCES: ANGULAR: + .30' .XX± = .02 [.508] .XX± = .005 [.1270] .XXX± = .0005 [.0127] SURFACE FINISH: 63 Ra REMOVE ALL BURRS AND SHARP EDGES .010 MAX INTERPRET DIMENSIONS AND GEOMETRIC TOLERANCING PER: ANSI Y14.5M-1994	<table><tr><td></td><td>DATE</td><td>NAME</td></tr><tr><td>DRAWN</td><td>1/25/07</td><td>MNH</td></tr></table>		DATE	NAME	DRAWN	1/25/07	MNH	<table><tr><td colspan="2"></td></tr><tr><td colspan="2">DESCRIPTION</td></tr><tr><td colspan="2">EDGE CARD, .100 CC LP</td></tr><tr><td colspan="2">PART NUMBER</td></tr><tr><td colspan="2">_ C _ DRT _</td></tr><tr><td>SIZE</td><td>DWG. NO.</td><td>REV</td></tr><tr><td>C</td><td>C10878</td><td>B</td></tr><tr><td colspan="2">SCALE: 2:1</td><td>SHEET 2 OF 3</td></tr></table>			DESCRIPTION		EDGE CARD, .100 CC LP		PART NUMBER		_ C _ DRT _		SIZE	DWG. NO.	REV	C	C10878	B	SCALE: 2:1		SHEET 2 OF 3
		DATE	NAME																								
	DRAWN	1/25/07	MNH																								
																											
	DESCRIPTION																										
EDGE CARD, .100 CC LP																											
PART NUMBER																											
_ C _ DRT _																											
SIZE	DWG. NO.	REV																									
C	C10878	B																									
SCALE: 2:1		SHEET 2 OF 3																									
THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.																											
																											

FILE NAME: Z:\ECO PENDING\2072\C10878, __C__DRT_ PRINT: 1/28/2010



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.