COSEL DC-DC Converters PCB Mount Type

SUCW1R5

Ordering information

SUC	W	1R5	12	12	B	P	-□
①	②	③	④	⑤	⑥	⑦	⑧

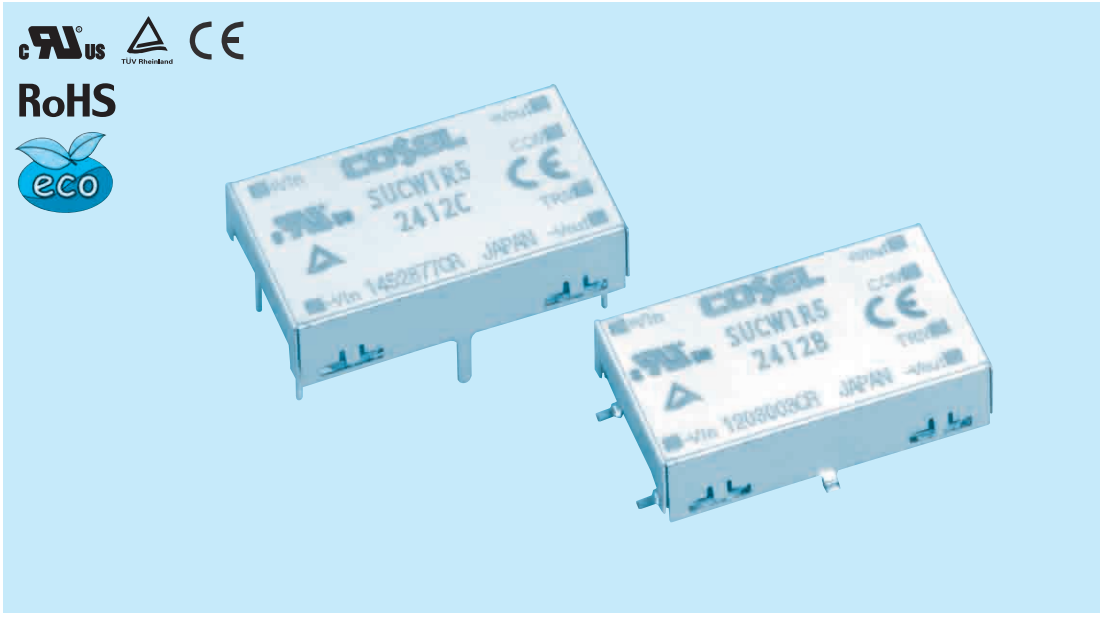

①Series name
②Dual output
③Output wattage
④Input voltage
⑤Output voltage
⑥Mounting type
B :SMD
C :DIP
⑦Packing form
Blank:Plastic cover
P :Tray (SMD type)
⑧Optional
C :with coating (only DIP type)*

* Safety standards are pending

SU·SUC/SUT

MODEL		SUCW1R50512	SUCW1R50515	SUCW1R51212	SUCW1R51215	SUCW1R52412	SUCW1R52415	SUCW1R54812	SUCW1R54815
MAX OUTPUT WATTAGE[W]		1.56	1.5	1.56	1.5	1.56	1.5	1.56	1.5
DC OUTPUT	VOLTAGE[V] *1	±12 or +24	±15 or +30	±12 or +24	±15 or +30	±12 or +24	±15 or +30	±12 or +24	±15 or +30
	CURRENT[A]	0.065	0.05	0.065	0.05	0.065	0.05	0.065	0.05

SPECIFICATIONS

	MODEL		SUCW1R50512	SUCW1R50515	SUCW1R51212	SUCW1R51215	SUCW1R52412	SUCW1R52415	SUCW1R54812	SUCW1R54815
INPUT	VOLTAGE[V]		DC4.5 - 9		DC9 - 18		DC18 - 36		DC36 - 76	
	CURRENT[A]	*2	0.446typ	0.429typ	0.178typ	0.171typ	0.089typ	0.086typ	0.045typ	0.043typ
	EFFICIENCY[%]	*2	70typ	70typ	73typ	73typ	73typ	73typ	73typ	73typ
OUTPUT	VOLTAGE[V]		±12(+24)	±15(+30)	±12(+24)	±15(+30)	±12(+24)	±15(+30)	±12(+24)	±15(+30)
	CURRENT[A]		0.065	0.05	0.065	0.05	0.065	0.05	0.065	0.05
	LINE REGULATION[mV]		60max	75max	60max	75max	60max	75max	60max	75max
	LOAD REGULATION[mV]		600max	750max	600max	750max	600max	750max	600max	750max
	RIPPLE[mVp-p]	-20 to +55℃ *3	120max	120max	120max	120max	120max	120max	120max	120max
		-40 to -20℃ *3	150max	150max	150max	150max	150max	150max	150max	150max
	RIPPLE NOISE[mVp-p]	-20 to +55℃ *3	150max	150max	150max	150max	150max	150max	150max	150max
		-40 to -20℃ *3	200max	200max	200max	200max	200max	200max	200max	200max
	TEMPERATURE REGULATION[mV]	-20 to +55℃	150max	180max	150max	180max	150max	180max	150max	180max
		-40 to +55℃	240max	290max	240max	290max	240max	290max	240max	290max
	DRIFT[mV]	*4	50max	60max	50max	60max	50max	60max	50max	60max
	START-UP TIME[ms]		20max (Minimum input, Io=100%)							
	OUTPUT VOLTAGE ADJUSTMENT RANGE		Fixed (TRM pin open) ±5% adjustable by external VR							
	OUTPUT VOLTAGE SETTING[V] (±5%)		11.40 - 12.60	14.25 - 15.75	11.40 - 12.60	14.25 - 15.75	11.40 - 12.60	14.25 - 15.75	11.40 - 12.60	14.25 - 15.75
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically							
ISOLATION	INPUT-OUTPUT		AC500V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)							
	INPUT-CASE		AC500V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)							
	OUTPUT-CASE		AC500V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)							
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE		-40 to +85℃, 20 - 95%RH (Non condensing) (Required Derating), 3,000m (10,000feet) max							
	STORAGE TEMP.,HUMID.AND ALTITUDE		-40 to +100℃, 20 - 95%RH (Non condensing), 9,000m (30,000feet) max							
	VIBRATION		10 - 55Hz, 98.0m/s² (10G), 3minutes period, 60minutes each along X, Y and Z axis							
	IMPACT		490.3m/s² (50G), 11ms, once each along X, Y and Z axis							
SAFETY	AGENCY APPROVALS		UL60950-1, C-UL, EN60950-1							
OTHERS	CASE SIZE/WEIGHT		22.4×7.0×13.2mm [0.88×0.28×0.52 inches] (W×H×D) / 3g max							
	COOLING METHOD		Convection/Forced air							

*1 Output pins can be connected in series to make a 24V/30V output.
*2 Rated input 5V, 12V, 24V or 48V DC Io=100%
*3 Ripple and Ripple Noise is measured by using measuring board with capacitor with in 25mm from output pin terminals.
*4 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25℃.
* Parallel operation with other model is not possible.

External view

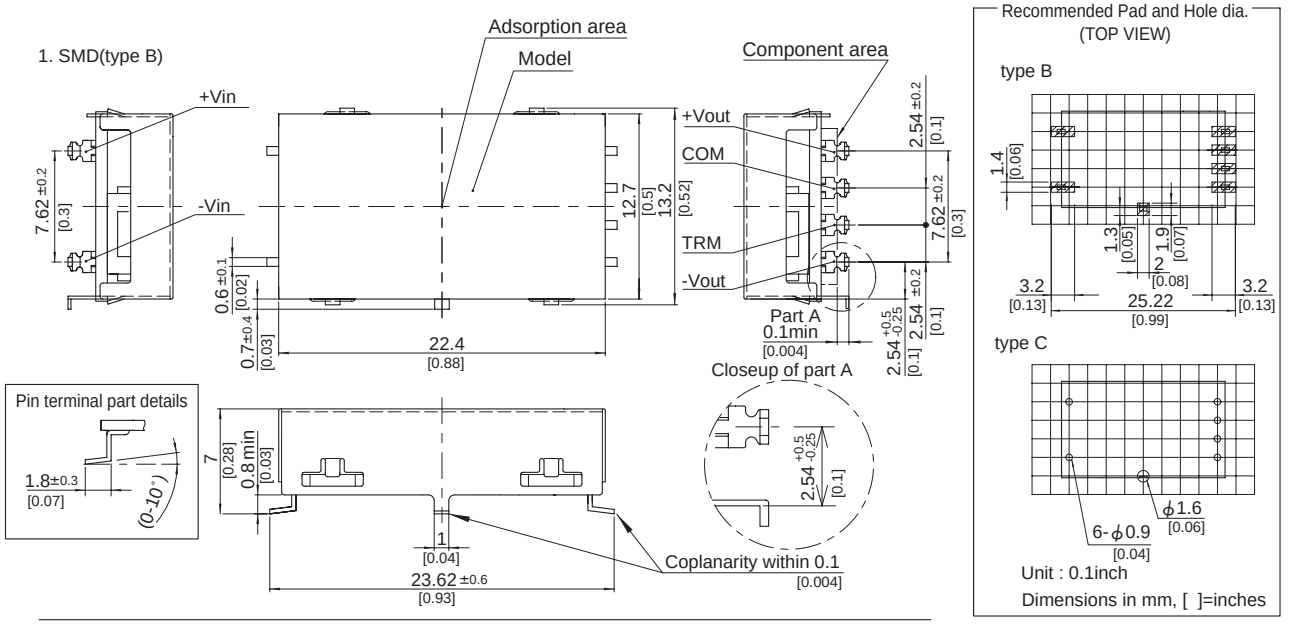

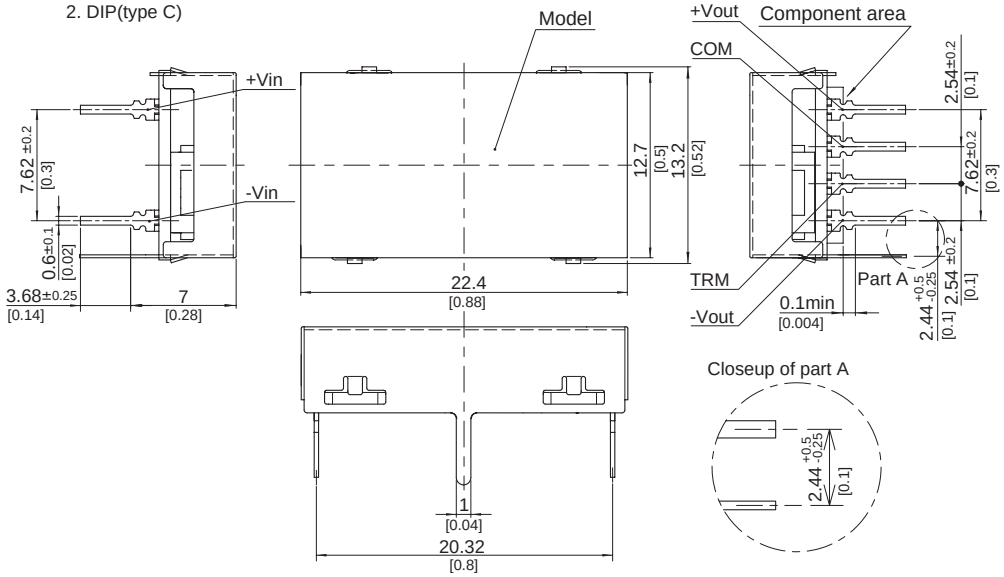

※ Tolerance ±0.5 [±0.02]
※ Dimensions in mm, [ ]=inches
※ Pin terminal thickness : 0.3±0.1 [0.012]
※ Pin terminal material : Copper alloy
※ Plating treatment of terminal : Lead free plating
※ Case thickness : 0.2±0.05 [0.008]
※ Case material : Brass
※ Plating treatment of case : Nickel plating
※ Please keep enough creepage distance with the pattern on PCB and other components.
※ Weight : 3g max

COSEL DC-DC Converters PCB Mount Type

SUCW3

Ordering information

SUC	W	3	12	12	B	P	-□
①	②	③	④	⑤	⑥	⑦	⑧

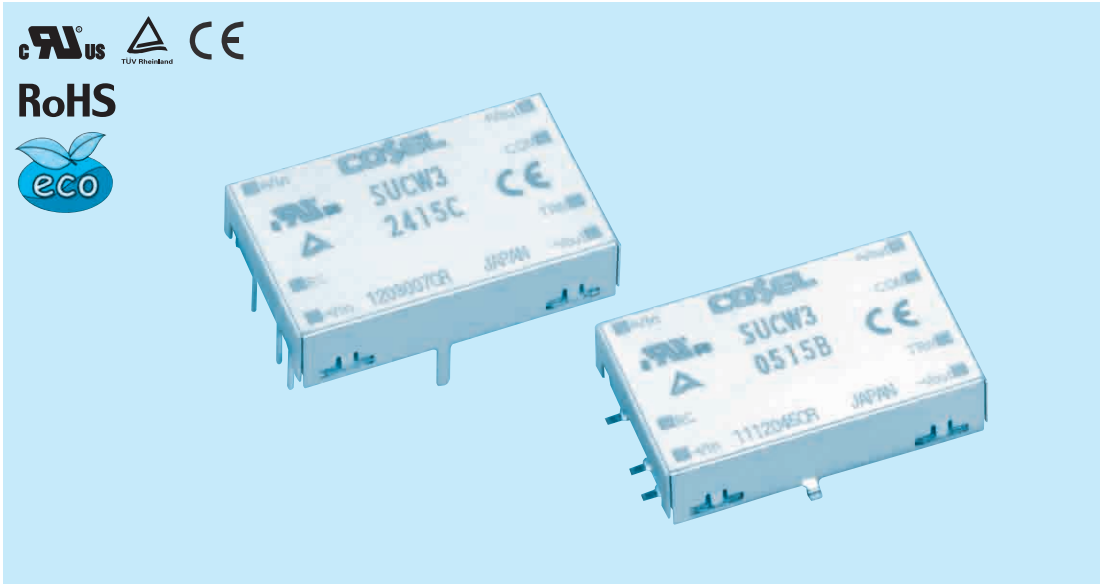

①Series name
②Dual output
③Output wattage
④Input voltage
⑤Output voltage
⑥Mounting type
B :SMD
C :DIP
⑦Packing form
Blank:Plastic cover
P :Tray (SMD type)
⑧Optional
G :Capacitor between Input and Output is removed.
C :with coating (only DIP type)*

* Safety standards are pending

MODEL		SUCW30512	SUCW30515	SUCW31212	SUCW31215	SUCW32412	SUCW32415	SUCW34812	SUCW34815
MAX OUTPUT WATTAGE[W]		3.12	3	3.12	3	3.12	3	3.12	3
DC OUTPUT	VOLTAGE[V] *1	±12 or +24	±15 or +30	±12 or +24	±15 or +30	±12 or +24	±15 or +30	±12 or +24	±15 or +30
	CURRENT[A]	0.13	0.1	0.13	0.1	0.13	0.1	0.13	0.1

SPECIFICATIONS

	MODEL		SUCW30512	SUCW30515	SUCW31212	SUCW31215	SUCW32412	SUCW32415	SUCW34812	SUCW34815
INPUT	VOLTAGE[V]		DC4.5 - 9		DC9 - 18		DC18 - 36		DC36 - 76	
	CURRENT[A]	*2	0.844typ	0.811typ	0.343typ	0.329typ	0.172typ	0.165typ	0.086typ	0.083typ
	EFFICIENCY[%]	*2	74typ	74typ	76typ	76typ	76typ	76typ	76typ	76typ
OUTPUT	VOLTAGE[V]		±12(+24)	±15(+30)	±12(+24)	±15(+30)	±12(+24)	±15(+30)	±12(+24)	±15(+30)
	CURRENT[A]		0.13	0.1	0.13	0.1	0.13	0.1	0.13	0.1
	LINE REGULATION[mV]		60max	75max	60max	75max	60max	75max	60max	75max
	LOAD REGULATION[mV]		600max	750max	600max	750max	600max	750max	600max	750max
	RIPPLE[mVp-p]	-20 to +55℃ *3	120max	120max	120max	120max	120max	120max	120max	120max
		-40 to -20℃ *3	150max	150max	150max	150max	150max	150max	150max	150max
	RIPPLE NOISE[mVp-p]	-20 to +55℃ *3	150max	150max	150max	150max	150max	150max	150max	150max
		-40 to -20℃ *3	200max	200max	200max	200max	200max	200max	200max	200max
	TEMPERATURE REGULATION[mV]	-20 to +55℃	150max	180max	150max	180max	150max	180max	150max	180max
		-40 to +55℃	240max	290max	240max	290max	240max	290max	240max	290max
	DRIFT[mV]	*4	50max	60max	50max	60max	50max	60max	50max	60max
	START-UP TIME[ms]		20max (Minimum input, Io=100%)							
	OUTPUT VOLTAGE ADJUSTMENT RANGE		Fixed (TRM pin open) ±5% adjustable by external VR							
	OUTPUT VOLTAGE SETTING[V] (±5%)		11.40 - 12.60	14.25 - 15.75	11.40 - 12.60	14.25 - 15.75	11.40 - 12.60	14.25 - 15.75	11.40 - 12.60	14.25 - 15.75
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically							
	REMOTE ON/OFF		Provided (Negative logic L : ON, H : OFF)							
ISOLATION	INPUT-OUTPUT		AC500V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)							
	INPUT-CASE		AC500V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)							
	OUTPUT-CASE		AC500V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)							
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE		-40 to +85℃, 20 - 95%RH (Non condensing) (Required Derating), 3,000m (10,000feet) max							
	STORAGE TEMP.,HUMID.AND ALTITUDE		-40 to +100℃, 20 - 95%RH (Non condensing), 9,000m (30,000feet) max							
	VIBRATION		10 - 55Hz, 98.0m/s² (10G), 3minutes period, 60minutes each along X, Y and Z axis							
	IMPACT		490.3m/s² (50G), 11ms, once each along X, Y and Z axis							
SAFETY	AGENCY APPROVALS		UL60950-1, C-UL, EN60950-1							
OTHERS	CASE SIZE/WEIGHT		25×7.0×16.1mm [0.98×0.28×0.63 inches] (W×H×D) / 5g max							
	COOLING METHOD		Convection/Forced air							

*1 Output pins can be connected in series to make a 24V/30V output.
*2 Rated input 5V, 12V, 24V or 48V DC Io=100%
*3 Ripple and Ripple Noise is measured by using measuring board with capacitor with in 25mm from output pin terminals.
*4 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25℃.
* Parallel operation with other model is not possible.

External view

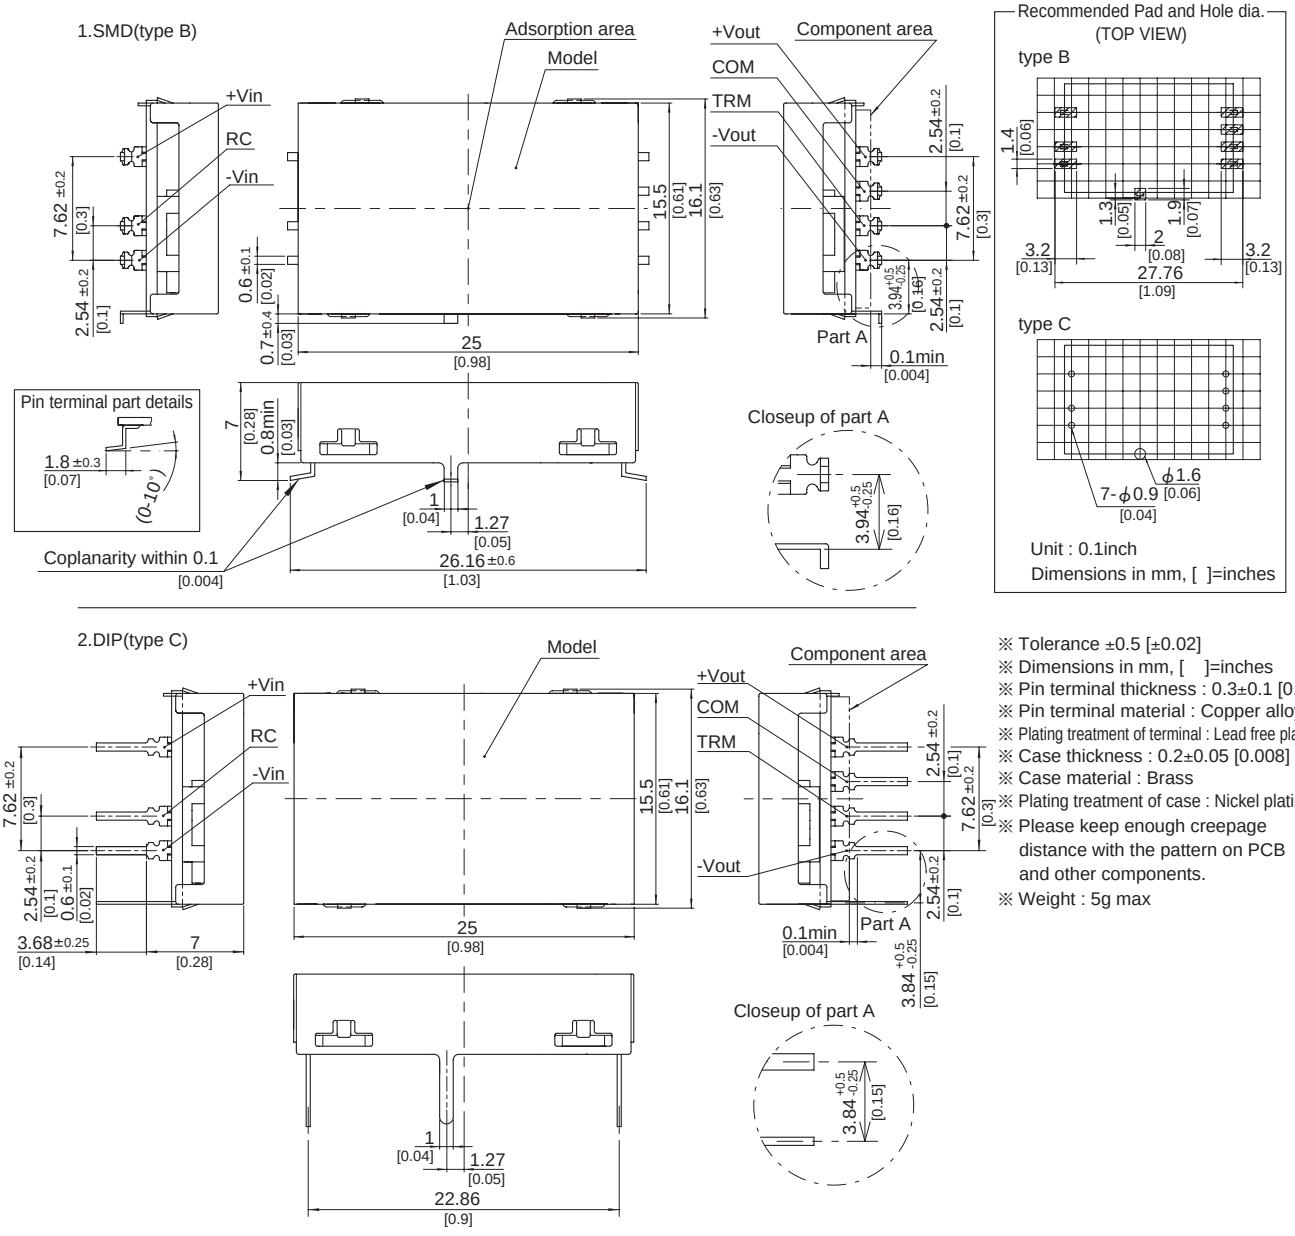

※ Tolerance ±0.5 [±0.02]
※ Dimensions in mm, [ ]=inches
※ Pin terminal thickness : 0.3±0.1 [0.012]
※ Pin terminal material : Copper alloy
※ Plating treatment of terminal : Lead free plating
※ Case thickness : 0.2±0.05 [0.008]
※ Case material : Brass
※ Plating treatment of case : Nickel plating
※ Please keep enough creepage distance with the pattern on PCB and other components.
※ Weight : 5g max

COSEL DC-DC Converters PCB Mount Type

SUCW6

Ordering information

SUC	W	6	12	12	B	P	-□
①	②	③	④	⑤	⑥	⑦	⑧

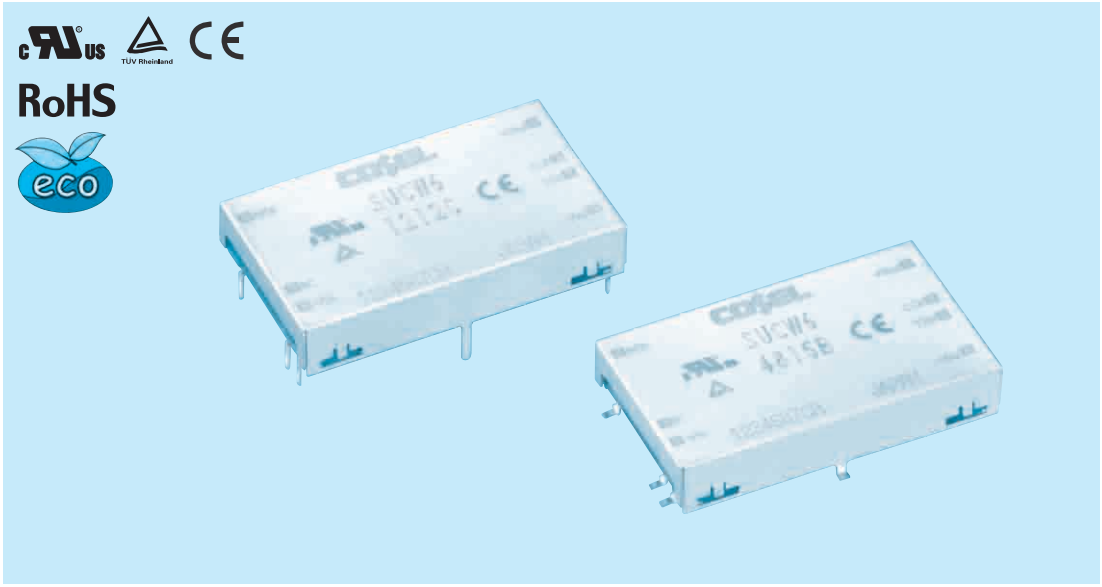

①Series name
②Dual output
③Output wattage
④Input voltage
⑤Output voltage
⑥Mounting type
B :SMD
C :DIP
⑦Packing form
Blank:Plastic cover
P :Tray (SMD type)
⑧Optional
G :Capacitor between Input and Output is removed.
C :with coating (only DIP type)*

* Safety standards are pending

MODEL		SUCW60512	SUCW60515	SUCW61212	SUCW61215	SUCW62412	SUCW62415	SUCW64812	SUCW64815
MAX OUTPUT WATTAGE[W]		6	6	6	6	6	6	6	6
DC OUTPUT	VOLTAGE[V] *1	±12 or +24	±15 or +30	±12 or +24	±15 or +30	±12 or +24	±15 or +30	±12 or +24	±15 or +30
	CURRENT[A]	0.25	0.2	0.25	0.2	0.25	0.2	0.25	0.2

SPECIFICATIONS

	MODEL		SUCW60512	SUCW60515	SUCW61212	SUCW61215	SUCW62412	SUCW62415	SUCW64812	SUCW64815
INPUT	VOLTAGE[V]		DC4.5 - 9		DC9 - 18		DC18 - 36		DC36 - 76	
	CURRENT[A]	*2	1.538typ	1.538typ	0.588typ	0.588typ	0.291typ	0.291typ	0.145typ	0.145typ
	EFFICIENCY[%]	*2	78typ	78typ	85typ	85typ	86typ	86typ	86typ	86typ
OUTPUT	VOLTAGE[V]		±12(+24)	±15(+30)	±12(+24)	±15(+30)	±12(+24)	±15(+30)	±12(+24)	±15(+30)
	CURRENT[A]		0.25	0.2	0.25	0.2	0.25	0.2	0.25	0.2
	LINE REGULATION[mV]		60max	75max	60max	75max	60max	75max	60max	75max
	LOAD REGULATION[mV]		600max	750max	600max	750max	600max	750max	600max	750max
	RIPPLE[mVp-p]	-20 to +55℃ *3	120max	120max	120max	120max	120max	120max	120max	120max
		-40 to -20℃ *3	150max	150max	150max	150max	150max	150max	150max	150max
	RIPPLE NOISE[mVp-p]	-20 to +55℃ *3	150max	150max	150max	150max	150max	150max	150max	150max
		-40 to -20℃ *3	200max	200max	200max	200max	200max	200max	200max	200max
	TEMPERATURE REGULATION[mV]	-20 to +55℃	150max	180max	150max	180max	150max	180max	150max	180max
		-40 to +55℃	240max	290max	240max	290max	240max	290max	240max	290max
	DRIFT[mV]	*4	50max	60max	50max	60max	50max	60max	50max	60max
	START-UP TIME[ms]		20max (Minimum input, Io=100%)							
	OUTPUT VOLTAGE ADJUSTMENT RANGE		Fixed (TRM pin open) ±5% adjustable by external VR							
	OUTPUT VOLTAGE SETTING[V] (±5%)		11.40 - 12.60	14.25 - 15.75	11.40 - 12.60	14.25 - 15.75	11.40 - 12.60	14.25 - 15.75	11.40 - 12.60	14.25 - 15.75
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically							
	REMOTE ON/OFF		Provided (Negative logic L : ON, H : OFF)							
ISOLATION	INPUT-OUTPUT		AC500V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)							
	INPUT-CASE		AC500V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)							
	OUTPUT-CASE		AC500V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)							
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE		-40 to +85℃, 20 - 95%RH (Non condensing) (Required Derating), 3,000m (10,000feet) max							
	STORAGE TEMP.,HUMID.AND ALTITUDE		-40 to +100℃, 20 - 95%RH (Non condensing), 9,000m (30,000feet) max							
	VIBRATION		10 - 55Hz, 98.0m/s^2 (10G), 3minutes period, 60minutes each along X, Y and Z axis							
	IMPACT		490.3m/s^2 (50G), 11ms, once each along X, Y and Z axis							
SAFETY	AGENCY APPROVALS		UL60950-1, C-UL, EN60950-1							
OTHERS	CASE SIZE/WEIGHT		32.6×7.0×19.1mm [1.28×0.28×0.75 inches] (W×H×D) / 7g max							
	COOLING METHOD		Convection/Forced air							

*1 Output pins can be connected in series to make a 24V/30V output.
*2 Rated input 5V, 12V, 24V or 48V DC Io=100%
*3 Ripple and Ripple Noise is measured by using measuring board with capacitor with in 25mm from output pin terminals.
*4 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25℃.
* Parallel operation with other model is not possible.

External view

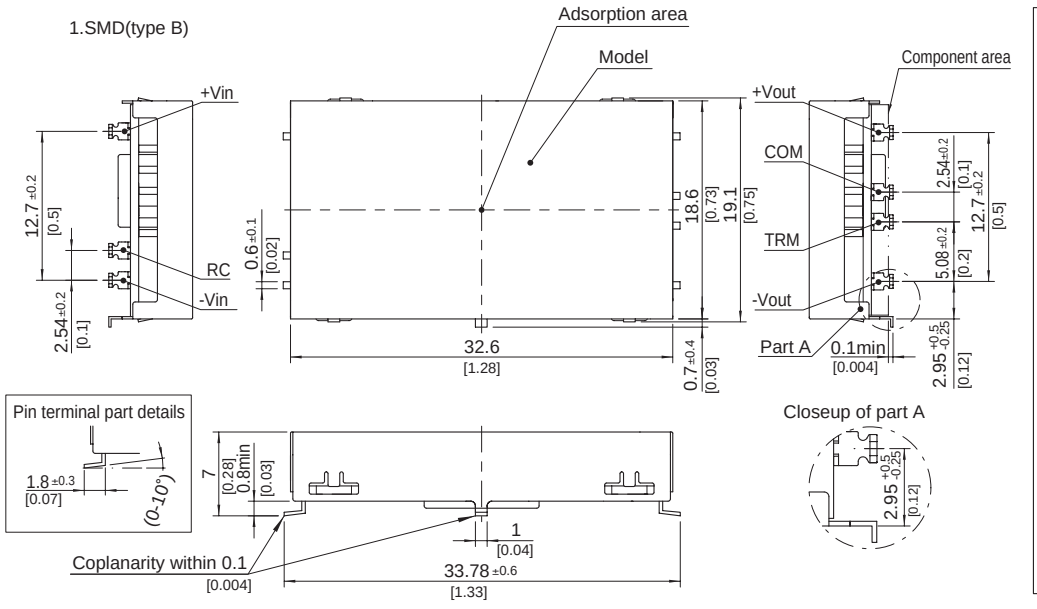

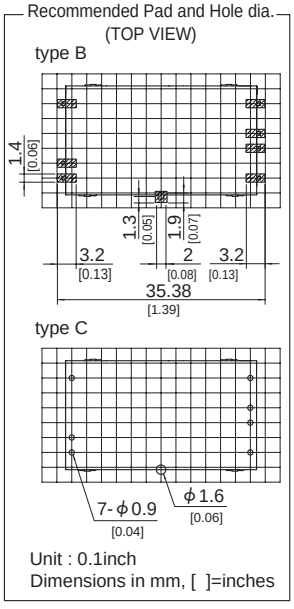

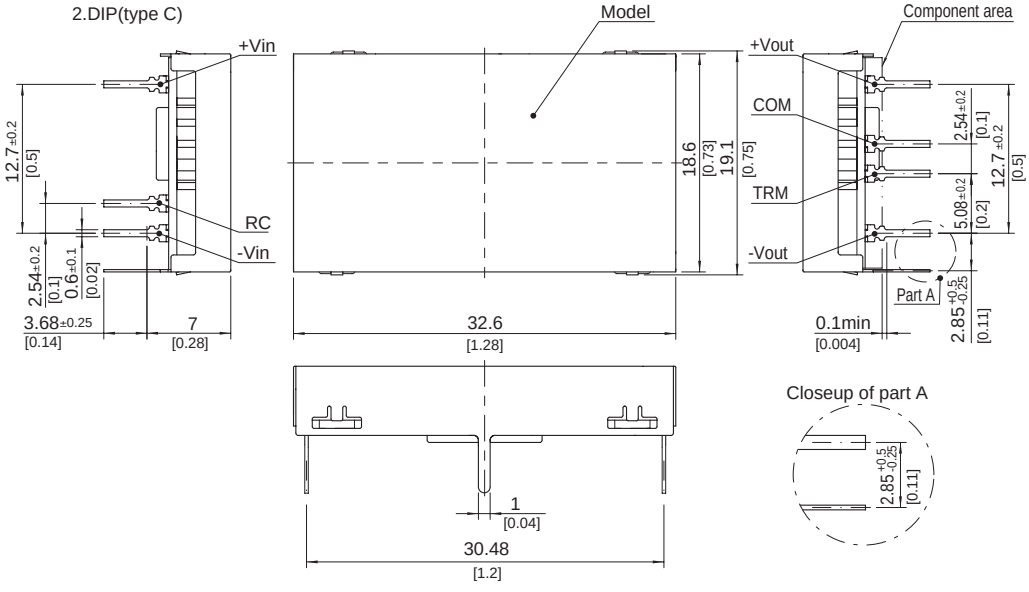

※ Tolerance ±0.5 [±0.02]
※ Dimensions in mm, [ ]=inches
※ Pin terminal thickness : 0.3±0.1 [0.012]
※ Pin terminal material : Copper alloy
※ Plating treatment of terminal : Lead free plating
※ Case thickness : 0.2±0.05 [0.008]
※ Case material : Brass
※ Plating treatment of case : Nickel plating
※ Please keep enough creepage distance with the pattern on PCB and other components.
※ Weight : 7g max

COSEL DC-DC Converters PCB Mount Type

SUCW10

Ordering information

SUC ① W ② 10 ③ 12 ④ 12 ⑤ B ⑥ P ⑦ -□ ⑧

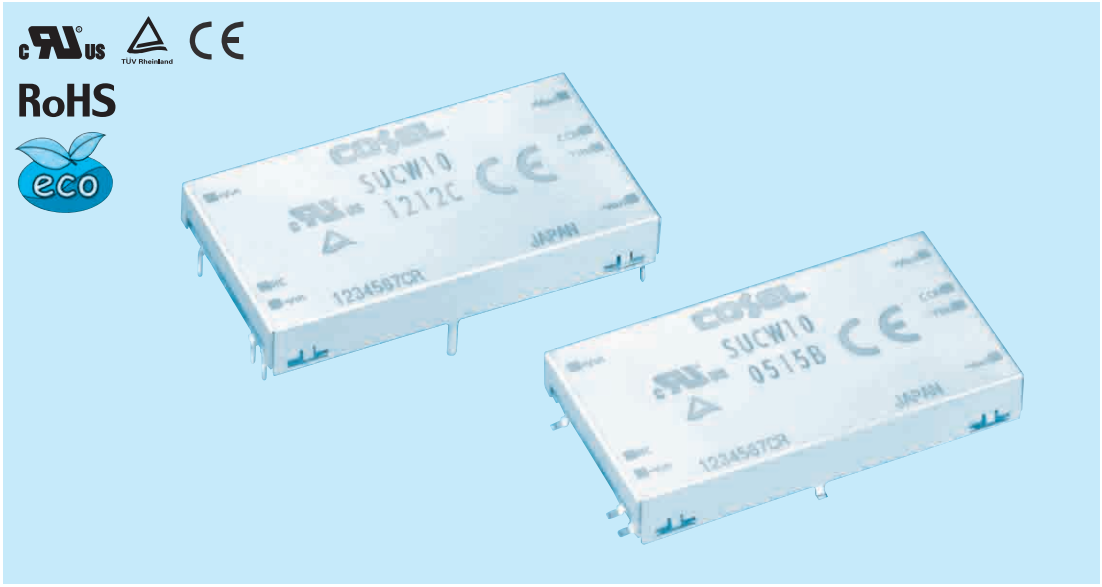

①Series name
②Dual output
③Output wattage
④Input voltage
⑤Output voltage
⑥Mounting type
B :SMD
C :DIP
⑦Packing form
Blank:Plastic cover
P :Tray(SMD type)
⑧Optional
G :Capacitor between Input and Output is removed.
C :with coating (only DIP type)*

* Safety standards are pending

SU·SUC/SUT

MODEL		SUCW100512	SUCW100515	SUCW101212	SUCW101215	SUCW102412	SUCW102415	SUCW104812	SUCW104815
MAX OUTPUT WATTAGE[W]		10.8	10.5	10.8	10.5	10.8	10.5	10.8	10.5
DC OUTPUT	VOLTAGE[V] *1	±12 or +24	±15 or +30	±12 or +24	±15 or +30	±12 or +24	±15 or +30	±12 or +24	±15 or +30
	CURRENT[A]	0.45	0.35	0.45	0.35	0.45	0.35	0.45	0.35

SPECIFICATIONS

	MODEL		SUCW100512	SUCW100515	SUCW101212	SUCW101215	SUCW102412	SUCW102415	SUCW104812	SUCW104815
INPUT	VOLTAGE[V]		DC4.5 - 9		DC9 - 18		DC18 - 36		DC36 - 76	
	CURRENT[A]	*2	2.51typ	2.44typ	1.05typ	1.02typ	0.523typ	0.509typ	0.262typ	0.254typ
	EFFICIENCY[%]	*2	86typ	86typ	86typ	86typ	86typ	86typ	86typ	86typ
OUTPUT	VOLTAGE[V]		±12(+24)	±15(+30)	±12(+24)	±15(+30)	±12(+24)	±15(+30)	±12(+24)	±15(+30)
	CURRENT[A]		0.45	0.35	0.45	0.35	0.45	0.35	0.45	0.35
	LINE REGULATION[mV]		60max	75max	60max	75max	60max	75max	60max	75max
	LOAD REGULATION[mV]		600max	750max	600max	750max	600max	750max	600max	750max
	RIPPLE[mVp-p]	-20 to +55℃ *3	120max	120max	120max	120max	120max	120max	120max	120max
		-40 to -20℃ *3	150max	150max	150max	150max	150max	150max	150max	150max
	RIPPLE NOISE[mVp-p]	-20 to +55℃ *3	150max	150max	150max	150max	150max	150max	150max	150max
		-40 to -20℃ *3	200max	200max	200max	200max	200max	200max	200max	200max
	TEMPERATURE REGULATION[mV]	-20 to +55℃	150max	180max	150max	180max	150max	180max	150max	180max
		-40 to +55℃	240max	290max	240max	290max	240max	290max	240max	290max
	DRIFT[mV]	*4	50max	60max	50max	60max	50max	60max	50max	60max
	START-UP TIME[ms]		20max (Minimum input, Io=100%)							
	OUTPUT VOLTAGE ADJUSTMENT RANGE		Fixed (TRM pin open) ±5% adjustable by external VR							
	OUTPUT VOLTAGE SETTING[V] (±5%)		11.40 - 12.60	14.25 - 15.75	11.40 - 12.60	14.25 - 15.75	11.40 - 12.60	14.25 - 15.75	11.40 - 12.60	14.25 - 15.75
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically							
	REMOTE ON/OFF		Provided (Negative logic L : ON, H : OFF)							
ISOLATION	INPUT-OUTPUT		AC500V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)							
	INPUT-CASE		AC500V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)							
	OUTPUT-CASE		AC500V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15℃)							
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE		-40 to +85℃, 20 - 95%RH (Non condensing) (Required Derating), 3,000m (10,000feet) max							
	STORAGE TEMP.,HUMID.AND ALTITUDE		-40 to +100℃, 20 - 95%RH (Non condensing), 9,000m (30,000feet) max							
	VIBRATION		10 - 55Hz, 98.0m/s² (10G), 3minutes period, 60minutes each along X, Y and Z axis							
	IMPACT		490.3m/s² (50G), 11ms, once each along X, Y and Z axis							
SAFETY	AGENCY APPROVALS		UL60950-1, C-UL, EN60950-1							
OTHERS	CASE SIZE/WEIGHT		40.2×7.0×22.0mm [1.58×0.28×0.87 inches] (W×H×D) / 10g max							
	COOLING METHOD		Convection/Forced air							

*1 Output pins can be connected in series to make a 24V/30V output.
*2 Rated input 5V, 12V, 24V or 48V DC Io=100%
*3 Ripple and Ripple Noise is measured by using measuring board with capacitor with in 25mm from output pin terminals.
*4 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25℃.
* Parallel operation with other model is not possible.

External view

1.SMD(type B)

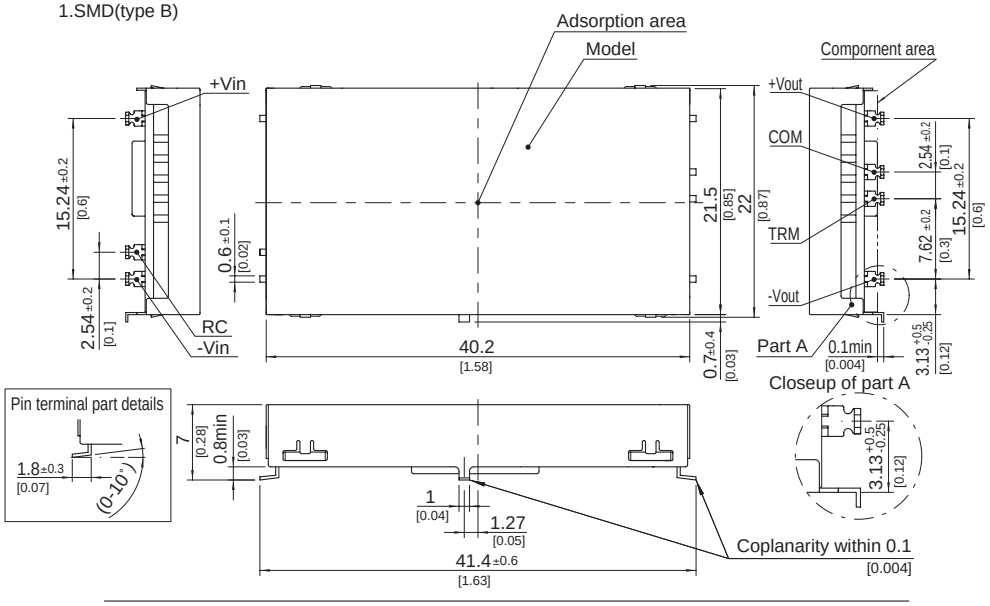

Recommended Pad and Hole dia.
(TOP VIEW)

type B



type C



Unit : 0.1inch
Dimensions in mm, [ ]=inches

2.DIP(type C)

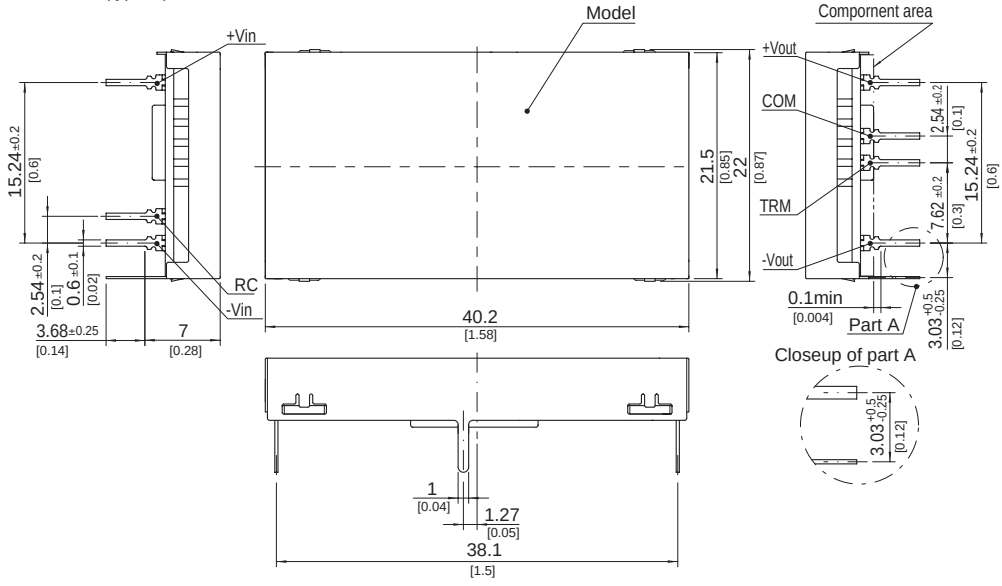

※ Tolerance ±0.5 [±0.02]
※ Dimensions in mm, [ ]=inches
※ Pin terminal thickness : 0.3±0.1 [0.012]
※ Pin terminal material : Copper alloy
※ Plating treatment of terminal : Lead free plating
※ Case thickness : 0.2±0.05 [0.008]
※ Case material : Brass
※ Plating treatment of case : Nickel plating
※ Please keep enough creepage distance with the pattern on PCB and other components.
※ Weight : 10g max

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cosel:

SUCW102415BP SUCW32415B-G SUCW1R50515C-C SUCW1R52412BP SUCW30515C-G SUCW61215C SUCW62415BP-G SUCW60515BP SUCW104815BP SUCW1R52415B SUCW62412B SUCW1R54812C-C SUCW62415B SUCW60515C-G SUCW64815BP SUCW62415C-G SUCW60512C SUCW102412BP SUCW1R54815C SUCW100512BP-G SUCW61212C SUCW1R50512B SUCW1R50512C-C SUCW104812BP SUCW101212BP-G SUCW102415C-C SUCW34815C-C SUCW32415C SUCW1R51215BP SUCW32415B SUCW1R51212C SUCW34812B SUCW102415B-G SUCW64812C SUCW32412C SUCW104815B SUCW31215C SUCW101215B SUCW61215BP SUCW1R52412B SUCW1R52415C-C SUCW30512B SUCW100515B SUCW31212C-C SUCW1R50515C SUCW32412B SUCW62415BP SUCW32415BP-G SUCW102415C SUCW100515C SUCW30515C-C SUCW64815C-C SUCW1R52412C-C SUCW31212C SUCW62412BP SUCW104812B SUCW64812BP SUCW30512C-C SUCW62415C-C SUCW61215C-C SUCW34812C SUCW64812C-G SUCW1R51215C-C SUCW32415C-G SUCW1R51212B SUCW60512C-G SUCW61215B SUCW30515C SUCW104812C-C SUCW31212B SUCW101212B SUCW102415C-G SUCW1R52415BP SUCW1R54815B SUCW102412BP-G SUCW1R50512BP SUCW62415B-G SUCW101215C SUCW62412B-G SUCW102415BP-G SUCW61215C-G SUCW1R51215C SUCW30515BP SUCW60512B SUCW64812C-C SUCW101215BP SUCW32412C-C SUCW31215B SUCW62412C SUCW101212C SUCW1R54812BP SUCW101212C-C SUCW61212BP SUCW1R50515BP SUCW100512B SUCW102412B SUCW102412C-G SUCW100515BP SUCW64812B SUCW1R50515B

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.