Precision Thick Film Chip Resistors
ERJ G : 01005, 0201
ERJ R : 0201, 0402, 0603, 0805
ERJ E : 0603, 0805, 1206, 1210, 1812, 2010, 2512

Type: **ERJ XG, 1G**
ERJ 1R, 2R, 3R, 6R
ERJ 3E, 6E, 8E, 14, 12, 1T

■ Features

- Small size and lightweight
- High reliability
  Metal glaze thick film resistive element and three layers of electrodes
- Compatible with placement machines
  Taping packaging available
- Suitable for both reflow and flow soldering
- RoHS compliant
- Low Resistance Tolerance
  ERJXG, 1G, 2R, 3E, 6E, 8E, 14, 12, 1T Series ····· ±1 %
  ERJ1R, 2R, 3R, 6R Series ····· ±0.5 %
- Reference Standards
  IEC 60115-8, JIS C 5201-8, EIAJ RC-2134B

■ Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions

Please see Data Files

■ Explanation of Part Numbers

- ERJ1R, 2R, 3R, 6R Series, ±0.5 % type

1	2	3	4	5	6	7	8	9	10	11	12
E	R	J	3	R	B	D	1	0	0	2	V

Product Code
Thick Film Chip Resistors

Size, Power Rating	
Type: inch	Power R.
1R : 0201	0.05 W
2R : 0402	0.063 W
3R : 0603	0.1 W
6R : 0805	0.1 W

T.C.R. Marking	
Code	T.C.R.
H	±50×10^{-6}/°C (1R, 2R)
B	±50×10^{-6}/°C (3R, 6R)
K	±100×10^{-6}/°C (2R)
E	±100×10^{-6}/°C (3R, 6R)

Resistance Tolerance	
Code	Tolerance
D	±0.5 %

Packaging Methods		
Code	Packaging	Type
C	Pressed Carrier Taping 2 mm pitch, 15,000 pcs.	ERJ1R
X	Punched Carrier Taping 2 mm pitch, 10,000 pcs.	ERJ2R
V	Punched Carrier Taping 4 mm pitch, 5,000 pcs.	ERJ3R ERJ6R

Resistance Value
The first three digits are significant figures of resistance and the last one denotes number of zeros following. Example: 1002→10 kΩ

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

● ERJXG, 1G, 2R, 3E, 6E, 8E, 14, 12, 1T Series, ±1 % type

1	2	3	4	5	6	7	8	9	10	11	12
E	R	J	8	E	N	F	1	0	0	2	V

Product Code
Thick Film Chip Resistors

Size, Power Rating	
Type : inch	Power R.
XGN : 01005	0.031 W
1GN : 0201	0.05 W
2RK : 0402	0.1 W
3EK : 0603	0.1 W
6EN : 0805	0.125 W
8EN : 1206	0.25 W
14N : 1210	0.5 W
12N : 1812	0.75 W
12S : 2010	0.75 W
1TN : 2512	1 W

Resistance Tolerance	
Code	Tolerance
F	±1 %

Resistance Value
The first three digits are significant figures of resistance and the last one denotes number of zeros following. Decimal point is expressed by "R". Example : 1002 → 10 kΩ

Packaging Methods		
Code	Packaging	Type
Y	Pressed Carrier Taping 2 mm pitch, 20,000 pcs.	ERJXGN
C	Pressed Carrier Taping 2 mm pitch, 15,000 pcs.	ERJ1GN
X	Punched Carrier Taping 2 mm pitch, 10,000 pcs.	ERJ2RK
V	Punched Carrier Taping 4 mm pitch, 5,000 pcs.	ERJ3EK ERJ6EN ERJ8EN
U	Embossed Carrier Taping 4 mm pitch, 5,000 pcs.	ERJ14N ERJ12N ERJ12S
	Embossed Carrier Taping 4 mm pitch, 4,000 pcs.	ERJ1TN

■ Construction

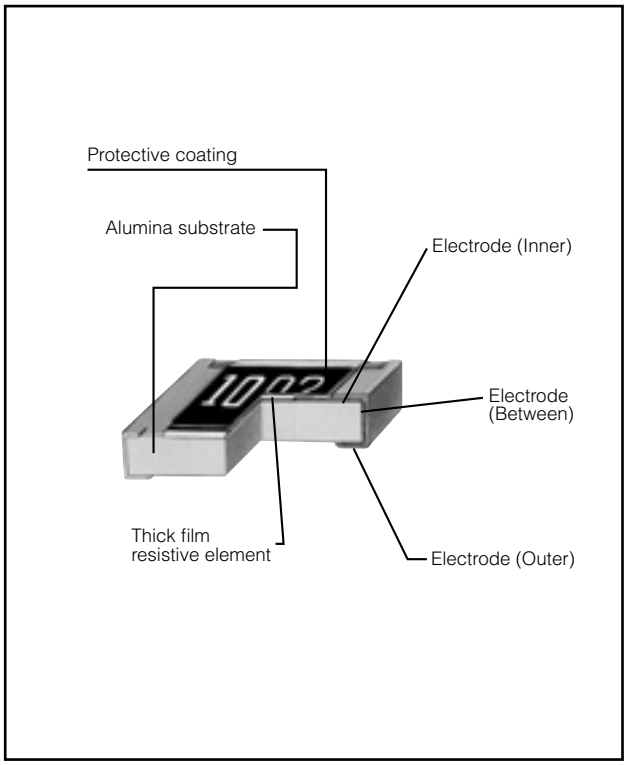

■ Dimensions in mm (not to scale)

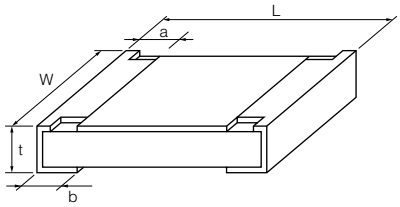

Type (inch size)	Dimensions (mm) L	W	a	b	t	Mass (Weight) [g/1000 pcs.]
ERJXG (01005)	$0.40^{\pm0.02}$	$0.20^{\pm0.02}$	$0.10^{\pm0.03}$	$0.10^{\pm0.03}$	$0.13^{\pm0.02}$	0.04
ERJ1G, 1R (0201)	$0.60^{\pm0.03}$	$0.30^{\pm0.03}$	$0.10^{\pm0.05}$	$0.15^{\pm0.05}$	$0.23^{\pm0.03}$	0.15
ERJ2R□ (0402)	$1.00^{\pm0.05}$	$0.50^{\pm0.05}$	$0.20^{\pm0.10}$	$0.25^{\pm0.05}$	$0.35^{\pm0.05}$	0.8
ERJ3R□ ERJ3EK (0603)	$1.60^{\pm0.15}$	$0.80^{+0.15}_{-0.05}$	$0.30^{\pm0.20}$	$0.30^{\pm0.15}$	$0.45^{\pm0.10}$	2
ERJ6R□ ERJ6EN (0805)	$2.00^{\pm0.20}$	$1.25^{\pm0.10}$	$0.40^{\pm0.20}$	$0.40^{\pm0.20}$	$0.60^{\pm0.10}$	4
ERJ8EN (1206)	$3.20^{+0.05}_{-0.20}$	$1.60^{+0.05}_{-0.15}$	$0.50^{\pm0.20}$	$0.50^{\pm0.20}$	$0.60^{\pm0.10}$	10
ERJ14N (1210)	$3.20^{\pm0.20}$	$2.50^{\pm0.20}$	$0.50^{\pm0.20}$	$0.50^{\pm0.20}$	$0.60^{\pm0.10}$	16
ERJ12N (1812)	$4.50^{\pm0.20}$	$3.20^{\pm0.20}$	$0.50^{\pm0.20}$	$0.50^{\pm0.20}$	$0.60^{\pm0.10}$	27
ERJ12S (2010)	$5.00^{\pm0.20}$	$2.50^{\pm0.20}$	$0.60^{\pm0.20}$	$0.60^{\pm0.20}$	$0.60^{\pm0.10}$	27
ERJ1TN (2512)	$6.40^{\pm0.20}$	$3.20^{\pm0.20}$	$0.65^{\pm0.20}$	$0.60^{\pm0.20}$	$0.60^{\pm0.10}$	45

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Ratings

<±0.5 %>

Type (inch size)	Power Rating at 70 °C (W)	Limiting Element Voltage(1) (V)	Maximum Overload Voltage(2) (V)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. (×10⁻⁶/°C)	Category Temperature Range (°C)
ERJ1RH (0201)	0.05	15	30	±0.5	1 k to 1 M (E24, E96)	±50	−55 to +125
ERJ2RH (0402)	0.063	50	100	±0.5	100 to 100 k (E24, E96)	±50	−55 to +125
ERJ2RK (0402)	0.063	50	100	±0.5	10 to 97.6 102 k to 1 M (E24, E96)	±100	−55 to +125
ERJ3RB (0603)	0.1	50	100	±0.5	100 to 100 k (E24, E96)	±50	−55 to +125
ERJ3RE (0603)	0.1	50	100	±0.5	10 to 97.6 102 k to 1 M (E24, E96)	±100	−55 to +125
ERJ6RB (0805)	0.1	150	200	±0.5	100 to 100 k (E24, E96)	±50	−55 to +125
ERJ6RE (0805)	0.1	150	200	±0.5	10 to 97.6 102 k to 1 M (E24, E96)	±100	−55 to +125

<±1 %>

Type (inch size)	Power Rating at 70 °C (W)	Limiting Element Voltage(1) (V)	Maximum Overload Voltage(2) (V)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. (×10⁻⁶/°C)	Category Temperature Range (°C)
ERJXGN (01005)	0.031	15	30	±1	10 to 1 M (E24, E96)	<100 Ω : ±300 100 Ω ≦ : ±200	−55 to +125
ERJ1GN (0201)	0.05	25	50	±1	10 to 1 M(3) (E24, E96)	±200	−55 to +125
ERJ2RK (0402)	0.1	50	100	±1	10 to 1 M(3) (E24, E96)	±100	−55 to +155
ERJ3EK (0603)	0.1	75	150	±1	10 to 1 M (E24, E96)	±100	−55 to +155
ERJ6EN (0805)	0.125	150	200	±1	10 to 2.2 M (E24, E96)	±100	−55 to +155
ERJ8EN (1206)	0.25	200	400	±1	10 to 2.2 M (E24, E96)	±100	−55 to +155
ERJ14N (1210)	0.5	200	400	±1	10 to 1 M (E24, E96)	±100	−55 to +155
ERJ12N (1812)	0.75	200	500	±1	10 to 1 M (E24, E96)	±100	−55 to +155
ERJ12S (2010)	0.75	200	500	±1	10 to 1 M (E24, E96)	±100	−55 to +155
ERJ1TN (2512)	1	200	500	±1	10 to 1 M (E24, E96)	±100	−55 to +155

(1) Rated Continuous Working Voltage (RCWV) shall be determined from RCWV=$\sqrt{\text{Power Rating} \times \text{Resistance Values}}$, or Limiting Element Voltage listed above, whichever less.
(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from SOTV=2.5 (Only ERJ2RK ±1% =2.0) × Power Rating or max. Overload Voltage listed above whichever less.
(3) Please contact us when you need a type with a resistance of less than 10 Ω.

Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

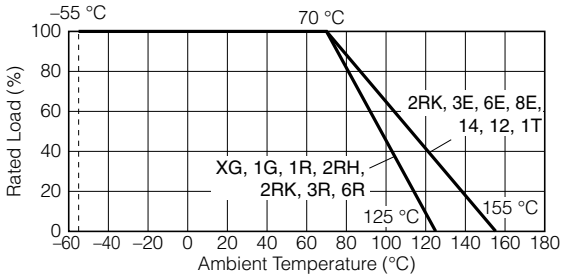

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.