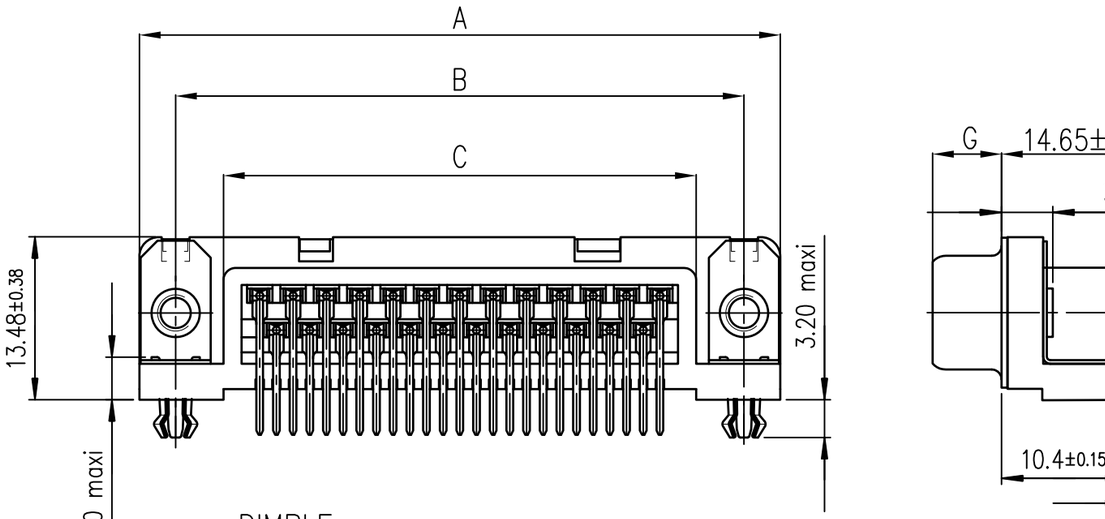

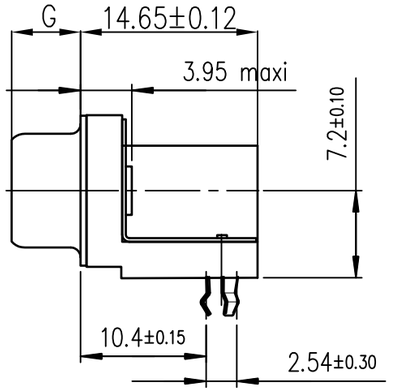

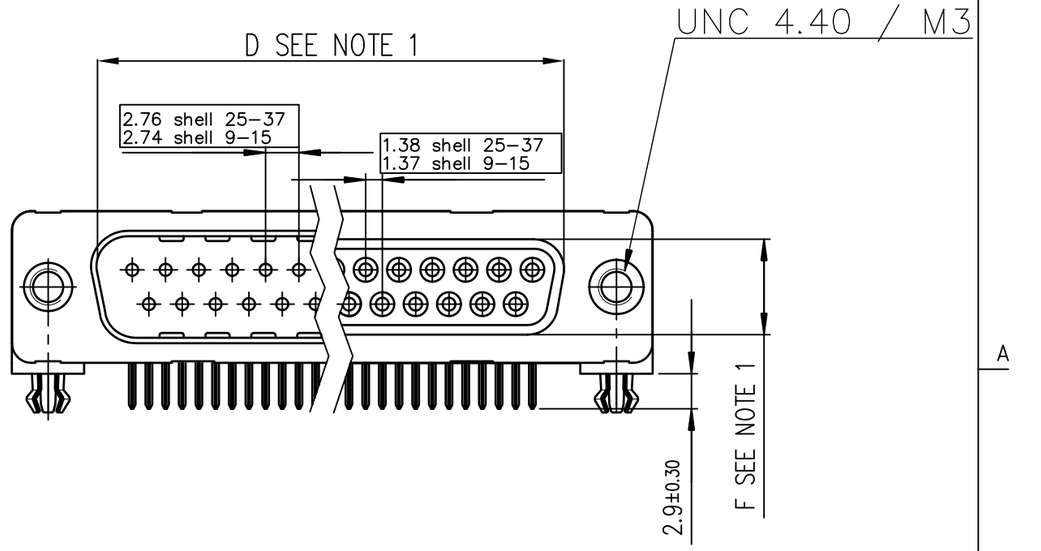

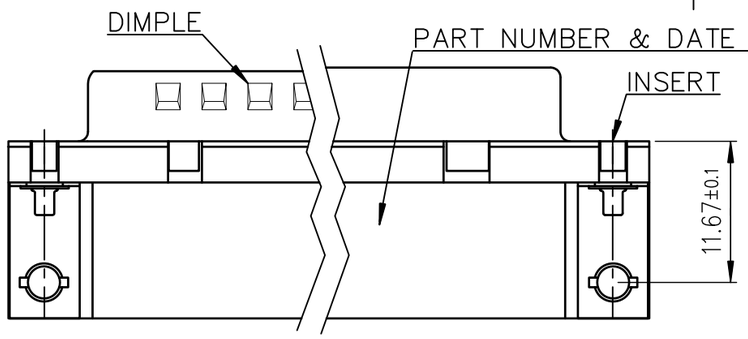

ORDERING INFORMATION

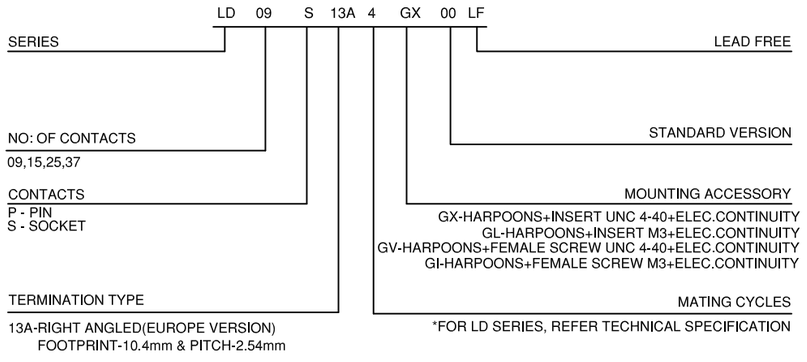

SHELL		A±0.38	B±0.12	C±0.10	$D^{0.25}_{0}$	E±0.07	F	G
09	P	30.81	24.99	16.96	16.79	10.96	8.35±0.12	$5.90^{0.15}_{0}$
	S	30.81	24.99	16.96	16.21	10.96	7.89±0.13	6.17±0.12
15	P	39.14	33.32	25.18	25.12	19.18	8.35±0.12	$5.90^{0.15}_{0}$
	S	39.14	33.32	25.18	24.54	19.18	7.89±0.13	6.17±0.12
25	P	53.03	47.04	39.12	38.84	33.12	8.35±0.12	$5.70^{0.25}_{0}$
	S	53.03	47.04	39.12	38.25	33.12	7.89±0.13	6.17±0.12
37	P	69.32	63.50	55.68	55.30	49.68	8.35±0.12	$5.70^{0.25}_{0}$
	S	69.32	63.50	55.68	54.71	49.68	7.89±0.13	6.17±0.12

NOTES:

1) INSIDE DIMENSIONS FOR THE MALE CONNECTOR AND OUTSIDE DIMENSIONS FOR THE FEMALE CONNECTOR
2) DIMPLE IS PROVIDED ONLY FOR THE MALE CONNECTOR
3) THE GENERAL VIEW IS FOR THE OPTION GX/GL

FEMALE SCREW

VIEW FOR GV/GI VERSION

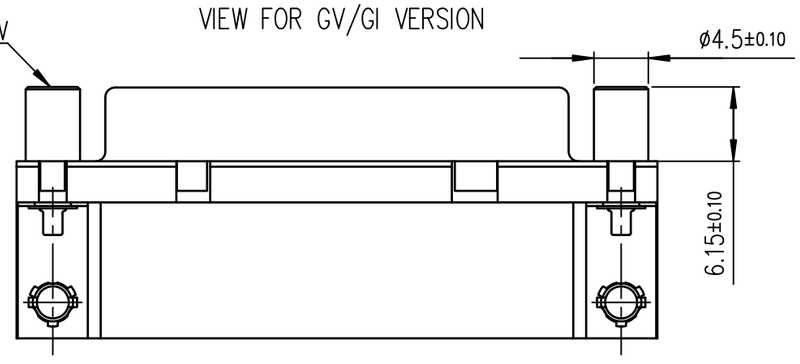

mat'l. code	surface	tolerance	projection	product family
–	ISO 1302	ISO 406 ISO 1101		D–SUB

ltr	ecn no	dr	date
A	–	AB	2014-08-01
B	ELX–I–19184	AB	2014-10-24

tolerances unless otherwise specified

angles	linear
0°±2°	.0±.0.1
	.00±0.1
	.000±0.1

MM

scale 2:1

dr	ALIAS BABU	2014-08-01
engr	ALIAS BABU	2014-10-24
chr	MITHUN PAUL	2014-10-24
appd	BIJU K PAUL	2014-10-24

title: DELTA–D R/A EUROPE LD SERIES

dwg no 10130913 | sheet 1 of 2 | size A3

type Product Customer Drawing

sheet index	revision	B	B
	sheet	1	2

Copyright FCI
FCIconnect.com

form: A3

PDS: Rev :B STATUS:Released Printed: Oct 24, 2014

TECHNICAL SPECIFICATION

PHYSICAL CHARACTERISTICS

INSULATOR MATERIAL : BLACK THERMOPLASTIC UL94 V0

CONTACTS MATERIAL : COPPER ALLOY

CONTACTS PLATING : GOLD FLASH OVER NICKEL

SHELL PLATING : NICKEL/TIN

ELECTRICAL CHARACTERISTICS

RATED VOLTAGE : 250V

RATED CURRENT : 5 A

CONTACT RESISTANCE : ≤25mΩ

INSULATION RESISTANCE : ≥5000 MΩ

MECHANICAL CHARACTERISTICS

MATING CYCLES : 50 MINIMUM

RETENTION AGAINST TORQUE : 0.5Nm

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE : -55°C TO +105°C

PACKING SPECIFICATION

REFER GS-14-2405

MATING VIEW FOR FEMALE CONNECTOR

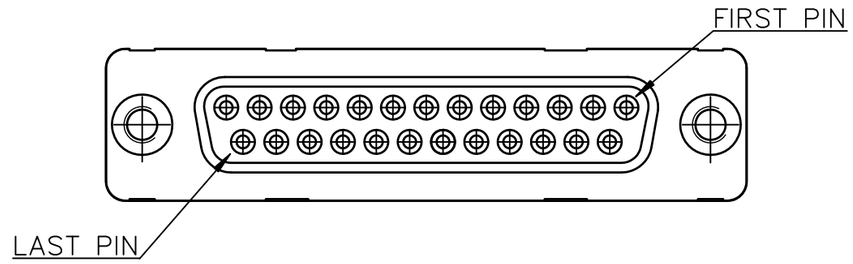

MATING VIEW FOR MALE CONNECTOR

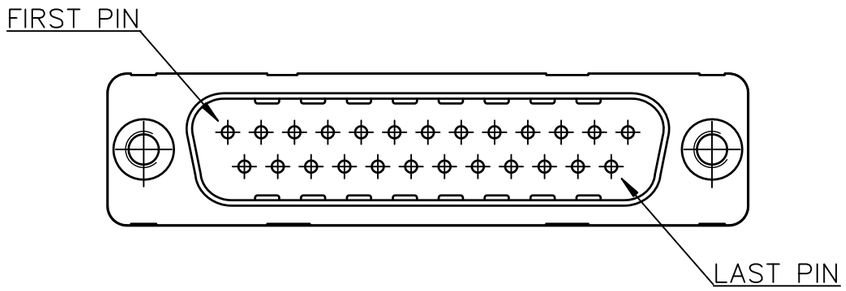

PC card drilling dimensions(after plating)

(thickness 1.60±0.20mm)

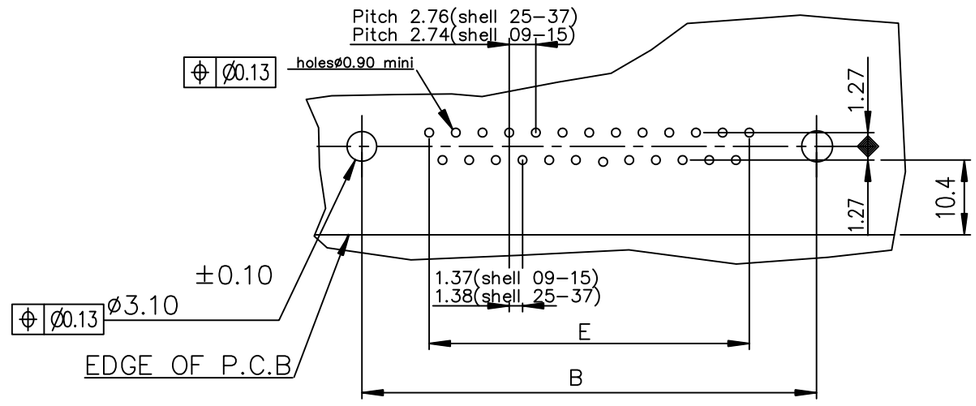

| | | |

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.