



DMOS dual full bridge driver with PWM current controller

Datasheet - production data

**PowerSO36****SO24**
(20 + 2 + 2)**Ordering numbers:****L6227PD (PowerSO36)**
L6227D (SO24)

- Thermal shutdown
- Undervoltage lockout
- Integrated fast freewheeling diodes

Applications

- Bipolar stepper motor
- Dual DC motor

Description

The L6227 device is a DMOS dual full bridge designed for motor control applications, realized in BCD technology, which combines isolated DMOS power transistors with CMOS and bipolar circuits on the same chip. The device also includes two independent constant off time PWM current controllers that performs the chopping regulation. Available in PowerSO36 and SO24 (20 + 2 + 2) packages, the L6227 device features a non-dissipative overcurrent protection on the high-side power MOSFETs and thermal shutdown.

Features


- Operating supply voltage from 8 to 52 V
- 2.8 A output peak current (1.4 A DC)
- $R_{DS(ON)}$ 0.73 Ω typ. value at $T_j = 25^\circ\text{C}$
- Operating frequency up to 100 KHz
- Non-dissipative overcurrent protection
- Dual independent constant t_{OFF} PWM current controllers
- Slow decay synchronous rectification
- Cross conduction protection

Contents

| | | |
|-----------|--|-----------|
| 1 | Block diagram | 3 |
| 2 | Maximum ratings | 4 |
| 3 | Pin connections | 6 |
| 4 | Electrical characteristics | 8 |
| 5 | Circuit description | 11 |
| 5.1 | Power stages and charge pump | 11 |
| 5.2 | Logic inputs | 11 |
| 6 | PWM current control | 14 |
| 7 | Slow decay mode | 18 |
| 7.1 | Non-dissipative overcurrent protection | 18 |
| 7.2 | Thermal protection | 21 |
| 8 | Application information | 22 |
| 8.1 | Output current capability and IC power dissipation | 24 |
| 8.2 | Thermal management | 25 |
| 9 | Package information | 27 |
| 9.1 | PowerSO36 package information | 27 |
| 9.2 | SO24 package information | 29 |
| 10 | Revision history | 30 |

1 Block diagram

Figure 1. Block diagram

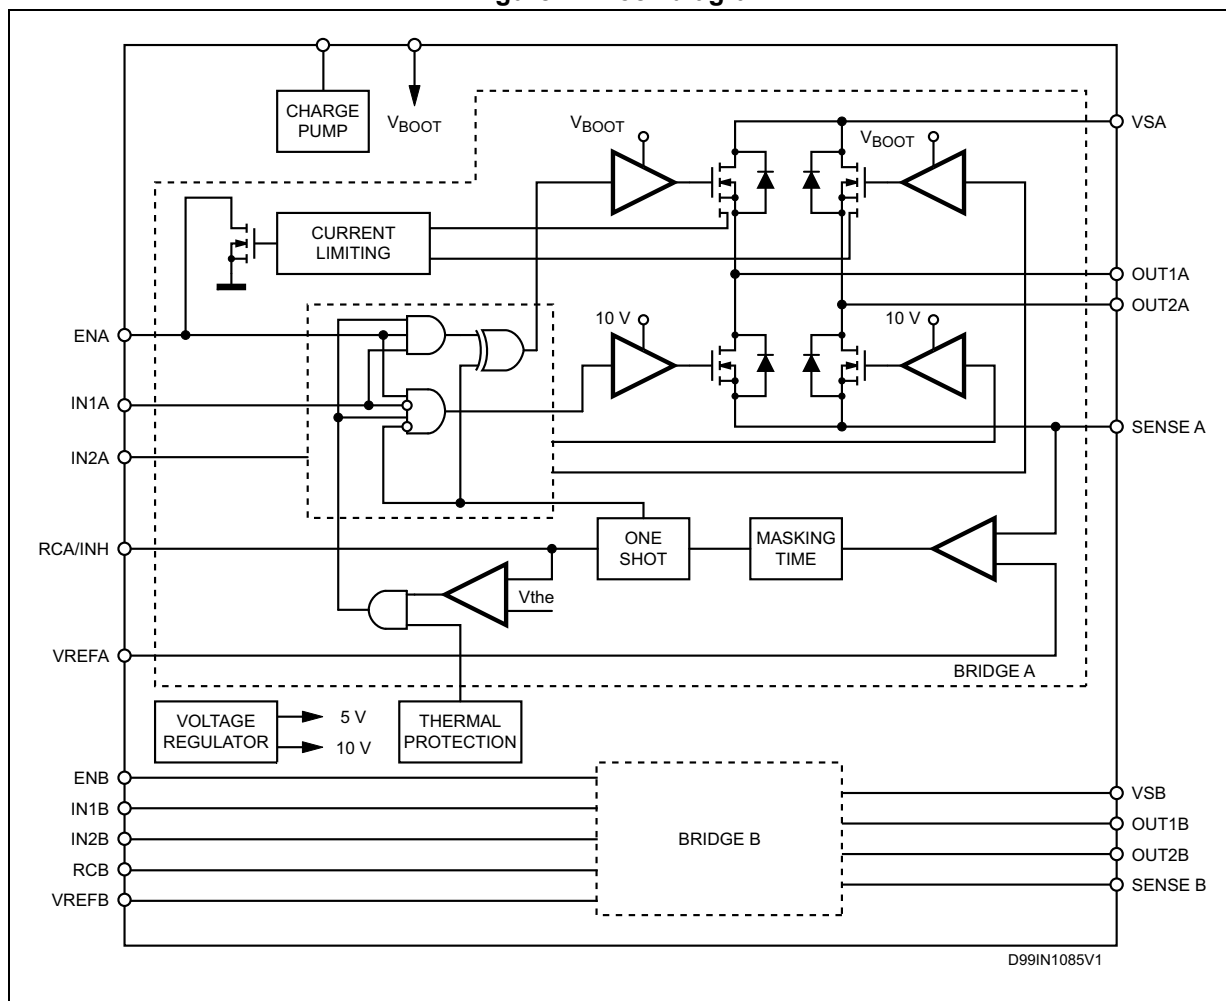

2 Maximum ratings

Table 1. Absolute maximum ratings

| Symbol | Parameter | Test conditions | Value | Unit |
|--------------------------------|--|---|------------|------|
| V_S | Supply voltage | $V_{SA} = V_{SB} = V_S$ | 60 | V |
| V_{OD} | Differential voltage between V_{SA} , OUT1 _A , OUT2 _A , SENSE _A and V_{SB} , OUT1 _B , OUT2 _B , SENSE _B | $V_{SA} = V_{SB} = V_S = 60\text{ V}$; $V_{SENSEA} = V_{SENSEB} = \text{GND}$ | 60 | V |
| V_{BOOT} | Bootstrap peak voltage | $V_{SA} = V_{SB} = V_S$ | $V_S + 10$ | V |
| V_{IN} , V_{EN} | Input and enable voltage range | - | -0.3 to +7 | V |
| V_{REFA} , V_{REFB} | Voltage range at pins V_{REFA} and V_{REFB} | - | -0.3 to +7 | V |
| V_{RCA} , V_{RCB} | Voltage range at pins RC_A and RC_B | - | -0.3 to +7 | V |
| V_{SENSEA} , V_{SENSEB} | Voltage range at pins SENSE _A and SENSE _B | - | -1 to +4 | V |
| $I_{S(\text{peak})}$ | Pulsed supply current (for each V_S pin), internally limited by the overcurrent protection | $V_{SA} = V_{SB} = V_S$; $t_{PULSE} < 1\text{ ms}$ | 3.55 | A |
| I_S | RMS supply current (for each V_S pin) | $V_{SA} = V_{SB} = V_S$ | 1.4 | A |
| T_{stg} , T_{OP} | Storage and operating temperature range | - | -40 to 150 | °C |

Table 2. Recommended operating conditions

| Symbol | Parameter | Test conditions | Min. | Max. | Unit |
|--------------------------------|--|--|----------|--------|--------|
| V_S | Supply voltage | $V_{SA} = V_{SB} = V_S$ | 8 | 52 | V |
| V_{OD} | Differential voltage between V_{SA} , OUT1 _A , OUT2 _A , SENSE _A and V_{SB} , OUT1 _B , OUT2 _B , SENSE _B | $V_{SA} = V_{SB} = V_S$; $V_{SENSEA} = V_{SENSEB}$ | - | 52 | V |
| V_{REFA} , V_{REFB} | Voltage range at pins V_{REFA} and V_{REFB} | - | -0.1 | 5 | V |
| V_{SENSEA} , V_{SENSEB} | Voltage range at pins SENSE _A and SENSE _B | (pulsed $t_W < t_{rr}$) (DC) | -6 -1 | 6 1 | V V |
| I_{OUT} | RMS output current | - | - | 1.4 | A |
| f_{sw} | Switching frequency | - | - | 100 | KHz |


Table 3. Thermal data

| Symbol | Description | SO24 | PowerSO36 | Unit |
|-----------------|--|------|-----------|------|
| $R_{th-j-pins}$ | Maximum thermal resistance junction pins | 15 | - | °C/W |
| $R_{th-j-case}$ | Maximum thermal resistance junction case | - | 2 | °C/W |
| $R_{th-j-amb1}$ | Maximum thermal resistance junction ambient ⁽¹⁾ | 52 | - | °C/W |
| $R_{th-j-amb1}$ | Maximum thermal resistance junction ambient ⁽²⁾ | - | 36 | °C/W |
| $R_{th-j-amb1}$ | Maximum thermal resistance junction ambient ⁽³⁾ | - | 16 | °C/W |
| $R_{th-j-amb2}$ | Maximum thermal resistance junction ambient ⁽⁴⁾ | 78 | 63 | °C/W |

1. Mounted on a multilayer FR4 PCB with a dissipating copper surface on the bottom side of 6 cm² (with a thickness of 35 µm).
2. Mounted on a multilayer FR4 PCB with a dissipating copper surface on the top side of 6 cm² (with a thickness of 35 µm).
3. Mounted on a multilayer FR4 PCB with a dissipating copper surface on the top side of 6 cm² (with a thickness of 35 µm), 16 via holes and a ground layer.
4. Mounted on a multilayer FR4 PCB without any heat sinking surface on the board.

3 Pin connections

Figure 2. Pin connections (top view)

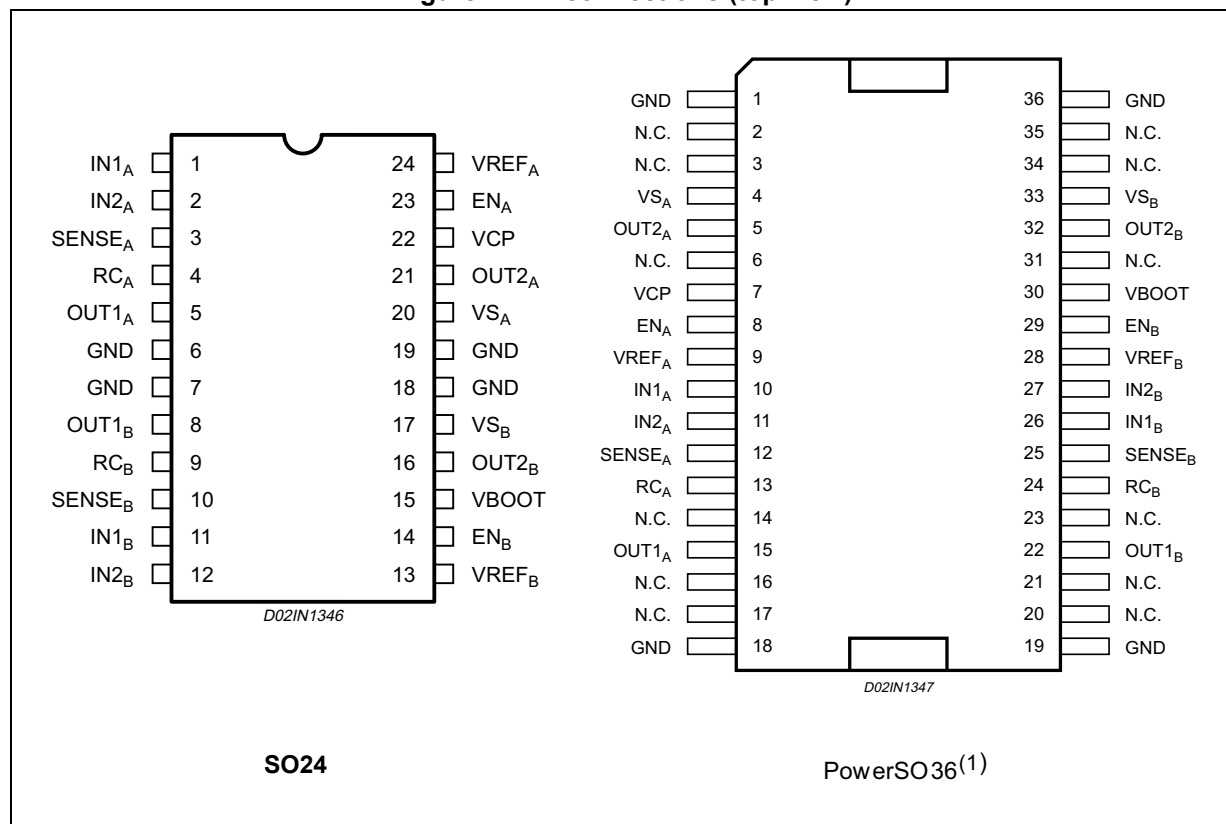

1. The slug is internally connected to pins 1, 18, 19 and 36 (GND pins).

Table 4. Pin description

| Package | | Name | Type | Function |
|---------|-----------|--------------------|--------------|---|
| SO24 | PowerSO36 | | | |
| Pin no. | Pin no. | | | |
| 1 | 10 | IN1 _A | Logic input | Bridge A logic input 1. |
| 2 | 11 | IN2 _A | Logic input | Bridge A logic input 2. |
| 3 | 12 | SENSE _A | Power supply | Bridge A source pin. This pin must be connected to power ground through a sensing power resistor. |
| 4 | 13 | RC _A | RC pin | RC network pin. A parallel RC network connected between this pin and ground sets the current controller OFF-time of the bridge A. |
| 5 | 15 | OUT1 _A | Power output | Bridge A output 1. |

Table 4. Pin description (continued)

| Package | | Name | Type | Function |
|--------------|---------------|--------------------|----------------------------|---|
| SO24 | PowerSO36 | | | |
| Pin no. | Pin no. | | | |
| 6, 7, 18, 19 | 1, 18, 19, 36 | GND | GND | Signal ground terminals. In SO packages, these pins are also used for heat dissipation toward the PCB. |
| 8 | 22 | OUT1 _B | Power output | Bridge B output 1. |
| 9 | 24 | RC _B | RC pin | RC network pin. A parallel RC network connected between this pin and ground sets the current controller OFF-time of the bridge B. |
| 10 | 25 | SENSE _B | Power supply | Bridge B source pin. This pin must be connected to power ground through a sensing power resistor. |
| 11 | 26 | IN1 _B | Logic input | Bridge B input 1 |
| 12 | 27 | IN2 _B | Logic input | Bridge B input 2 |
| 13 | 28 | VREF _B | Analog input | Bridge B current controller reference voltage. Do not leave this pin open or connect to GND. |
| 14 | 29 | EN _B | Logic input ⁽¹⁾ | Bridge B enable. LOW logic level switches OFF all power MOSFETs of bridge B. This pin is also connected to the collector of the overcurrent and thermal protection transistor to implement overcurrent protection. If not used, it has to be connected to +5 V through a resistor. |
| 15 | 30 | VBOOT | Supply voltage | Bootstrap voltage needed for driving the upper power MOSFETs of both bridge A and bridge B. |
| 16 | 32 | OUT2 _B | Power output | Bridge B output 2. |
| 17 | 33 | VS _B | Power supply | Bridge B power supply voltage. It must be connected to the supply voltage together with pin VS _A . |
| 20 | 4 | VS _A | Power supply | Bridge A power supply voltage. It must be connected to the supply voltage together with pin VS _B . |
| 21 | 5 | OUT2 _A | Power output | Bridge A output 2. |
| 22 | 7 | VCP | Output | Charge pump oscillator output. |
| 23 | 8 | EN _A | Logic input ⁽¹⁾ | Bridge A enable. LOW logic level switches OFF all power MOSFETs of bridge A. This pin is also connected to the collector of the overcurrent and thermal protection transistor to implement overcurrent protection. If not used, it has to be connected to +5 V through a resistor. |
| 24 | 9 | VREF _A | Analog input | Bridge A current controller reference voltage. Do not leave this pin open or connect to GND. |

1. Also connected at the output drain of the overcurrent and thermal protection MOSFET. Therefore, it has to be driven putting in series a resistor with a value in the range of 2.2 K Ω - 180 K Ω , recommended 100 K Ω .

4 Electrical characteristics

Table 5. Electrical characteristics
($T_{amb} = 25\text{ °C}$, $V_S = 48\text{ V}$, unless otherwise specified)

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|---------------------------|--|--|------|------|------|------|
| V _{Sth(ON)} | Turn-on threshold | - | 5.8 | 6.3 | 6.8 | V |
| V _{Sth(OFF)} | Turn-off threshold | - | 5 | 5.5 | 6 | V |
| I _S | Quiescent supply current | All bridges OFF; T _J = -25 °C to 125 °C ⁽¹⁾ | - | 5 | 10 | mA |
| T _{J(OFF)} | Thermal shutdown temperature | - | - | 165 | - | °C |
| Output DMOS transistors | | | | | | |
| R _{DS(ON)} | High-side + low-side switch ON resistance | T _J = 25 °C | - | 1.47 | 1.69 | W |
| | | T _J = 125 °C ⁽¹⁾ | - | 2.35 | 2.7 | W |
| I _{DSS} | Leakage current | EN = low; OUT = V _S | - | - | 2 | mA |
| | | EN = low; OUT = GND | -0.3 | - | - | mA |
| Source drain diodes | | | | | | |
| V _{SD} | Forward ON voltage | I _{SD} = 1.4 A, EN = LOW | - | 1.15 | 1.3 | V |
| t _{rr} | Reverse recovery time | I _f = 1.4 A | - | 300 | - | ns |
| t _{fr} | Forward recovery time | - | - | 200 | - | ns |
| Logic input | | | | | | |
| V _{IL} | Low level logic input voltage | - | -0.3 | - | 0.8 | V |
| V _{IH} | High level logic input voltage | - | 2 | - | 7 | V |
| I _{IL} | Low level logic input current | GND logic input voltage | -10 | - | | μA |
| I _{IH} | High level logic input current | 7 V logic input voltage | - | - | 10 | μA |
| V _{th(ON)} | Turn-on input threshold | - | - | 1.8 | 2.0 | V |
| V _{th(OFF)} | Turn-off input threshold | - | 0.8 | 1.3 | - | V |
| V _{th(HYS)} | Input threshold hysteresis | - | 0.25 | 0.5 | - | V |
| Switching characteristics | | | | | | |
| t _{D(on)EN} | Enable to out turn ON delay time ⁽²⁾ | I _{LOAD} = 1.4 A, resistive load | 500 | - | 800 | ns |
| t _{D(on)IN} | Input to out turn ON delay time | I _{LOAD} = 1.4 A, resistive load (deadtime included) | - | 1.9 | - | μs |
| t _{RISE} | Output rise time ⁽²⁾ | I _{LOAD} = 1.4 A, resistive load | 40 | | 250 | ns |
| t _{D(off)EN} | Enable to out turn OFF delay time ⁽²⁾ | I _{LOAD} = 1.4 A, resistive load | 500 | 800 | 1000 | ns |
| t _{D(off)IN} | Input to out turn OFF delay time | I _{LOAD} = 1.4 A, resistive load | 500 | 800 | 1000 | ns |
| t _{FALL} | Output fall time ⁽²⁾ | I _{LOAD} = 1.4 A, resistive load | 40 | - | 250 | ns |
| t _{dt} | Deadtime protection | - | 0.5 | 1 | - | μs |
| f _{CP} | Charge pump frequency | -25 °C <T _J < 125 °C | - | 0.6 | 1 | MHz |

Table 5. Electrical characteristics
($T_{amb} = 25\text{ }^{\circ}\text{C}$, $V_s = 48\text{ V}$, unless otherwise specified) (continued)

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|--------------------------------------|--|---|------|---------|------|---------------|
| PWM comparator and monostable | | | | | | |
| I_{RCA}, I_{RCB} | Source current at pins RC_A and RC_B | $V_{RCA} = V_{RCB} = 2.5\text{ V}$ | 3.5 | 5.5 | - | mA |
| V_{offset} | Offset voltage on sense comparator | $V_{REFA}, V_{REFB} = 0.5\text{ V}$ | - | ± 5 | - | mV |
| t_{PROP} | Turn OFF propagation delay ⁽³⁾ | - | - | 500 | - | ns |
| t_{BLANK} | Internal blanking time on SENSE pins | - | - | 1 | - | μs |
| $t_{ON(MIN)}$ | Minimum On time | - | - | 2.5 | 3 | μs |
| t_{OFF} | PWM recirculation time | $R_{OFF} = 20\text{ K}\Omega$; $C_{OFF} = 1\text{ nF}$ | - | 13 | - | μs |
| | | $R_{OFF} = 100\text{ K}\Omega$; $C_{OFF} = 1\text{ nF}$ | - | 61 | - | μs |
| I_{BIAS} | Input bias current at pins $VREF_A$ and $VREF_B$ | - | - | - | 10 | μA |
| Overcurrent protection | | | | | | |
| I_{SOVER} | Input supply overcurrent protection threshold | $T_j = -25\text{ }^{\circ}\text{C}$ to $125\text{ }^{\circ}\text{C}$ ⁽¹⁾ | 2 | 2.8 | 3.55 | A |
| R_{OPDR} | Open drain ON resistance | $I = 4\text{ mA}$ | - | 40 | 60 | Ω |
| $t_{OCD(ON)}$ | OCD turn-on delay time ⁽⁴⁾ | $I = 4\text{ mA}$; $C_{EN} < 100\text{ pF}$ | - | 200 | - | ns |
| $t_{OCD(OFF)}$ | OCD turn-off delay time ⁽⁴⁾ | $I = 4\text{ mA}$; $C_{EN} < 100\text{ pF}$ | - | 100 | - | ns |


1. Tested at $25\text{ }^{\circ}\text{C}$ in a restricted range and guaranteed by characterization.

2. See [Figure 3: Switching characteristic definition](#).

3. Measured applying a voltage of 1 V to pin SENSE and a voltage drop from 2 V to 0 V to pin VREF.


4. See [Figure 4: Overcurrent detection timing definition](#).

Figure 3. Switching characteristic definition

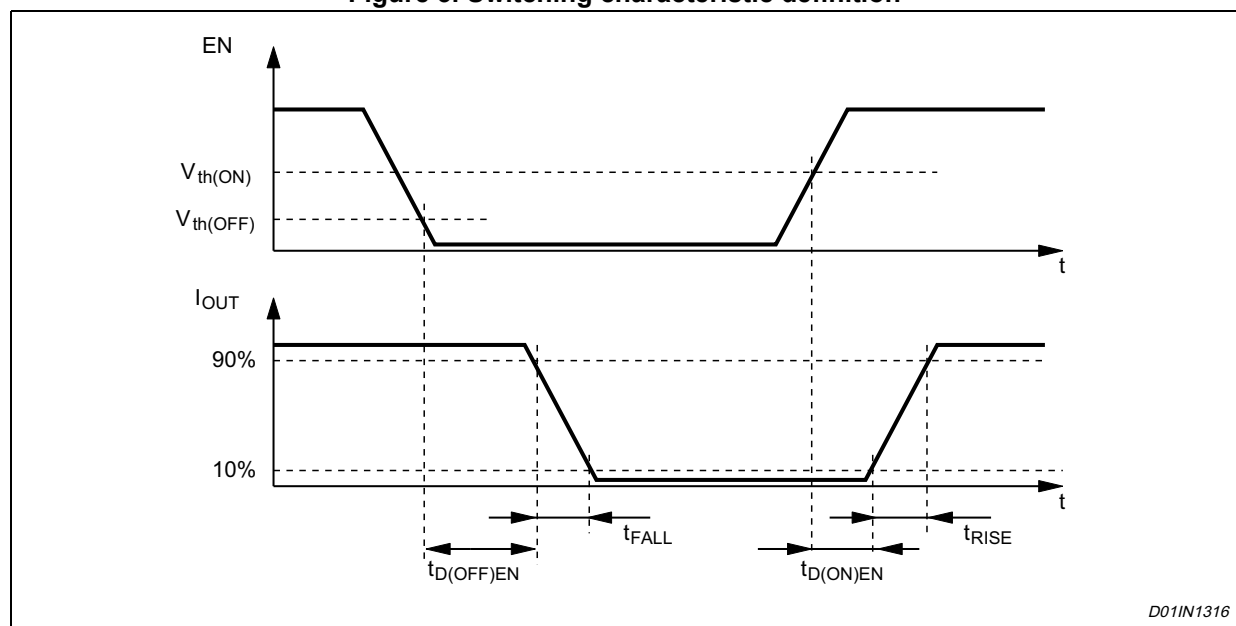

D01IN1316

Figure 4. Overcurrent detection timing definition

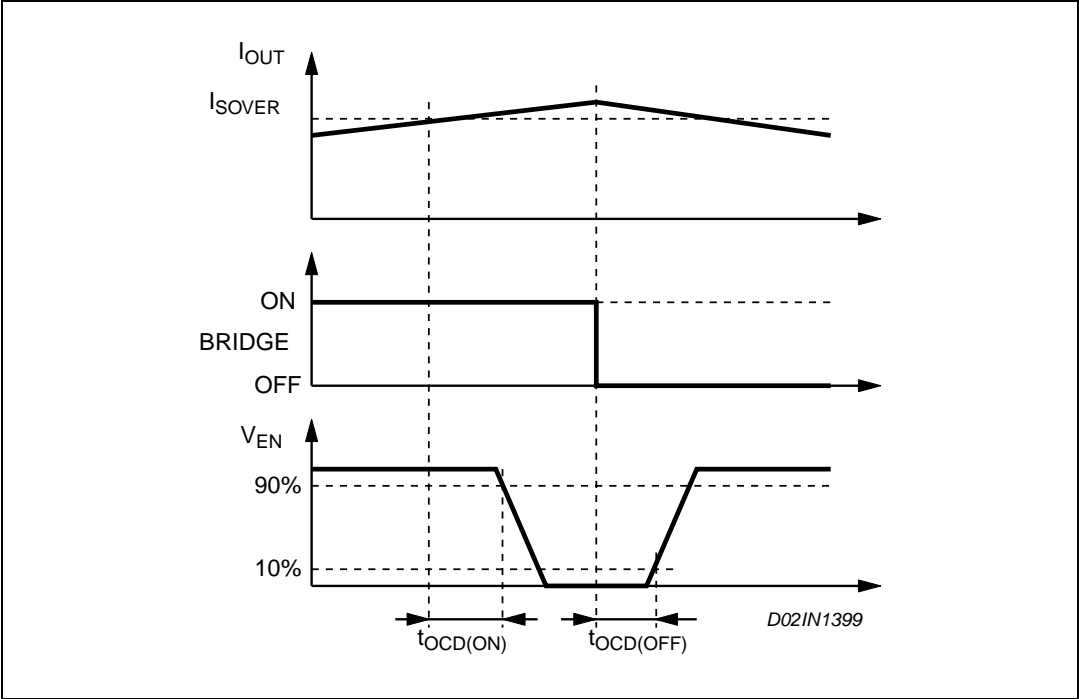

5 Circuit description

5.1 Power stages and charge pump


The L6227 device integrates two independent power MOS full bridges. Each power MOS has an $R_{DS(ON)} = 0.73 \Omega$ (typical value at 25 °C), with intrinsic fast freewheeling diode. Cross conduction protection is achieved using a deadtime ($t_d = 1 \mu s$ typical) between the switch off and switch on of two power MOS in one leg of a bridge.

Using N-channel power MOS for the upper transistors in the bridge requires a gate drive voltage above the power supply voltage. The bootstrapped (V_{BOOT}) supply is obtained through an internal oscillator and few external components to realize a charge pump circuit as shown in [Figure 5](#). The oscillator output (VCP) is a square wave at 600 kHz (typical) with 10 V amplitude. Recommended values/part numbers for the charge pump circuit are shown in [Table 6](#).

Table 6. Charge pump external components values

| Component | Value |
|------------|--------------|
| C_{BOOT} | 220 nF |
| C_P | 10 nF |
| R_P | 100 Ω |
| D1 | 1N4148 |
| D2 | 1N4148 |

Figure 5. Charge pump circuit

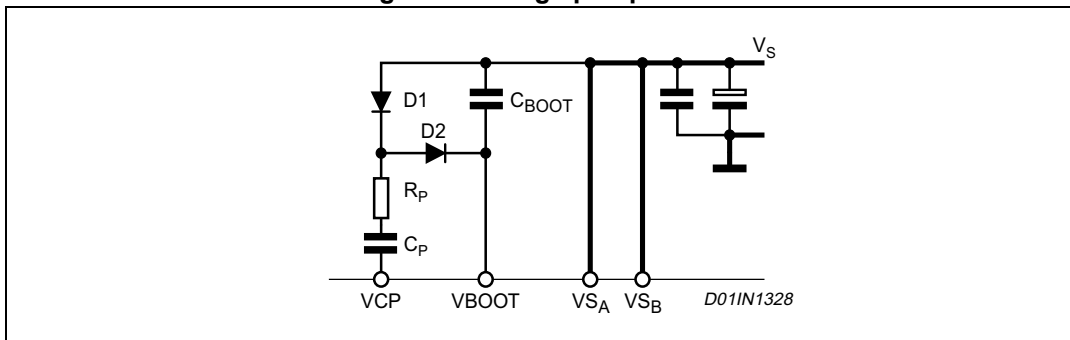

5.2 Logic inputs

Pins $IN1_A$, $IN2_B$, $IN1_B$ and $IN2_A$ are TTL/CMOS compatible logic inputs. The internal structure is shown in [Figure 6](#). Typical value for turn-on and turn-off thresholds are respectively $V_{thon} = 1.8 V$ and $V_{thoff} = 1.3 V$.

Pins EN_A and EN_B have identical input structure with the exception that the drains of the overcurrent and thermal protection MOSFETs (one for the bridge A and one for the bridge B) are also connected to these pins. Due to these connections some care needs to be taken in driving these pins. The EN_A and EN_B inputs may be driven in one of two configurations as shown in [Figure 7](#) or [8](#). If driven by an open drain (collector) structure,

a pull-up resistor R_{EN} and a capacitor C_{EN} are connected as shown in [Figure 7](#). If the driver is a standard push-pull structure the resistor R_{EN} and the capacitor C_{EN} are connected as shown in [Figure 8](#). The resistor R_{EN} should be chosen in the range from 2.2 k Ω to 180 k Ω . Recommended values for R_{EN} and C_{EN} are respectively 100 k Ω and 5.6 nF. More information on selecting the values is found in [Section 7.1: Non-dissipative overcurrent protection on page 18](#).

Figure 6. Logic inputs internal structure

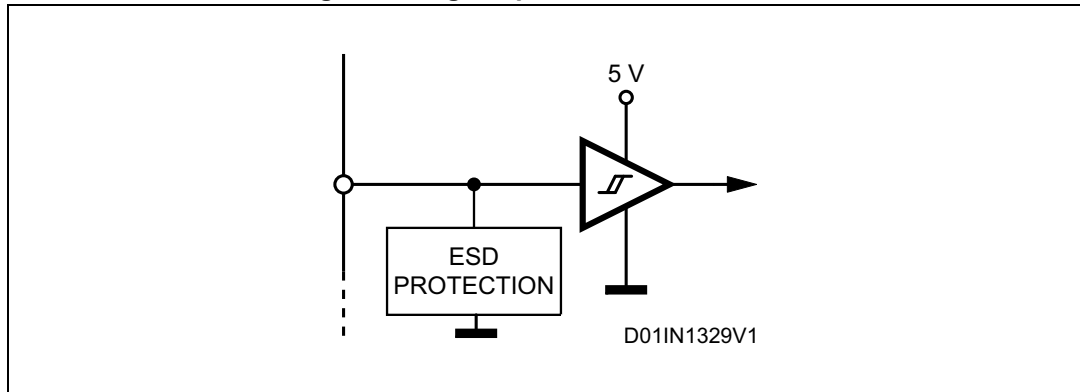


Figure 7. EN_A and EN_B pins open collector driving

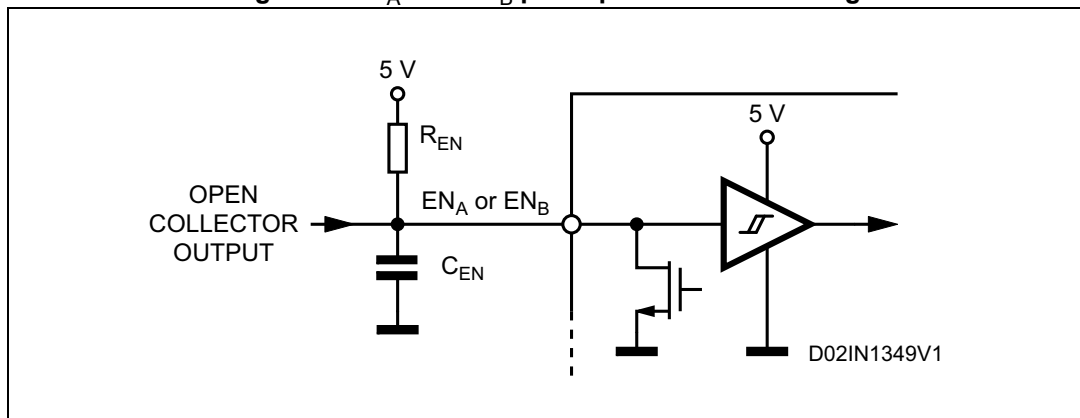


Figure 8. EN_A and EN_B pins push-pull driving

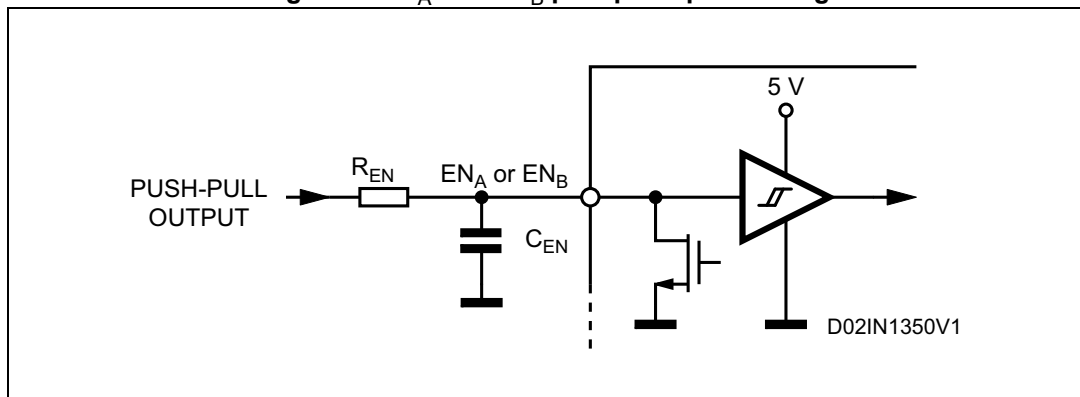


Table 7. Truth table

| Inputs | | | Outputs | | Description ⁽¹⁾ |
|--------|------------------|------------------|-----------------------|-------------------------|----------------------------|
| EN | IN1 | IN2 | OUT1 | OUT2 | |
| L | X ⁽²⁾ | X ⁽²⁾ | High Z ⁽³⁾ | High Z ⁽³⁾ | Disable |
| H | L | L | GND | GND | Brake mode (lower path) |
| H | H | L | Vs | GND (Vs) ⁽⁴⁾ | Forward |
| H | L | H | GND (Vs) | Vs | Reverse |
| H | H | H | Vs | Vs | Brake mode (upper path) |

1. Valid only in case of load connected between OUT1 and OUT2.

2. X = don't care.

3. High Z= high impedance output.

4. GND (Vs) = GND during t_{ON}, Vs during t_{OFF}.

PWM current control

The L6227 device includes a constant off time PWM current controller for each of the two bridges. The current control circuit senses the bridge current by sensing the voltage drop across an external sense resistor connected between the source of the two lower power MOS transistors and ground, as shown in [Figure 9](#). As the current in the load builds up the voltage across the sense resistor increases proportionally. When the voltage drop across the sense resistor becomes greater than the voltage at the reference input (VREF_A or VREF_B), the sense comparator triggers the monostable switching the low-side MOS off. The low-side MOS remains off for the time set by the monostable and the motor current recirculates in the upper path. When the monostable times out the bridge will again turn on. Since the internal deadtime, used to prevent cross conduction in the bridge, delays the turn on of the power MOS, the effective off time is the sum of the monostable time plus the deadtime.

Figure 9. PWM current controller simplified schematic

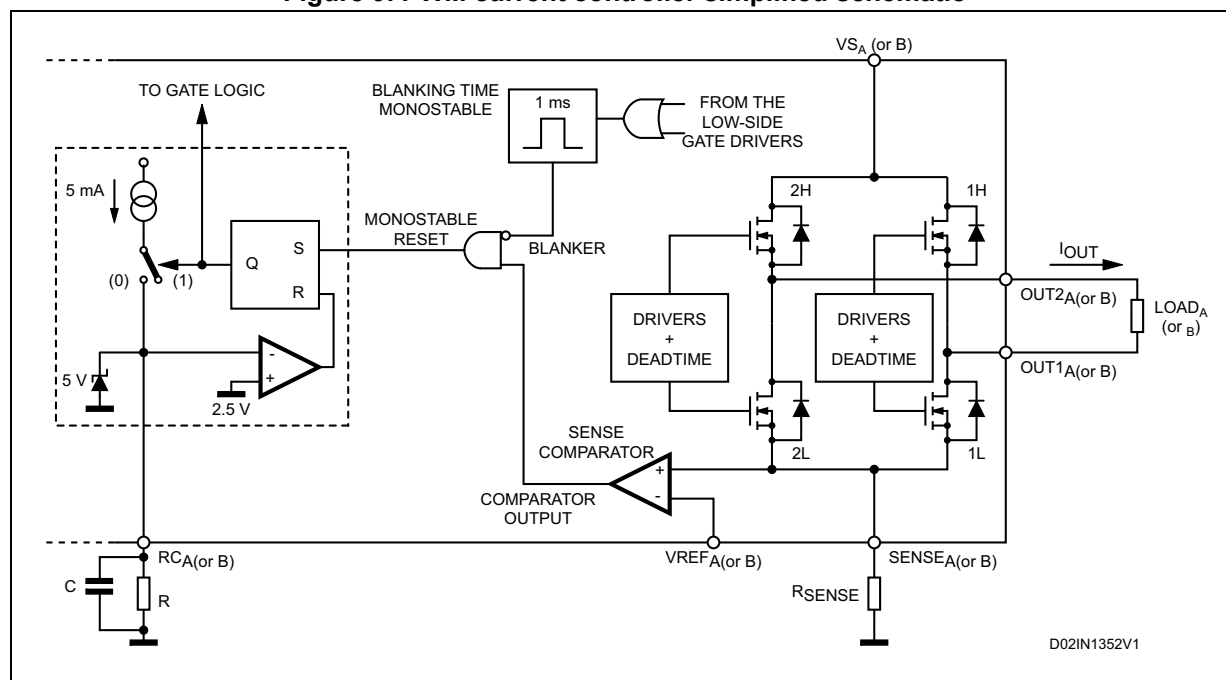


Figure 10 shows the typical operating waveforms of the output current, the voltage drop across the sensing resistor, the RC pin voltage and the status of the bridge. Immediately after the low-side power MOS turns on, a high peak current flows through the sensing resistor due to the reverse recovery of the freewheeling diodes. The L6227 device provides a 1 μ s blanking time t_{BLANK} that inhibits the comparator output so that this current spike cannot prematurely retrigger the monostable.

Figure 10. Output current regulation waveforms

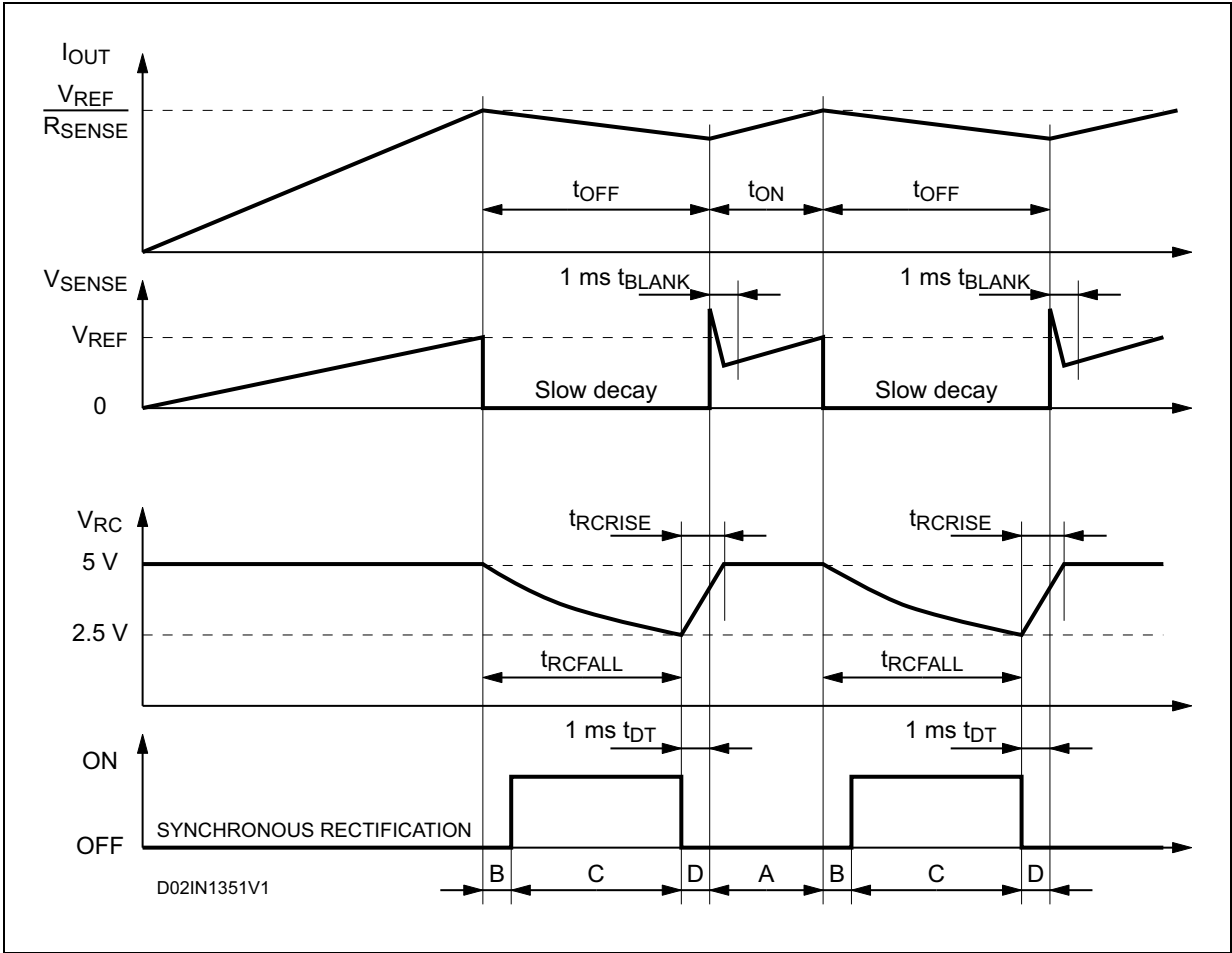


Figure 11 shows the magnitude of the Off time t_{OFF} versus C_{OFF} and R_{OFF} values. It can be approximately calculated from the equations:

Equation 1

$$t_{RCFALL} = 0.6 \cdot R_{OFF} \cdot C_{OFF}$$

$$t_{OFF} = t_{RCFALL} + t_{DT} = 0.6 \cdot R_{OFF} \cdot C_{OFF} + t_{DT}$$

where R_{OFF} and C_{OFF} are the external component values and t_{DT} is the internally generated deadtime with:

Equation 2

$$20 \text{ K}\Omega \leq R_{OFF} \leq 100 \text{ K}\Omega$$

$$0.47 \text{ nF} \leq C_{OFF} \leq 100 \text{ nF}$$

$$t_{DT} = 1 \text{ }\mu\text{s (typical value)}$$

Therefore:

Equation 3

$$t_{OFF(MIN)} = 6.6 \text{ }\mu\text{s}$$

$$t_{OFF(MAX)} = 6 \text{ ms}$$

These values allow a sufficient range of t_{OFF} to implement the drive circuit for most motors.

The capacitor value chosen for C_{OFF} also affects the rise time t_{RCRISE} of the voltage at the pin RCOFF. The rise time t_{RCRISE} will only be an issue if the capacitor is not completely charged before the next time the monostable is triggered. Therefore, the on time t_{ON} , which depends by motors and supply parameters, has to be bigger than t_{RCRISE} for allowing a good current regulation by the PWM stage. Furthermore, the on time t_{ON} can not be smaller than the minimum on time $t_{ON(MIN)}$.

Equation 4

$$\begin{cases} t_{ON} > t_{ON(MIN)} = 2.5\mu\text{s (typ. value)} \\ t_{ON} > t_{RCRISE} - t_{DT} \end{cases}$$

$$t_{RCRISE} = 600 \cdot C_{OFF}$$

Figure 12 shows the lower limit for the on time t_{ON} for having a good PWM current regulation capacity. It has to be said that t_{ON} is always bigger than $t_{ON(MIN)}$ because the device imposes this condition, but it can be smaller than $t_{RCRISE} - t_{DT}$. In this last case the device continues to work but the off time t_{OFF} is not more constant.

So, small C_{OFF} value gives more flexibility for the applications (allows smaller on time and, therefore, higher switching frequency), but, the smaller is the value for C_{OFF} , the more influential will be the noises on the circuit performance.

Figure 11. t_{OFF} versus C_{OFF} and R_{OFF}


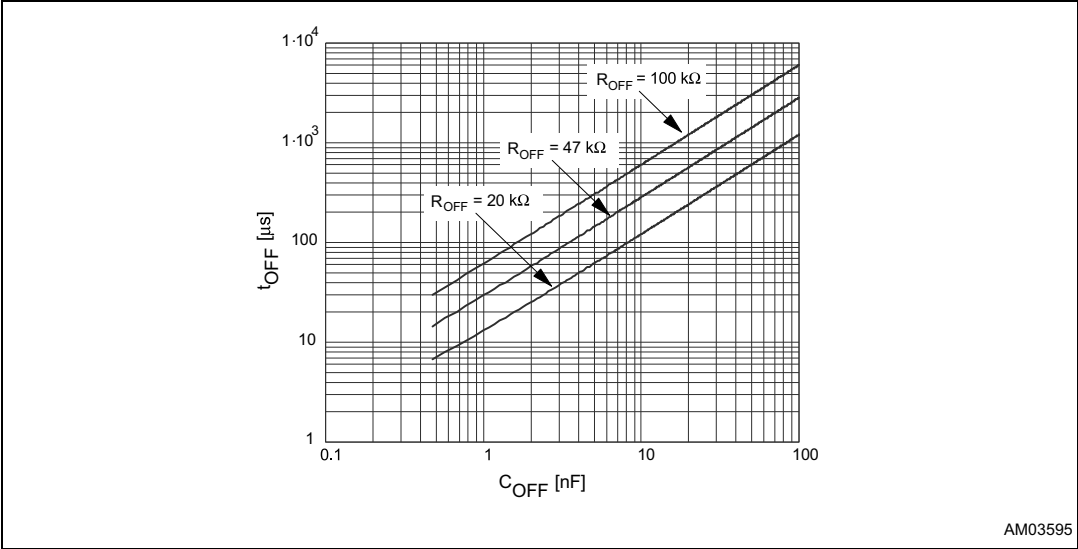



Figure 12. Area where t_{ON} can vary maintaining the PWM regulation

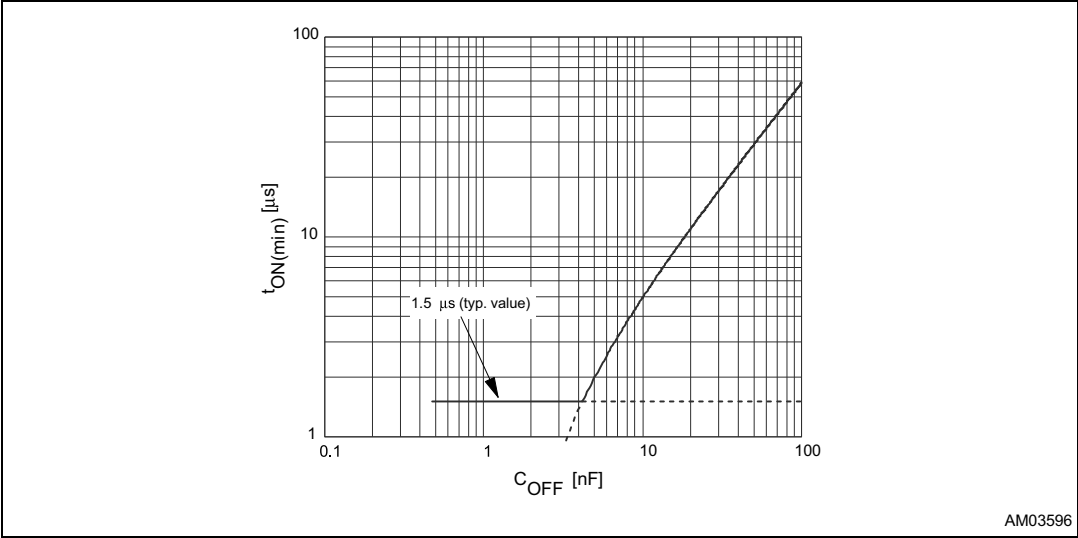

7 Slow decay mode

Figure 13 shows the operation of the bridge in the slow decay mode. At the start of the off time, the lower power MOS is switched off and the current recirculates around the upper half of the bridge. Since the voltage across the coil is low, the current decays slowly. After the deadtime the upper power MOS is operated in the synchronous rectification mode. When the monostable times out, the lower power MOS is turned on again after some delay set by the deadtime to prevent cross conduction.

Figure 13. Slow decay mode output stage configurations

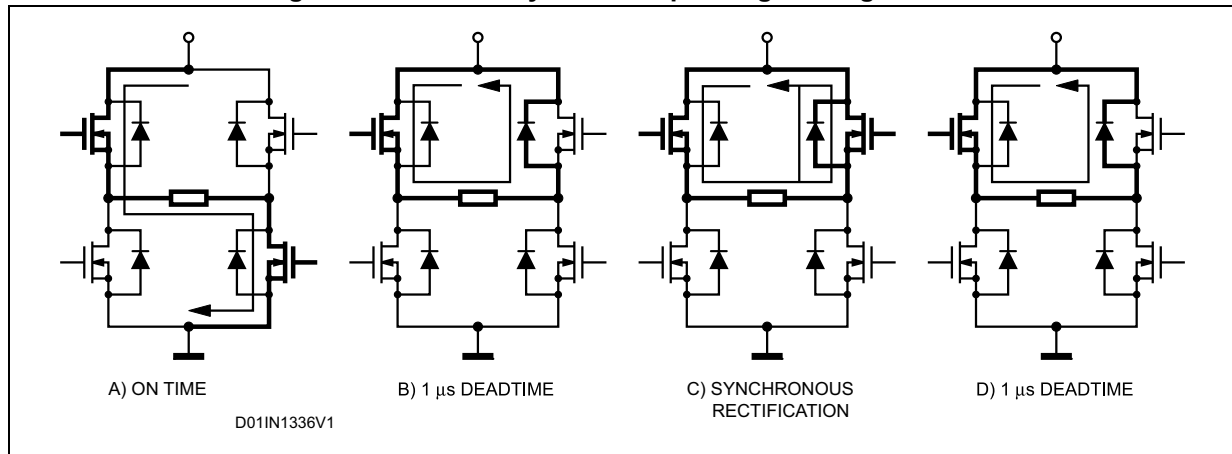

7.1 Non-dissipative overcurrent protection

The L6227 integrates an “Overcurrent Detection” circuit (OCD). This circuit provides protection against a short-circuit to ground or between two phases of the bridge. With this internal overcurrent detection, the external current sense resistor normally used and its associated power dissipation are eliminated. *Figure 14* shows a simplified schematic of the overcurrent detection circuit.

To implement the overcurrent detection, a sensing element that delivers a small but precise fraction of the output current is implemented with each high-side power MOS. Since this current is a small fraction of the output current there is very little additional power dissipation. This current is compared with an internal reference current I_{REF} . When the output current in one bridge reaches the detection threshold (typically 2.8 A) the relative OCD comparator signals a fault condition. When a fault condition is detected, the EN pin is pulled below the turn off threshold (1.3 V typical) by an internal open drain MOS with a pull down capability of 4 mA. By using an external R-C on the EN pin, the off time before recovering normal operation can be easily programmed by means of the accurate thresholds of the logic inputs.

Figure 14. Overcurrent protection simplified schematic

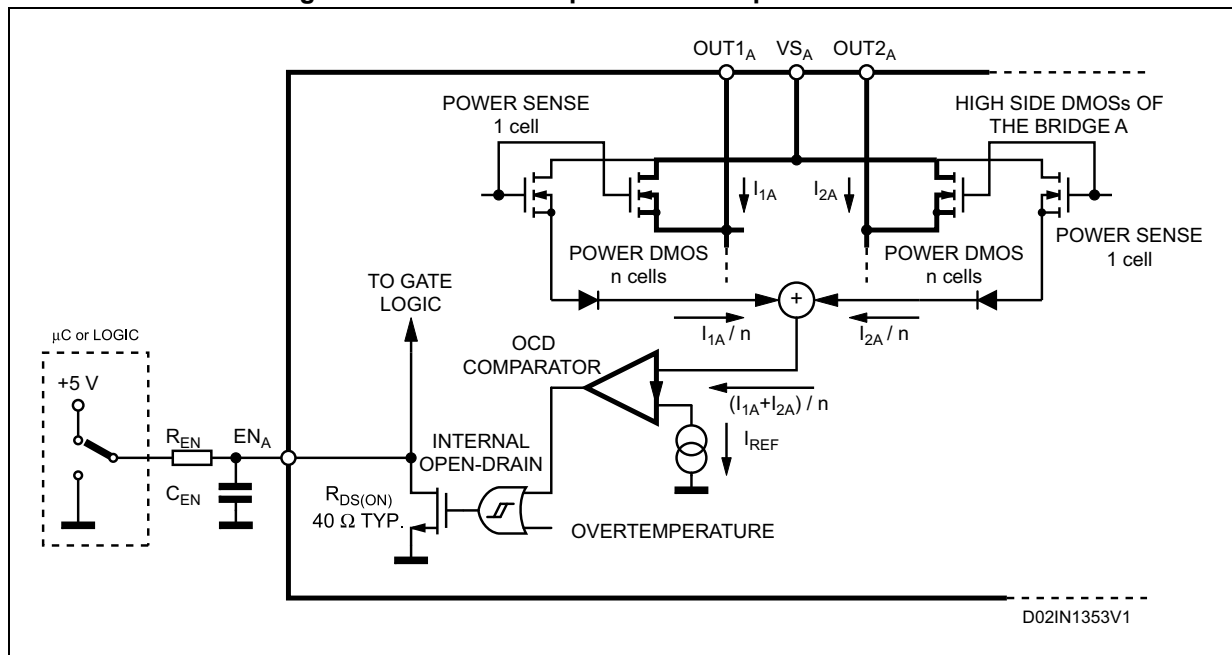


Figure 15 shows the overcurrent detection operation. The disable time t_{DISABLE} before recovering normal operation can be easily programmed by means of the accurate thresholds of the logic inputs. It is affected whether by C_{EN} and R_{EN} values and its magnitude is reported in Figure 16. The delay time t_{DELAY} before turning off the bridge when an overcurrent has been detected depends only by C_{EN} value. Its magnitude is reported in Figure 17.

C_{EN} is also used for providing immunity to pin EN against fast transient noises. Therefore the value of C_{EN} should be chosen as big as possible according to the maximum tolerable delay time and the R_{EN} value should be chosen according to the desired disable time.

The resistor R_{EN} should be chosen in the range from 2.2 kΩ to 180 kΩ. Recommended values for R_{EN} and C_{EN} are respectively 100 kΩ and 5.6 nF that allow obtaining 200 μs disable time.

Figure 15. Overcurrent protection waveforms

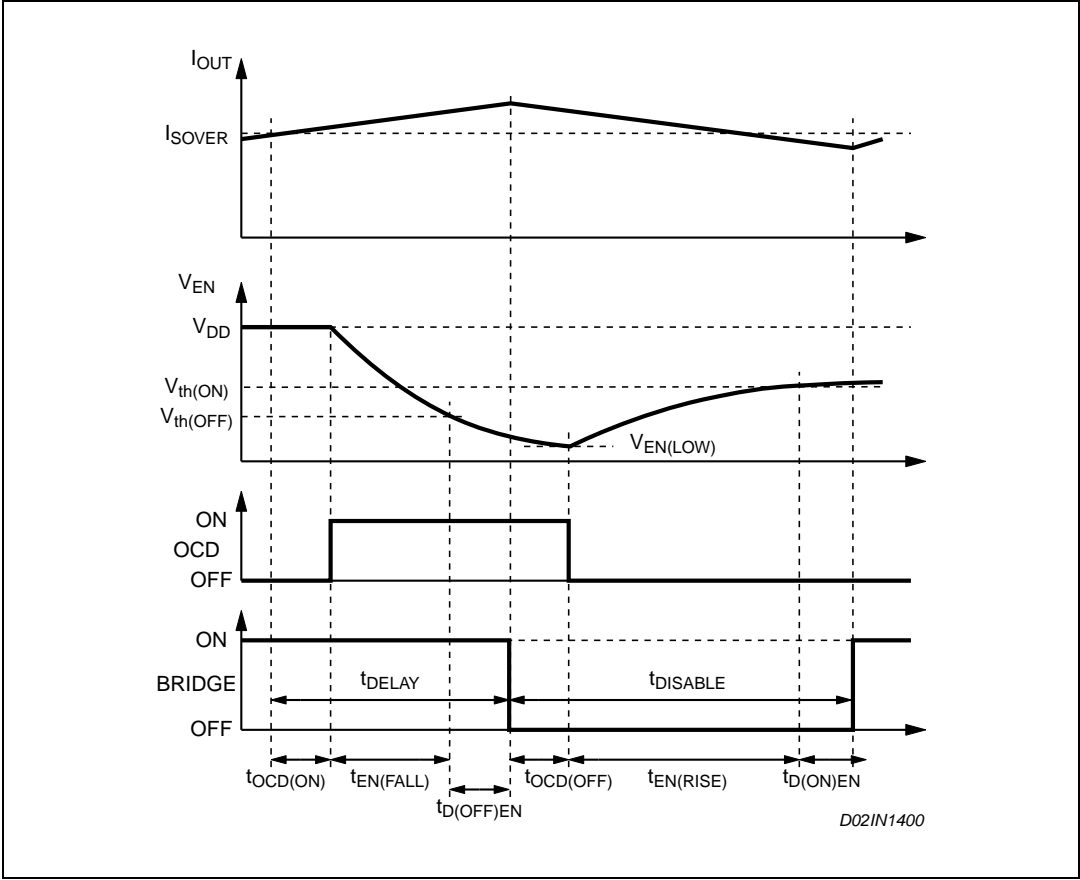


Figure 16. t_{DISABLE} versus C_{EN} and R_{EN} ($V_{\text{DD}} = 5 \text{ V}$)

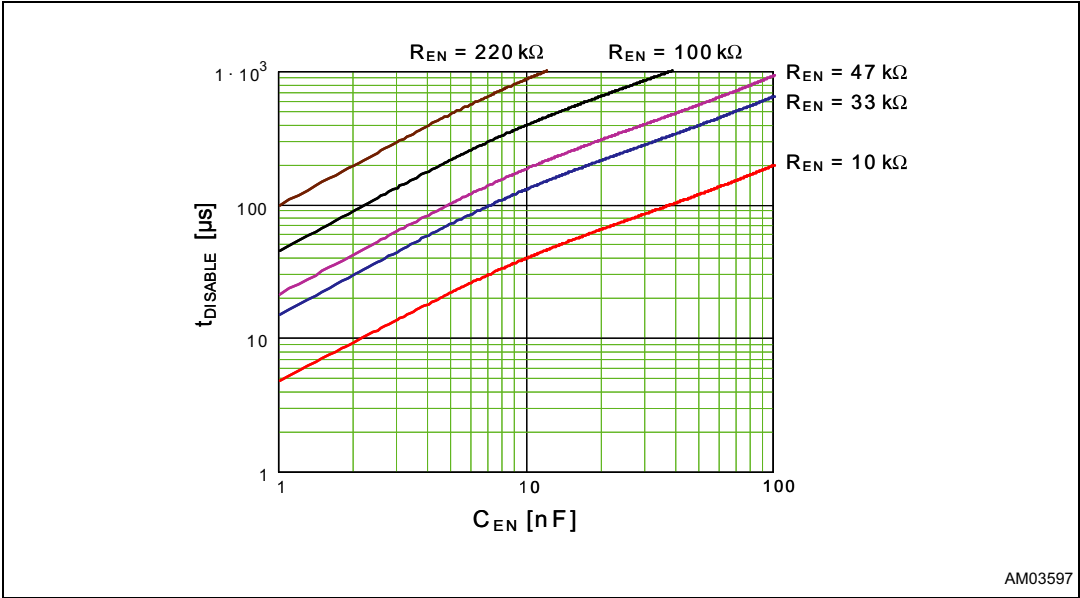
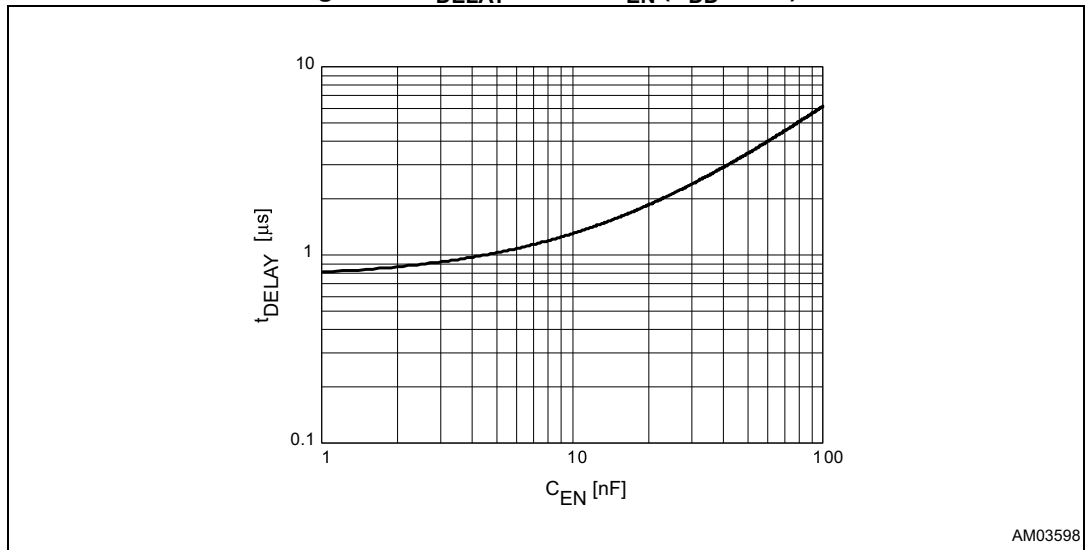


Figure 17. t_{DELAY} versus C_{EN} ($V_{\text{DD}} = 5 \text{ V}$)

7.2 Thermal protection

In addition to the overcurrent protection, the L6227 device integrates a thermal protection for preventing the device destruction in case of junction overtemperature. It works sensing the die temperature by means of a sensible element integrated in the die. The device switches-off when the junction temperature reaches 165 °C (typ. value) with 15 °C hysteresis (typ. value).


8 Application information

A typical application using the L6227 device is shown in [Figure 18](#). Typical component values for the application are shown in Table 3. A high quality ceramic capacitor in the range of 100 to 200 nF should be placed between the power pins (VS_A and VS_B) and ground near the L6227 to improve the high frequency filtering on the power supply and reduce high frequency transients generated by the switching. The capacitors connected from the EN_A and EN_B inputs to ground set the shutdown time for the bridge A and bridge B respectively when an overcurrent is detected (see [Section 7.1: Non-dissipative overcurrent protection](#)). The two current sensing inputs ($SENSE_A$ and $SENSE_B$) should be connected to the sensing resistors with a trace length as short as possible in the layout. The sense resistors should be non-inductive resistors to minimize the di/dt transients across the resistor. To increase noise immunity, unused logic pins (except EN_A and EN_B) are best connected to 5 V (high logic level) or GND (low logic level) (see [Table 4: Pin description on page 6](#)). It is recommended to keep power ground and signal ground separated on the PCB.

Table 8. Component values for typical application

| Component | Value |
|--------------|----------------|
| C_1 | 100 μ F |
| C_2 | 100 nF |
| C_A | 1 nF |
| C_B | 1 nF |
| C_{BOOT} | 220 nF |
| C_P | 10 nF |
| C_{ENA} | 5.6 nF |
| C_{ENB} | 5.6 nF |
| C_{REFA} | 68 nF |
| C_{REFB} | 68 nF |
| D_1 | 1N4148 |
| D_2 | 1N4148 |
| R_A | 39 K Ω |
| R_B | 39 K Ω |
| R_{ENA} | 100 K Ω |
| R_{ENB} | 100 K Ω |
| R_P | 100 Ω |
| R_{SENSEA} | 0.6 Ω |
| R_{SENSEB} | 0.6 Ω |

Figure 18. Typical application

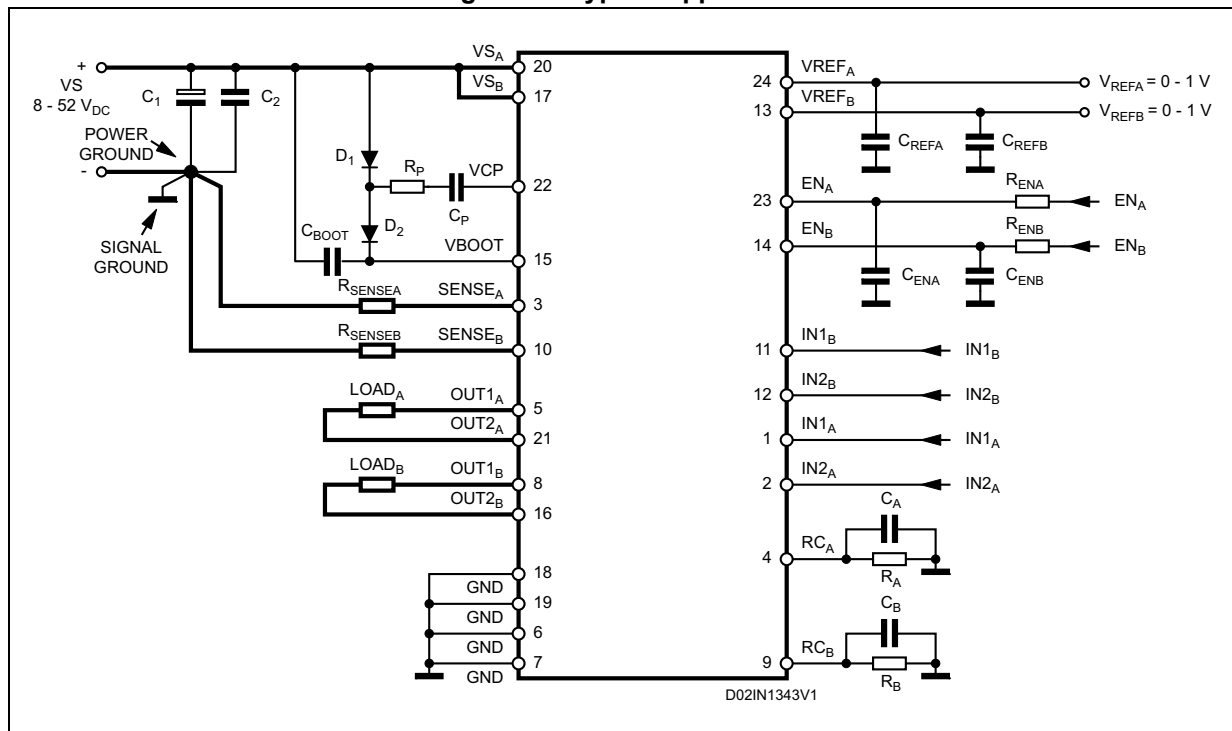

8.1 Output current capability and IC power dissipation

In [Figure 19](#) and [Figure 20](#) are shown the approximate relation between the output current and the IC power dissipation using PWM current control driving two loads, for two different driving types:

- One full bridge ON at a time ([Figure 19](#)) in which only one load at a time is energized.
- Two full bridges ON at the same time ([Figure 20](#)) in which two loads at the same time are energized.

For a given output current and driving type the power dissipated by the IC can be easily evaluated, in order to establish which package should be used and how large must be the on-board copper dissipating area to guarantee a safe operating junction temperature (125 °C maximum).

Figure 19. IC power dissipation versus output current with one full bridge ON at a time


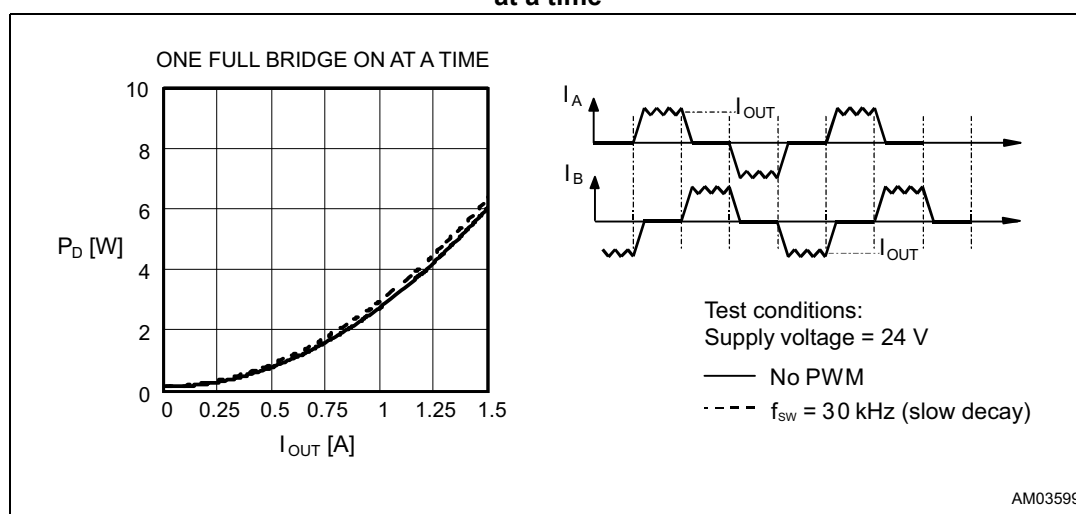


Figure 20. IC power dissipation versus output current with two full bridges ON at the same time

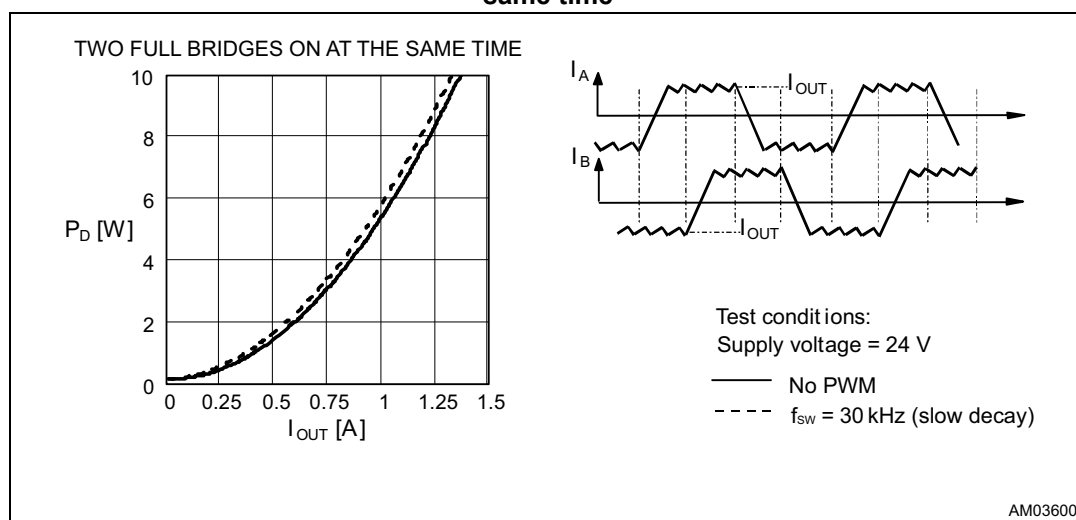

8.2 Thermal management

In most applications the power dissipation in the IC is the main factor that sets the maximum current that can be delivered by the device in a safe operating condition. Therefore, it has to be taken into account very carefully. Besides the available space on the PCB, the right package should be chosen considering the power dissipation. Heat sinking can be achieved using copper on the PCB with proper area and thickness. [Figure 22](#) and [23](#) show the junction to ambient thermal resistance values for the PowerSO36 and SO24 packages.

For instance, using a PowerSO package with a copper slug soldered on a 1.5 mm copper thickness FR4 board with a 6 cm² dissipating footprint (copper thickness of 35 µm), the $R_{th j-amb}$ is about 35 °C/W. [Figure 21](#) shows mounting methods for this package. Using a multilayer board with vias to a ground plane, thermal impedance can be reduced down to 15 °C/W.

Figure 21. Mounting the PowerSO package

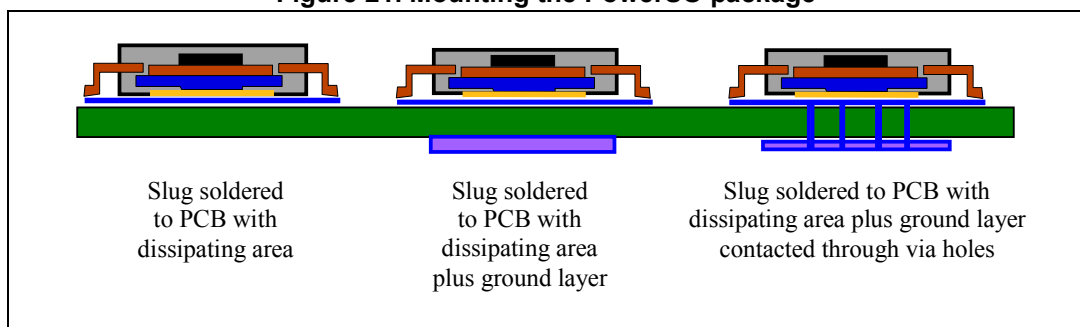


Figure 22. PowerSO36 junction ambient thermal resistance versus on-board copper area

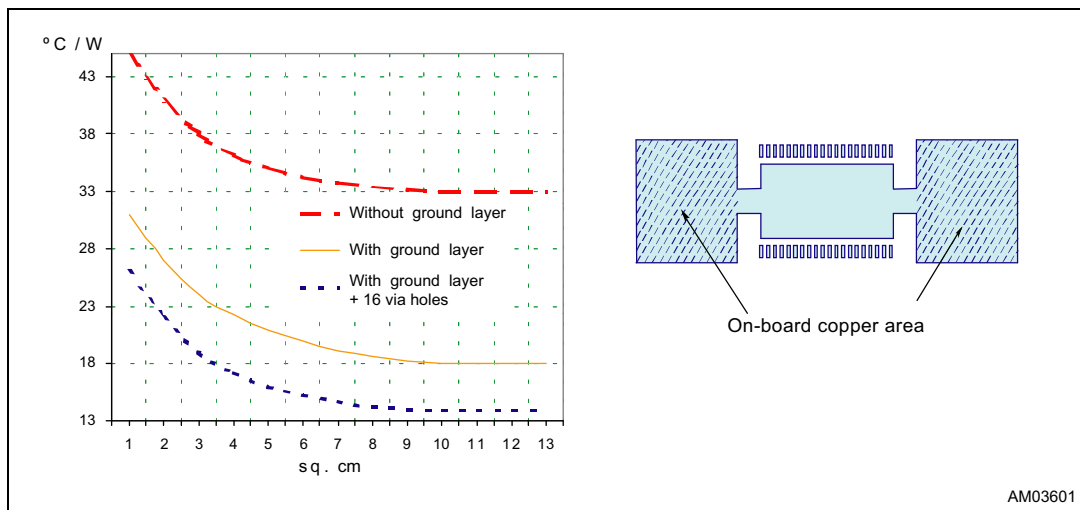
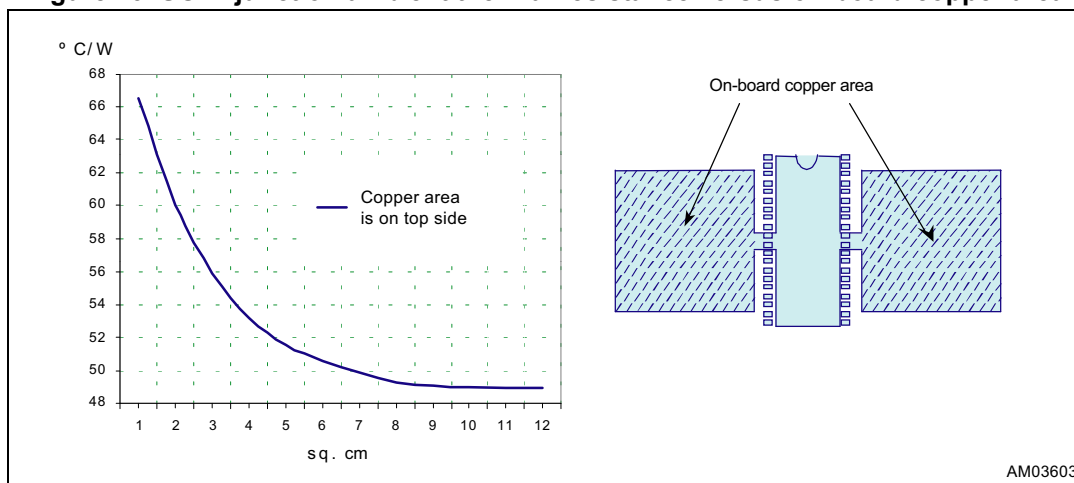


Figure 23. SO24 junction ambient thermal resistance versus on-board copper area

9 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

9.1 PowerSO36 package information

Figure 24. PowerSO36 package outline

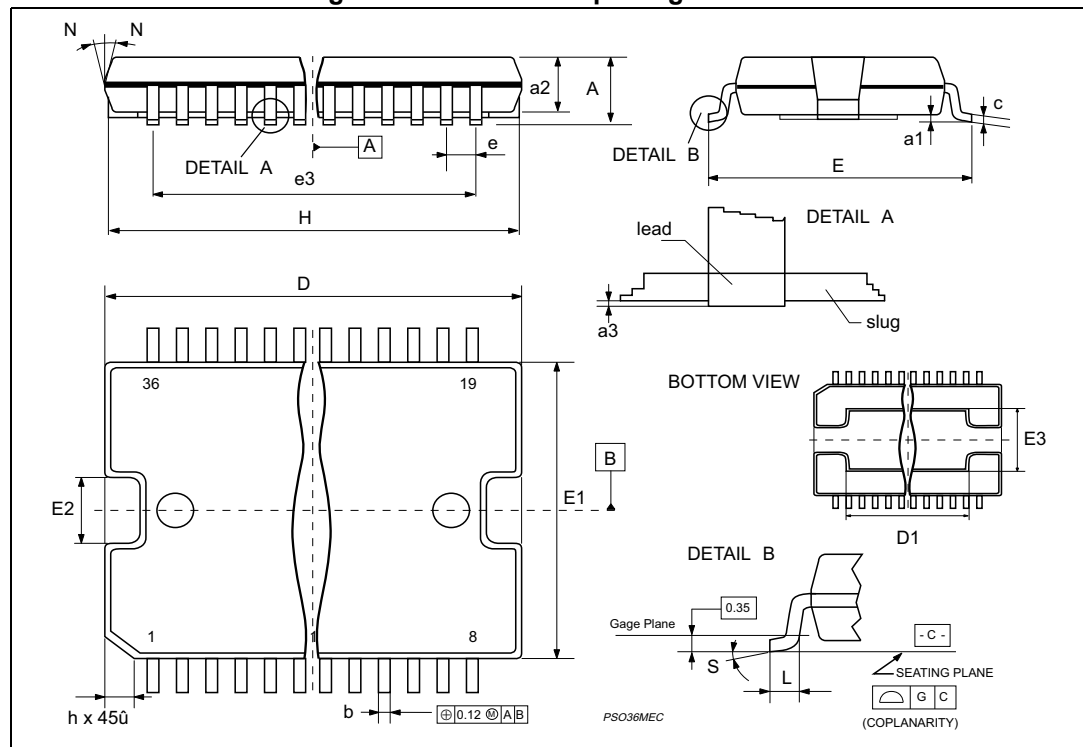


Table 9. PowerSO36 package mechanical data

| Symbol | Dimensions | | | | | |
|-------------------|------------|-------|-------|-------|--------|-------|
| | mm | | | inch | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | - | - | 3.60 | - | - | 0.141 |
| a1 | 0.10 | - | 0.30 | 0.004 | - | 0.012 |
| a2 | - | - | 3.30 | - | - | 0.130 |
| a3 | 0 | - | 0.10 | 0 | - | 0.004 |
| b | 0.22 | - | 0.38 | 0.008 | - | 0.015 |
| c | 0.23 | - | 0.32 | 0.009 | - | 0.012 |
| D ⁽¹⁾ | 15.80 | - | 16.00 | 0.622 | - | 0.630 |
| D1 | 9.40 | - | 9.80 | 0.370 | - | 0.385 |
| E | 13.90 | - | 14.50 | 0.547 | - | 0.570 |
| e | - | 0.65 | - | - | 0.0256 | - |
| e3 | - | 11.05 | - | - | 0.435 | - |
| E1 ⁽¹⁾ | 10.90 | - | 11.10 | 0.429 | - | 0.437 |
| E2 | - | - | 2.90 | - | - | 0.114 |
| E3 | 5.80 | - | 6.20 | 0.228 | - | 0.244 |
| E4 | 2.90 | - | 3.20 | 0.114 | - | 0.126 |
| G | 0 | - | 0.10 | 0 | - | 0.004 |
| H | 15.50 | - | 15.90 | 0.610 | - | 0.626 |
| h | - | - | 1.10 | - | - | 0.043 |
| L | 0.80 | - | 1.10 | 0.031 | - | 0.043 |
| N | 10° (max.) | | | | | |
| S | 8° (max.) | | | | | |

1. "D" and "E1" do not include mold flash or protrusions.

- Mold flash or protrusions shall not exceed 0.15 mm (0.006 inch).

- Critical dimensions are "a3", "E" and "G".

9.2 SO24 package information

Figure 25. SO24 package outline

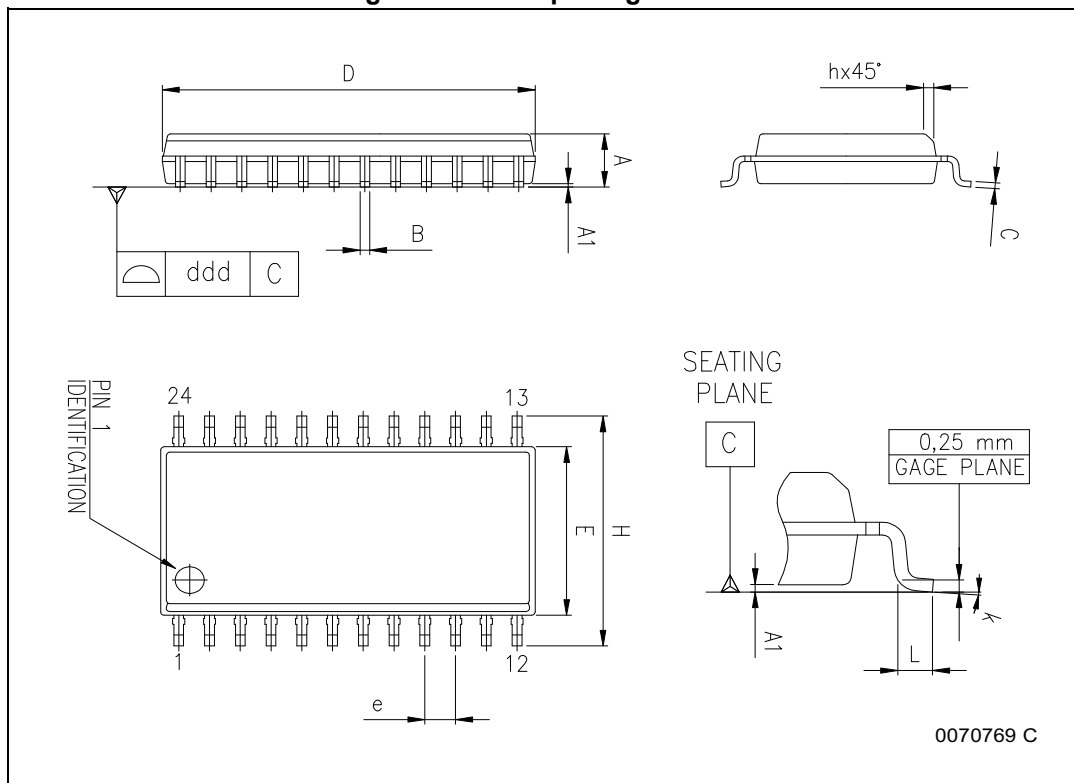


Table 10. SO24 package mechanical data

| Symbol | Dimensions (mm) | | | Dimensions (inch) | | |
|------------------|----------------------|------|-------|-------------------|-------|-------|
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | 2.35 | - | 2.65 | 0.093 | - | 0.104 |
| A1 | 0.10 | - | 0.30 | 0.004 | - | 0.012 |
| B | 0.33 | - | 0.51 | 0.013 | - | 0.020 |
| C | 0.23 | - | 0.32 | 0.009 | - | 0.013 |
| D ⁽¹⁾ | 15.20 | - | 15.60 | 0.598 | - | 0.614 |
| E | 7.40 | - | 7.60 | 0.291 | - | 0.299 |
| e | - | 1.27 | - | - | 0.050 | - |
| H | 10.0 | - | 10.65 | 0.394 | - | 0.419 |
| h | 0.25 | - | 0.75 | 0.010 | - | 0.030 |
| L | 0.40 | - | 1.27 | 0.016 | - | 0.050 |
| k | 0° (min.), 8° (max.) | | | | | |
| ddd | - | - | 0.10 | - | - | 0.004 |

1. D¹ dimension does not include mold flash, protrusions or gate burrs. Mold flash, protrusions or gate burrs shall not exceed 0.15 mm per side.

10 Revision history

Table 11. Document revision history

| Date | Revision | Changes |
|-------------|----------|--|
| 03-Sep-2003 | 1 | Initial release. |
| 18-Feb-2014 | 2 | <p>Updated <i>Section : Description on page 1</i> (removed “MultiPower-” from “MultiPower-BCD technology”).</p> <p>Added <i>Contents on page 2</i>.</p> <p>Updated <i>Section 1: Block diagram</i> (added section title, numbered and moved <i>Figure 1: Block diagram</i> to page 3).</p> <p>Added title to <i>Section 2: Maximum ratings on page 4</i>, added numbers and titles from <i>Table 1: Absolute maximum ratings</i> to <i>Table 3: Thermal data</i>.</p> <p>Added title to <i>Section 3: Pin connections on page 6</i>, added number and title to <i>Figure 2: Pin connections (top view)</i>, renumbered note 1 below <i>Figure 2</i>, added title to <i>Table 4: Pin description</i>, renumbered note 1 below <i>Table 4</i>.</p> <p>Added title to <i>Section 4: Electrical characteristics on page 8</i>, added title and number to <i>Table 5</i>, renumbered notes 1 to 4 below <i>Table 5</i>. Renumbered <i>Figure 3</i> and <i>Figure 4</i>.</p> <p>Added title numbers to <i>Section 5: Circuit description on page 11</i> (including <i>Section 5.1</i> to <i>Section 5.2</i>). Removed “and μC” from first sentence of <i>Section 5.2</i>. Renumbered <i>Table 6</i> and <i>Table 7</i>, added header to <i>Table 6</i> and <i>Table 7</i>. Renumbered <i>Figure 5</i> to <i>Figure 8</i>.</p> <p>Added title numbers to <i>Section 6: PWM current control on page 14</i>. Renumbered <i>Figure 9</i> to <i>Figure 12</i>. Added titles to <i>Equation 1: on page 16</i> till <i>Equation 4: on page 16</i>.</p> <p>Added title numbers to <i>Section 7: Slow decay mode on page 18</i> (including <i>Section 7.1</i> and <i>Section 7.2</i>). Renumbered <i>Figure 13</i> to <i>Figure 17</i>.</p> <p>Added title numbers to <i>Section 8: Application information on page 22</i> (including <i>Section 8.1</i> and <i>Section 8.2</i>). Renumbered <i>Table 8</i>, added header to <i>Table 8</i>. Renumbered <i>Figure 18</i> to <i>Figure 24</i>.</p> <p>Updated <i>Section 9: Package information on page 27</i> (added main title and ECOPACK text. Added titles from <i>Table 9: PowerSO36 package mechanical data</i> to <i>Table 11: SO24 package mechanical data</i> and from <i>Figure 25: PowerSO36 package outline</i> to <i>Figure 27: SO24 package outline</i>, reversed order of named tables and figures. Removed 3D figures of packages, replaced 0.200 by 0.020 inch of max. B value in <i>Table 11</i>).</p> <p>Added cross-references throughout document.</p> <p>Added <i>Section 10: Revision history</i> and <i>Table 12</i>.</p> <p>Minor modifications throughout document.</p> |
| 03-Oct-2018 | 3 | <p>Removed PowerDIP24 package from the whole document.</p> <p>Removed “T_j” from Table 2 on page 4.</p> <p>Minor modifications throughout document.</p> |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.