


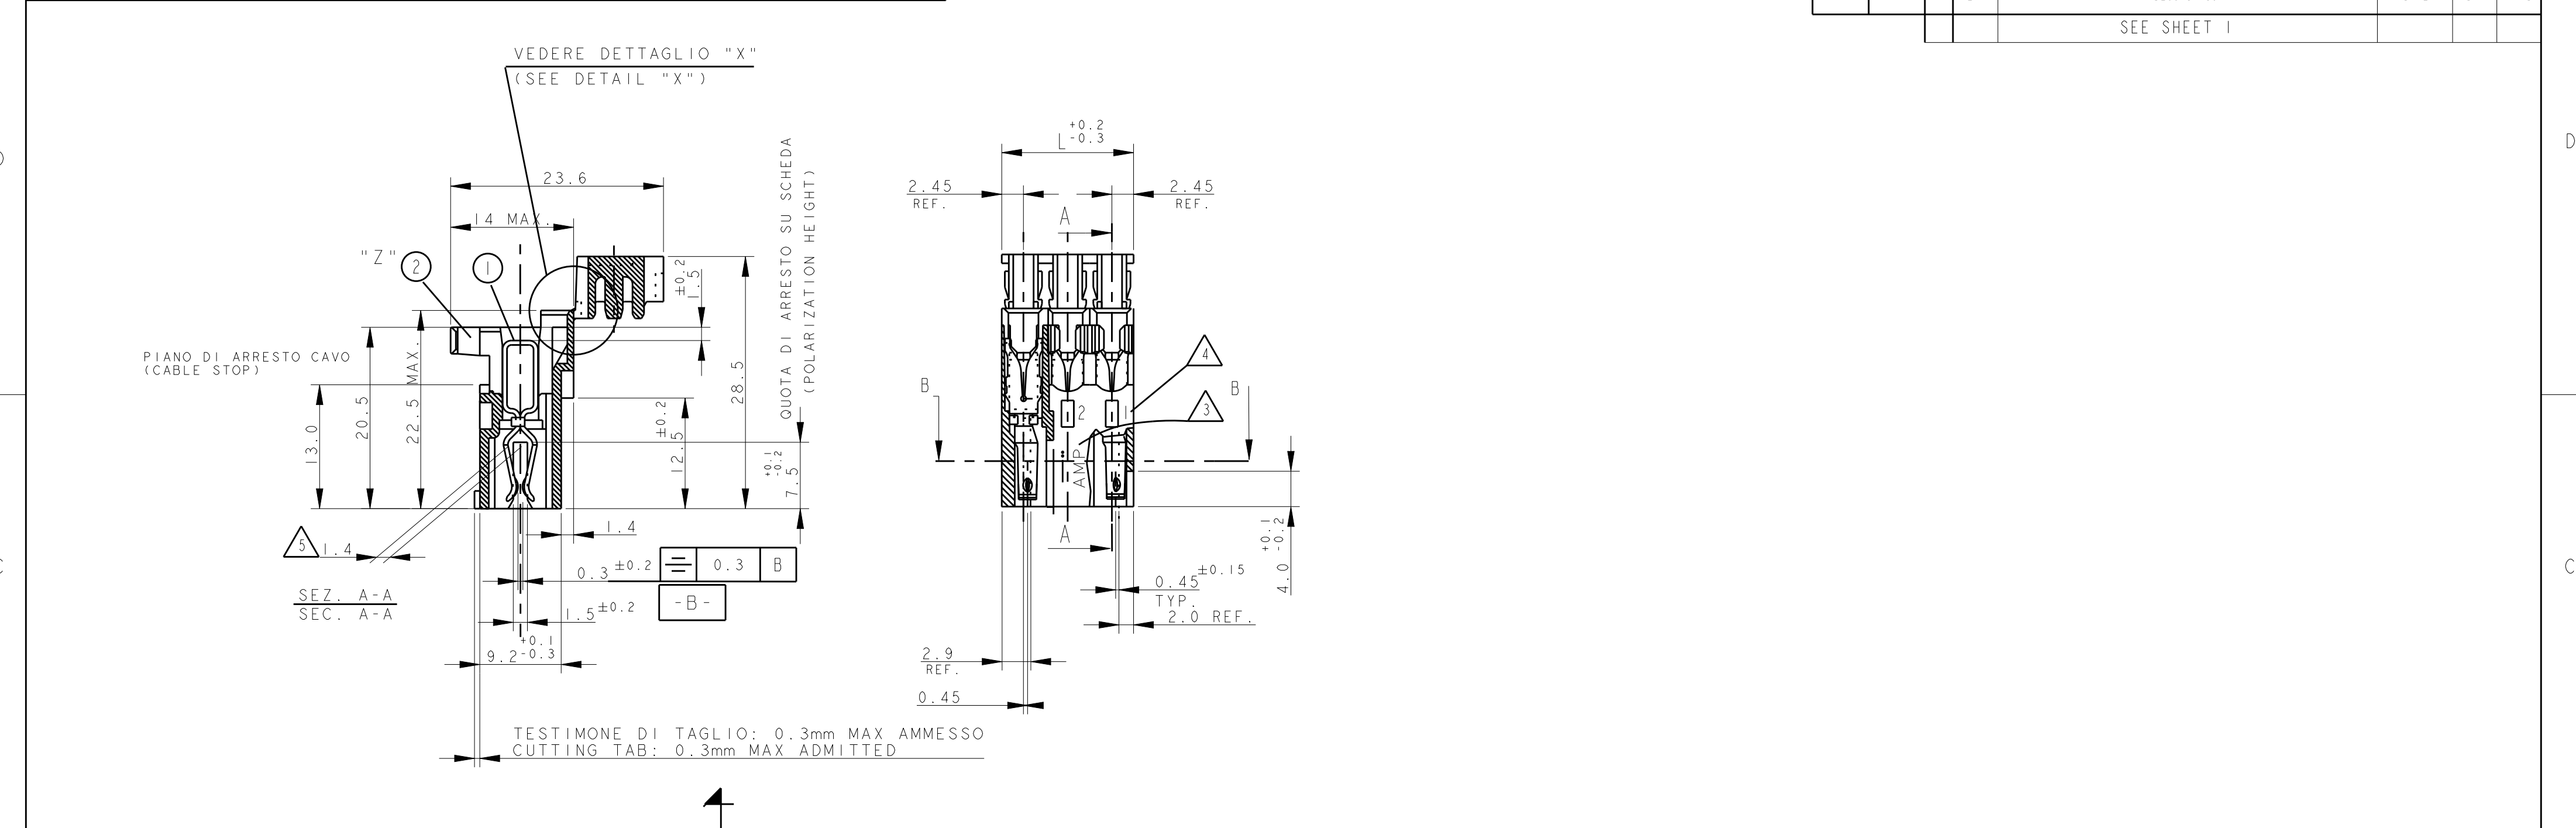

RAPPRESENTAZIONE GRAFICA DEI P/Ns:
(GRAPHICAL REPRESENTATION OF P/Ns:)
x-282043-2 and x-282043-3

RAPPRESENTAZIONE GRAFICA DEI P/Ns:
(GRAPHICAL REPRESENTATION OF P/Ns:)
x-282235-2 and x-282235-3

RAPPRESENTAZIONE GRAFICA DEI P/Ns:
(GRAPHICAL REPRESENTATION OF P/Ns:)
x-284546-1

7) PER I NUMERI DI RIFERIMENTO DEI CONNETTORI VEDERE
ULTIMO FOGLIO (FOR PN/S SEE LAST SHEET)

10) PER LE DIMENSIONI DELLE DIME DEL CIRCUITO STAMPATO
VEDERE FOGLIO 5
(FOR PCB LAYOUT AND DIMENSIONS SEE SHEET 5)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
CONNETTORE NYLON
(CONNECTOR NYLON)
CONTATTO OTTONE
(CONTACT BRASS)

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ± 0.3
3 PLC ±
4 PLC ±
ANGLES ±2°
FINISH
STAGNATO
(TIN PLATED)

DWN
C.CORDOLA 23JUL1996
CHK
G.TURCO 23JUL1996
APVD
G.TURCO 23JUL1996
PRODUCT SPEC
108-20067
APPLICATION SPEC
114-20018
WEIGHT
-
Customer Drawing

NAME
MONO-SHAPE, MK1
PCB CONNECTOR 2-12 POS.

SIZE
A2
CAGE CODE
1
DRAWING NO
C-282042
RESTRICTED TO
-

SCALE
NO
SHEET
2
OF
8
REV
78

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT copyright_d08ye-

ALL RIGHTS RESERVED.

LOC-

DIST-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

23.6

14 MAX.

±0.2

0.75

28.5

12.5

±0.2

20.5

22.5 MAX.

13.0 REF.

1.6

5

1

2

PIANO DI ARRESTO CAVO
(CABLE STOP)

QUOTA DI ARRESTO SU SCHEDA
(STOP ON COUNTERPART)

±0.1
-0.2

7.5

0.3±0.2

1.4

1.7±0.2

9.2^{+0.1}_{-0.3}

TESTIMONE DI TAGLIO: 0.3mm MAX AMMESSO
CUTTING TAB: 0.3mm MAX ADMITTED

SEZ. A-A
SEC. A-A

-B-

0.4

B

2.45 REF.

5.0

2.45 REF.

A

7.5

B

0.45±0.15

2.0 REF.

2.9 REF.

0.45±0.15

7.5

4

3

1

2

3

4

5

6

7

REPRESENTAZIONE GRAFICA DEL P/N
(GRAPHICAL REPRESENTATION OF P/N)
x-284401-1

2.45 REF.

A

7.5

B

0.45±0.15

5.0

PASSO (PITCH)

2.0 REF.

2.45 REF.

1.7±0.15

1.6

2.9 REF.

0.8±0.15

3.2

1.8

5.0

2.45 REF.

1.6

SEZIONE B-B
SECTION B-B

(FOR THE INSIDE POLARIZATION KEYS SEE LAST SHEET)

REPRESENTAZIONE GRAFICA DEL P/N
(GRAPHICAL REPRESENTATION OF P/N)
x-282052-1

12

11

10

9

8

7

6

5

4

3

2

1

7.5

B

7.5

B

0.8^{+0.1}_{-0.2}

SEZIONE B-B
SECTION B-B

NOTA: PER LA POSIZIONE DI CHIAVE DI
POLARIZZAZIONE (INTERNA) VEDERE ULTIMO FOGLIO:
(FOR THE INSIDE POLARIZATION KEYS SEE LAST SHEET)

REPRESENTAZIONE GRAFICA DEL P/N
(GRAPHICAL REPRESENTATION OF P/N)
x-284401-1

10

9

8

7

6

5

4

3

2

1

1.7±0.15

2.45 REF.

0.8^{+0.1}_{-0.2}

SEZIONE B-B
SECTION B-B

NOTA: PER LA POSIZIONE DELLA CHIAVE
DI POLARIZZAZIONE (INTERNA) VEDERE
ULTIMO FOGLIO
(FOR THE INSIDE POLARIZATION KEYS SEE LAST SHEET)

7) PER I NUMERI DI RIFERIMENTO DEI CONNETTORI VEDERE
ULTIMO FOGLIO (FOR PN/S SEE LAST SHEET)

10) PER LE DIMENSIONI DELLE DIME DEL CIRCUITO STAMPATO
VEDERE FOGLIO 5
(FOR PCB LAYOUT AND DIMENSIONS SEE SHEET 5)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 23JUL1996
CHK C.CORDOLA
G.TURCO
APVD 23JUL1996
G.TURCO

DIMENSIONS:
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±2°
FINISH STAGNATO
(TIN PLATED)

MATERIAL CONNETTORE NYLON
(CONNECTOR NYLON)
CONTATTO OTTONE
(CONTACT BRASS)

DWN 23JUL1996
CHK G.TURCO
APVD 23JUL1996
G.TURCO

PRODUCT SPEC 108-20067

APPLICATION SPEC 114-20018

WEIGHT -

Customer Drawing

SCALE NO

SHEET 4

OF 8

REV Z8

NAME MONO-SHAPE, MK1
PCB CONNECTOR 2-12 POS.

SIZE A2

CAGE CODE 1



DRAWING NO C-282042

RESTRICTED TO -

A

6 POS.	6 POS.	7 POS.
DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-284734-1	DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-282046-1	DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-282047-1 and 2293372-7
8 POS.	8 POS.	9 POS.
DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-284208-1	DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-284574-1	DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-282049-1
10 POS.	10 POS.	
DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-284401-x	DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-282050-x	
11 POS.	12 POS.	
DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-282051-x	DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-282052-x	

CONNECTOR LAYOUT
(3D VIEW FOR REFERENCE TO SHOW THE CONNECTOR
ORIENTATION RESPECT TO PCB CUT OUT DESIGN)

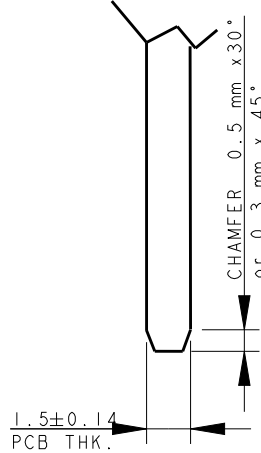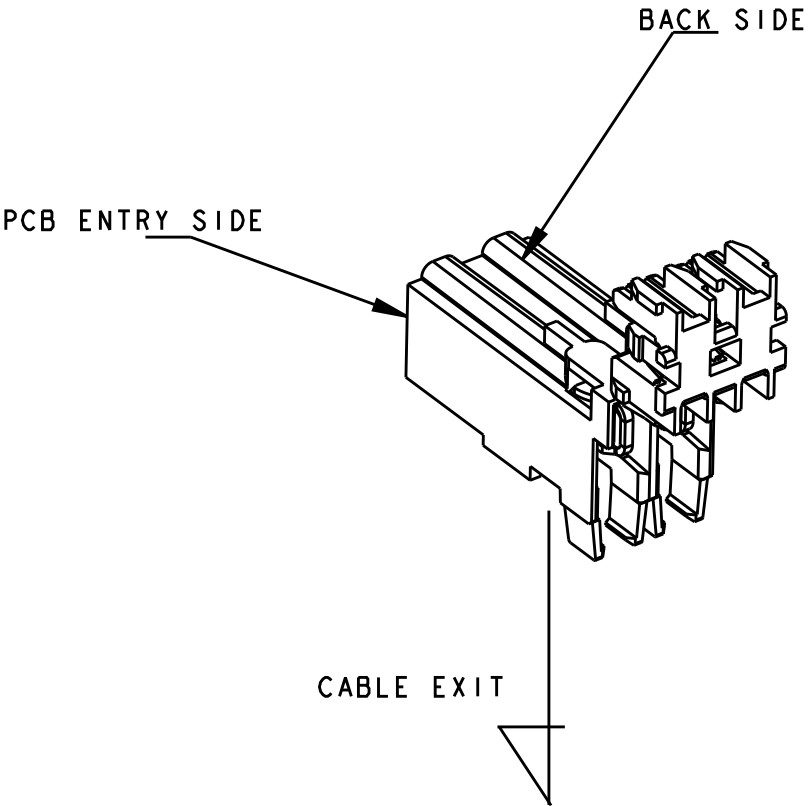



- SUGGESTED SHAPE FOR PCB MATING
SIDE, CAN BE ALSO OBTAINED
BY SCORING PROCESS-

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. CORDOLA 23JUL1996	 TE Connectivity					
DIMENSIONS: mm		CHK G. TURCO 23JUL1996						
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G. TURCO 23JUL1996	NAME MONO-SHAPE, MK1 PCB CONNECTOR 2-12 POS.				
	0 PLC ± 0.3		PRODUCT SPEC					
	1 PLC ±		108-20067					
	2 PLC ±		APPLICATION SPEC					
	3 PLC ±		114-20018					
4 PLC ±		WEIGHT -		SIZE A2	CAGE CODE 1	DRAWING NO C-282042	RESTRICTED TO -	
MATERIAL CONNETTORE NYLON (CONNECTOR NYLON) CONTATTO OTTONE (CONTACT BRASS)		FINISH STAGNATO (TIN PLATED)	Customer Drawing		SCALE NO	SHEET 6	OF 8	REV 78

4		3		2		1	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		LOC		DIST	
COPYRIGHT copyright.d8Te-		ALL RIGHTS RESERVED.		P		LTR	
		PART NUMBER ASSY. CONN.		DESCRIPTION		DATE	
				SEE SHEET 1		DWN	
						APVD	

D

 PA GF, UL-V0 GWEPT 750° C NO FLAME, NATURAL
PRELIMINARY - NOT YET RELEASED FOR PRODUCTION

NO. of POS.	CONFIGURATION (SEE TYP. SECTION ONLY FOR REF.)	ON TRAY PACKAGING VERSION	PART REV.	LOOSE PIECES PACKAGING VERSION	PART REV.	POLARIZ. POSITION (INTERVIA)	"L" (mm)	COLOR CODE
5		2293372-5	I	-	-	1-2	24.9	-
7		2293372-7	I	-	-	-	34.9	-

C

B


A

D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. CORDOLA 23JUL1996	 TE Connectivity				
DIMENSIONS: mm		CHK G. TURCO 23JUL1996					
		APVD G. TURCO 23JUL1996	NAME MONO-SHAPE, MKI PCB CONNECTOR 2-12 POS.				
		PRODUCT SPEC 108-20067					
MATERIAL CONNETTORE NYLON (CONNECTOR NYLON) CONTATTO OTTONE (CONTACT BRASS)		APPLICATION SPEC 114-20018	SIZE A2	CAGE CODE 1	DRAWING NO. C-282042	RESTRICTED TO -	
		WEIGHT -	Customer Drawing			SCALE NO	SHEET 8



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.