



Laird Technologies ,Co., Ltd.

**SPECIFICATION FOR APPROVAL**

*Customer : All*

*Manufacturer : Laird Technologies Co.,Ltd.*

*Product : Molding Power Inductor*

*Laird P/N : **MGV1004 Series***

*Customer P/N : N/A*

*Issued Date : 2018.2.2*

*Rev : **A***

**Customer Response**

<i>Approved By:</i>	<i>Signature:</i>	<i>Date:</i>

**Laird Signature**

<i>Approved By</i>	<i>Checked By</i>	<i>Prepared By</i>
<i>Chiang</i>	<i>Siemens Mi</i>	<i>Denny Chen</i>

Laird (Foshan) Magnetics Co., Ltd.

Fu'an Industrial Zone, Leliu Town, Shunde, Foshan City, Guangdong, China 528322

Tel: +86 (757) 25638860 Fax: +86 (757) 25638862

ISO 9001  
ISO14001  
OHSAS18001


Email: [china@lairdtech.com](mailto:china@lairdtech.com) Website: [www.lairdtech.com](http://www.lairdtech.com)





**SPECIFICATION FOR APPROVAL**

**1.MECHANICAL & DIMENSIONS**

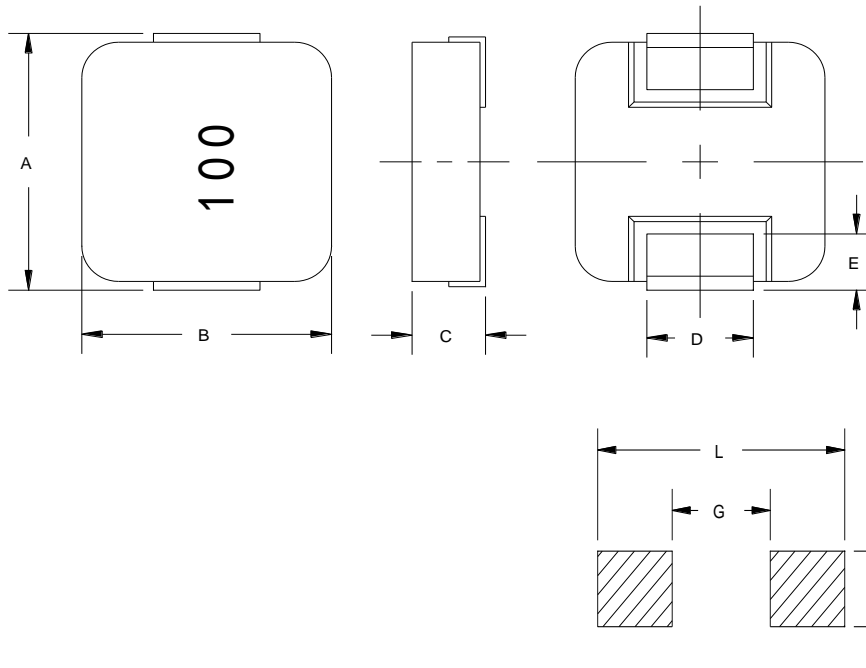

(UNIT: mm)	
A	11.00±0.50
B	10.00±0.30
C	4.00±0.40
D	3.00±0.30
E	2.30±0.30
L	13.6 ref
G	5.4 ref
H	3.5 ref
REMARK	


**2.PART NUMBER NOMENCLATOR:**

**MGV 1004 100 M - 1X**  
**A B C D E**

A: Product Series.  
 B: Series number, part size  
 C: Inductance code

D: Inductance Tolerance. (M=±20% ,N=±30%)  
 E: "X"=0:Standard catalog part number  
 "X"=1-9:Controlled customized part **OR** different performance than std catalog part. And "5-9" is for automotive grade.

**3.EQUIVALENT CIRCUIT:**



**SPECIFICATION FOR APPROVAL**







PART NUMBER	(uH)	I <sub>rms</sub> (A) Typ.	I <sub>sat</sub> (A) Typ.	DCR(mΩ) Typ	DCR(mΩ) Max	REMARK
MGV1004R15N-10	0.15±30%	43	75	0.5	0.6	
MGV1004R19N-10	0.19±30%	36	70	0.6	0.9	
MGV1004R20N-10	0.20±30%	35	70	0.7	1.0	
MGV1004R22M-10	0.22±20%	35	60	0.8	1.0	
MGV1004R36M-10	0.36±20%	31	60	1.05	1.2	
MGV1004R47M-10	0.47±20%	28	43	1.3	1.5	
MGV1004R56M-10	0.56±20%	25	40	1.6	1.8	
MGV10041R0M-10	1.00±20%	18	36	3.0	3.3	
MGV10041R2M-10	1.20±20%	17	33	3.3	3.8	
MGV10041R5M-10	1.50±20%	16	33	4.0	4.6	
MGV10042R2M-10	2.20±20%	12	27	6.5	7.0	
MGV10043R3M-10	3.30±20%	11	20	10.8	11.8	
MGV10044R7M-10	4.70±20%	10	17	15.0	15.5	
MGV10045R6M-10	5.60±20%	9	14	17.0	19.3	
MGV10046R8M-10	6.80±20%	8.5	13.5	17.5	23.3	
MGV1004100M-10	10.0±20%	7.5	12.0	27.0	30.0	
MGV1004150M-10	15.0±20%	6.25	10.0	40.0	45.0	
MGV1004220M-10	22.0±20%	5.0	7	64.0	74.0	
MGV1004330M-10	33.0±20%	3.5	5	92.0	112.0	
MGV1004470M-10	47.0±20%	3.0	4.5	145.0	167.0	

**GENERAL SPECIFICATION:**

- 1, Test conditions(L): 100KHz, 1V<sub>rms</sub>
- 2, Operating temperature: -55°C to +125°C (Including self-heating)
- 3, Storage temperature: -10°C to +40°C
- 4, Humidity range: 60% RH Max.
- 5, Heat Rated Current (I<sub>rms</sub>) will cause the coil temperature rise approximately Δt of 40°C
- 6, Saturation Current (I<sub>sat</sub>) will cause L<sub>0</sub> to drop approximately 30%.
- 7, Part Temperature (Ambient+Temp. Rise) : Should not exceed 125°C under worst case operating condi
- 8, Storage condition (component in its packaging)







**SPECIFICATION FOR APPROVAL**

**Characteristics Curve**

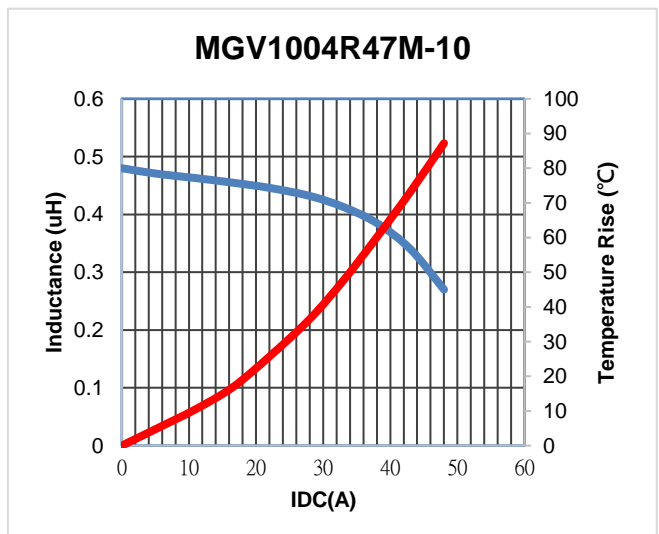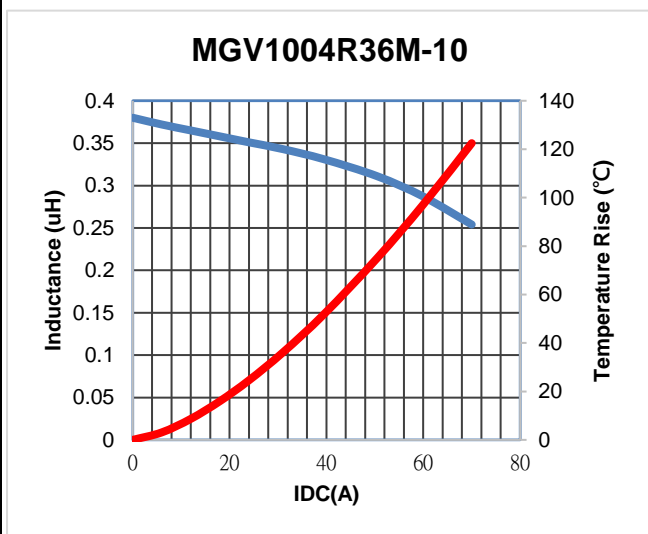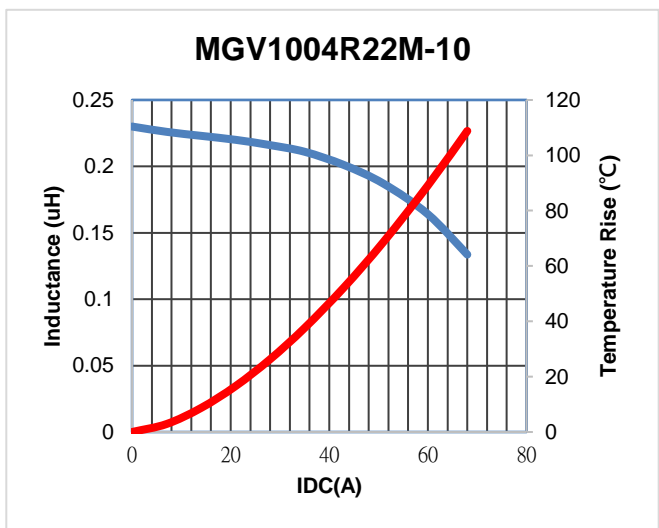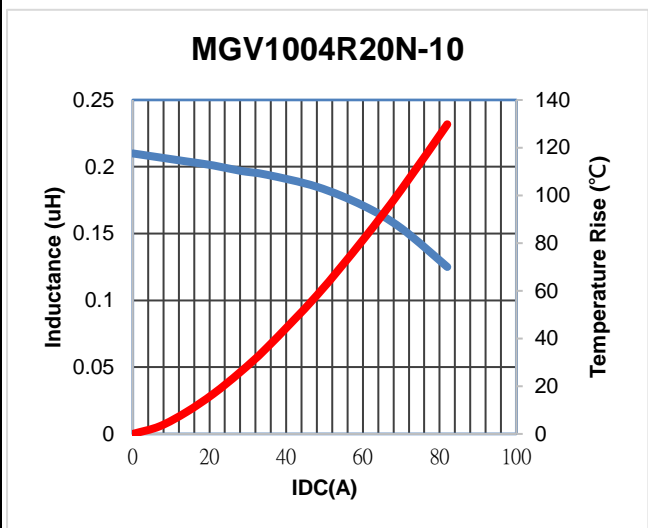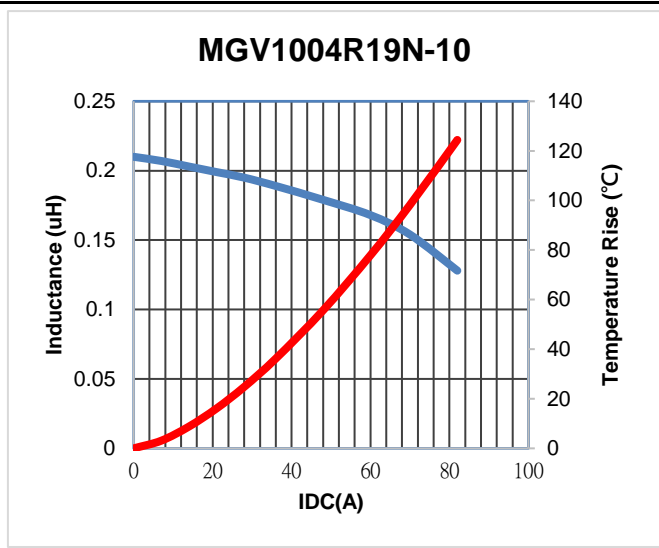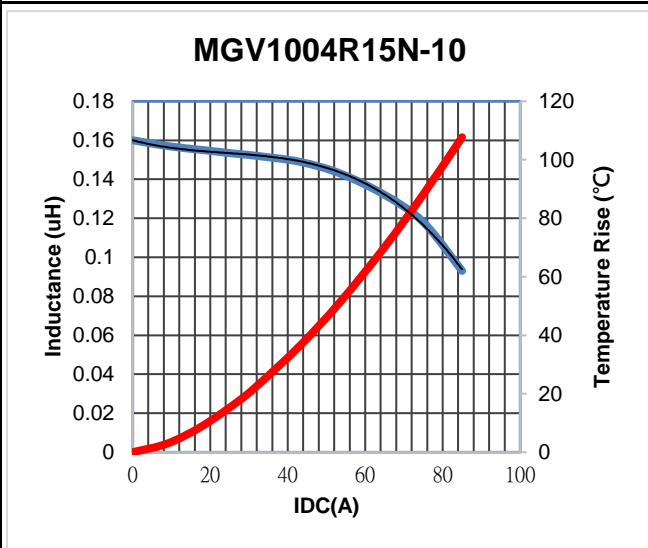

**SPECIFICATION FOR APPROVAL**


**Characteristics Curve**

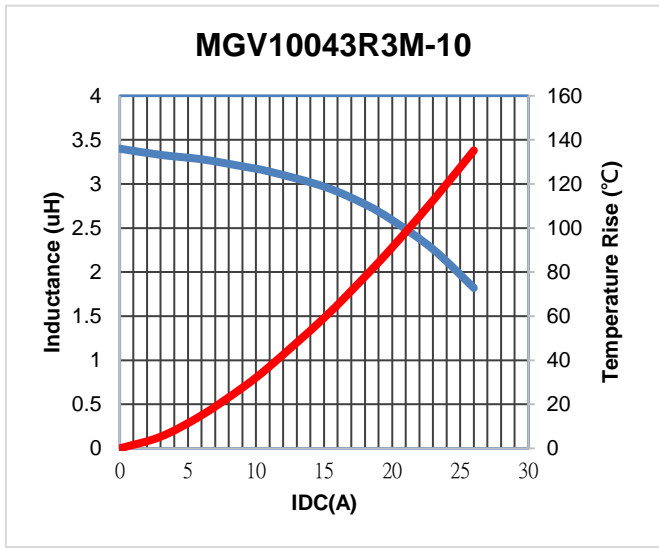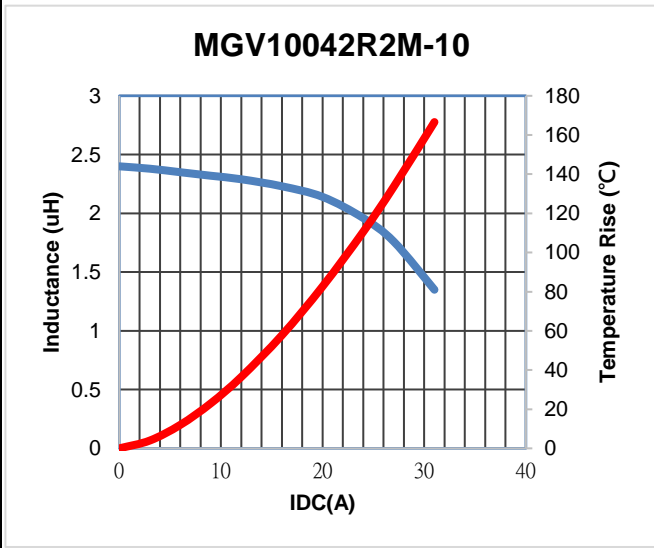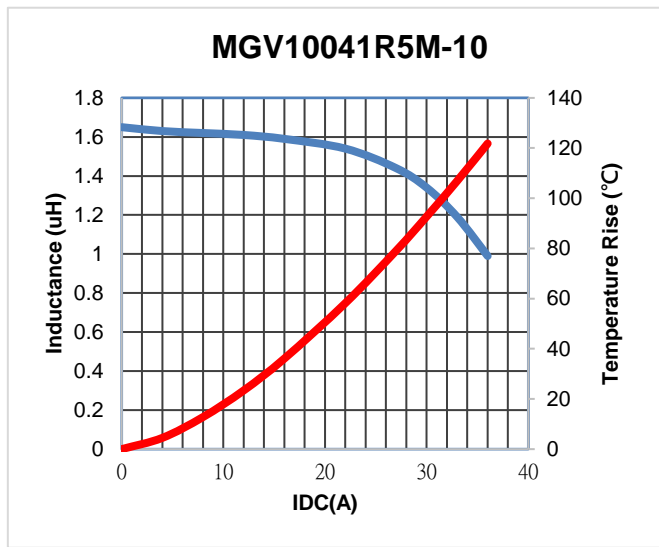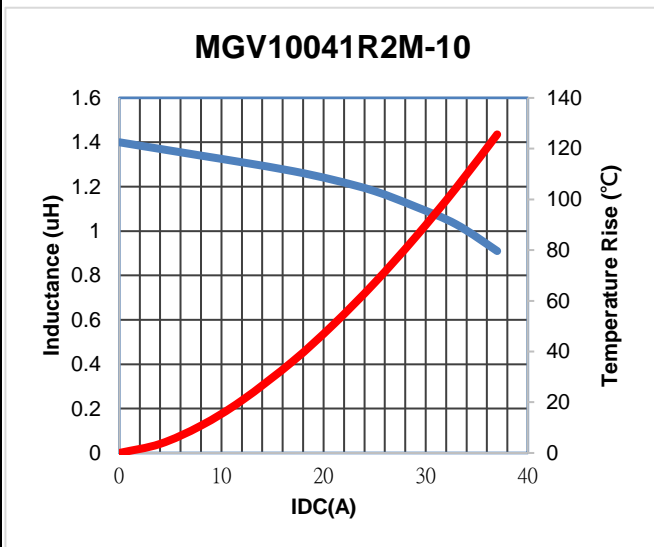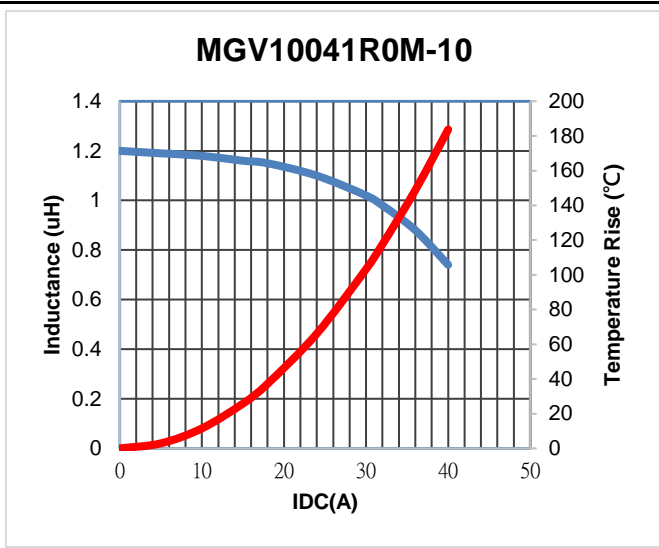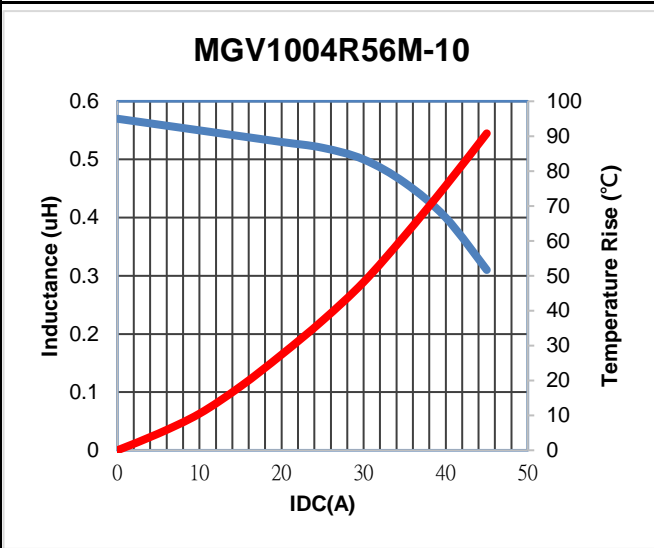


**SPECIFICATION FOR APPROVAL**

**Characteristics Curve**


**MGV10044R7M-10**

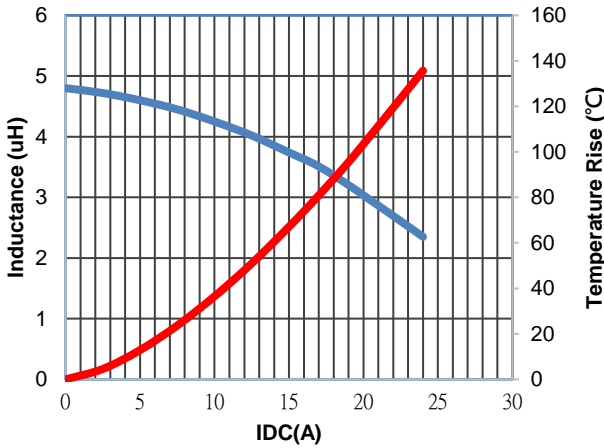


**MGV10045R6M-10**

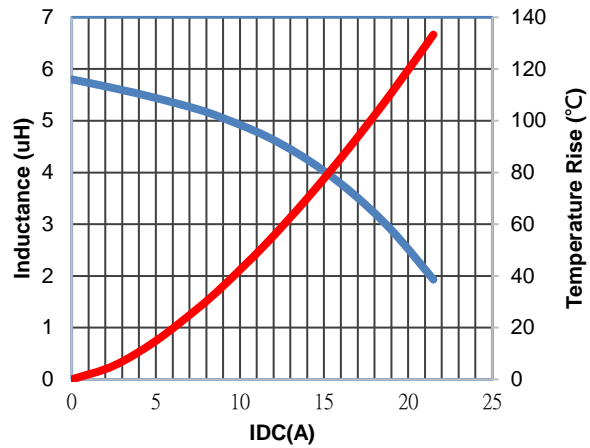


**MGV10046R8M-10**

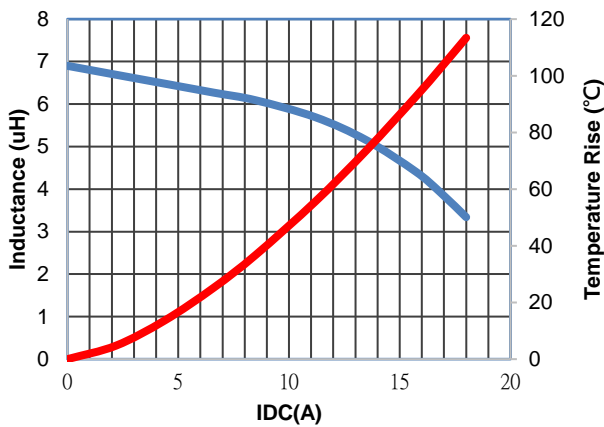


**MGV1004100M-10**

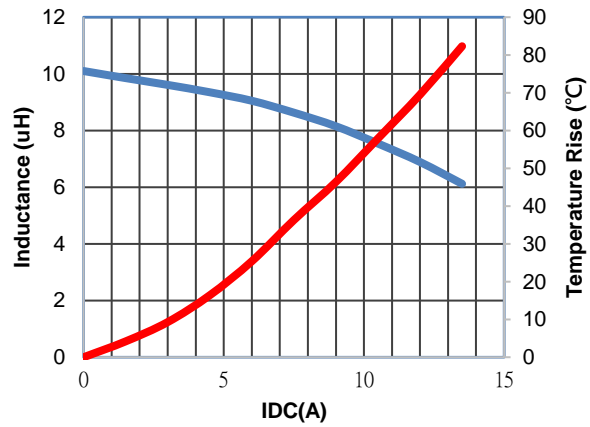

**MGV1004150M-10**

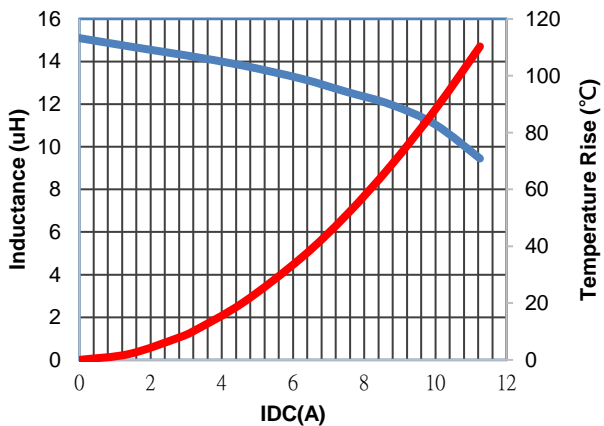


**MGV1004220M-10**

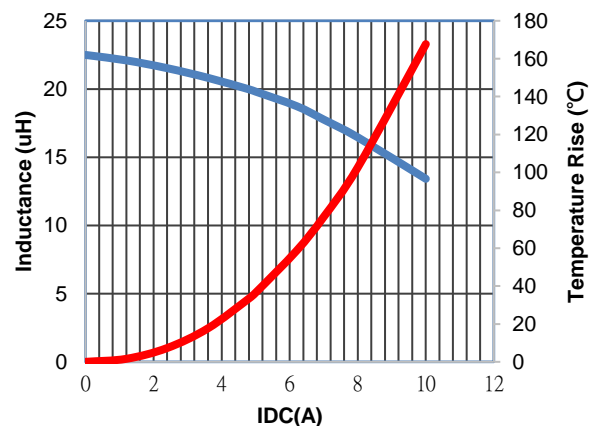


**SPECIFICATION FOR APPROVAL**

**Characteristics Curve**

**MGV1004330M-10**

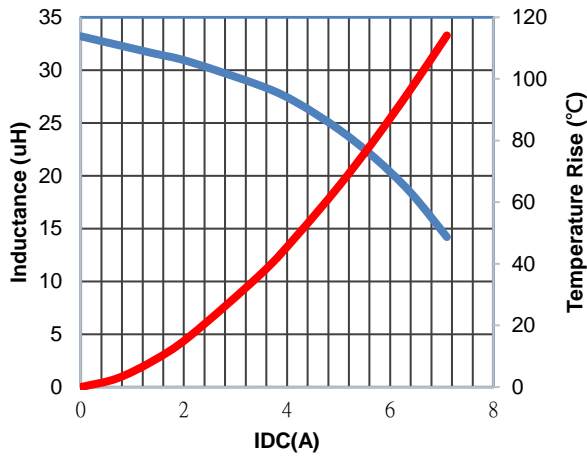

**MGV1004470M-10**

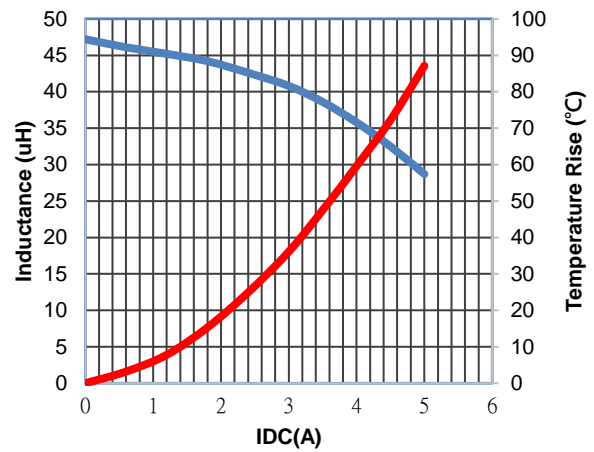




**Recommended Soldering Conditions**


**For Lead-Free Application**

Figure 1 . Re-flow Soldering

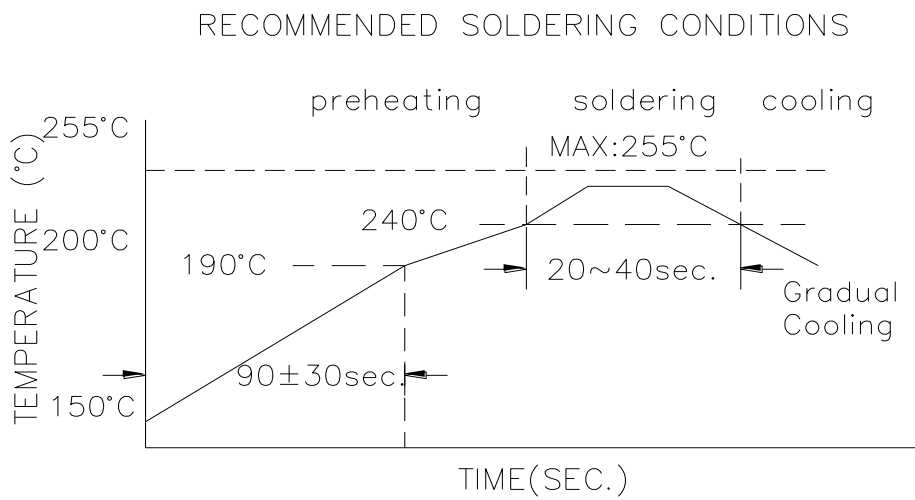

**Reflow times: 3 times max**

Figure 2 . Hand Soldering

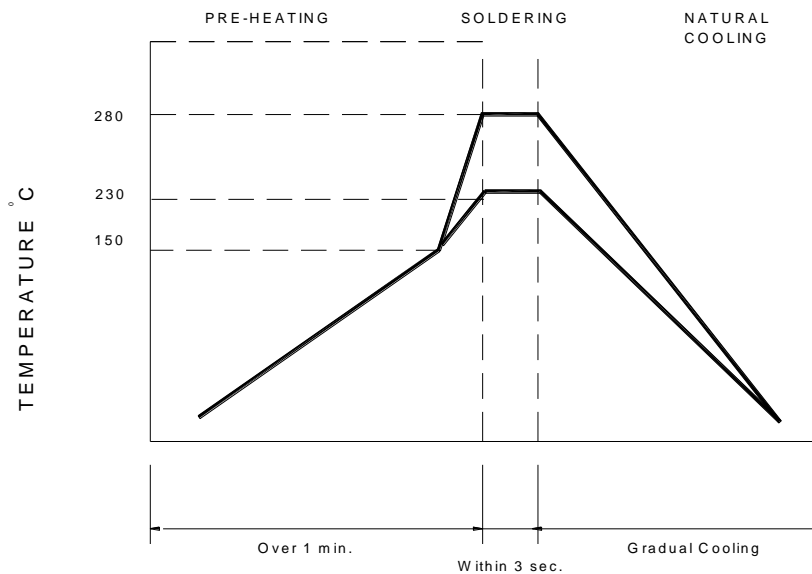

**Hand solder times: 1 time max**




**Reliability and Testina Conditions / Pin Type Power Inductors**

**SMD series(Consumer)**

Item	Reference	Additional Requirements
Operating temperature range	-55°C ~ +125°C (Including self-temperature rise)	
Storage temperature and humidity range	-10°C to +40°C , 60% RH Max	
High Temperature Exposure (Storage)	MIL-STD-202 Method 108	85±2°C, 168+24hours
Temperature Cycling	JESD22 Method JA-104	-40°C → +85, transforming interval:20s, 100cycles
Operational Life	MIL-PRF-2	85±°C, 168+24hours Apply maximum rated voltage and current according part drawing
External Visual	MIL-STD-883 Method 2009	Inspect device construction, marking and workmanship. Electrical Test not required.
Physical Dimension	JESD22 Method JB-100	Verify physical dimensions to the applicable device detail specification. Note: User(s) and Suppliers spec. Electrical Test not required
Vibration	MIL-STD-202 Method 204	10~55Hz,1.5mm, 2 hours in each 3mutually
Resistance to Soldering Heat	MIL-STD-202 Method 210	1. Max. 260±5°C,10±1s, 2 times 2.Solder Composition: Sn/3Ag/0.5Cu
Solderability	J-STD-002	245±5°C, 5±1sec, Solder: Sn/3.0Ag/0.5Cu
Electrical Characterization	Print Spec	Parametrically test per lot and sample size requirements, summary to show Min, Max, Mean and Standard deviation at room as well as Min and Max Operating temperatures
Board Flex	AEC-Q200-005	2mm,30±1s
Terminal Strength(SMD)	AEC-Q200-006	10N, 5S, X,Y direct


**PACKAGING**

**Reel Dimension**

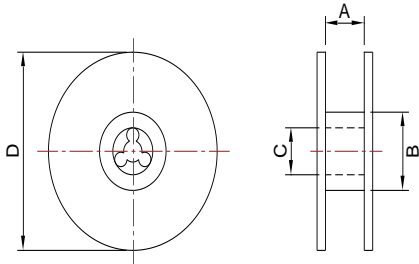

Type	A(mm)	B(mm)	C(mm)	D(mm)
13'x24	24.4+2/-0	100 ± 2	13+0.5/-0.2	330

**Tape Dimension**

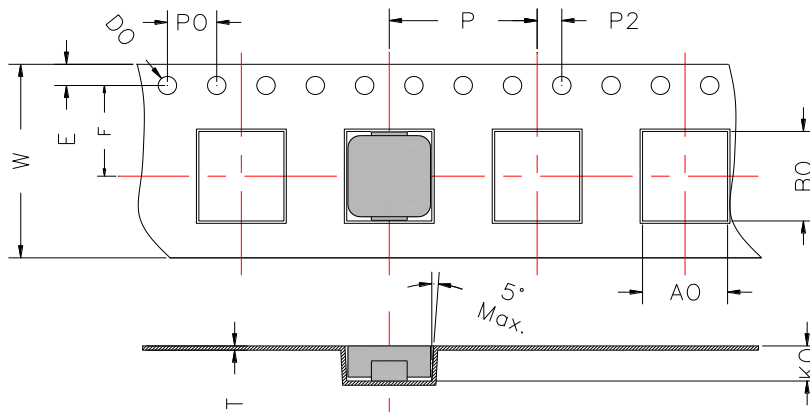


W	E	F	P	A0	B0	P2	P0	K0	t
24.0±0.3	1.75±0.1	11.5±0.1	16±0.1	10.4±0.1	11.6±0.1	2.0±0.1	4.0±0.1	4.5±0.1	0.35±0.05

**Packaging Quantity**

P/N	Chip/Reel
MGV1004 Series	500pcs
Size	

**Peeling Off Force**

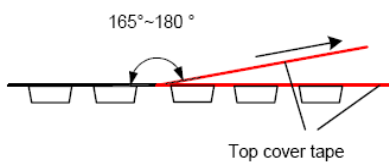

The force peeling off cove tape is 10 to 100 grams			
in the arrow direction under the following conditions			
Room Temp (°C)	Room Humidity	Room atrn (hPa)	Teaming Speed (mm/min)
5~35	45~85	860~1060	300

**※Storage Conditions**

1. Temperature and humidity conditions: -10-+40°C and 60% RH.
2. Recommended products should be used within 12 mont from the time of manufacturing.
3. The packaging material should be kept where no chlorin or sulfur exists in the air.
4. Allowable stacking condition of Packaging box: max height 1.5m or 5 boxes stacking



**SPECIFICATION FOR APPROVAL**

**MATERIAL IDENTIFICATION**

ITEM	DESCRIPTION	Spec	SGS No.	SUPPLIERS
1	Powder	Iron Powder	SCL03H001687001	Laird
2	Copper Wire	AIB	SCL01G06040701E	PACIFIC
3	Coating	Paint	RHS01G006468001	BERLIN
4	Clip	Clip	CAN1406178103	HUIGAO



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.